



# **Red Hat 3scale 2-saas**

## **Developer Portal**

For Use with Red Hat 3scale 2-saas



# Red Hat 3scale 2-saas Developer Portal

---

For Use with Red Hat 3scale 2-saas

## Legal Notice

Copyright © 2018 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

## Abstract

This guide documents the developer portal on Red Hat 3scale 2-saas.

## Table of Contents

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>CHAPTER 1. DEVELOPER PORTAL AUTHENTICATION</b>                     | <b>16</b> |
| 1.1. ENABLING AND DISABLING USERNAME/EMAIL AND PASSWORD               | 17        |
| 1.2. ENABLING AND DISABLING AUTHENTICATION VIA GITHUB                 | 17        |
| 1.3. ENABLING AND DISABLING AUTHENTICATION VIA AUTH0                  | 18        |
| 1.3.1. Note                                                           | 19        |
| 1.4. ENABLING AND DISABLING AUTHENTICATION VIA RED HAT SINGLE SIGN-ON | 19        |
| 1.4.1. Before You Begin                                               | 19        |
| 1.4.2. Configuring Red Hat Single Sign-On                             | 19        |
| 1.4.3. Configuring 3scale                                             | 23        |
| <b>CHAPTER 2. CHANGE BUILT-IN PAGES</b>                               | <b>25</b> |
| 2.1. IDENTIFY THE ELEMENTS                                            | 25        |
| 2.2. MODIFY OR HIDE THE ELEMENTS                                      | 25        |
| 2.3. OPTION A: CSS                                                    | 26        |
| 2.4. OPTION B: JQUERY                                                 | 26        |
| <b>CHAPTER 3. CHANGE CSS</b>                                          | <b>28</b> |
| 3.1. STEP 1: CREATE A NEW CSS FILE                                    | 28        |
| 3.2. STEP 2: LINK THE STYLE SHEET INTO YOUR PAGE LAYOUT               | 28        |
| <b>CHAPTER 4. CUSTOM SIGNUP FORM FIELDS</b>                           | <b>29</b> |
| 4.1. CUSTOM FIELDS                                                    | 29        |
| <b>CHAPTER 5. CHANGE EMAIL TEMPLATES</b>                              | <b>35</b> |
| 5.1. STEP 1: DEFINE YOUR WORKFLOWS BEFORE EMAIL CONFIGURATION         | 35        |
| 5.2. STEP 2: TEST YOUR WORKFLOW AND IDENTIFY ACTIVE EMAIL TEMPLATES   | 35        |
| 5.3. STEP 3: EDIT AND SAVE YOUR CUSTOM TEMPLATE                       | 35        |
| 5.4. STEP 4: REPEAT FOR ALL TEMPLATES IN YOUR WORKFLOWS               | 36        |
| 5.4.1. More information                                               | 36        |
| <b>CHAPTER 6. CUSTOM DOMAIN</b>                                       | <b>37</b> |
| 6.1. PREREQUISITES                                                    | 37        |
| 6.2. STEP 1: ADD A CNAME ENTRY TO YOUR DNS SETUP                      | 37        |
| 6.3. STEP 2 (OPTIONAL): ADD A CAA RECORD TO YOUR DNS SETUP            | 37        |
| 6.4. STEP 3: CONTACT RED HAT SUPPORT                                  | 38        |
| 6.5. STEP 4: REVIEW YOUR DEVELOPER PORTAL                             | 38        |
| <b>CHAPTER 7. CONFIGURE EMAIL DOMAIN</b>                              | <b>39</b> |
| 7.1. STEP 1: CONFIGURE EMAIL DOMAIN                                   | 39        |
| 7.2. STEP 2: VERIFY YOUR DNS CHANGES                                  | 39        |
| 7.3. STEP 3: INFORM SUPPORT TO FINALIZE THE EMAIL DOMAIN CHANGE       | 40        |
| <b>CHAPTER 8. LIQUIDS: EMAIL TEMPLATES</b>                            | <b>41</b> |
| 8.1. ACCOUNT MANAGEMENT                                               | 41        |
| 8.2. CREDIT CARD NOTIFICATIONS                                        | 42        |
| 8.3. LIMIT ALERTS                                                     | 42        |
| 8.4. APPLICATIONS                                                     | 42        |
| 8.5. INVOICING                                                        | 43        |
| 8.6. SERVICES                                                         | 44        |
| 8.7. SIGNUP                                                           | 45        |
| <b>CHAPTER 9. LIQUID REFERENCE</b>                                    | <b>46</b> |
| 9.1. DROPS                                                            | 46        |
| 9.2. TAGS                                                             | 48        |

|                                                         |    |
|---------------------------------------------------------|----|
| 9.3. FILTERS                                            | 49 |
| 9.4. DROPS (UP)                                         | 49 |
| 9.4.1. Account drop (up)                                | 49 |
| 9.4.1.1. Methods                                        | 49 |
| 9.4.1.1.1. errors                                       | 49 |
| 9.4.1.1.2. id                                           | 49 |
| 9.4.1.1.3. name                                         | 49 |
| 9.4.1.1.4. vat_zero_text                                | 50 |
| 9.4.1.1.5. vat_rate                                     | 50 |
| 9.4.1.1.6. unread_messages                              | 50 |
| 9.4.1.1.7. latest_messages                              | 50 |
| 9.4.1.1.8. bought_account_plan                          | 50 |
| 9.4.1.1.9. bought_account_contract                      | 50 |
| 9.4.1.1.10. credit_card_display_number                  | 50 |
| 9.4.1.1.11. credit_card_expiration_date                 | 50 |
| 9.4.1.1.12. credit_card_required?                       | 50 |
| 9.4.1.1.13. credit_card_stored?                         | 50 |
| 9.4.1.1.14. credit_card_missing?                        | 50 |
| 9.4.1.1.15. timezone                                    | 50 |
| 9.4.1.1.16. paid?                                       | 50 |
| 9.4.1.1.17. on_trial?                                   | 50 |
| 9.4.1.1.18. telephone_number                            | 51 |
| 9.4.1.1.19. approval_required?                          | 51 |
| 9.4.1.1.20. created_at                                  | 51 |
| 9.4.1.1.21. full_address                                | 51 |
| 9.4.1.1.22. applications                                | 51 |
| 9.4.1.1.23. subscribed_services                         | 51 |
| 9.4.1.1.24. admin                                       | 51 |
| 9.4.1.1.25. extra_fields_plain_text                     | 51 |
| 9.4.1.1.26. fields_plain_text                           | 51 |
| 9.4.1.1.27. extra_fields                                | 51 |
| 9.4.1.1.28. fields                                      | 51 |
| 9.4.1.1.29. builtin_fields                              | 52 |
| 9.4.1.1.30. multiple_applications_allowed?              | 52 |
| 9.4.1.1.31. billing_address                             | 52 |
| 9.4.1.1.32. has_billing_address?                        | 52 |
| 9.4.1.1.33. can                                         | 52 |
| 9.4.1.1.34. edit_url                                    | 52 |
| 9.4.1.1.35. edit_ogone_billing_address_url              | 52 |
| 9.4.1.1.36. edit_payment_express_billing_address_url    | 52 |
| 9.4.1.1.37. edit_braintree_blue_credit_card_details_url | 52 |
| 9.4.1.1.38. domain                                      | 52 |
| 9.4.1.1.39. upgraded?                                   | 52 |
| 9.4.1.1.40. requires_credit_card?                       | 52 |
| 9.4.1.1.41. support_email                               | 52 |
| 9.4.1.1.42. finance_support_email                       | 52 |
| 9.4.2. AccountPlan drop (up)                            | 52 |
| 9.4.2.1. Methods                                        | 53 |
| 9.4.2.1.1. selected?                                    | 53 |
| 9.4.2.1.2. bought?                                      | 53 |
| 9.4.2.1.3. features                                     | 53 |
| 9.4.2.1.4. setup_fee                                    | 53 |
| 9.4.2.1.5. name                                         | 53 |

|                                            |    |
|--------------------------------------------|----|
| 9.4.2.1.6. system_name                     | 53 |
| 9.4.2.1.7. id                              | 53 |
| 9.4.2.1.8. free?                           | 53 |
| 9.4.2.1.9. paid?                           | 54 |
| 9.4.2.1.10. approval_required?             | 54 |
| 9.4.2.1.11. flat_cost                      | 54 |
| 9.4.3. Alert drop (up)                     | 54 |
| 9.4.3.1. Methods                           | 54 |
| 9.4.3.1.1. level                           | 54 |
| 9.4.3.1.2. message                         | 54 |
| 9.4.3.1.3. utilization                     | 54 |
| 9.4.4. Application drop (up)               | 55 |
| 9.4.4.1. Methods                           | 55 |
| 9.4.4.1.1. errors                          | 55 |
| 9.4.4.1.2. id                              | 55 |
| 9.4.4.1.3. can_change_plan?                | 55 |
| 9.4.4.1.4. trial?                          | 55 |
| 9.4.4.1.5. live?                           | 55 |
| 9.4.4.1.6. state                           | 55 |
| 9.4.4.1.7. remaining_trial_period_days     | 55 |
| 9.4.4.1.8. plan                            | 55 |
| 9.4.4.1.9. plan_change_permission_name     | 56 |
| 9.4.4.1.10. plan_change_permission_warning | 56 |
| 9.4.4.1.11. contract                       | 56 |
| 9.4.4.1.12. admin_url                      | 56 |
| 9.4.4.1.13. name                           | 56 |
| 9.4.4.1.14. can                            | 56 |
| 9.4.4.1.15. oauth                          | 56 |
| 9.4.4.1.16. pending?                       | 56 |
| 9.4.4.1.17. buyer_alerts_enabled?          | 56 |
| 9.4.4.1.18. description                    | 56 |
| 9.4.4.1.19. redirect_url                   | 56 |
| 9.4.4.1.20. filters_limit                  | 56 |
| 9.4.4.1.21. keys_limit                     | 56 |
| 9.4.4.1.22. referrer_filters               | 56 |
| 9.4.4.1.23. rejection_reason               | 56 |
| 9.4.4.1.24. user_key                       | 57 |
| 9.4.4.1.25. application_id                 | 57 |
| 9.4.4.1.26. key                            | 57 |
| 9.4.4.1.27. url                            | 57 |
| 9.4.4.1.28. edit_url                       | 57 |
| 9.4.4.1.29. update_user_key_url            | 57 |
| 9.4.4.1.30. log_requests_url               | 57 |
| 9.4.4.1.31. alerts_url                     | 57 |
| 9.4.4.1.32. application_keys_url           | 57 |
| 9.4.4.1.33. service                        | 57 |
| 9.4.4.1.34. keys                           | 57 |
| 9.4.4.1.35. oauth_mode?                    | 58 |
| 9.4.4.1.36. user_key_mode?                 | 58 |
| 9.4.4.1.37. app_id_mode?                   | 58 |
| 9.4.4.1.38. change_plan_url                | 58 |
| 9.4.4.1.39. log_requests?                  | 58 |
| 9.4.4.1.40. application_keys               | 58 |

|                                      |    |
|--------------------------------------|----|
| 9.4.4.1.41. extra_fields             | 58 |
| 9.4.4.1.42. fields                   | 58 |
| 9.4.4.1.43. builtin_fields           | 58 |
| 9.4.4.1.44. cinstance                | 58 |
| 9.4.5. ApplicationKey drop (up)      | 58 |
| 9.4.5.1. Methods                     | 58 |
| 9.4.5.1.1. id                        | 58 |
| 9.4.5.1.2. value                     | 58 |
| 9.4.5.1.3. url                       | 58 |
| 9.4.5.1.4. application               | 58 |
| 9.4.6. ApplicationPlan drop (up)     | 58 |
| 9.4.6.1. Methods                     | 59 |
| 9.4.6.1.1. selected?                 | 59 |
| 9.4.6.1.2. bought?                   | 59 |
| 9.4.6.1.3. features                  | 59 |
| 9.4.6.1.4. setup_fee                 | 59 |
| 9.4.6.1.5. name                      | 59 |
| 9.4.6.1.6. system_name               | 59 |
| 9.4.6.1.7. id                        | 59 |
| 9.4.6.1.8. free?                     | 60 |
| 9.4.6.1.9. paid?                     | 60 |
| 9.4.6.1.10. approval_required?       | 60 |
| 9.4.6.1.11. flat_cost                | 60 |
| 9.4.6.1.12. metrics                  | 60 |
| 9.4.6.1.13. usage_limits             | 60 |
| 9.4.6.1.14. service                  | 60 |
| 9.4.7. Base drop (up)                | 60 |
| 9.4.7.1. Methods                     | 61 |
| 9.4.7.1.1. login_url                 | 61 |
| 9.4.7.1.2. user_identified?          | 61 |
| 9.4.8. Base drop (up)                | 61 |
| 9.4.8.1. Methods                     | 61 |
| 9.4.8.1.1. errors                    | 61 |
| 9.4.8.1.2. title                     | 61 |
| 9.4.8.1.3. kind                      | 61 |
| 9.4.8.1.4. url                       | 61 |
| 9.4.8.1.5. description               | 61 |
| 9.4.9. BillingAddressField drop (up) | 61 |
| 9.4.9.1. Methods                     | 61 |
| 9.4.9.1.1. input_name                | 61 |
| 9.4.9.1.2. label                     | 61 |
| 9.4.9.1.3. choices                   | 61 |
| 9.4.9.1.4. errors                    | 61 |
| 9.4.9.1.5. html_id                   | 61 |
| 9.4.9.1.6. hidden?                   | 61 |
| 9.4.9.1.7. visible?                  | 62 |
| 9.4.9.1.8. read_only?                | 62 |
| 9.4.9.1.9. name                      | 62 |
| 9.4.9.1.10. value                    | 62 |
| 9.4.9.1.11. required                 | 62 |
| 9.4.10. Can drop (up)                | 62 |
| 9.4.10.1. Methods                    | 62 |
| 9.4.10.1.1. be_updated?              | 62 |



|                                             |    |
|---------------------------------------------|----|
| 9.4.10.1.2. add_referrer_filters?           | 62 |
| 9.4.10.1.3. add_application_keys?           | 62 |
| 9.4.10.1.4. regenerate_user_key?            | 62 |
| 9.4.10.1.5. regenerate_oauth_secret?        | 62 |
| 9.4.10.1.6. manage_keys?                    | 62 |
| 9.4.10.1.7. delete_key?                     | 62 |
| 9.4.11. Can drop (up)                       | 62 |
| 9.4.11.1. Methods                           | 62 |
| 9.4.11.1.1. change_plan?                    | 62 |
| 9.4.12. Cas drop (up)                       | 62 |
| 9.4.12.1. Methods                           | 62 |
| 9.4.12.1.1. login_url                       | 62 |
| 9.4.12.1.2. user_identified?                | 62 |
| 9.4.13. Contract drop (up)                  | 62 |
| 9.4.13.1. Methods                           | 63 |
| 9.4.13.1.1. errors                          | 63 |
| 9.4.13.1.2. id                              | 63 |
| 9.4.13.1.3. can_change_plan?                | 63 |
| 9.4.13.1.4. trial?                          | 63 |
| 9.4.13.1.5. live?                           | 63 |
| 9.4.13.1.6. state                           | 63 |
| 9.4.13.1.7. remaining_trial_period_days     | 63 |
| 9.4.13.1.8. plan                            | 63 |
| 9.4.13.1.9. plan_change_permission_name     | 63 |
| 9.4.13.1.10. plan_change_permission_warning | 63 |
| 9.4.13.1.11. contract                       | 63 |
| 9.4.14. Country drop (up)                   | 63 |
| 9.4.14.1. Methods                           | 64 |
| 9.4.14.1.1. errors                          | 64 |
| 9.4.14.1.2. to_str                          | 64 |
| 9.4.14.1.3. code                            | 64 |
| 9.4.14.1.4. label                           | 64 |
| 9.4.15. CountryField drop (up)              | 64 |
| 9.4.15.1. Methods                           | 64 |
| 9.4.15.1.1. value                           | 64 |
| 9.4.15.1.2. name                            | 64 |
| 9.4.15.1.3. required                        | 64 |
| 9.4.15.1.4. hidden?                         | 64 |
| 9.4.15.1.5. hidden                          | 64 |
| 9.4.15.1.6. visible?                        | 64 |
| 9.4.15.1.7. visible                         | 64 |
| 9.4.15.1.8. read_only                       | 64 |
| 9.4.15.1.9. errors                          | 64 |
| 9.4.15.1.10. input_name                     | 64 |
| 9.4.15.1.11. html_id                        | 65 |
| 9.4.15.1.12. label                          | 65 |
| 9.4.15.1.13. to_str                         | 65 |
| 9.4.15.1.14. choices                        | 65 |
| 9.4.16. CurrentUser drop (up)               | 65 |
| 9.4.16.1. Methods                           | 65 |
| 9.4.16.1.1. errors                          | 65 |
| 9.4.16.1.2. admin?                          | 65 |
| 9.4.16.1.3. username                        | 65 |

|                                |    |
|--------------------------------|----|
| 9.4.16.1.4. account            | 65 |
| 9.4.16.1.5. name               | 65 |
| 9.4.16.1.6. email              | 65 |
| 9.4.16.1.7. password_required? | 66 |
| 9.4.16.1.8. sections           | 66 |
| 9.4.16.1.9. role               | 66 |
| 9.4.16.1.10. roles_collection  | 66 |
| 9.4.16.1.11. url               | 66 |
| 9.4.16.1.12. edit_url          | 66 |
| 9.4.16.1.13. can               | 67 |
| 9.4.16.1.14. extra_fields      | 67 |
| 9.4.16.1.15. fields            | 67 |
| 9.4.16.1.16. builtin_fields    | 67 |
| 9.4.17. Error drop (up)        | 67 |
| 9.4.17.1. Methods              | 67 |
| 9.4.17.1.1. attribute          | 67 |
| 9.4.17.1.2. message            | 67 |
| 9.4.17.1.3. value              | 68 |
| 9.4.17.1.4. to_str             | 68 |
| 9.4.18. Errors drop (up)       | 68 |
| 9.4.18.1. Methods              | 68 |
| 9.4.18.1.1. empty?             | 68 |
| 9.4.18.1.2. present?           | 68 |
| 9.4.19. Feature drop (up)      | 68 |
| 9.4.19.1. Methods              | 68 |
| 9.4.19.1.1. errors             | 69 |
| 9.4.19.1.2. name               | 69 |
| 9.4.19.1.3. description        | 69 |
| 9.4.19.1.4. has_description?   | 69 |
| 9.4.20. Field drop (up)        | 69 |
| 9.4.20.1. Methods              | 69 |
| 9.4.20.1.1. value              | 69 |
| 9.4.20.1.2. name               | 69 |
| 9.4.20.1.3. required           | 69 |
| 9.4.20.1.4. hidden?            | 69 |
| 9.4.20.1.5. hidden             | 69 |
| 9.4.20.1.6. visible?           | 69 |
| 9.4.20.1.7. visible            | 69 |
| 9.4.20.1.8. read_only          | 70 |
| 9.4.20.1.9. errors             | 70 |
| 9.4.20.1.10. input_name        | 70 |
| 9.4.20.1.11. html_id           | 70 |
| 9.4.20.1.12. label             | 70 |
| 9.4.20.1.13. to_str            | 70 |
| 9.4.20.1.14. choices           | 70 |
| 9.4.21. Flash drop (up)        | 70 |
| 9.4.21.1. Methods              | 71 |
| 9.4.21.1.1. messages           | 71 |
| 9.4.22. Forum drop (up)        | 71 |
| 9.4.22.1. Methods              | 71 |
| 9.4.22.1.1. enabled?           | 71 |
| 9.4.22.1.2. latest_posts       | 71 |
| 9.4.23. I18n drop (up)         | 71 |

|                                   |    |
|-----------------------------------|----|
| 9.4.23.1. Methods                 | 71 |
| 9.4.23.1.1. short_date            | 71 |
| 9.4.23.1.2. long_date             | 71 |
| 9.4.23.1.3. default_date          | 71 |
| 9.4.24. Invitation drop (up)      | 72 |
| 9.4.24.1. Methods                 | 72 |
| 9.4.24.1.1. errors                | 72 |
| 9.4.24.1.2. email                 | 72 |
| 9.4.24.1.3. accepted?             | 72 |
| 9.4.24.1.4. accepted_at           | 72 |
| 9.4.24.1.5. sent_at               | 72 |
| 9.4.24.1.6. resend_url            | 72 |
| 9.4.24.1.7. url                   | 73 |
| 9.4.25. Invoice drop (up)         | 73 |
| 9.4.25.1. Methods                 | 73 |
| 9.4.25.1.1. errors                | 73 |
| 9.4.25.1.2. friendly_id           | 73 |
| 9.4.25.1.3. name                  | 73 |
| 9.4.25.1.4. state                 | 73 |
| 9.4.25.1.5. cost                  | 73 |
| 9.4.25.1.6. currency              | 73 |
| 9.4.25.1.7. cost_without_vat      | 73 |
| 9.4.25.1.8. vat_amount            | 73 |
| 9.4.25.1.9. exists_pdf?           | 74 |
| 9.4.25.1.10. period_begin         | 74 |
| 9.4.25.1.11. period_end           | 74 |
| 9.4.25.1.12. issued_on            | 74 |
| 9.4.25.1.13. due_on               | 74 |
| 9.4.25.1.14. paid_on              | 74 |
| 9.4.25.1.15. vat_code             | 74 |
| 9.4.25.1.16. fiscal_code          | 74 |
| 9.4.25.1.17. account              | 74 |
| 9.4.25.1.18. buyer_account        | 74 |
| 9.4.25.1.19. line_items           | 74 |
| 9.4.25.1.20. payment_transactions | 74 |
| 9.4.25.1.21. url                  | 75 |
| 9.4.25.1.22. pdf_url              | 75 |
| 9.4.26. Janrain drop (up)         | 75 |
| 9.4.26.1. Methods                 | 75 |
| 9.4.26.1.1. login_url             | 75 |
| 9.4.26.1.2. user_identified?      | 75 |
| 9.4.26.1.3. session_url           | 75 |
| 9.4.26.1.4. relying_party         | 75 |
| 9.4.27. Lineltem drop (up)        | 75 |
| 9.4.27.1. Methods                 | 75 |
| 9.4.27.1.1. errors                | 75 |
| 9.4.27.1.2. name                  | 75 |
| 9.4.27.1.3. description           | 76 |
| 9.4.27.1.4. quantity              | 76 |
| 9.4.27.1.5. cost                  | 76 |
| 9.4.28. Message drop (up)         | 76 |
| 9.4.28.1. Methods                 | 76 |
| 9.4.28.1.1. errors                | 76 |

|                              |    |
|------------------------------|----|
| 9.4.28.1.2. id               | 76 |
| 9.4.28.1.3. subject          | 76 |
| 9.4.28.1.4. body             | 76 |
| 9.4.28.1.5. created_at       | 76 |
| 9.4.28.1.6. url              | 76 |
| 9.4.28.1.7. state            | 76 |
| 9.4.28.1.8. sender           | 77 |
| 9.4.28.1.9. to               | 77 |
| 9.4.28.1.10. recipients      | 77 |
| 9.4.29. Message drop (up)    | 77 |
| 9.4.29.1. Methods            | 77 |
| 9.4.29.1.1. type             | 77 |
| 9.4.29.1.2. text             | 77 |
| 9.4.30. Metric drop (up)     | 77 |
| 9.4.30.1. Methods            | 77 |
| 9.4.30.1.1. errors           | 77 |
| 9.4.30.1.2. unit             | 77 |
| 9.4.30.1.3. description      | 77 |
| 9.4.30.1.4. name             | 77 |
| 9.4.30.1.5. system_name      | 78 |
| 9.4.30.1.6. usage_limits     | 78 |
| 9.4.30.1.7. pricing_rules    | 78 |
| 9.4.30.1.8. has_parent       | 78 |
| 9.4.31. Page drop (up)       | 78 |
| 9.4.31.1. Methods            | 78 |
| 9.4.31.1.1. errors           | 78 |
| 9.4.31.1.2. title            | 79 |
| 9.4.31.1.3. system_name      | 79 |
| 9.4.32. Page drop (up)       | 79 |
| 9.4.32.1. Methods            | 79 |
| 9.4.32.1.1. errors           | 79 |
| 9.4.32.1.2. title            | 79 |
| 9.4.32.1.3. kind             | 79 |
| 9.4.32.1.4. url              | 79 |
| 9.4.32.1.5. description      | 79 |
| 9.4.33. Pagination drop (up) | 79 |
| 9.4.33.1. Methods            | 79 |
| 9.4.33.1.1. page_size        | 79 |
| 9.4.33.1.2. current_page     | 80 |
| 9.4.33.1.3. current_offset   | 80 |
| 9.4.33.1.4. pages            | 80 |
| 9.4.33.1.5. items            | 81 |
| 9.4.33.1.6. previous         | 81 |
| 9.4.33.1.7. next             | 81 |
| 9.4.33.1.8. parts            | 81 |
| 9.4.34. Part drop (up)       | 81 |
| 9.4.34.1. Methods            | 81 |
| 9.4.34.1.1. url              | 81 |
| 9.4.34.1.2. rel              | 81 |
| 9.4.34.1.3. current?         | 81 |
| 9.4.34.1.4. is_link          | 81 |
| 9.4.34.1.5. title            | 81 |
| 9.4.34.1.6. to_s             | 81 |

|                                            |    |
|--------------------------------------------|----|
| 9.4.35. PaymentGateway drop (up)           | 81 |
| 9.4.35.1. Methods                          | 81 |
| 9.4.35.1.1. braintree_blue?                | 81 |
| 9.4.35.1.2. authorize_net?                 | 81 |
| 9.4.35.1.3. type                           | 81 |
| 9.4.36. PaymentTransaction drop (up)       | 81 |
| 9.4.36.1. Methods                          | 82 |
| 9.4.36.1.1. errors                         | 82 |
| 9.4.36.1.2. currency                       | 82 |
| 9.4.36.1.3. amount                         | 82 |
| 9.4.36.1.4. created_at                     | 82 |
| 9.4.36.1.5. success?                       | 82 |
| 9.4.36.1.6. message                        | 82 |
| 9.4.36.1.7. reference                      | 82 |
| 9.4.37. PlanFeature drop (up)              | 82 |
| 9.4.37.1. Methods                          | 82 |
| 9.4.37.1.1. errors                         | 82 |
| 9.4.37.1.2. name                           | 83 |
| 9.4.37.1.3. description                    | 83 |
| 9.4.37.1.4. has_description?               | 83 |
| 9.4.37.1.5. enabled?                       | 83 |
| 9.4.38. Post drop (up)                     | 83 |
| 9.4.38.1. Methods                          | 83 |
| 9.4.38.1.1. errors                         | 83 |
| 9.4.38.1.2. body                           | 83 |
| 9.4.38.1.3. topic                          | 83 |
| 9.4.38.1.4. created_at                     | 83 |
| 9.4.38.1.5. url                            | 83 |
| 9.4.39. Post drop (up)                     | 84 |
| 9.4.39.1. Methods                          | 84 |
| 9.4.39.1.1. errors                         | 84 |
| 9.4.39.1.2. title                          | 84 |
| 9.4.39.1.3. kind                           | 84 |
| 9.4.39.1.4. url                            | 84 |
| 9.4.39.1.5. description                    | 84 |
| 9.4.40. PricingRule drop (up)              | 84 |
| 9.4.40.1. Methods                          | 84 |
| 9.4.40.1.1. cost_per_unit                  | 84 |
| 9.4.40.1.2. min                            | 84 |
| 9.4.40.1.3. max                            | 84 |
| 9.4.40.1.4. plan                           | 84 |
| 9.4.41. Provider drop (up)                 | 84 |
| 9.4.41.1. Methods                          | 84 |
| 9.4.41.1.1. name                           | 85 |
| 9.4.41.1.2. payment_gateway                | 85 |
| 9.4.41.1.3. domain                         | 85 |
| 9.4.41.1.4. timezone                       | 85 |
| 9.4.41.1.5. support_email                  | 85 |
| 9.4.41.1.6. finance_support_email          | 85 |
| 9.4.41.1.7. telephone_number               | 85 |
| 9.4.41.1.8. multiple_applications_allowed? | 85 |
| 9.4.41.1.9. logo_url                       | 86 |
| 9.4.41.1.10. multiple_services_allowed?    | 86 |

|                                          |    |
|------------------------------------------|----|
| 9.4.41.1.11. finance_allowed?            | 86 |
| 9.4.41.1.12. multiple_users_allowed?     | 86 |
| 9.4.41.1.13. account_plans               | 86 |
| 9.4.41.1.14. services                    | 87 |
| 9.4.41.1.15. signups_enabled?            | 87 |
| 9.4.41.1.16. account_management_enabled? | 87 |
| 9.4.42. ReferrerFilter drop (up)         | 87 |
| 9.4.42.1. Methods                        | 87 |
| 9.4.42.1.1. id                           | 87 |
| 9.4.42.1.2. value                        | 87 |
| 9.4.42.1.3. delete_url                   | 87 |
| 9.4.42.1.4. application                  | 87 |
| 9.4.43. Request drop (up)                | 87 |
| 9.4.43.1. Methods                        | 87 |
| 9.4.43.1.1. request_uri                  | 87 |
| 9.4.43.1.2. host_with_port               | 88 |
| 9.4.43.1.3. host                         | 88 |
| 9.4.43.1.4. path                         | 88 |
| 9.4.44. Role drop (up)                   | 88 |
| 9.4.44.1. Methods                        | 88 |
| 9.4.44.1.1. name                         | 88 |
| 9.4.44.1.2. description                  | 88 |
| 9.4.45. Search drop (up)                 | 88 |
| 9.4.45.1. Methods                        | 88 |
| 9.4.45.1.1. errors                       | 88 |
| 9.4.45.1.2. query                        | 88 |
| 9.4.45.1.3. total_found                  | 89 |
| 9.4.45.1.4. results                      | 89 |
| 9.4.46. Service drop (up)                | 89 |
| 9.4.46.1. Methods                        | 89 |
| 9.4.46.1.1. errors                       | 89 |
| 9.4.46.1.2. name                         | 89 |
| 9.4.46.1.3. system_name                  | 89 |
| 9.4.46.1.4. description                  | 89 |
| 9.4.46.1.5. subscribed?                  | 89 |
| 9.4.46.1.6. subscription                 | 90 |
| 9.4.46.1.7. subscribable?                | 90 |
| 9.4.46.1.8. subscribe_url                | 90 |
| 9.4.46.1.9. application_plans            | 90 |
| 9.4.46.1.10. service_plans               | 90 |
| 9.4.46.1.11. plans                       | 90 |
| 9.4.46.1.12. features                    | 90 |
| 9.4.46.1.13. apps_identifier             | 91 |
| 9.4.46.1.14. backend_version             | 91 |
| 9.4.46.1.15. referrer_filters_required?  | 91 |
| 9.4.46.1.16. metrics                     | 91 |
| 9.4.46.1.17. support_email               | 91 |
| 9.4.47. ServiceContract drop (up)        | 91 |
| 9.4.47.1. Methods                        | 91 |
| 9.4.47.1.1. errors                       | 91 |
| 9.4.47.1.2. id                           | 91 |
| 9.4.47.1.3. can_change_plan?             | 91 |
| 9.4.47.1.4. trial?                       | 92 |

|                                             |    |
|---------------------------------------------|----|
| 9.4.47.1.5. live?                           | 92 |
| 9.4.47.1.6. state                           | 92 |
| 9.4.47.1.7. remaining_trial_period_days     | 92 |
| 9.4.47.1.8. plan                            | 92 |
| 9.4.47.1.9. plan_change_permission_name     | 92 |
| 9.4.47.1.10. plan_change_permission_warning | 92 |
| 9.4.47.1.11. contract                       | 92 |
| 9.4.47.1.12. name                           | 92 |
| 9.4.47.1.13. system_name                    | 92 |
| 9.4.47.1.14. change_plan_url                | 92 |
| 9.4.47.1.15. service                        | 92 |
| 9.4.47.1.16. applications                   | 92 |
| 9.4.47.1.17. can                            | 92 |
| 9.4.48. ServicePlan drop (up)               | 93 |
| 9.4.48.1. Methods                           | 93 |
| 9.4.48.1.1. selected?                       | 93 |
| 9.4.48.1.2. bought?                         | 93 |
| 9.4.48.1.3. features                        | 93 |
| 9.4.48.1.4. setup_fee                       | 93 |
| 9.4.48.1.5. name                            | 93 |
| 9.4.48.1.6. system_name                     | 93 |
| 9.4.48.1.7. id                              | 94 |
| 9.4.48.1.8. free?                           | 94 |
| 9.4.48.1.9. paid?                           | 94 |
| 9.4.48.1.10. approval_required?             | 94 |
| 9.4.48.1.11. flat_cost                      | 94 |
| 9.4.48.1.12. service                        | 94 |
| 9.4.49. TimeZone drop (up)                  | 95 |
| 9.4.49.1. Methods                           | 95 |
| 9.4.49.1.1. full_name                       | 95 |
| 9.4.49.1.2. to_str                          | 95 |
| 9.4.50. Today drop (up)                     | 95 |
| 9.4.50.1. Methods                           | 95 |
| 9.4.50.1.1. month                           | 95 |
| 9.4.50.1.2. day                             | 95 |
| 9.4.50.1.3. year                            | 95 |
| 9.4.50.1.4. beginning_of_month              | 95 |
| 9.4.51. Topic drop (up)                     | 95 |
| 9.4.51.1. Methods                           | 95 |
| 9.4.51.1.1. errors                          | 95 |
| 9.4.51.1.2. title                           | 95 |
| 9.4.51.1.3. kind                            | 95 |
| 9.4.51.1.4. url                             | 95 |
| 9.4.51.1.5. description                     | 96 |
| 9.4.52. Topic drop (up)                     | 96 |
| 9.4.52.1. Methods                           | 96 |
| 9.4.52.1.1. errors                          | 96 |
| 9.4.52.1.2. title                           | 96 |
| 9.4.52.1.3. url                             | 96 |
| 9.4.53. Url drop (up)                       | 96 |
| 9.4.53.1. Methods                           | 96 |
| 9.4.53.1.1. to_s                            | 96 |
| 9.4.53.1.2. to_str                          | 96 |

|                                   |     |
|-----------------------------------|-----|
| 9.4.53.1.3. title                 | 96  |
| 9.4.53.1.4. current_or_subpath?   | 96  |
| 9.4.53.1.5. current?              | 96  |
| 9.4.53.1.6. active?               | 97  |
| 9.4.54. Urls drop (up)            | 97  |
| 9.4.54.1. Methods                 | 97  |
| 9.4.54.1.1. provider              | 97  |
| 9.4.54.1.2. cas_login             | 97  |
| 9.4.54.1.3. new_application       | 97  |
| 9.4.54.1.4. signup                | 97  |
| 9.4.54.1.5. search                | 97  |
| 9.4.54.1.6. login                 | 98  |
| 9.4.54.1.7. logout                | 98  |
| 9.4.54.1.8. forgot_password       | 98  |
| 9.4.54.1.9. service_subscription  | 98  |
| 9.4.54.1.10. compose_message      | 98  |
| 9.4.54.1.11. messages_outbox      | 98  |
| 9.4.54.1.12. messages_trash       | 98  |
| 9.4.54.1.13. empty_messages_trash | 98  |
| 9.4.54.1.14. credit_card_terms    | 98  |
| 9.4.54.1.15. credit_card_privacy  | 98  |
| 9.4.54.1.16. credit_card_refunds  | 98  |
| 9.4.54.1.17. users                | 98  |
| 9.4.54.1.18. personal_details     | 98  |
| 9.4.54.1.19. access_details       | 98  |
| 9.4.54.1.20. payment_details      | 98  |
| 9.4.54.1.21. new_invitation       | 98  |
| 9.4.54.1.22. invitations          | 99  |
| 9.4.54.1.23. dashboard            | 99  |
| 9.4.54.1.24. applications         | 99  |
| 9.4.54.1.25. api_access_details   | 99  |
| 9.4.54.1.26. services             | 99  |
| 9.4.54.1.27. messages_inbox       | 99  |
| 9.4.54.1.28. stats                | 99  |
| 9.4.54.1.29. account_overview     | 99  |
| 9.4.54.1.30. account_plans        | 99  |
| 9.4.54.1.31. invoices             | 99  |
| 9.4.55. UsageLimit drop (up)      | 99  |
| 9.4.55.1. Methods                 | 99  |
| 9.4.55.1.1. period                | 99  |
| 9.4.55.1.2. metric                | 99  |
| 9.4.55.1.3. value                 | 99  |
| 9.4.56. User drop (up)            | 99  |
| 9.4.56.1. Methods                 | 100 |
| 9.4.56.1.1. errors                | 100 |
| 9.4.56.1.2. admin?                | 100 |
| 9.4.56.1.3. username              | 100 |
| 9.4.56.1.4. account               | 100 |
| 9.4.56.1.5. name                  | 100 |
| 9.4.56.1.6. email                 | 100 |
| 9.4.56.1.7. password_required?    | 100 |
| 9.4.56.1.8. sections              | 100 |
| 9.4.56.1.9. role                  | 101 |



|                                                    |            |
|----------------------------------------------------|------------|
| 9.4.56.1.10. roles_collection                      | 101        |
| 9.4.56.1.11. url                                   | 101        |
| 9.4.56.1.12. edit_url                              | 101        |
| 9.4.56.1.13. can                                   | 101        |
| 9.4.56.1.14. extra_fields                          | 101        |
| 9.4.56.1.15. fields                                | 102        |
| 9.4.56.1.16. builtin_fields                        | 102        |
| 9.5. TAGS (UP)                                     | 102        |
| 9.5.1. Tag 'braintree_customer_form' (up)          | 102        |
| 9.5.2. Tag 'csrf' (up)                             | 102        |
| 9.5.3. Tag 'content' (up)                          | 102        |
| 9.5.4. Tag 'content_for' (up)                      | 102        |
| 9.5.5. Tag 'debug' (up)                            | 102        |
| 9.5.6. Tag 'email' (up)                            | 102        |
| 9.5.7. Tag 'flash' (up)                            | 103        |
| 9.5.8. Tag 'footer' (up)                           | 104        |
| 9.5.9. Tag 'form' (up)                             | 104        |
| 9.5.10. Tag 'latest_forum_posts' (up)              | 105        |
| 9.5.11. Tag 'latest_messages' (up)                 | 105        |
| 9.5.12. Tag 'logo' (up)                            | 106        |
| 9.5.13. Tag 'menu' (up)                            | 106        |
| 9.5.14. Tag 'oldfooter' (up)                       | 106        |
| 9.5.15. Tag 'plan_widget' (up)                     | 106        |
| 9.5.16. Tag 'portlet' (up)                         | 106        |
| 9.5.17. Tag 'submenu' (up)                         | 106        |
| 9.5.18. Tag '3scale_essentials' (up)               | 107        |
| 9.5.19. Tag 'user_widget' (up)                     | 107        |
| 9.6. FILTERS (UP)                                  | 107        |
| 9.6.1. FormHelpers filters (up)                    | 107        |
| 9.6.1.1. error_class filter                        | 107        |
| 9.6.1.2. inline_errors filter                      | 107        |
| 9.6.2. ParamFilter filters (up)                    | 107        |
| 9.6.2.1. to_param filter                           | 107        |
| 9.6.3. Common filters (up)                         | 107        |
| 9.6.3.1. group_by filter                           | 107        |
| 9.6.3.2. any filter                                | 108        |
| 9.6.3.3. stylesheet_link_tag filter                | 108        |
| 9.6.3.4. javascript_include_tag filter             | 108        |
| 9.6.3.5. image_tag filter                          | 108        |
| 9.6.3.6. mail_to filter                            | 108        |
| 9.6.3.7. html_safe filter                          | 108        |
| 9.6.3.8. pluralize filter                          | 108        |
| 9.6.3.9. delete_button filter                      | 108        |
| 9.6.3.10. delete_button_ajax filter                | 109        |
| 9.6.3.11. update_button filter                     | 109        |
| 9.6.3.12. create_button filter                     | 109        |
| 9.6.3.13. create_button_ajax filter                | 109        |
| 9.6.3.14. regenerate_oauth_secret_button filter    | 109        |
| 9.6.3.15. link_to filter                           | 109        |
| <b>CHAPTER 10. LIQUIDS: DEVELOPER PORTAL .....</b> | <b>110</b> |
| 10.1. WHAT ARE LIQUIDS?                            | 110        |
| 10.1.1. Pros and cons                              | 110        |

|                                                        |            |
|--------------------------------------------------------|------------|
| 10.2. HOW TO USE LIQUIDS                               | 110        |
| 10.2.1. Liquid drops, tags, and their meanings         | 111        |
| 10.2.2. The context                                    | 111        |
| 10.2.3. Hierarchy                                      | 111        |
| 10.3. USAGE OF LIQUIDS IN THE CMS                      | 112        |
| 10.3.1. Enabling Liquids                               | 112        |
| 10.3.2. Different use on pages, partials, and layouts  | 112        |
| 10.3.3. Use with CSS/JS                                | 112        |
| 10.4. USAGE OF LIQUIDS IN EMAIL TEMPLATES              | 113        |
| 10.4.1. Differences from CMS                           | 113        |
| 10.5. TROUBLESHOOTING                                  | 113        |
| 10.5.1. Debugging                                      | 113        |
| 10.5.2. Typical errors and ways to solve them          | 113        |
| 10.5.3. Answers on the forum                           | 114        |
| <b>CHAPTER 11. MULTI-SERVICE SIGNUP</b>                | <b>115</b> |
| 11.1. PREREQUISITES                                    | 115        |
| 11.2. INTRODUCTION                                     | 115        |
| 11.3. STEP 1: THE LOOP                                 | 115        |
| 11.4. STEP 2: SIGNUP COLUMNS                           | 116        |
| 11.5. STEP 3: SUBSCRIBE AND LINKS                      | 116        |
| 11.6. STEP 4: STYLING                                  | 116        |
| <b>CHAPTER 12. DEVELOPER PORTAL OVERVIEW</b>           | <b>118</b> |
| 12.1. CMS OVERVIEW                                     | 118        |
| 12.2. CONTENT                                          | 118        |
| 12.3. LAYOUTS AND PARTIALS                             | 120        |
| 12.4. PORTLETS                                         | 121        |
| 12.4.1. Note                                           | 121        |
| 12.5. REDIRECTS AND CHANGES                            | 122        |
| <b>CHAPTER 13. RESTRICTED CONTENT</b>                  | <b>123</b> |
| 13.1. RESTRICTED PAGES                                 | 123        |
| 13.2. RESTRICTED BLOCKS OF CONTENT                     | 124        |
| 13.2.1. Pro tip: How to automate setting extra fields  | 124        |
| 13.3. REQUIRING USER LOGIN                             | 125        |
| <b>CHAPTER 14. CONFIGURE SIGNUP FLOWS</b>              | <b>126</b> |
| 14.1. STEP 1: REMOVE ALL APPROVAL STEPS                | 126        |
| 14.2. STEP 2: ENABLE ALL POSSIBLE DEFAULT PLANS        | 127        |
| 14.3. STEP 3: TEST THE WORKFLOW                        | 128        |
| <b>CHAPTER 15. SSO FOR DEVELOPER PORTAL</b>            | <b>129</b> |
| 15.1. STEP 1: CREATE YOUR USERS IN THE 3SCALE PLATFORM | 129        |
| 15.2. STEP 2: REQUEST A LOGIN LINK                     | 129        |
| 15.3. STEP 3: REDIRECT USER WITH AUTOMATIC LOGIN       | 129        |
| <b>CHAPTER 16. SETTING TERMS AND CONDITIONS</b>        | <b>131</b> |
| 16.1. TERMS AND CONDITIONS                             | 131        |
| 16.2. CREDIT CARD POLICIES                             | 132        |



# CHAPTER 1. DEVELOPER PORTAL AUTHENTICATION

Follow these steps to configure access to your developer portal.


This article shows how to enable and disable the different types of authentication that can be made available on your developer portal to allow your developers to sign up or sign in.

At the moment, 3scale supports three different ways of authenticating to the developer portal, which are covered in the following sections:

1. [Username/email and password](#)
2. [Authentication via GitHub](#)
3. [Authentication via Auth0](#)
4. [Authentication via Red Hat Single Sign-On](#)

By default, only one type of authentication will be enabled on your developer portal, two if you signed up on 3scale.net:

- Username/email and password
- Authentication via GitHub (using the 3scale GitHub application) - only enabled by default if you signed up on 3scale.net

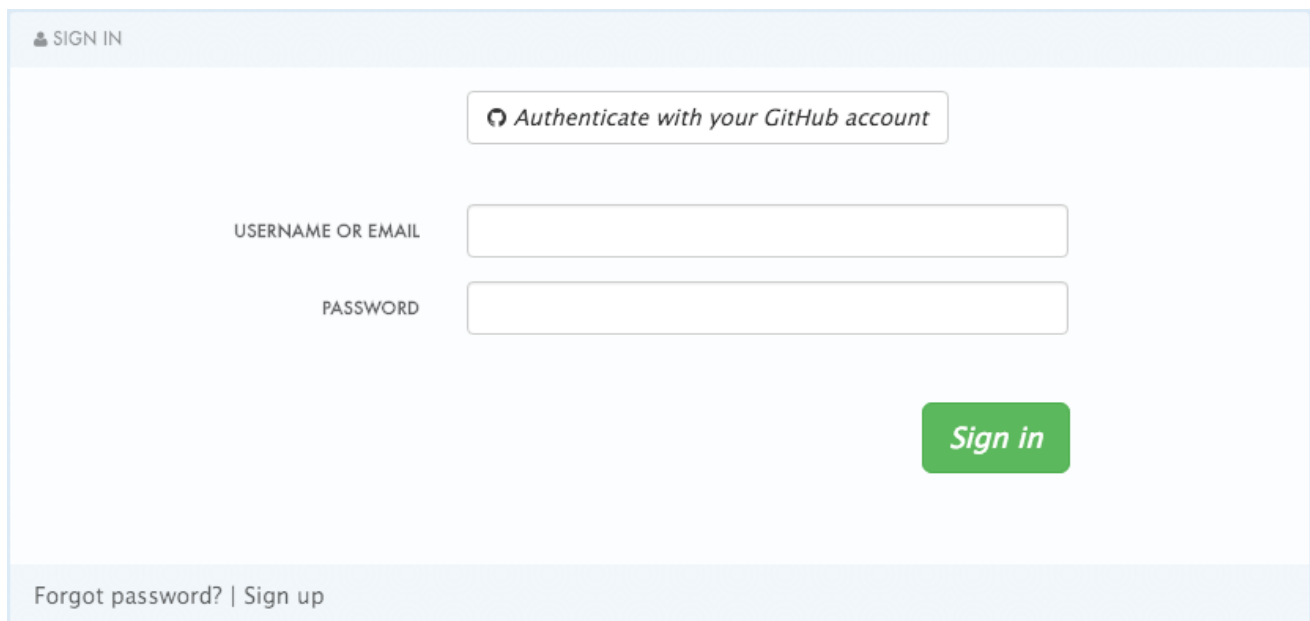

The screenshot shows the 'SIGN IN' page of the 3scale Developer Portal. At the top left, there is a 'SIGN IN' header with a user icon. Below it, there is a button labeled 'Authenticate with your GitHub account'. Underneath, there are two input fields: 'USERNAME OR EMAIL' and 'PASSWORD'. To the right of the 'PASSWORD' field is a green 'Sign in' button. At the bottom of the form, there is a link that says 'Forgot password? | Sign up'.

## NOTE

Older 3scale accounts (created prior to December 14th, 2015) might need to follow an extra step in order to enable GitHub and Auth0 authentication.

If this applies to you, you will need to add the following code snippet to the login and signup templates in order to enable this feature in both forms.

```
{% include 'login/sso' %}
```

## 1.1. ENABLING AND DISABLING USERNAME/EMAIL AND PASSWORD

By default, the username/email and password authentication is enabled on your developer portal. Usually there is no change to be made here, as this is a standard way for your developers to create an account and to login.

However, in some rare cases you might want to remove this authentication type. To do so, edit the **Login > New** template as in the screenshot below:

```

1 <div class="row">
2   <div class="col-md-9">
3     <div class="panel panel-default">
4       <div class="panel-heading">
5         <i class="fa fa-user"></i>
6         Sign in
7       </div>
8       <div class="panel-body">
9
10        {% include 'login/sso' %}
11
12        {% comment %}
13
14        {% form 'login' form, class: 'form-horizontal' %}
15        {% include 'login/cas' %}
16        {% include 'login/raain' %}
17
18        <fieldset>
19          <div class="form-group" id="session_username_input">
20            <label for="session_username" class="control-label col-md-4">Username or Email</label>
21            <div class="col-md-6">
22              <input id="session_username" name="username" tabindex="1" autofocus="autofocus"
23                type="text"
24                class="form-control">
25            </div>
26          </div>
27          <div class="form-group" id="session_password_input">
28            <label for="session_password" class="control-label col-md-4">Password</label>
29            <div class="col-md-6">
30              <input id="session_password" name="password" tabindex="2"
31                type="password"
32                class="form-control">
33            </div>
34          </div>
35
36          <input name="remember_me" type="hidden" value="1">
37        </fieldset>
38        <fieldset>
39          <div class="form-group">
40            <div class="col-md-10">
41              <input name="commit" type="submit" value="Sign in" class="btn btn-success btn-lg pull-
42right">
43            </div>
44          </div>
45        </fieldset>
46
47        {% endform %}
48        {% endcomment %}
49
50      </div>
51      <div class="panel-footer">
52        <a href="{{ urls.forgot_password }}">Forgot password?</a>
53
54        {% if provider.signups_enabled? %}
55        | <a href="{{ urls.signup }}" class="link">Sign up</a>
56        {% endif %}
57      </div>
58    </div>
59  </div>
60 </div>
61

```

If you need to add back the username/email and password authentication to your developer portal, just remove the liquid comment tags added in the previous step.

## 1.2. ENABLING AND DISABLING AUTHENTICATION VIA GITHUB

In order to enable your own GitHub application, first you will need to create one and retrieve the corresponding credentials.

There are two different ways you can configure authentication via GitHub:

- Using the 3scale GitHub application (enabled by default for hosted 3scale accounts)
- Using your own GitHub application (for on-premises installations)

To make changes to this default configuration, you can go to your 3scale Admin Portal, in **Audience > Developer Portal > SSO Integrations** you will see the following screen:

**RED HAT 3SCALE** API MANAGEMENT Audience ▾

### Single Sign-on Integrations

| Integration                            | State  |
|----------------------------------------|--------|
| <a href="#">GitHub</a>                 | Hidden |
| <a href="#">★ Auth0</a>                | Hidden |
| <a href="#">Red Hat Single Sign-On</a> | Hidden |

Click on **GitHub** to access the configuration screen:



[Edit](#)

**Published:** ☒

**Branding:** 3scale branded

**Authentication Flow** **Test**

From this screen you can:

1. Make the GitHub authentication available or unavailable on your developer portal – to do so, simply check or uncheck the "Published" box.
2. Choose the 3scale branded GitHub application or add your own GitHub application – the 3scale GitHub application is enabled (published) by default. You can configure your own GitHub application by clicking on **Edit** and entering the details of the OAuth application created in GitHub ("Client" and "Client secret"). Please note that in order to make the integration work properly with your own GitHub application, you should configure the authorization callback URL of your GitHub application using the "Callback URL" that you should see after switching to the "custom branded" option (e.g. <https://yourdomain.3scale.net/auth/github/callback>).
3. Test that the configured authentication flow works as expected.

## 1.3. ENABLING AND DISABLING AUTHENTICATION VIA AUTH0


### 1.3.1. Note

This feature is only available on the Enterprise plans.

In order to have your developers authenticate using Auth0, you first need to have a valid Auth0 subscription.

Authentication via Auth0 won't be enabled by default. If you want to use your Auth0 account in conjunction with 3scale to manage the access to your developer portal, you can follow these steps to configure it:

Go to your 3scale Admin Portal, in **Audience > Developer Portal > SSO Integrations** click on **Auth0**.

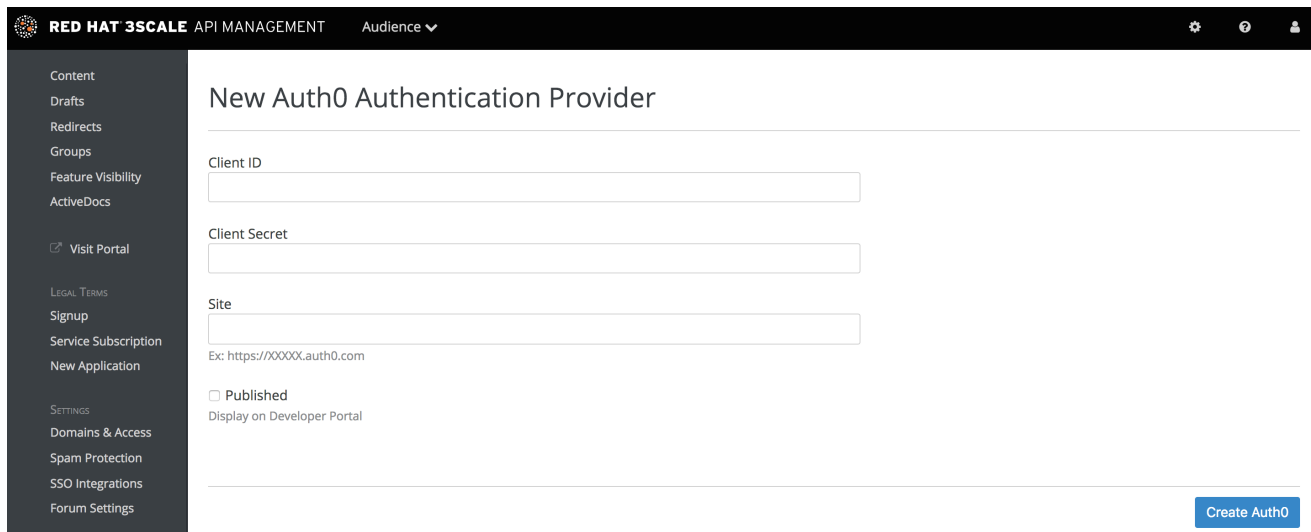

The screenshot shows the 'New Auth0 Authentication Provider' configuration screen in the 3scale Admin Portal. The left sidebar contains navigation links: Content, Drafts, Redirects, Groups, Feature Visibility, ActiveDocs, Visit Portal, LEGAL TERMS, Signup, Service Subscription, New Application, SETTINGS, Domains & Access, Spam Protection, SSO Integrations, and Forum Settings. The main form area has the following fields and options:

- Client ID**: A text input field.
- Client Secret**: A text input field.
- Site**: A text input field with a placeholder example: `Ex: https://XXXXX.auth0.com`.
- Published**: A checkbox labeled 'Published' with the subtext 'Display on Developer Portal'.

A blue button labeled 'Create Auth0' is located at the bottom right of the form.

On this configuration screen, you'll need to add the details of your Auth0 account. Once you've entered the client ID, client secret, and site, check the "Published" box and click on **Create Auth0** to make it available on your developer portal.

## 1.4. ENABLING AND DISABLING AUTHENTICATION VIA RED HAT SINGLE SIGN-ON



### NOTE

This feature is only available on enterprise plans.

Red Hat Single Sign-On (RH-SSO) is an integrated Sign-On solution (SSO) that, when used in conjunction with 3scale, allows you to authenticate your developers using any of the available Red Hat Single Sign-On identity brokering and user federation options.

Refer to the [supported configurations](#) page for information on which versions of Red Hat Single Sign-On are compatible with 3scale.

### 1.4.1. Before You Begin

Before you can integrate Red Hat Single Sign-On with 3scale, you must have a working Red Hat Single Sign-On instance. Refer to the Red Hat Single Sign-On documentation for installation instructions: [Installing RH-SSO 7.2](#)

### 1.4.2. Configuring Red Hat Single Sign-On

Perform the following steps to configure Red Hat Single Sign-On:

1. Create a realm as described in the [Red Hat Single Sign-On documentation](#).
2. Add a client by going to **Clients** and clicking on **Create**. Fill the form as indicated in the image below:

The screenshot shows the 'Clients' configuration page in Red Hat Single Sign-On. The left sidebar contains navigation links: Master, Configure (Realm Settings, Clients, Client Templates, Roles, Identity Providers, User Federation, Authentication), and Manage (Groups, Users, Sessions, Events, Import). The main content area is titled '3scale-dev-portal' and has tabs for Settings, Roles, Mappers, Scope, Revocation, Sessions, Offline Access, and Installation. The 'Settings' tab is active, showing various configuration fields:

- Client ID:** 3scale-dev-portal
- Name:** (empty field)
- Description:** (empty field)
- Enabled:** ON
- Consent Required:** OFF
- Client Protocol:** openid-connect
- Client Template:** (empty field)
- Access Type:** confidential
- Standard Flow Enabled:** ON
- Implicit Flow Enabled:** OFF
- Direct Access Grants Enabled:** OFF
- Root URL:** Your 3scale admin portal URL http://yourdomain.3scale.net or custom domain
- \* Valid Redirect URIs:** Your 3scale admin portal URL followed by /\*
- Base URL:** (empty field)
- Admin URL:** (empty field)
- Web Origins:** (empty field)

At the bottom of the form are 'Save' and 'Cancel' buttons.

- In the **Client ID** field, choose a name for your client.
- The **Direct Grants Only** field must be disabled.
- In the **Client Protocol** field choose *openid-connect*.
- In **Access Type** choose *confidential*.
- In the **Root URL** field, add your 3scale admin portal URL. This should be the URL address that you use to log in into your developer portal, e.g.: <https://yourdomain.3scale.net> or your custom URL.
- In the **Valid Redirect URLs**, add your domain again followed by /\* like this: [https://yourdomain.3scale.net/\\*](https://yourdomain.3scale.net/*).

1. Get the client secret by going to the Client you just created and then clicking on **Credentials**. Choose *Client Id and Secret*.



Account 

Settings

Credentials

Roles

Mappers Scope 

Revocation

Sessions Offline Access Client Authenticator Client Id and Secret 

Secret


2f024368-40ef-43a8-8e19-af0b679d9215

Regenerate Secret

Registration access token 

Regenerate registration access token


1. In order to configure a seamless integration and make the signup on 3scale transparent for the user, you need to configure a couple of mappers. To do so go to **Clients** > *select your client* > **Mappers**. For the first mapper, verified email, click on **Add Builtin**.

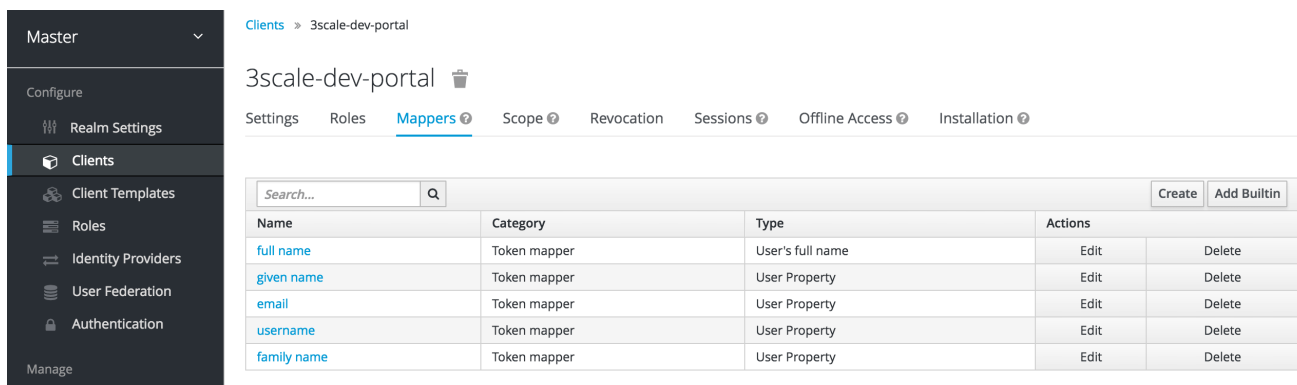

The screenshot shows the 'Mappers' page for the '3scale-dev-portal' client. The left sidebar contains navigation links: Master, Configure, Realm Settings, Clients (selected), Client Templates, Roles, Identity Providers, User Federation, Authentication, and Manage. The main content area has a breadcrumb 'Clients > 3scale-dev-portal' and a sub-breadcrumb 'Mappers'. Below the breadcrumb is a table of built-in mappers. The table has columns for Name, Category, Type, and Actions. The mappers listed are: full name (Token mapper, User's full name), given name (Token mapper, User Property), email (Token mapper, User Property), username (Token mapper, User Property), and family name (Token mapper, User Property). Each mapper has 'Edit' and 'Delete' actions. At the top right of the table are 'Create' and 'Add Builtin' buttons.

| Name        | Category     | Type             | Actions      |
|-------------|--------------|------------------|--------------|
| full name   | Token mapper | User's full name | Edit, Delete |
| given name  | Token mapper | User Property    | Edit, Delete |
| email       | Token mapper | User Property    | Edit, Delete |
| username    | Token mapper | User Property    | Edit, Delete |
| family name | Token mapper | User Property    | Edit, Delete |

- + Then select the *email verified* option, and click on **Add selected** to save the changes.

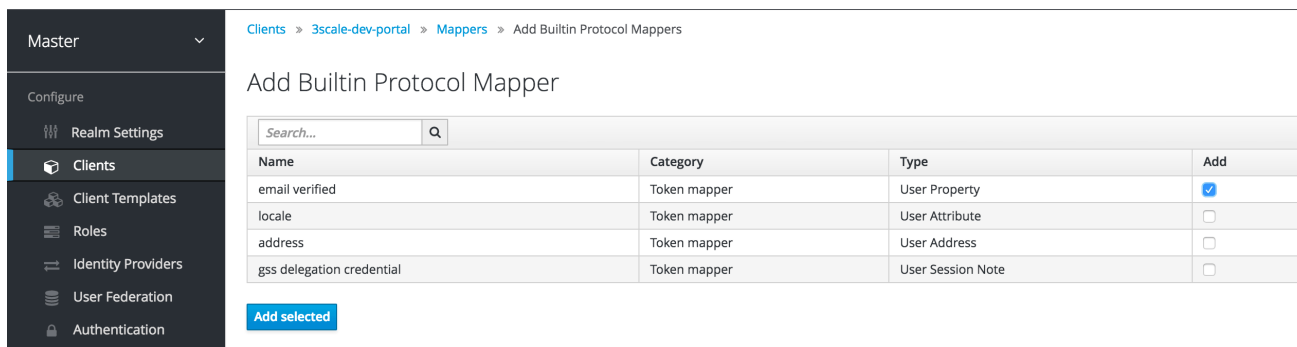

The screenshot shows the 'Add Builtin Protocol Mapper' page. The left sidebar is the same as the previous screenshot. The main content area has a breadcrumb 'Clients > 3scale-dev-portal > Mappers > Add Builtin Protocol Mappers'. Below the breadcrumb is a table of built-in mappers. The table has columns for Name, Category, Type, and Add. The mappers listed are: email verified (Token mapper, User Property), locale (Token mapper, User Attribute), address (Token mapper, User Address), and gss delegation credential (Token mapper, User Session Note). Each mapper has an 'Add' checkbox. The 'email verified' checkbox is checked. At the bottom left of the table is an 'Add selected' button.

| Name                      | Category     | Type              | Add                                 |
|---------------------------|--------------|-------------------|-------------------------------------|
| email verified            | Token mapper | User Property     | <input checked="" type="checkbox"/> |
| locale                    | Token mapper | User Attribute    | <input type="checkbox"/>            |
| address                   | Token mapper | User Address      | <input type="checkbox"/>            |
| gss delegation credential | Token mapper | User Session Note | <input type="checkbox"/>            |

- + For the second mapper, click on **Create** and in **Mapper Type** choose User Attribute. Fill in the form as shown in the screenshot below:

## Create Protocol Mapper

|                       |                                                                           |
|-----------------------|---------------------------------------------------------------------------|
| Protocol ⓘ            | <input type="text" value="openid-connect"/>                               |
| Name ⓘ                | <input type="text" value="org_name"/>                                     |
| Consent Required ⓘ    | <input type="checkbox"/> OFF                                              |
| Mapper Type ⓘ         | <input type="text" value="User Attribute"/>                               |
| User Attribute ⓘ      | <input type="text" value="org_name"/>                                     |
| Token Claim Name ⓘ    | <input type="text" value="org_name"/>                                     |
| Claim JSON Type ⓘ     | <input type="text" value="String"/>                                       |
| Add to ID token ⓘ     | <input checked="" type="checkbox"/> ON                                    |
| Add to access token ⓘ | <input checked="" type="checkbox"/> ON                                    |
| Multivalued ⓘ         | <input type="checkbox"/> OFF                                              |
|                       | <input type="button" value="Save"/> <input type="button" value="Cancel"/> |

- The **User Attribute** field should be *org\_name*.
  - The **Token Claim Name** field should be *org\_name* as well.
  - In **Claim JSON Type** choose *String*.
  - Turn on the **Add to ID token** and **Add to access token** switches.
- Finally, click on **Save**. By doing this we're adding organization name as an attribute to our users on RH-SSO. If a value is attached, 3scale will be able to create an account automatically. If not, then the user will be asked to indicate one before the account can be created.
1. Add a user so you can test the integration. To do so, go to **Users** and then click on **Add user** and provide information for all the fields required. Please, note that when you create an User in RHSSO the Email Verified attribute (email\_verified) should be set to ON, otherwise the user will not be activated in 3scale.

Alternatively, you could use RH-SSO as an identity broker or configure it to federate external databases. For more information about how to configure these, please see the RH-SSO documentation for [identity brokering](#) and [user federation](#).

If you decide to go this way, and in order for your developers to be able to skip both the RH-SSO and 3scale account creation steps, we recommend the following configuration. In the example provided, we're using GitHub as our IdP.

1. On RH-SSO, after configuring GitHub in **Identity providers**, go to the tab called **Mappers** and click on **Create**

## Organization Name

|                                                                                                                  |                                                 |
|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| ID                                                                                                               | <input type="text"/>                            |
| Name *                          | <input type="text" value="organization name"/>  |
| Mapper Type                     | <input type="text" value="Attribute Importer"/> |
| Social Profile JSON Field Path  | <input type="text" value="company"/>            |
| User Attribute Name             | <input type="text" value="org_name"/>           |
| <input type="button" value="Save"/> <input type="button" value="Cancel"/>                                        |                                                 |

1. Give it a name so you can identify it.
2. In **Mapper Type** select *Attribute Importer*.
3. In **Social Profile JSON Field Path** add *company*, which is the name of the attribute on GitHub.
4. In **User Attribute Name** add *org\_name*, that is how we called the attribute in RH-SSO.



### NOTE

RH-SSO requires first and last name as well as email as mandatory fields. 3scale requires email address, username, and organization name. So in addition to configuring a mapper for the organization name, and for your users to be able to skip both sign up forms, make sure that:

- In the IdP account, they have their first name and last name set.
- In the IdP account, their email address is accessible. E.g. In GitHub, if you set up your email address as private, it won't be shared.

### 1.4.3. Configuring 3scale

Authentication via RH-SSO won't be enabled by default. If you want to use your RH-SSO account in conjunction with 3scale to manage access to your developer portal, you can follow the steps below to configure it.

Go to your 3scale Admin Portal, in **Audience > Developer Portal > SSO Integrations** click on **Red Hat Single Sign-On**. (Remember: this is an enterprise only feature so you may have to ask your account manager to enable this for you).

On this configuration screen, you'll need to add the details of your RH-SSO client that you have configured in the previous step:

- **Client**: Name of your client on RH-SSO
- **Client Secret**: Client secret on RH-SSO
- **Realm**: Realm name and URL address to your RH-SSO

Once you've entered those, check the "Published" box and click on **Create RH-SSO** to make it available on your developer portal.

RED HAT 3SCALE API MANAGEMENT

Audience ▼



Content

Drafts

Redirects

Groups

Feature Visibility

ActiveDocs

Visit Portal

LEGAL TERMS

Signup

Service Subscription

New Application

SETTINGS

Domains & Access

Spam Protection

SSO Integrations

Forum Settings

DOCS

Liquid Reference

## New Red Hat Single Sign-On Authentication Provider

Client ID

Client Secret

Realm

e.g.: https://rh-ssso.example.com/auth/realms/demo

☐ Do not verify SSL certificate

☐ Published

Display on Developer Portal

Create Red Hat Single Sign-On

## CHAPTER 2. CHANGE BUILT-IN PAGES

By the end of this section, you'll be able to modify and/or hide any elements on the system-generated pages.


There are some elements generated by the system that are not possible to change from the CMS: the Signup, Dashboard, and Account pages. This guide shows how to customize the content on these pages with some simple CSS and JavaScript scripts.

### CAUTION

The 3scale system-generated pages are subject to change (although infrequently). These changes may break any customizations that you implement following this guide. If you can avoid using these hacks, please do so. Before you continue, please be sure that you'll be able to monitor for any disruptive changes and do the necessary maintenance work to keep your portal functioning correctly.

### 2.1. IDENTIFY THE ELEMENTS

The first and most important thing to do is identify what you want to hide. To do that, use Firebug (or any other developer tools such as Chrome Developer tools or Opera Dragonfly). Choose the desired element, and in the console, right click on it and select Copy CSS path. This way you save the exact CSS path to make it easy to manipulate. Remember, if the element is a part of the sidebar navigation widget, you'll also have to specify which position in the list. For this, you can use either the "+" selector (for example, to choose 3rd li element: `ul + li + li + li`) or the `:nth-child(n)` CSS3 pseudoclass.

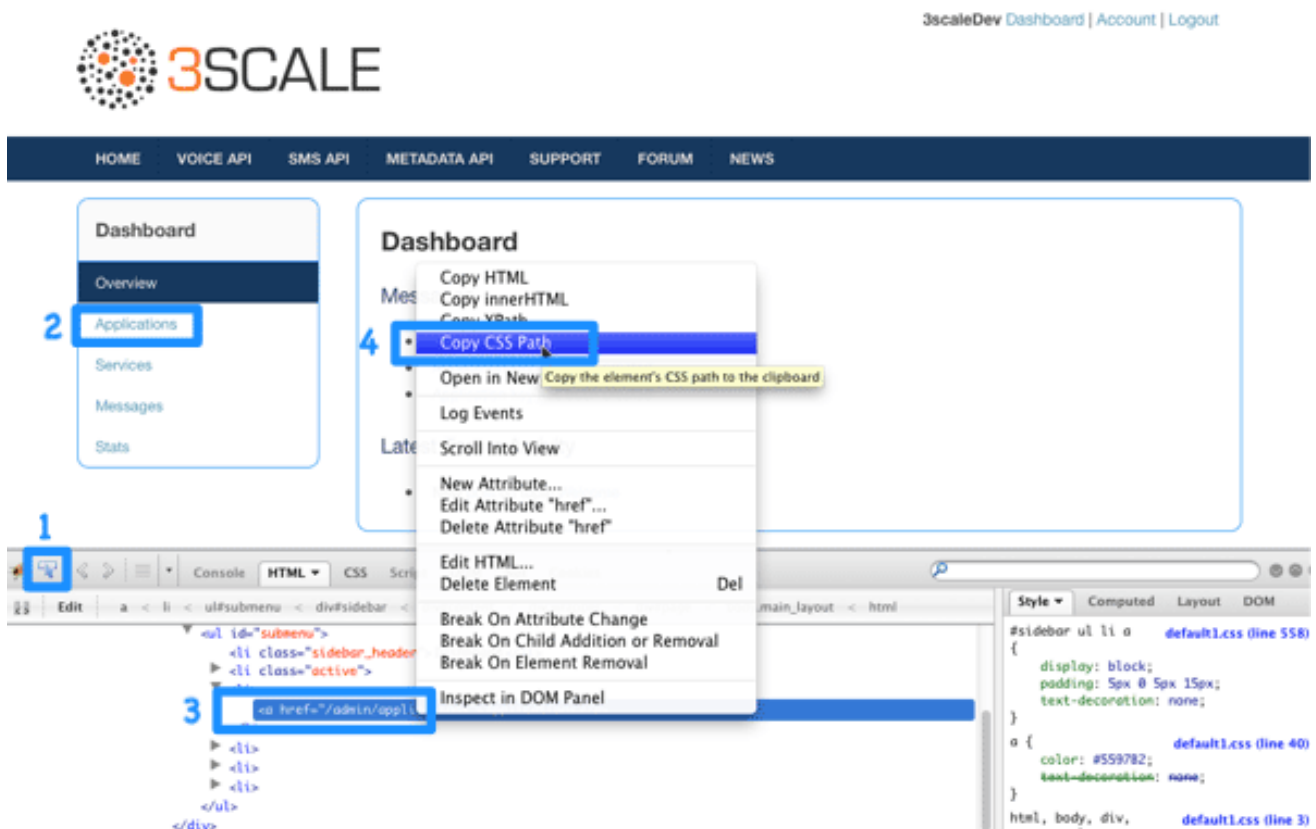

### 2.2. MODIFY OR HIDE THE ELEMENTS

Now, having identified the elements, you can change their display settings. Depending on the type of element, you can choose from two possible methods: CSS manipulation or jQuery script. CSS manipulation is more lightweight and reliable, but doesn't work well for some kinds of elements that exist

on a number of pages (for example, the 3rd element in the Dashboard's sidebar also exists in the Account section but has a different value). Some trickier implementations require use of CSS3 which is not supported by old browsers. In the next two steps, you'll see both of these approaches.

## 2.3. OPTION A: CSS

As an example, try to hide the latest forum posts box from the Dashboard page. Following the first step, you have identified its CSS path as:

```
#three-scale .dashboard_bubble
```

Keep in mind that it's the second box with the same path, so you'll use the "+" selector. Your path will now look like this:

```
.main_layout #three-scale .dashboard_bubble + .dashboard_bubble
/* or */
.main_layout #three-scale .dashboard_bubble:nth-child(1)
```

Changing display property to none makes that box invisible:


```
.main_layout #three-scale .dashboard_bubble:nth-child(1) {
    display: none;
}
```

## 2.4. OPTION B: JQUERY

If you have a trickier element to hide such as a sidebar menu element, it's better to use some jQuery. The CSS path of these elements is identical on the Dashboard and Account sections, and you don't want to hide elements in both sections. So choose the element based on the CSS path and the content. In this example, assume you want to hide the messages section from the Dashboard's sidebar. Your CSS path is:

```
#three-scale #submenu li a
```

In order to match the content, you'll use the `.text()` function. You'll also include the code inside the document's head and inside the ready function so it's executed after all the content has been generated.

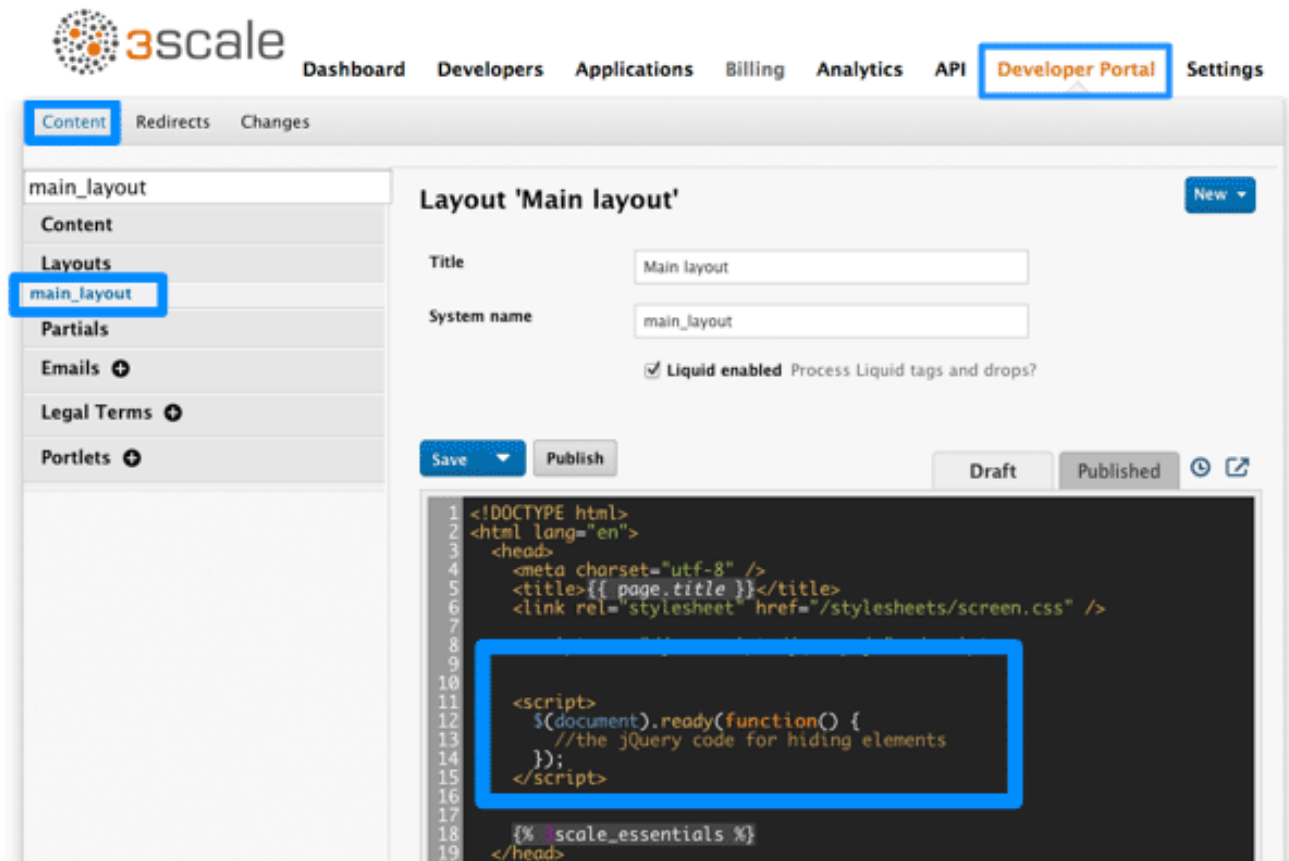

The resulting code snippet will look like this:

```
$(function() {
  $('#three-scale #submenu li a').each(function() {
    if ($(this).text() == "Messages")
      $(this).parent().css('display', 'none');
  });
});
```

This is not the only solution. It just shows one possible way of doing it. The same example could be done using pure CSS with CSS3 selectors basing on the attributes values. For the complete CSS3 selectors specification, take a look [here](#).

## CHAPTER 3. CHANGE CSS

You can customize the look and feel of the entire Developer Portal to match your own branding. A standard CSS stylesheet is available to provide an easy starting point for your customizations.

In this tutorial, you'll add your own CSS customizations to your Developer Portal and reload it to put your new styling changes live.

### 3.1. STEP 1: CREATE A NEW CSS FILE

There is a default stylesheet, **default.css**. It is quite large and complex, so rather than extend it, it's better to create your own stylesheet for any of your own customizations to overwrite the defaults. You create a new stylesheet the same way you create a page (just remember to choose an appropriate MIME content type in the advanced page settings).

It's important that the selected layout is blank. Otherwise the page layout HTML will obscure the CSS rules.

### 3.2. STEP 2: LINK THE STYLE SHEET INTO YOUR PAGE LAYOUT

Add the link to your custom CSS in each of your layout templates (or in a partial if you have a common HEAD section) after the link to bootstrap.css. For example:

```
<link rel="stylesheet" href="/stylesheets/custom.css">
```

Now enjoy the beauty of your own unique branding!



## CHAPTER 4. CUSTOM SIGNUP FORM FIELDS

Learn how to add custom signup fields and the different options around this feature.

By default, 3scale provides commonly used fields at user/account/application signup. You may need to add your own custom fields to these common defaults.

### 4.1. CUSTOM FIELDS

In your Admin Portal, go to **Audience > Accounts > Field Definitions** where you can see the default form fields and define new ones.

**RED HAT 3SCALE** API MANAGEMENT Audience ▾

**Accounts** ▾  
Listing  
Subscriptions  
SETTINGS  
Usage Rules  
**Fields Definitions**

**Applications** ▸  
**Billing** ▸  
**Portal** ▸  
**Messages** ▸

### Fields Definitions

Here you can manage all the information you gather from your users. You can add new fields and change the existing ones; making them Hidden, Read Only, or Required. You can change the text your users see when viewing or entering data (shown here between quotes). Drag and drop the fields to set the order in which they will be shown.

#### Account

Create

|            |                           |          |      |
|------------|---------------------------|----------|------|
| ✚ org_name | "Organization/Group Name" | Required | Edit |
|------------|---------------------------|----------|------|

#### User

Create

|            |            |          |      |
|------------|------------|----------|------|
| ✚ username | "Username" | Required | Edit |
| ✚ email    | "Email"    | Required | Edit |

#### Application

Create

|               |               |          |      |
|---------------|---------------|----------|------|
| ✚ name        | "Name"        | Required | Edit |
| ✚ description | "Description" | Required | Edit |

The new account/user signup page is actually an amalgamation of the first two sections. The account fields appear at the top, followed by the user fields, followed by the password fields which don't need to be configured.

 SIGN UP

ORGANIZATION/GROUP NAME

USERNAME

EMAIL

PASSWORD

PASSWORD CONFIRMATION

By signing up you agree to the following Legal Terms and Conditions ([show](#))

*Sign up*

Try adding 3 extra fields, 2 to the user signup section and 1 to the account section. Click create, add the following new field definition and then create it. The required checkbox will, of course, make it mandatory on the signup form. There are also options to make things hidden and read only. A hidden field may be added, for example, when you want new signups to have fields set that you don't necessarily want to highlight to them, such as `access_restricted_areas` which would be empty by default. As an admin, you can update this to true later on a per-user basis. Your page logic could read it in to determine what to display. A read-only field might be, for example, browser location, which you could use JavaScript on page load to set.

## New Field definition for User

Add a field to store information about your developers on signup or at any other time. Make the fields Hidden, Read Only, Required. The label is the text developers will see when viewing or entering their data.

FIELD FROM SCRATCH OR BASED ON EXISTING FIELD

[new field]

FIELD DETAILS

Name

last\_name

The low level system name.

Label

Last Name

The field title your developers will see.

☒ Required

Makes the field required for developers.

☐ Hidden

Developers won't be able to see this field.

☐ Read only

Developers won't be able to change this field.

Choices

Full time, Part time, Contract

Separate the predefined options for this field by commas or enter each option on a new line.

Create

Now try adding a drop-down to the user signup form. Call it "employment type". Add these comma-separated values into the choices field: full time, part time, contract. The drop-down will be populated with these values.

FIELD FROM SCRATCH OR BASED ON EXISTING FIELD

[new field]

FIELD DETAILS

Name

employment\_type

The low level system name.

Label

Employment Type

The field title your developers will see.

☐ Required

Makes the field required for developers.

☐ Hidden

Developers won't be able to see this field.

☐ Read only

Developers won't be able to change this field.

Choices

Full time, Part time, Contract

Separate the predefined options for this field by commas or enter each option on a new line.

Create

Now add a pre-defined field to the account. Usually the fields you add have no system functionality – they simply hold data that you can access later. (See [restricted content](#).)

Create a field as normal. Then on the drop-down above "name", choose po\_number. With this field, a PO number will appear on 3scale-generated invoices sent to this developer account. System-generated fields can be overridden by your admins at any time. Give the field a name – something like "PO number" – and create it.

## New Field definition for Account

Add a field to store information about your developers on signup or at any other time. Make the fields Hidden, Read Only, Required. The label is the text developers will see when viewing or entering their data.

FIELD FROM SCRATCH OR BASED ON EXISTING FIELD

☒ [new field]

☐ org\_legaladdress  
☐ org\_legaladdress\_cont  
☐ telephone\_number  
☐ vat\_code  
☐ vat\_rate  
☐ fiscal\_code  
☐ state\_region  
☐ city  
☐ country  
☐ zip  
☐ primary\_business  
☐ business\_category  
☐ po\_number  
☐ billing\_address

☐ Required

Makes the field required for developers.

☐ Hidden

Developers won't be able to see this field.

☐ Read only

Developers won't be able to change this field.

Choices

Separate the predefined options for this field by commas or enter each option on a new line.

Create

Now take a look at your work. You can see the free text last name and the employment type drop-down have been added to the User section. The PO number system field, also free text, has been added to the Account section.

 SIGN UP

ORGANIZATION/GROUP NAME

PO NUMBER

USERNAME

EMAIL

LAST NAME

EMPLOYMENT TYPE

✓

Full Time

Part Time

Contract

PASSWORD

PASSWORD CONFIRMATION

By signing up you agree to the following Legal Terms and Conditions ([show](#))

Sign up

Finally, these custom fields can be set using the 3scale API. For example, "application create" on [3scale API](#).

## CHAPTER 5. CHANGE EMAIL TEMPLATES

By the end of this section, you will have edited and saved a custom email template.

You can completely customize the content of all standard email communication with developers, allowing you to closely match the workflows you've set up for your Developer Portal.

### 5.1. STEP 1: DEFINE YOUR WORKFLOWS BEFORE EMAIL CONFIGURATION

There are a lot of email template options, only a subset of which will be relevant for your workflows. Save yourself time by making sure you're happy with your workflows before beginning to edit the email templates. This way, you'll only edit the templates that you'll actually use.

### 5.2. STEP 2: TEST YOUR WORKFLOW AND IDENTIFY ACTIVE EMAIL TEMPLATES

Perform a dry run of your finalized workflows, making sure to test all the possible branches (such as approval and rejection). Then, identify each email notification that your test developer account receives to determine what to edit in the next step.

### 5.3. STEP 3: EDIT AND SAVE YOUR CUSTOM TEMPLATE

The first time you edit a template, you'll actually "create" a custom template. Then in subsequent edits, you'll save your changes. Warning: there is no version control. We recommend you make a local copy if you want to be able to revert changes.

You can use liquid tags for dynamic content in your email. We especially recommend you make backups when you make changes to the liquid tags.

**RED HAT 3SCALE** API MANAGEMENT Audience ▾

Accounts >

Applications >

Billing >

Portal >

**Messages** ▾

Inbox

Sent messages

Trash

SETTINGS

Support Emails

**Email Templates**

## Edit template "Buyer Account approved"

You can use Liquid tags to set the email headers or disable sending. Read more in the [liquid documentation](#).

Subject  
use 3scale default

Bcc

Cc

Reply to

From  
use 3scale default

**Liquid tags for dynamic email customisation**

```

1 {% email %}{% do_not_send %}{% endemail %}
2
3 Dear {{ user.display_name }},
4
5 {{ provider.name }} has approved your signup for the {{ provider.name }} API.
6
7 You may now view and manage your app/API key at https://{{ provider.domain }}/admin/
8
9 If you have problems logging into the account please contact {{ provider.support_email }}.
10
11 Sincerely,
12 The {{ provider.name }} API Team
13

```

Disable Sending Snippet

Save

## 5.4. STEP 4: REPEAT FOR ALL TEMPLATES IN YOUR WORKFLOWS

Complete these same steps until you've covered all possible branches for your workflows.

### 5.4.1. More information

- Before customizing your email templates, it's best to have the [signup flows](#) fully finalized and tested.
- If you intend to change any of the liquid tags within the email templates, be sure to read up on the [liquid reference documentation](#).



## CHAPTER 6. CUSTOM DOMAIN

To complete the branding of your Developer Portal, you'll probably want to have it appear under your own corporate domain name at a location like <https://developer.mydomain.com> or <https://api.mydomain.com>. The most popular option among 3scale customers is [developer.mydomain.com](https://developer.mydomain.com).

The 3scale SaaS platform manages the SSL certificate, issued by the [Let's Encrypt](#) certificate authority, for the custom developer portal domain.

Follow the steps below to change the URL of your Developer Portal to one under your own company domain name.

### 6.1. PREREQUISITES

- You must be subscribed to a paid 3scale plan
- You must have a Red Hat account with a valid 3scale entitlement

If you need help with your Red Hat account, contact [Red Hat customer service](#)

### 6.2. STEP 1: ADD A CNAME ENTRY TO YOUR DNS SETUP

Within your DNS, add a CNAME record pointing your domain name to **autoss1.3scale.net**. For example, a domain **developer.mydomain.com** pointing to **autoss1.3scale.net** may look like:

```
developer.mydomain.com.  CNAME  autoss1.3scale.net.
```

Normally you would want to make the change to your custom domain before you allow public access to your Developer Portal. If you already have public users, bear in mind that it's not possible to define a redirect from [mydomain.3scale.net](#) to your custom domain, so you'll need to inform your users about the domain change.

It's best to implement the CNAME in advance. In the rare case that this isn't possible – such as if you have an existing site in public use at that domain – please contact [Red Hat support](#) to determine the best way to synchronize a switchover.

It may take some time for the changes with your DNS to propagate. Validate that your CNAME record has been configured correctly. You may use the following commands to validate CNAME configuration:

```
dig cname developer.mydomain.com
```

or

```
nslookup developer.mydomain.com
```

### 6.3. STEP 2 (OPTIONAL): ADD A CAA RECORD TO YOUR DNS SETUP

If you are using [Certificate Authority Authorization \(CAA\)](#), you must allow the Let's Encrypt certificate authority to issue certificates for your domain by adding a CAA record for the **letsencrypt.org** address on the root domain. For example, a domain **mydomain.com** pointing to **letsencrypt.org** may look like:

■

```
mydomain.com. CAA 0 issue "letsencrypt.org"
```

Depending on your DNS provider, you may need to add the **0 issue "letsencrypt.org"** flag, tag, and value to the list of certificate authorities in the CAA record for your root domain. Refer to your DNS provider for instructions on how to configure CAA records.

## 6.4. STEP 3: CONTACT RED HAT SUPPORT

Once you have added a CNAME entry and, optionally, added a CAA record to your DNS setup, you must open a [Red Hat support case](#) to request the Developer Portal domain change, specifying the following:

- Select the "Red Hat 3scale API Management Platform" product
- In the case description, include the following:
  - The Admin Portal domain of your 3scale account, for example: **mydomain-admin.3scale.net**
  - The custom domain for the Developer Portal that you would like to use, for example: **developer.mydomain.com**

Once you have submitted the ticket, Red Hat support will validate the DNS setup and either provide confirmation once the change is applied, or respond appropriately.

## 6.5. STEP 4: REVIEW YOUR DEVELOPER PORTAL


Once you receive confirmation from Red Hat support regarding your domain change, review and test your Developer Portal. Ensure any non-relative links to your custom domain are updated.

## CHAPTER 7. CONFIGURE EMAIL DOMAIN

Emails sent from the 3scale system to developers on your behalf are distributed by SendGrid. The configurations guidelines in this section allow the emails to come from one of your domains rather than from 3scale.

This feature is not available on Personal plan accounts.

After you have the email setup configured on your side, [open a support case](#) on the Red Hat Customer Portal to complete the process. Just as for SSL certificates, we recommend you complete these steps as soon as possible.

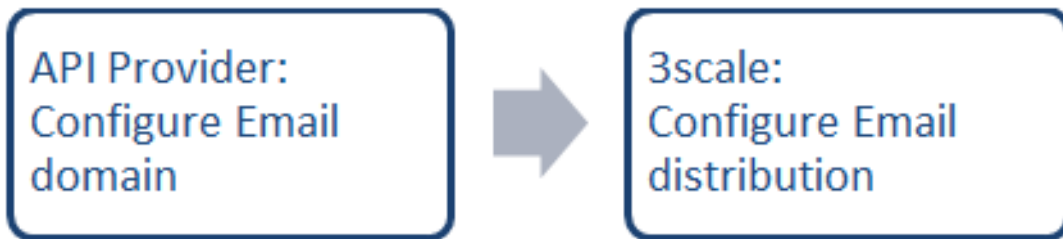

### 7.1. STEP 1: CONFIGURE EMAIL DOMAIN

1. Add a domain that is a CNAME to SendGrid. (Choose anything you like for the APIMAIL.YOURDOMAIN subdomain):

```
APIMAIL.YOURDOMAIN.com CNAME u11705.wl206.sendgrid.net
```

2. Add the following TXT record to YOURDOMAIN.com:

```
v=spf1 include:u11705.wl206.sendgrid.net -all
```

(Or add include:u11705.wl206.sendgrid.net to an existing record.)

3. Add the domain keys to ensure email deliverability:

```
s1._domainkey.YOURDOMAIN.com CNAME
s1.domainkey.u11705.wl206.sendgrid.net
s2._domainkey.YOURDOMAIN.com CNAME
s2.domainkey.u11705.wl206.sendgrid.net
o1.APIMAIL.YOURDOMAIN.com A 167.89.103.115
```

### 7.2. STEP 2: VERIFY YOUR DNS CHANGES

Use the following DIG statements from the command line to verify that your DNS changes are correctly implemented:

```
dig cname APIMAIL.YOURDOMAIN.com
# should return "u11705.wl206.sendgrid.net"

dig cname s1._domainkey.YOURDOMAIN.com
# should return "s1.domainkey.u11705.wl206.sendgrid.net"

dig cname s2._domainkey.YOURDOMAIN.com
```

```
# should return "s2.domainkey.u11705.wl206.sendgrid.net"

dig a o1.APIMAIL.YOURDOMAIN.com
# should return "167.89.103.115"

dig txt APIMAIL.YOURDOMAIN.com
# should return "v=spf1 include:u11705.wl206.sendgrid.net -all"
```

## 7.3. STEP 3: INFORM SUPPORT TO FINALIZE THE EMAIL DOMAIN CHANGE

As the final step, inform support to initiate the email change with the following information:

- Desired email address for outbound mail. The email address should be in the form of [apicontact@YOURDOMAIN.com](mailto:apicontact@YOURDOMAIN.com).
- Entry that you used for APIMAIL.YOURDOMAIN.
- Full company address (including country).
- Contact phone number.

## CHAPTER 8. LIQUIDS: EMAIL TEMPLATES

You'll probably want to customize the email templates with your organization's own messaging and terminology. You can also take advantage of liquid drops to display personalized information for each of your customers.

Similar to how liquid drops are used in the CMS, every email template has its own context. This means that liquid drops available in one email template may not necessarily be available for other email templates.

This reference outlines which liquid drops are available where, with email templates grouped together by subject matter and the set of liquid drops that they support.

### 8.1. ACCOUNT MANAGEMENT

The following email templates fall under this category:

- Buyer Account confirmed
- Buyer Account approved
- Buyer account rejected

For these, you can use the following liquid drops:

- **user** ⇒ **User**
- **domain** ⇒ **String**
- **account** ⇒ **Account**
- **provider** ⇒ **Provider**
- **support\_email** ⇒ **String**

Additionally, the following template:

- Password recovery for buyer  
have access to the following liquid drops:
- **user** ⇒ **User**
- **provider** ⇒ **Provider**
- **url** ⇒ **url**

The email to invite additional users to an account:

- Invitation  
has access to:
- **account** ⇒ **Account**
- **provider** ⇒ **Provider**
- **url** ⇒ **url**

## 8.2. CREDIT CARD NOTIFICATIONS

- Credit card expired notification for provider
- Credit Card expired notification for buyer

You can use the following liquid drops:

- **user\_account** ⇒ **Account**
- **account** ⇒ **Account**
- **provider\_account** ⇒ **Provider**
- **provider** ⇒ **Provider**

## 8.3. LIMIT ALERTS

- Alert notification for provider ( $\geq 100\%$ )
- Alert notification for buyer ( $\geq 100\%$ )
- Alert notification for provider ( $< 100\%$ )
- Alert notification for buyer ( $< 100\%$ )

have access to:

- **application** ⇒ **Application**
- **account** ⇒ **Account**
- **provider** ⇒ **Provider**
- **service** ⇒ **Service**
- **alert** ⇒ **Alert**

## 8.4. APPLICATIONS

The following email templates all deal with application and application plan notifications.

- Application created for provider

They have access to:

- **url** ⇒ **url**

Application plan change request notification email templates:

- Plan change request for buyer
- Plan change request for provider

They have access to:

- **application** ⇒ **Application**
- **provider** ⇒ **Provider**
- **account** ⇒ **Account**
- **user** ⇒ **User**
- **plan** ⇒ **Plan**
- **credit\_card\_url** ⇒ **credit\_card\_url**

Finally, the following email templates have an increasing number of available liquid drops, starting with the base for...

- Application plan changed for buyer
- Application plan changed for provider
- Application trial period expired for buyer

They have access to:

- **provider** ⇒ **Provider**
- **account** ⇒ **Account**
- **user** ⇒ **User**
- **plan** ⇒ **Plan**

As well as all of the above liquid drops, the following application plan messages...

- Application suspended for buyer
- Application accepted for buyer
- Application rejected for buyer
- Application contract cancelled for provider

have the additional liquid drops listed

- **application** ⇒ **Application**
- **service** ⇒ **Service**

More liquid drops accumulate for the following email templates for application keys:

- Application key created for buyer
- Application key deleted for buyer
- **key** ⇒ **key**

## 8.5. INVOICING

The following email template...

- Review invoices prior to charging for provider

has access to:

- **provider** ⇒ **Provider**
- **url** ⇒ **String**>

Additionally, the following templates...

- Invoice charge failure for provider without retry
- Invoice upcoming charge for buyer
- Invoice charge failure for provider with retry
- Invoice charge failure for buyer without retry
- Invoice charged successfully for buyer
- Invoice charge failure for buyer with retry

share the following liquids:

- **account** ⇒ **Account**
- **provider** ⇒ **Provider**
- **cost** ⇒ **cost**
- **invoice\_url** ⇒ **invoice\_url**
- **payment\_url** ⇒ **payment\_url**

## 8.6. SERVICES

The following email templates:

- Service contract cancelled for provider
- Service trial period expired for buyer
- Service plan changed for provider
- Service contract suspended for buyer

have access to:

- **provider** ⇒ **Provider**
- **account** ⇒ **Account**
- **user** ⇒ **User**
- **plan** ⇒ **Plan**



As well as the above liquid drops, the following service templates...

- Service created for provider
- Service accepted for buyer
- Service rejected for buyer

have the additional liquid drops listed:

- **service** ⇒ **Service**
- **service\_contract** ⇒ **Contract**
- **subscription** ⇒ **Contract**

## 8.7. SIGNUP

The following email templates...

- Sign-up notification for provider
- Sign-up notification for buyer

have access to:

- **user** ⇒ **User**
- **provider** ⇒ **Provider**
- **url** ⇒ **activate\_url**

## CHAPTER 9. LIQUID REFERENCE

The following variables are available in every Liquid template:

- [provider](#) - all your services, plans and settings under one hood
- [urls](#) - routes to built-in pages of the developers portal (login, signup etc.)
- [current\\_user](#) - username, address and rights of the **currently logged-in user**
- [current\\_account](#) - messages, applications and plans of the **currently logged-in user**
- [today](#) - current date

Builtin pages can also have other variables available (they are mentioned in the CMS editor). For example, an edit user form edit will have a **user** variable assigned or while displaying an application detail, you can expect to have a variable **application** accessible.

The type of a variable (an important thing to know to use this reference) can be determined by putting a `{% debug:help %}` tag into the page which will list all the available variables and it's types in an HTML comment for you. However, usually they can be guessed quite easily from the method or variable name.

### 9.1. DROPS

- [Account drop](#)
- [AccountPlan drop](#)
- [Alert drop](#)
- [Application drop](#)
- [ApplicationKey drop](#)
- [ApplicationPlan drop](#)
- [Base drop](#)
- [Base drop](#)
- [BillingAddressField drop](#)
- [Can drop](#)
- [Can drop](#)
- [Cas drop](#)
- [Contract drop](#)
- [Country drop](#)
- [CountryField drop](#)
- [CurrentUser drop](#)
- [Error drop](#)

- [Errors drop](#)
- [Feature drop](#)
- [Field drop](#)
- [Flash drop](#)
- [Forum drop](#)
- [I18n drop](#)
- [Invitation drop](#)
- [Invoice drop](#)
- [LineItem drop](#)
- [Message drop](#)
- [Message drop](#)
- [Metric drop](#)
- [Page drop](#)
- [Page drop](#)
- [Pagination drop](#)
- [Part drop](#)
- [PaymentGateway drop](#)
- [PaymentTransaction drop](#)
- [PlanFeature drop](#)
- [Post drop](#)
- [Post drop](#)
- [PricingRule drop](#)
- [Provider drop](#)
- [ReferrerFilter drop](#)
- [Request drop](#)
- [Role drop](#)
- [Search drop](#)
- [Service drop](#)
- [ServiceContract drop](#)

- [ServicePlan drop](#)
- [TimeZone drop](#)
- [Today drop](#)
- [Topic drop](#)
- [Topic drop](#)
- [URL drop](#)
- [URLs drop](#)
- [UsageLimit drop](#)
- [User drop](#)

## 9.2. TAGS

- [Tag 'braintree\\_customer\\_form'](#)
- [Tag 'csrf'](#)
- [Tag 'content'](#)
- [Tag 'content\\_for'](#)
- [Tag 'debug'](#)
- [Tag 'email'](#)
- [Tag 'flash'](#)
- [Tag 'footer'](#)
- [Tag 'form'](#)
- [Tag 'latest\\_forum\\_posts'](#)
- [Tag 'latest\\_messages'](#)
- [Tag 'logo'](#)
- [Tag 'menu'](#)
- [Tag 'oldfooter'](#)
- [Tag 'plan\\_widget'](#)
- [Tag 'portlet'](#)
- [Tag 'submenu'](#)
- [Tag '3scale\\_essentials'](#)
- [Tag 'user\\_widget'](#)

## 9.3. FILTERS

- [FormHelpers filters](#)
- [ParamFilter filters](#)
- [Common filters](#)

## 9.4. DROPS (UP)

### 9.4.1. Account drop (up)

A developer account. See **User** drop if you are looking for the email addresses or similar information.

```
<h2>Account organization name {{ current_account.name }}</h2>
Plan {{ current_account.bought_account_plan.name }}
Telephone {{ current_account.telephone_number }}

{{ current_account.fields_plain_text }}
{{ current_account.extra_fields_plain_text }}

{% if current_account.approval_required? %}
  <p>This account requires approval.</p>
{% endif %}

{% if current_account.credit_card_required? %}

  {% if current_account.credit_card_stored? %}
    <p>This account has credit card details stored in database.</p>
  {% else %}
    <p>Please enter your {{ 'credit card details' | link_to:
urls.payment_details }}.</p>
  {% endif %}

  {% if current_account.credit_card_missing? %}
    <p>This account has no credit card details stored in database.</p>
  {% endif %}
{% endif %}
```

#### 9.4.1.1. Methods

##### 9.4.1.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ account.errors.name | inline_errors }}
```

##### 9.4.1.1.2. id

Returns the id of the account

##### 9.4.1.1.3. name

Returns the organization name of the developer's account

#### **9.4.1.1.4. vat\_zero\_text**

Return a text about a vat zero

#### **9.4.1.1.5. vat\_rate**

Return the vat rate

#### **9.4.1.1.6. unread\_messages**

Unread messages

#### **9.4.1.1.7. latest\_messages**

Return the latest messages

#### **9.4.1.1.8. bought\_account\_plan**

Returns the plan the account has contracted

#### **9.4.1.1.9. bought\_account\_contract**

Returns the contract account

#### **9.4.1.1.10. credit\_card\_display\_number**

#### **9.4.1.1.11. credit\_card\_expiration\_date**

#### **9.4.1.1.12. credit\_card\_required?**

Returns whether the account is required to enter credit card details

#### **9.4.1.1.13. credit\_card\_stored?**

Returns whether the account has credit card details stored

#### **9.4.1.1.14. credit\_card\_missing?**

Returns whether the account has no credit card details stored

#### **9.4.1.1.15. timezone**

Returns timezone of this account

#### **9.4.1.1.16. paid?**

Returns whether the account has at least a paid contract

#### **9.4.1.1.17. on\_trial?**

Returns whether the account is on trial period, i.e. all his paid contracts has to be in trial period

**9.4.1.1.18. telephone\_number**

Returns the telephone number of the account

**9.4.1.1.19. approval\_required?**

Returns whether the account requires approval?

**9.4.1.1.20. created\_at**

Returns UNIX timestamp of account creation (signup) **Example:** Converting timestamp to JavaScript Date

```
<script>
  var data = new Date({{ account.created_at }} * 1000);
</script>
```

**9.4.1.1.21. full\_address**

Can be composed by legal address, city and state

**9.4.1.1.22. applications**

Returns the applications of the account

**9.4.1.1.23. subscribed\_services**

Returns a array with ServiceContract drops

**9.4.1.1.24. admin**

Returns the admin user of this account

**9.4.1.1.25. extra\_fields\_plain\_text**

Returns the extra fields defined for the account as plain text

**9.4.1.1.26. fields\_plain\_text**

Returns the fields defined for the account as plain text

**9.4.1.1.27. extra\_fields**

Returns only extra fields with values of this account **Example:** Print all extra fields

```
{% for field in account.extra_fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

**9.4.1.1.28. fields**

Returns all fields with values of this account **Example:** Print all fields

```
{% for field in account.fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.1.1.29. builtin\_fields

#### 9.4.1.1.30. multiple\_applications\_allowed?

#### 9.4.1.1.31. billing\_address

Returns the billing address of this account

#### 9.4.1.1.32. has\_billing\_address?

Returns whether this account has a billing address or not

#### 9.4.1.1.33. can

Give access to permission methods

```
{% if account.can.be_deleted? %}
  <!-- do something -->
{% endif %}
```

#### 9.4.1.1.34. edit\_url

#### 9.4.1.1.35. edit\_ogone\_billing\_address\_url

#### 9.4.1.1.36. edit\_payment\_express\_billing\_address\_url

#### 9.4.1.1.37. edit\_braintree\_blue\_credit\_card\_details\_url

#### 9.4.1.1.38. domain

#### 9.4.1.1.39. upgraded?

#### 9.4.1.1.40. requires\_credit\_card?

#### 9.4.1.1.41. support\_email

#### 9.4.1.1.42. finance\_support\_email

### 9.4.2. AccountPlan drop (up)

**Example:** Using account plan drop in liquid

```
<p class="notice">The examples for plan drop apply here</p>
```



### 9.4.2.1. Methods

#### 9.4.2.1.1. selected?

Returns whether the plan is selected

```
{% if plan.selected? %}
  <p>You will signup to {{ plan.name }}</p>
{% endif %}
```

#### 9.4.2.1.2. bought?

Returns whether the plan is bought

```
{% if plan.bought? %}
  <p>You are on this plan already!</p>
{% endif %}
```

#### 9.4.2.1.3. features

Returns an array of available features

#### 9.4.2.1.4. setup\_fee

Returns the setup fee

#### 9.4.2.1.5. name

Returns the name of the plan

```
<h2>We offer you a new {{ plan.name }} plan!</h2>
```

#### 9.4.2.1.6. system\_name

Returns the system name of the plan

```
{% for plan in available_plans %}
  {% if plan.system_name == 'my_free_plan' %}

    <p>You will buy our only free plan!</p>
  {% endif %}
{% endfor %}
```

#### 9.4.2.1.7. id

Returns the plan id

#### 9.4.2.1.8. free?

The plan is free if it is not 'paid' (see the 'paid?' method)

```
{% if plan.free? %}
```

```

    <p>This plan is free of charge.</p>
{% else %}

    <p>Plan costs</p>
    Setup fee {{ plan.setup_fee }}
    Flat cost {{ plan.flat_cost }}

{% endif %}

```

#### 9.4.2.1.9. paid?

The plan is 'paid' when it has non-zero fixed or setup fee or there are some pricing rules present

```

{% if plan.paid? %}
    <p>this plan is a paid one.</p>
{% else %}
    <p>this plan is a free one.</p>
{% endif %}

```

#### 9.4.2.1.10. approval\_required?

Returns whether the plan requires approval?

```

{% if plan.approval_required? %}
    <p>This plan requires approval.</p>
{% endif %}

```

#### 9.4.2.1.11. flat\_cost

Returns the monthly fixed fee of the plan

### 9.4.3. Alert drop (up)

**Example:** Using alert drop in liquid

```

<h2>Alert details</h2>
Level {{ alert.level }}
Message {{ alert.message }}
Utilization {{ alert.utilization }}

```

#### 9.4.3.1. Methods

##### 9.4.3.1.1. level

The alert level can be one of 50, 80, 90, 100, 120, 150, 200, 300.

##### 9.4.3.1.2. message

Text message describing the alert, for example 'hits per minute: 5 of 5'

##### 9.4.3.1.3. utilization

Decimal number marking the actual utilization that triggered the alert (1.0 is equal to 100%).

```
Used by {{ alert.utilization | times: 100 }} percent.
```

#### 9.4.4. Application drop (up)

**Example:** Using application drop in liquid

```
<h2>Application {{ application.name }} ({{ application.application_id }})
</h2>
<p>{{ application.description }}</p>
```

##### 9.4.4.1. Methods

###### 9.4.4.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ application.errors.name | inline_errors }}
```

###### 9.4.4.1.2. id

Returns the id of the application

###### 9.4.4.1.3. can\_change\_plan?

Returns 'true' if changing of the application is allowed either directly or by request.

###### 9.4.4.1.4. trial?

Returns true if the contract is still in the trial period.

**Note:** If you change the trial period length of a plan, it does not affect the existing contracts.

###### 9.4.4.1.5. live?

###### 9.4.4.1.6. state

There are three possible states:

- pending
- live
- suspended

###### 9.4.4.1.7. remaining\_trial\_period\_days

Number of day still left in the trial period.

###### 9.4.4.1.8. plan

Returns a plan drop with the plan of the application

**9.4.4.1.9. plan\_change\_permission\_name**

Returns name of the allowed action

**9.4.4.1.10. plan\_change\_permission\_warning**

Returns a warning messenger of the allowed action

**9.4.4.1.11. contract****9.4.4.1.12. admin\_url**

Returns the admin\_url of the application

**9.4.4.1.13. name**

Returns the name of the application

**9.4.4.1.14. can****9.4.4.1.15. oauth****9.4.4.1.16. pending?**

Returns 'true' if application state is pending

**9.4.4.1.17. buyer\_alerts\_enabled?****9.4.4.1.18. description**

Returns the description of the application

**9.4.4.1.19. redirect\_url**

Returns the redirect url for the OAuth of the application

**9.4.4.1.20. filters\_limit**

Returns the amount of referrer filters allowed for this application

**9.4.4.1.21. keys\_limit**

Returns the amount of application keys allowed for this application

**9.4.4.1.22. referrer\_filters**

Returns the referrer filters associated with this application

**9.4.4.1.23. rejection\_reason**

Returns the reason for rejecting an application

**9.4.4.1.24. user\_key**

Returns the user\_key of application

**9.4.4.1.25. application\_id**

Returns the application\_id of an application

**9.4.4.1.26. key**

Returns the application id or the user key

**9.4.4.1.27. url**

Returns URL of the builtin detail view for this application.

**9.4.4.1.28. edit\_url**

Returns URL of the builtin edit view for this application.

**9.4.4.1.29. update\_user\_key\_url****9.4.4.1.30. log\_requests\_url****9.4.4.1.31. alerts\_url****9.4.4.1.32. application\_keys\_url****9.4.4.1.33. service**

Service to which that application belongs to.

**9.4.4.1.34. keys**

Returns the keys of an application

```
{% case application.keys.size %}
{% when 0 %}
    Generate your application key.
{% when 1 %}
    <h4>Application key for {{ application.name }} {{
application.application_id }}</h4>
    <p>Key is: {{ application.keys.first }}</p>
{% else %}
    <h4>Application keys for {{ application.name }} {{
application.application_id }}</h4>
    <ul>
        {% for key in application.keys %}
            <li>{{ key }}</li>
        {% endfor %}
    </ul>
{% endcase %}
```

#### 9.4.4.1.35. oauth\_mode?

#### 9.4.4.1.36. user\_key\_mode?

#### 9.4.4.1.37. app\_id\_mode?

#### 9.4.4.1.38. change\_plan\_url

#### 9.4.4.1.39. log\_requests?

#### 9.4.4.1.40. application\_keys

#### 9.4.4.1.41. extra\_fields

Returns non-hidden extra fields with values for this application **Example:** Print all extra fields

```
{% for field in application.extra_fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.4.1.42. fields

Returns all builtin and extra fields with values for this application **Example:** Print all fields

```
{% for field in application.fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.4.1.43. builtin\_fields

Returns only builtin fields of the application

#### 9.4.4.1.44. cinstance

### 9.4.5. ApplicationKey drop [\(up\)](#)

#### 9.4.5.1. Methods

##### 9.4.5.1.1. id

##### 9.4.5.1.2. value

##### 9.4.5.1.3. url

##### 9.4.5.1.4. application

### 9.4.6. ApplicationPlan drop [\(up\)](#)

### 9.4.6.1. Methods

#### 9.4.6.1.1. selected?

Returns whether the plan is selected

```
{% if plan.selected? %}
  <p>You will signup to {{ plan.name }}</p>
{% endif %}
```

#### 9.4.6.1.2. bought?

Returns whether the plan is bought

```
{% if plan.bought? %}
  <p>You are on this plan already!</p>
{% endif %}
```

#### 9.4.6.1.3. features

Returns the visible features of the plan

```
{% if plan == my_free_plan %}
  <p>These plans are the same.</p>
{% else %}
  <p>These plans are not the same.</p>
{% endif %}
```

#### 9.4.6.1.4. setup\_fee

Returns the setup fee of the plan

#### 9.4.6.1.5. name

Returns the name of the plan

```
<h2>We offer you a new {{ plan.name }} plan!</h2>
```

#### 9.4.6.1.6. system\_name

Returns the system name of the plan

```
{% for plan in available_plans %}
  {% if plan.system_name == 'my_free_plan' %}

    <p>You will buy our only free plan!</p>
  {% endif %}
{% endfor %}
```

#### 9.4.6.1.7. id

Returns the plan id

#### 9.4.6.1.8. free?

The plan is free if it is not 'paid' (see the 'paid?' method)

```
{% if plan.free? %}  
  <p>This plan is free of charge.</p>  
{% else %}  
  
  <p>Plan costs</p>  
  Setup fee {{ plan.setup_fee }}  
  Flat cost {{ plan.flat_cost }}  
  
{% endif %}
```

#### 9.4.6.1.9. paid?

The plan is 'paid' when it has non-zero fixed or setup fee or there are some pricing rules present

```
{% if plan.paid? %}  
  <p>this plan is a paid one.</p>  
{% else %}  
  <p>this plan is a free one.</p>  
{% endif %}
```

#### 9.4.6.1.10. approval\_required?

Returns whether the plan requires approval?

```
{% if plan.approval_required? %}  
  <p>This plan requires approval.</p>  
{% endif %}
```

#### 9.4.6.1.11. flat\_cost

Returns the monthly fixed fee of the plan

#### 9.4.6.1.12. metrics

Returns the metrics of the plan

#### 9.4.6.1.13. usage\_limits

Returns the usage limits of the plan

#### 9.4.6.1.14. service

Returns the service of the plan

### 9.4.7. Base drop (up)



### 9.4.7.1. Methods

#### 9.4.7.1.1. login\_url

#### 9.4.7.1.2. user\_identified?

## 9.4.8. Base drop (up)

### 9.4.8.1. Methods

#### 9.4.8.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ base.errors.name | inline_errors }}
```

#### 9.4.8.1.2. title

Returns the title result

#### 9.4.8.1.3. kind

Returns the kind of result, can be 'topic' or 'page'

#### 9.4.8.1.4. url

Returns the resource url of the result

#### 9.4.8.1.5. description

Returns a descriptive string for the result

## 9.4.9. BillingAddressField drop (up)

### 9.4.9.1. Methods

#### 9.4.9.1.1. input\_name

#### 9.4.9.1.2. label

#### 9.4.9.1.3. choices

#### 9.4.9.1.4. errors

#### 9.4.9.1.5. html\_id

#### 9.4.9.1.6. hidden?

9.4.9.1.7. visible?

9.4.9.1.8. read\_only?

9.4.9.1.9. name

9.4.9.1.10. value

9.4.9.1.11. required

## 9.4.10. Can drop [\(up\)](#)

### 9.4.10.1. Methods

9.4.10.1.1. be\_updated?

9.4.10.1.2. add\_referrer\_filters?

9.4.10.1.3. add\_application\_keys?

9.4.10.1.4. regenerate\_user\_key?

9.4.10.1.5. regenerate\_oauth\_secret?

9.4.10.1.6. manage\_keys?

9.4.10.1.7. delete\_key?

## 9.4.11. Can drop [\(up\)](#)

### 9.4.11.1. Methods

9.4.11.1.1. change\_plan?

## 9.4.12. Cas drop [\(up\)](#)

### 9.4.12.1. Methods

9.4.12.1.1. login\_url

9.4.12.1.2. user\_identified?

## 9.4.13. Contract drop [\(up\)](#)

```
Plan of the contract {{ contract.plan.name }}
```

### 9.4.13.1. Methods

#### 9.4.13.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ contract.errors.name | inline_errors }}
```

#### 9.4.13.1.2. id

Returns the id

#### 9.4.13.1.3. can\_change\_plan?

Returns true if any form of change is possible

#### 9.4.13.1.4. trial?

Returns true if the contract is still in the trial period.

**Note:** If you change the trial period length of a plan, it does not affect the existing contracts.

#### 9.4.13.1.5. live?

#### 9.4.13.1.6. state

There are three possible states:

- pending
- live
- suspended

#### 9.4.13.1.7. remaining\_trial\_period\_days

Number of day still left in the trial period.

#### 9.4.13.1.8. plan

Returns the plan of the contract

#### 9.4.13.1.9. plan\_change\_permission\_name

Returns name of the allowed action

#### 9.4.13.1.10. plan\_change\_permission\_warning

Returns a warning messenger of the allowed action

#### 9.4.13.1.11. contract

### 9.4.14. Country drop (up)

### 9.4.14.1. Methods

#### 9.4.14.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ country.errors.name | inline_errors }}
```

#### 9.4.14.1.2. to\_str

#### 9.4.14.1.3. code

#### 9.4.14.1.4. label

### 9.4.15. CountryField drop [\(up\)](#)

#### 9.4.15.1. Methods

##### 9.4.15.1.1. value

Returns ID of the country

```
{{ account.fields.country.value }} => 42
```

compare with:

```
{{ account.fields.country }} => 'United States'
```

##### 9.4.15.1.2. name

Returns system name of the field

##### 9.4.15.1.3. required

##### 9.4.15.1.4. hidden?

##### 9.4.15.1.5. hidden

##### 9.4.15.1.6. visible?

##### 9.4.15.1.7. visible

##### 9.4.15.1.8. read\_only

##### 9.4.15.1.9. errors

##### 9.4.15.1.10. input\_name

**9.4.15.1.11. html\_id****9.4.15.1.12. label**

Returns label of the field

```
{{ account.fields.country.label }}
<!-- => 'Country' -->
```

**9.4.15.1.13. to\_str**

Returns name of the country

```
{{ account.fields.country }} => 'United States'
```

**9.4.15.1.14. choices****9.4.16. CurrentUser drop (up)****9.4.16.1. Methods****9.4.16.1.1. errors**

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ current_user.errors.name | inline_errors }}
```

**9.4.16.1.2. admin?**

Returns whether the user is an admin.

```
{% if user.admin? %}
  <p>You are an admin of your account.</p>
{% endif %}
```

**9.4.16.1.3. username**

Returns the username of the user, html escaped.

**9.4.16.1.4. account**

Returns the account of the user.

**9.4.16.1.5. name**

Returns the first and surname of the user.

**9.4.16.1.6. email**

Returns the email of the user.

#### 9.4.16.1.7. password\_required?

This method will return **true** for users using the builtin Developer Portal authentication mechanisms and **false** for those that are authenticated via Janrain, CAS or other single-sign-on method.

```

{{ if user.password_required? }}

{{ endif }}
```

#### 9.4.16.1.8. sections

Returns the list of sections the user has access to.

```

{% if user.sections.size > 0 %}
  <p>You can access following sections of our portal:</p>
  <ul>
    {% for section in user.sections %}
      <li>{{ section }}</li>
    {% endfor %}
  </ul>
{% endif %}
```

#### 9.4.16.1.9. role

Returns the role of the user

#### 9.4.16.1.10. roles\_collection

Returns a list of available roles for the user

```

{% for role in user.roles_collection %}
  <li>
    <label for="user_role_{{ role.key }}">

      {{ role.text&nbsp;}}
    </label>
  </li>
{% endfor %}
```

#### 9.4.16.1.11. url

Return the resource url of the user

```

{{ 'Delete' | delete_button: user.url }}
```

#### 9.4.16.1.12. edit\_url

Return the url to edit the user

```

{{ 'Edit' | link_to: user.edit_url, title: 'Edit', class: 'action edit' }}
```

#### 9.4.16.1.13. can

Exposes rights of current user which are dependent on your settings and user's role. You can call these methods on the returned object:

- `invite_user?`
- `create_application?`
- `see_log_requests?`

```
{% if current_user.can.see_log_requests? and application.log_requests? %}
  (<a href="{{ application.log_requests_url }}" class="action edit">App
Request Log</a>)
{% endif %}
```

#### 9.4.16.1.14. extra\_fields

Returns non-hidden extra fields with values for this user **Example:** Print all extra fields

```
{% for field in user.extra_fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.16.1.15. fields

Returns all fields with values for this user **Example:** Print all fields

```
{% for field in user.fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.16.1.16. builtin\_fields

Returns all builtin fields with values for this user

### 9.4.17. Error drop (up)

When a form fails to submit because of invalid data, the **errors** array will be available on the related model.

#### 9.4.17.1. Methods

##### 9.4.17.1.1. attribute

Returns attribute of the model to this error is related

```
{{ account.errors.org_name.first.attribute }}
<!-- org_name -->
```

##### 9.4.17.1.2. message

Returns description of the error

```
{{ account.errors.first.message }}  
<!-- can't be blank -->
```

#### 9.4.17.1.3. value

Returns value of the attribute to which the **error** is related

```
{{ account.errors.org_name.first.value }}  
<!-- => "ACME Co." -->
```

#### 9.4.17.1.4. to\_str

Returns full description of the error (includes the attribute name)

```
{{ model.errors.first }}  
<!-- => "Attribute can't be blank" -->
```

### 9.4.18. Errors drop (up)

**Example:** get all errors

```
{% for error in form.errors %}  
  attribute: {{ error.attribute }}  
  ...  
{% endfor %}
```

#### 9.4.18.1. Methods

##### 9.4.18.1.1. empty?

Returns true if there are no errors

```
{% if form.errors == empty %}  
  Congratulations! You have no errors!  
{% endif %}
```

##### 9.4.18.1.2. present?

Returns true if there are some errors

```
{% if form.errors == present %}  
  Sorry, there were some errors.  
{% endif %}
```

### 9.4.19. Feature drop (up)

#### 9.4.19.1. Methods



#### 9.4.19.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ feature.errors.name | inline_errors }}
```

#### 9.4.19.1.2. name

Returns the name of the feature

```
<h2>Feature {{ feature.name }}</h2>
```

#### 9.4.19.1.3. description

Returns the description of the feature

#### 9.4.19.1.4. has\_description?

Returns whether the feature has description

```
{% if feature.has_description? %}
  {{ feature.description }}
{% else %}
  This feature has no description.
{% endif %}
```

### 9.4.20. Field drop [\(up\)](#)

#### 9.4.20.1. Methods

##### 9.4.20.1.1. value

Returns value if the field

```
Name: {{ account.fields.first_name.value }}
```

##### 9.4.20.1.2. name

Returns system name of the field

##### 9.4.20.1.3. required

##### 9.4.20.1.4. hidden?

##### 9.4.20.1.5. hidden

##### 9.4.20.1.6. visible?

##### 9.4.20.1.7. visible

#### 9.4.20.1.8. read\_only

#### 9.4.20.1.9. errors

#### 9.4.20.1.10. input\_name

Returns name for the HTML input that is expected when the form is submitted.

```
<!-- the 'name' attribute will be 'account[country]' -->
```

#### 9.4.20.1.11. html\_id

Returns a unique field identifier that is commonly used as HTML ID attribute.

```
{{ account.fields.country.html_id }}  
<!-- => 'account_country' -->
```

#### 9.4.20.1.12. label

Returns label of the field

```
{{ account.fields.country.label }}  
<!-- => 'Country' -->
```

#### 9.4.20.1.13. to\_str

Returns value of the field if used as variable

```
{{ account.fields.first_name }} => 'Tom'
```

#### 9.4.20.1.14. choices

Returns array of choices available for that field, if any. For example for a field called **fruit** it may respond with ['apple', 'bannana', 'orange'].

You can define the choices in your /admin/fields\_definitions[admin dashboard]. Each of the array elements responds to **id** and **label** which are usually just the same unless the field is a special builtin one (like **country**) It is recommended to use those methods rather than output the **choice** 'as is' for future compatibility.

```
{% for choice in field.choices %}  
  <select name="{{ field.input_name }}" id="{{ field.html_id }}_id"  
        class="{{ field.errors | error_class }}">  
    <option {% if field.value == choice %} selected {% endif %} value="{{  
choice.id }}">  
      {{ choice }}  
    </option>  
  {% endfor %}
```

### 9.4.21. Flash drop (up)

### 9.4.21.1. Methods

#### 9.4.21.1.1. messages

Return an array of messages

```
{% for message in flash.messages %}
  <p id="flash-{{ message.type }}">
    {{ message.text }}
  </p>
{% endfor %}
```

### 9.4.22. Forum drop (up)

#### 9.4.22.1. Methods

##### 9.4.22.1.1. enabled?

Returns true if you have forum functionality enabled.

```
{% if forum.enabled? %}
  <a href="/forum">Check out our forum!</a>
{% endif %}
```

##### 9.4.22.1.2. latest\_posts

### 9.4.23. I18n drop (up)

```
Provide useful strings for i18n support.

{{ object.some_date | date: i18n.long_date }}
```

#### 9.4.23.1. Methods

##### 9.4.23.1.1. short\_date

Alias for %b %d

```
Dec 11
```

##### 9.4.23.1.2. long\_date

Alias for %B %d, %Y

```
December 11, 2013
```

##### 9.4.23.1.3. default\_date

Alias for %Y-%m-%d

2013-12-11

#### 9.4.24. Invitation drop (up)

Email: {{ invitation.email }}

```

<tr id="invitation_{{ invitation.id }}">
  <td> {{ invitation.email }} </td>
  <td> {{ invitation.sent_at | date: i18n.short_date }} </td>
  <td>
    {% if invitation.accepted? %}
      yes, on {{invitation.accepted_at | format: i18n.short_date }}
    {% else %}
      no
    {% endif %}
  </td>
</tr>

```

##### 9.4.24.1. Methods

###### 9.4.24.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ invitation.errors.name | inline_errors }}
```

###### 9.4.24.1.2. email

Returns email address

###### 9.4.24.1.3. accepted?

Returns true if the invitation was accepted

###### 9.4.24.1.4. accepted\_at

Returns a date if the invitations was accepted

```
{{ invitation.accepted_at | date: i18n.short_date }}
```

###### 9.4.24.1.5. sent\_at

Returns the creation date

```
{{ invitation.sent_at | date: i18n.short_date }}
```

###### 9.4.24.1.6. resend\_url

Returns the url for resend the invitation

■

```
{{ "Resend" | update_button: invitation.resend_url}}
```

#### 9.4.24.1.7. url

Returns the resource url

```
{{ "Delete" | delete_button: invitation.url }}
```

### 9.4.25. Invoice drop (up)

#### 9.4.25.1. Methods

##### 9.4.25.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ invoice.errors.name | inline_errors }}
```

##### 9.4.25.1.2. friendly\_id

Returns a friendly id

```
<td> {{ invoice.id }} </td>
<td> {{ invoice.name }} </td>
<td> {{ invoice.state }} </td>
<td> {{ invoice.cost }} {{ invoice.currency }} </td>
```

##### 9.4.25.1.3. name

String composed by month and year

##### 9.4.25.1.4. state

##### 9.4.25.1.5. cost

Returns a number with two decimals

```
23.00
```

##### 9.4.25.1.6. currency

##### 9.4.25.1.7. cost\_without\_vat

Returns cost without VAT

##### 9.4.25.1.8. vat\_amount

Returns vat amount

**9.4.25.1.9. exists\_pdf?**

Return true if the pdf was generated

**9.4.25.1.10. period\_begin**

```
{{ invoice.period_begin | date: i18n.short_date }}
```

**9.4.25.1.11. period\_end**

```
{{ invoice.period_end | date: i18n.long_date }}
```

**9.4.25.1.12. issued\_on**

```
{{ invoice.issued_on | date: i18n.long_date }}
```

**9.4.25.1.13. due\_on**

```
{{ invoice.due_on | date: i18n.long_date }}
```

**9.4.25.1.14. paid\_on**

```
{{ invoice.paid_on | date: i18n.long_date }}
```

**9.4.25.1.15. vat\_code****9.4.25.1.16. fiscal\_code****9.4.25.1.17. account**

Return a AccountDrop

**9.4.25.1.18. buyer\_account****9.4.25.1.19. line\_items**

Returns a array of LineltemDrop

```
{% for line_item in invoice.line_items %}
  <tr class="line_item {% cycle 'odd', 'even' %}">
    <th>{{ line_item.name }}</th>
    <td>{{ line_item.description }}</td>
    <td>{{ line_item.quantity }}</td>
    <td>{{ line_item.cost }}</td>
  </tr>
{% endfor %}
```

**9.4.25.1.20. payment\_transactions**

Returns a array of PaymentTransactionDrop

```
{% for payment_transaction in invoice.payment_transactions %}
  <tr>
    <td> {% if payment_transaction.success? %} Success {% else %} Failure
{% endif %} </td>
    <td> {{ payment_transaction.created_at }} </td>
    <td> {{ payment_transaction.reference }} </td>
    <td> {{ payment_transaction.message }} </td>
    <td> {{ payment_transaction.amount }} {{ payment_transaction.currency
}} </td>
  </tr>
{% endfor %}
```

#### 9.4.25.1.21. url

Return the resource url of the invoice

```
{{ "Show" | link_to: invoice.url }}
```

#### 9.4.25.1.22. pdf\_url

Return the resource url of the invoice pdf

```
{{ "PDF" | link_to: invoice.pdf_url }}
```

### 9.4.26. Janrain drop [\(up\)](#)

#### 9.4.26.1. Methods

##### 9.4.26.1.1. login\_url

##### 9.4.26.1.2. user\_identified?

##### 9.4.26.1.3. session\_url

##### 9.4.26.1.4. relying\_party

### 9.4.27. Lineltem drop [\(up\)](#)

#### 9.4.27.1. Methods

##### 9.4.27.1.1. errors

If a form of this model is rendered after unsuccesfull submit, this returns" errors that occured.

```
{{ line_item.errors.name | inline_errors }}
```

##### 9.4.27.1.2. name

```
{% for line_item in invoice.line_items %}
  <tr class="line_item {% cycle 'odd', 'even' %}">
    <th>{{ line_item.name }}</th>
    <td>{{ line_item.description }}</td>
    <td>{{ line_item.quantity }}</td>
    <td>{{ line_item.cost }}</td>
  </tr>
{% endfor %}
```

#### 9.4.27.1.3. description

#### 9.4.27.1.4. quantity

#### 9.4.27.1.5. cost

### 9.4.28. Message drop [\(up\)](#)

#### 9.4.28.1. Methods

##### 9.4.28.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ message.errors.name | inline_errors }}
```

##### 9.4.28.1.2. id

Returns the id of the message

##### 9.4.28.1.3. subject

If subject is not present then either a truncated body or **(no subject)** string is returned.

##### 9.4.28.1.4. body

Body of the message

##### 9.4.28.1.5. created\_at

Returns the creation date

```
{{ message.created_at | date: 'i18n.short_date' }}
```

##### 9.4.28.1.6. url

URL of the message detail, points either to inbox or outbox.

##### 9.4.28.1.7. state

Either 'read' or 'unread'



**9.4.28.1.8. sender**

Returns the name of the sender

**9.4.28.1.9. to**

Returns the name of the receiver

**9.4.28.1.10. recipients****9.4.29. Message drop (up)****9.4.29.1. Methods****9.4.29.1.1. type**

The possible types of the messages are:

- success (not used by now)
- info
- warning
- danger

**9.4.29.1.2. text****9.4.30. Metric drop (up)****9.4.30.1. Methods****9.4.30.1.1. errors**

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ metric.errors.name | inline_errors }}
```

**9.4.30.1.2. unit**

Returns the unit of the metric

```
This metric is measured in {{ metric.unit | pluralize }}
```

**9.4.30.1.3. description**

Returns the description of the metric

**9.4.30.1.4. name**

Returns the name of the metric

```
<h4>Metric {{ metric.name }}</h4>
<p>{{ metric.description }}</p>
```

#### 9.4.30.1.5. system\_name

Returns the system name of this metric

```
<h4>Metric {{ metric.name }}</h4>
<p>{{ metric.system_name }}</p>
```

#### 9.4.30.1.6. usage\_limits

Returns the usage limits of the metric

```
{% if metric.usage_limits.size > 0 %}
  <p>Usage limits of the metric</p>
  <ul>
    {% for usage_limit in metric.usage_limits %}
      <li>{{ usage_limit.period }} : {{ usage_limit.value }}</li>
    {% endfor %}
  </ul>
{% else %}
  <p>This metric has no usage limits</p>
{% endif %}
```

#### 9.4.30.1.7. pricing\_rules

Returns the pricing rules of the metric

```
{% if metric.pricing_rules.size > 0 %}
  <p>Pricing rules of the metric</p>
  <ul>
    {% for pricing_rule in metric.pricing_rules %}
      <li>{{ pricing_rule.cost_per_unit }}</li>
    {% endfor %}
  </ul>

{% else %}
  <p>This metric has no pricing rules</p>
{% endif %}
```

#### 9.4.30.1.8. has\_parent

### 9.4.31. Page drop (up)

#### 9.4.31.1. Methods

##### 9.4.31.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ page.errors.name | inline_errors }}
```

#### 9.4.31.1.2. title

Returns the title of the page

```
<title>{{ page.title }}</title>
```

#### 9.4.31.1.3. system\_name

Returns system name of the page

```
{% if page.system_name == 'my_page' %}
  {% include 'custom_header' %}
{% endif %}
```

### 9.4.32. Page drop [\(up\)](#)

#### 9.4.32.1. Methods

##### 9.4.32.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ page.errors.name | inline_errors }}
```

##### 9.4.32.1.2. title

##### 9.4.32.1.3. kind

##### 9.4.32.1.4. url

##### 9.4.32.1.5. description

### 9.4.33. Pagination drop [\(up\)](#)

#### 9.4.33.1. Methods

##### 9.4.33.1.1. page\_size

Number of items on one full page.

```
{% for part in pagination.parts %}
  {% if part.is_link %}
    {% case part.rel %}
    {% when 'previous' %}
      {% assign css_class = 'previous_page' %}
    {% when 'next' %}
      {% assign css_class = 'next_page' %}
  {% endfor %}
```

```

        {% else %}
        {% assign css_class = ' ' %}
        {% endcase %}

        <a class="{{ css_class }}" rel="{{ part.rel }}" href="{{ part.url
    }}">{{ part.title }}</a>
    {% else %}
    {% case part.rel %}
    {% when 'current' %}
    <em class="current">{{ part.title }}</em>
    {% when 'gap' %}
    &#x2026;
    {% else %}
    {{ part.title }}
    {% endcase %}
    {% endif %}
    {% endfor %}

<!-- Outputs:
=====

<a class="previous_page" rel="prev" href="?page=7">&#x2190; Previous</a>
<a rel="start" href="?page=1">1</a>
<a href="?page=2">2</a>
<a href="?page=3">3</a>
<a href="?page=4">4</a>
<a href="?page=5">5</a>
<a href="?page=6">6</a>
<a rel="prev" href="?page=7">7</a>
<em class="current">8</em>
<a rel="next" href="?page=9">9</a>
<a href="?page=10">10</a>
<a href="?page=11">11</a>
<a href="?page=12">12</a>
&#x2026;
<a href="?page=267">267</a>
<a href="?page=268">268</a>
<a class="next_page" rel="next" href="?page=9">Next &#x2192;</a>

=====
-->

```

#### 9.4.33.1.2. current\_page

Number of the currently selected page.

#### 9.4.33.1.3. current\_offset

Items skipped so far.

#### 9.4.33.1.4. pages

Total number of pages.

**9.4.33.1.5. items**

Total number of items in all pages together.

**9.4.33.1.6. previous**

Number of the previous page or empty.

**9.4.33.1.7. next**

Number of the next page or empty.

**9.4.33.1.8. parts**

Elements that help to render a user-friendly pagination. See the `[[part-drop[part drop]` for more information.

**9.4.34. Part drop (up)****9.4.34.1. Methods****9.4.34.1.1. url****9.4.34.1.2. rel****9.4.34.1.3. current?****9.4.34.1.4. is\_link****9.4.34.1.5. title****9.4.34.1.6. to\_s****9.4.35. PaymentGateway drop (up)****9.4.35.1. Methods****9.4.35.1.1. braintree\_blue?**

Returns whether current payment gateway is authorize.Net

**9.4.35.1.2. authorize\_net?**

Returns whether current payment gateway is authorize.Net

**9.4.35.1.3. type**

Returns the type of this payment gateway.

**9.4.36. PaymentTransaction drop (up)**

### 9.4.36.1. Methods

#### 9.4.36.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ payment_transaction.errors.name | inline_errors }}
```

#### 9.4.36.1.2. currency

Returns the currency

```
{% for payment_transaction in invoice.payment_transactions %}
  <tr>
    <td> {% if payment_transaction.success? %} Success {% else %} Failure
{% endif %} </td>
    <td> {{ payment_transaction.created_at }} </td>
    <td> {{ payment_transaction.reference }} </td>
    <td> {{ payment_transaction.message }} </td>
    <td> {{ payment_transaction.amount }} {{ payment_transaction.currency
}} </td>
  </tr>
{% endfor %}
```

#### 9.4.36.1.3. amount

Returns the amount

#### 9.4.36.1.4. created\_at

Returns the creation date

#### 9.4.36.1.5. success?

Returns true if was success

#### 9.4.36.1.6. message

Returns the message of the transaction

#### 9.4.36.1.7. reference

Returns the reference

### 9.4.37. PlanFeature drop [\(up\)](#)

#### 9.4.37.1. Methods

##### 9.4.37.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ plan_feature.errors.name | inline_errors }}
```

#### 9.4.37.1.2. name

Returns the name of the feature

```
<h2>Feature {{ feature.name }}</h2>
```

#### 9.4.37.1.3. description

Returns the description of the feature

#### 9.4.37.1.4. has\_description?

Returns whether the feature has description

```
{% if feature.has_description? %}
  {{ feature.description }}
{% else %}
  This feature has no description.
{% endif %}
```

#### 9.4.37.1.5. enabled?

### 9.4.38. Post drop (up)

#### 9.4.38.1. Methods

##### 9.4.38.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ post.errors.name | inline_errors }}
```

##### 9.4.38.1.2. body

Text of the post.

##### 9.4.38.1.3. topic

Every post belongs to a [\[\[topic-drop\[topic\]](#)

##### 9.4.38.1.4. created\_at

Date when this post created

```
{{ post.created_at | date: i18n.short_date }}
```

##### 9.4.38.1.5. url

The url of this post within its topic

### 9.4.39. Post drop [\(up\)](#)

#### 9.4.39.1. Methods

##### 9.4.39.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ post.errors.name | inline_errors }}
```

##### 9.4.39.1.2. title

##### 9.4.39.1.3. kind

##### 9.4.39.1.4. url

##### 9.4.39.1.5. description

### 9.4.40. PricingRule drop [\(up\)](#)

#### 9.4.40.1. Methods

##### 9.4.40.1.1. cost\_per\_unit

Returns the cost per unit of the pricing rule **Example:** Using pricing rule drop in liquid

```
<h2>Pricing rule</h2>
Min value {{ pricing_rule.min }}
Max value {{ pricing_rule.max }}
Cost per unit {{ pricing_rule.cost_per_unit }}
```

##### 9.4.40.1.2. min

Returns the minimum value of the pricing rule

##### 9.4.40.1.3. max

Returns the maximum value of the pricing rule

##### 9.4.40.1.4. plan

Returns plan of pricing rule

### 9.4.41. Provider drop [\(up\)](#)

#### 9.4.41.1. Methods



#### 9.4.41.1.1. name

Returns the name of your organization.

```

Domain {{ provider.domain }}

{% if provider.multiple_applications_allowed? %}

    <p>Applications</p>
    <ul>
    {% for app in account.applications %}
        <li>{{ app.name }}</li>
    {% endfor %}
    </ul>

{% else %}
    Application {{ account.applications.first.name }}
{% endif %}

For general questions contact us at {{ provider.support_email }},
for invoice or payment related questions contact us at {{
provider.finance_support_email }}

```

#### 9.4.41.1.2. payment\_gateway

Returns the payment gateway associated with your organization

#### 9.4.41.1.3. domain

Domain of your developer portal

#### 9.4.41.1.4. timezone

Returns timezone that you use. Can be changed in your /p/admin/account/edit[administration dashboard].

#### 9.4.41.1.5. support\_email

Support email of the account

#### 9.4.41.1.6. finance\_support\_email

Finance support email of the account

#### 9.4.41.1.7. telephone\_number

Returns the telephone number of the account

#### 9.4.41.1.8. multiple\_applications\_allowed?

*True* if developers can have more separate applications with their own keys, stats, etc. **Depends on your 3scale plan.**

```

{% if provider.multiple_applications_allowed? %}

```

```

    <p>Applications</p>
    <ul>
    {% for app in account.applications %}
        <li>{{ app.name }}</li>
    {% endfor %}
    </ul>

{% else %}
    Application {{ account.applications.first.name }}
{% endif %}

```

#### 9.4.41.1.9. logo\_url

Return the logo url

#### 9.4.41.1.10. multiple\_services\_allowed?

*True* if your 3scale plan allows you to manage multiple APIs as separate [\[service\[services.](#)

```

{% if provider.multiple_services_allowed? %}
    {% for service in provider.services %}
        Service {{ service.name }} is available.
    {% endfor %}
{% endif %}

```

#### 9.4.41.1.11. finance\_allowed?

#### 9.4.41.1.12. multiple\_users\_allowed?

*True* if the developer accounts can have multiple logins associated with them (**depends on your 3scale plan**) and its visibility has been turned on for your developer portal in the `/p/admin/cms/switches[settings]`.

```

{% if provider.multiple_users_allowed? %}
    <ul id="subsubmenu">
        <li>
            {{ 'Users' | link_to: urls.users }}
        </li>
        <li>
            {{ 'Sent invitations' | link_to: urls.invitations }}
        </li>
    </ul>
{% endif %}

```

#### 9.4.41.1.13. account\_plans

Returns all published account plans.

```

<p>We offer following account plans:</p>
<ul>
{% for plan in model.account_plans %}

```

```
<li>{{ plan.name }} </li>
{% endfor %}
</ul>
```

#### 9.4.41.1.14. services

Returns all defined services.

```
<p>You can signup to any of our services!</p>
<ul>
{% for service in provider.services %}
  <li>{{ service.name }} <a href="/signup/service/{{ service.system_name
  }}">Signup!</a></li>
{% endfor %}
```

#### 9.4.41.1.15. signups\_enabled?

You can enable or disable signups in the Usage rules section of your Admin Portal.

#### 9.4.41.1.16. account\_management\_enabled?

You can enable or disable account management in the Usage rules section.

### 9.4.42. ReferrerFilter drop (up)

#### 9.4.42.1. Methods

##### 9.4.42.1.1. id

##### 9.4.42.1.2. value

##### 9.4.42.1.3. delete\_url

##### 9.4.42.1.4. application

### 9.4.43. Request drop (up)

**Example:** Using request drop in liquid

```
<h2>Request details</h2>
URI {{ request.request_uri }}
Host {{ request.host }}
Host and port {{ request.host_with_port }}
```

#### 9.4.43.1. Methods

##### 9.4.43.1.1. request\_uri

Returns the URI of the request

#### 9.4.43.1.2. host\_with\_port

Returns the host with port of the request

#### 9.4.43.1.3. host

Returns the host part of the request URL

#### 9.4.43.1.4. path

Returns the path part of the request URL

```
{% if request.path == '/' %}
  Welcome on a landing page!
{% else %}
  This just an ordinary page.
{% endif %}
```

### 9.4.44. Role drop [\(up\)](#)

#### 9.4.44.1. Methods

##### 9.4.44.1.1. name

Return internal name of the role, important for the system

##### 9.4.44.1.2. description

Return a descriptive text for the role

### 9.4.45. Search drop [\(up\)](#)

#### 9.4.45.1. Methods

##### 9.4.45.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ search.errors.name | inline_errors }}
```

##### 9.4.45.1.2. query

Returns the searched string

```
<h3>{{ search.token }}</h3>
<p>found on {{ search.total_found }} {{ search.item | pluralize }} </p>
<dl>
  {% for result in search.results %}
    <dt>
      [ {{ result.kind | capitalize }} ]
      {{ result.title | link_to: result.url }}
    </dt>
```

```

    <dd>
      {{ result.description }}
    </dd>
  {% endfor %}
</dl>

```

#### 9.4.45.1.3. total\_found

Returns the number of matching elements

#### 9.4.45.1.4. results

Returns an array of results for que search

### 9.4.46. Service drop (up)

#### 9.4.46.1. Methods

##### 9.4.46.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```

{{ service.errors.name | inline_errors }}

```

##### 9.4.46.1.2. name

Returns the name of the service

##### 9.4.46.1.3. system\_name

Returns the system name of the service

```

{% case service.system_name %}
{% when 'api' %}
  API is our newest service!
{% when 'old' %}
  Unfortunately we dont allow more signups to our old service.
{% endcase %}

```

##### 9.4.46.1.4. description

Returns the description of the service

##### 9.4.46.1.5. subscribed?

Returns whether the service is subscribed

```

{% if service.subscribed? %}
  <p>You already subscribed this service.</p>
{% endif %}

```

#### 9.4.46.1.6. subscription

Returns a subscription(**ServiceContract** drop) if the currently logged in user is subscribed to this service, Nil otherwise.

```
{% if service.subscription %}
  Your applications for service {{ service.name }} are:
  {% for app in service.subscription.applications %}
    {{ app.name }}<br/>
  {% endfor %}
{% else %}
  <p>You are not subscribed to this.</p>
{% endif %}
```

#### 9.4.46.1.7. subscribable?

#### 9.4.46.1.8. subscribe\_url

#### 9.4.46.1.9. application\_plans

Returns the **published** application plans of the service

```
{% for service in model.services %}
  <h4>{{ service.name }} application plans:</h4>
  <dl>
    {% for application_plan in service.application_plans %}
      <dt>{{ application_plan.name }}</dt>
      <dd>{{ application_plan.system_name }}</dd>
    {% endfor %}
  </dl>
{% endfor %}
```

#### 9.4.46.1.10. service\_plans

Returns the *published* service plans of the service

```
<p>We offer following service plans:</p>
<dl>
  {% for service in model.services %}
    {% for service_plan in service.service_plans %}
      <dt>{{ service_plan.name }}</dt>
      <dd>{{ service_plan.system_name }}</dd>
    {% endfor %}
  {% endfor %}
</dl>
```

#### 9.4.46.1.11. plans

Returns the application plans of the service

#### 9.4.46.1.12. features

Returns the visible features of the service

```
{% if service.features.size > 0 %}
  <p>{{ service.name }} has following features:</p>
  <ul>
    {% for feature in service.features %}
      <li>{{ feature.name }}</li>
    {% endfor %}
  </ul>
{% else %}
  <p>Unfortunately, {{ service.name }} currently has no features.</p>
{% endif %}
```

#### 9.4.46.1.13. apps\_identifier

Depending on the authentication mode set, returns either 'ID', 'API key' or 'Client ID' for OAuth authentication.

```
{{ service.application_key_name }}
```

#### 9.4.46.1.14. backend\_version

#### 9.4.46.1.15. referrer\_filters\_required?

#### 9.4.46.1.16. metrics

Returns the metrics of the service

```
<p>On {{ service.name }} we measure following metrics:</p>
<ul>
  {% for metric in service.metrics %}
    <li>{{ metric.name }}</li>
  {% endfor %}
</ul>
```

#### 9.4.46.1.17. support\_email

Support email of the service

### 9.4.47. ServiceContract drop (up)

#### 9.4.47.1. Methods

##### 9.4.47.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ service_contract.errors.name | inline_errors }}
```

##### 9.4.47.1.2. id

##### 9.4.47.1.3. can\_change\_plan?

Returns true if any form of change is possible

#### **9.4.47.1.4. trial?**

Returns true if the contract is still in the trial period.

**Note:** If you change the trial period length of a plan, it does not affect the existing contracts.

#### **9.4.47.1.5. live?**

#### **9.4.47.1.6. state**

There are three possible states:

- pending
- live
- suspended

#### **9.4.47.1.7. remaining\_trial\_period\_days**

Number of day still left in the trial period.

#### **9.4.47.1.8. plan**

Returns the plan of the contract

#### **9.4.47.1.9. plan\_change\_permission\_name**

Returns name of the allowed action

#### **9.4.47.1.10. plan\_change\_permission\_warning**

Returns a warning messenger of the allowed action

#### **9.4.47.1.11. contract**

#### **9.4.47.1.12. name**

#### **9.4.47.1.13. system\_name**

#### **9.4.47.1.14. change\_plan\_url**

#### **9.4.47.1.15. service**

#### **9.4.47.1.16. applications**

#### **9.4.47.1.17. can**

Exposes specific rights of the current user for that subscription.



```
{% if subscription.can.change_plan? %}
  ...
{% endif %}
```

## 9.4.48. ServicePlan drop (up)

### 9.4.48.1. Methods

#### 9.4.48.1.1. selected?

Returns whether the plan is selected

```
{% if plan.selected? %}
  <p>You will signup to {{ plan.name }}</p>
{% endif %}
```

#### 9.4.48.1.2. bought?

Returns whether the plan is bought

```
{% if plan.bought? %}
  <p>You are on this plan already!</p>
{% endif %}
```

#### 9.4.48.1.3. features

Returns the visible features of the plan

```
{% if plan == my_free_plan %}
  <p>These plans are the same.</p>
{% else %}
  <p>These plans are not the same.</p>
{% endif %}
```

#### 9.4.48.1.4. setup\_fee

Returns the setup fee of the plan

#### 9.4.48.1.5. name

Returns the name of the plan

```
<h2>We offer you a new {{ plan.name }} plan!</h2>
```

#### 9.4.48.1.6. system\_name

Returns the system name of the plan

```
{% for plan in available_plans %}
  {% if plan.system_name == 'my_free_plan' %}
```

```

    <p>You will buy our only free plan!</p>
  {% endif %}
{% endfor %}

```

#### 9.4.48.1.7. id

Returns the plan id

#### 9.4.48.1.8. free?

The plan is free if it is not 'paid' (see the 'paid?' method)

```

{% if plan.free? %}
  <p>This plan is free of charge.</p>
{% else %}

  <p>Plan costs</p>
  Setup fee {{ plan.setup_fee }}
  Flat cost {{ plan.flat_cost }}

{% endif %}

```

#### 9.4.48.1.9. paid?

The plan is 'paid' when it has non-zero fixed or setup fee or there are some pricing rules present

```

{% if plan.paid? %}
  <p>this plan is a paid one.</p>
{% else %}
  <p>this plan is a free one.</p>
{% endif %}

```

#### 9.4.48.1.10. approval\_required?

Returns whether the plan requires approval?

```

{% if plan.approval_required? %}
  <p>This plan requires approval.</p>
{% endif %}

```

#### 9.4.48.1.11. flat\_cost

Returns the monthly fixed fee of the plan

#### 9.4.48.1.12. service

**Example:** Using service plan drop in liquid

```

<p class="notice">The examples for plan drop apply here</p>
Service of this plan {{ plan.service.name }}

```

## 9.4.49. TimeZone drop (up)

### 9.4.49.1. Methods

#### 9.4.49.1.1. full\_name

#### 9.4.49.1.2. to\_str

## 9.4.50. Today drop (up)

### 9.4.50.1. Methods

#### 9.4.50.1.1. month

Returns current month (1-12)

#### 9.4.50.1.2. day

Returns current day of the month (1-31)

#### 9.4.50.1.3. year

Returns current year **Example:** Create dynamic copyright

```
&copy;{{ today.year }}
```

#### 9.4.50.1.4. beginning\_of\_month

Returns date of beginning of current month

```
This month began on {{ today.beginning_of_month | date: '%A' }}
```

## 9.4.51. Topic drop (up)

### 9.4.51.1. Methods

#### 9.4.51.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ topic.errors.name | inline_errors }}
```

#### 9.4.51.1.2. title

#### 9.4.51.1.3. kind

#### 9.4.51.1.4. url

#### 9.4.51.1.5. description

### 9.4.52. Topic drop (up)

#### 9.4.52.1. Methods

##### 9.4.52.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ topic.errors.name | inline_errors }}
```

##### 9.4.52.1.2. title

Name of the topic. Submitted when first post to the thread is posted.

##### 9.4.52.1.3. url

### 9.4.53. Url drop (up)

#### 9.4.53.1. Methods

##### 9.4.53.1.1. to\_s

##### 9.4.53.1.2. to\_str

##### 9.4.53.1.3. title

##### 9.4.53.1.4. current\_or\_subpath?

True if the path of the current page is the same as this one or it's a 'direct subpath' of it (i.e. extended by ID). For example with `{{ urls.outbox }}` these will return true:

- `/admin/sent/messages/received`
- `/admin/sent/messages/received/42`

But not these:

- `/admin/sent/messsages/new`
- `/admin/sent/messsages/longer/subpath`

See also '#active?', '#current?'.

##### 9.4.53.1.5. current?

True if the URL's path is the the same as of the current. Parameters and other components are not taken into account. See also '#active?'.

```
{% assign url = urls.messages_inbox %}
```

```

<!-- => http://awesome.3scale.net/admin/messages/sent -->

<!-- Current page: http://awesome.3scale.net/admin/messages/sent?unread=1
-->
{{ url.current? }} => true

<!-- Current page: http://awesome.3scale.net/admin/messages -->
{{ url.current? }} => false

```

#### 9.4.53.1.6. active?

True if the current page is in the same menu structure as this URL. See also '#current?'.

```

{% assign url = urls.messages_inbox %}
<!-- => http://awesome.3scale.net/admin/messages/sent -->

<!-- Current page: http://awesome.3scale.net/admin/messages -->
{{ url.active? }} => true

<!-- Current page: http://awesome.3scale.net/admin/messages/trash -->
{{ url.active? }} => true

<!-- Current page: http://awesome.3scale.net/admin/stats -->
{{ url.active? }} => false

```

### 9.4.54. Urls drop (up)

#### 9.4.54.1. Methods

##### 9.4.54.1.1. provider

##### 9.4.54.1.2. cas\_login

```

<a href="{{ urls.signup }}">signup here</a>
<a href="{{ urls.service_subscription }}">subscribe to a service here</a>

```

##### 9.4.54.1.3. new\_application

##### 9.4.54.1.4. signup

URL of a signup page. Accessible for all.

```

<a href="{{ urls.signup }}?{{ service_plan | param_filter }}&{{ app_plan |
param_filter }}" >Signup Now!</a>

```

##### 9.4.54.1.5. search

URL to which all the search requests should be sent

```

<form action="{{ urls.search }}" method="get">

```

```
</form>
```

#### **9.4.54.1.6. login**

#### **9.4.54.1.7. logout**

#### **9.4.54.1.8. forgot\_password**

#### **9.4.54.1.9. service\_subscription**

URL to a service subscription page. Only for logged in users.

```
<a href="{{ urls.service_subscription }}"?{{ service_plan | param_filter
  }}" >
  Subscribe to service {{ service.name }}
</a>
```

#### **9.4.54.1.10. compose\_message**

URL to a page that allows the developer contact provider via the internal messaging system.

#### **9.4.54.1.11. messages\_outbox**

URL to the list of messages sent by a developer.

#### **9.4.54.1.12. messages\_trash**

#### **9.4.54.1.13. empty\_messages\_trash**

#### **9.4.54.1.14. credit\_card\_terms**

#### **9.4.54.1.15. credit\_card\_privacy**

#### **9.4.54.1.16. credit\_card\_refunds**

#### **9.4.54.1.17. users**

#### **9.4.54.1.18. personal\_details**

URL or Nil if user account management is disabled (check your Usage rules).

#### **9.4.54.1.19. access\_details**

A page with API key(s) and other authentication info. Differs depending on the authentication strategy.

#### **9.4.54.1.20. payment\_details**

#### **9.4.54.1.21. new\_invitation**

Page to invite new users

#### 9.4.54.1.22. invitations

List of all the sent invitations

#### 9.4.54.1.23. dashboard

#### 9.4.54.1.24. applications

#### 9.4.54.1.25. api\_access\_details

#### 9.4.54.1.26. services

#### 9.4.54.1.27. messages\_inbox

URL to the list of received messages.

#### 9.4.54.1.28. stats

#### 9.4.54.1.29. account\_overview

#### 9.4.54.1.30. account\_plans

#### 9.4.54.1.31. invoices

### 9.4.55. UsageLimit drop (up)

**Example:** Using usage limit drop in liquid

```
You cannot do more than {{ limit.value }} {{ limit.metric.unit }}s per {{
limit.period }}
```

#### 9.4.55.1. Methods

##### 9.4.55.1.1. period

Returns the period of the usage limit

##### 9.4.55.1.2. metric

Usually `hits` but can be any custom method.

##### 9.4.55.1.3. value

Returns the value of the usage limit

### 9.4.56. User drop (up)

```
<h2>User {{ user.display_name }}</h2>
```

```
Account {{ user.account.name }}
Username {{ user.username }}
Email {{ user.email }}
Website {{ user.website }}
```

#### 9.4.56.1. Methods

##### 9.4.56.1.1. errors

If a form of this model is rendered after unsuccessful submit, this returns" errors that occurred.

```
{{ user.errors.name | inline_errors }}
```

##### 9.4.56.1.2. admin?

Returns whether the user is an admin.

```
{% if user.admin? %}
  <p>You are an admin of your account.</p>
{% endif %}
```

##### 9.4.56.1.3. username

Returns the username of the user, html escaped.

##### 9.4.56.1.4. account

Returns the account of the user.

##### 9.4.56.1.5. name

Returns the first and surname of the user.

##### 9.4.56.1.6. email

Returns the email of the user.

##### 9.4.56.1.7. password\_required?

This method will return **true** for users using the builtin Developer Portal authentication mechanisms and **false** for those that are authenticated via Janrain, CAS or other single-sign-on method.

```
{% if user.password_required? %}

{% endif %}
```

##### 9.4.56.1.8. sections

Returns the list of sections the user has access to.



```
{% if user.sections.size > 0 %}
  <p>You can access following sections of our portal:</p>
  <ul>
    {% for section in user.sections %}
      <li>{{ section }}</li>
    {% endfor %}
  </ul>
{% endif %}
```

#### 9.4.56.1.9. role

Returns the role of the user

#### 9.4.56.1.10. roles\_collection

Retuns a list of available roles for the user

```
{% for role in user.roles_collection %}
  <li>
    <label for="user_role_{{ role.key }}">

      {{ role.text&nbsp;}}
    </label>
  </li>
{% endfor %}
```

#### 9.4.56.1.11. url

Return the resource url of the user

```
{{ 'Delete' | delete_button: user.url }}
```

#### 9.4.56.1.12. edit\_url

Return the url to edit the user

```
{{ 'Edit' | link_to: user.edit_url, title: 'Edit', class: 'action edit' }}
```

#### 9.4.56.1.13. can

Give access to permission methods

```
{% if user.can.be_managed? %}
  <!-- do something -->
{% endif %}
```

#### 9.4.56.1.14. extra\_fields

Returns non-hidden extra fields with values for this user **Example:** Print all extra fields

```
{% for field in user.extra_fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.56.1.15. fields

Returns all fields with values for this user **Example:** Print all fields

```
{% for field in user.fields %}
  {{ field.label }}: {{ field.value }}
{% endfor %}
```

#### 9.4.56.1.16. builtin\_fields

Returns all builtin fields with values for this user

## 9.5. TAGS ([UP](#))

### 9.5.1. Tag 'braintree\_customer\_form' ([up](#))

Renders a form to enter data required for Braintree Blue payment gateway

### 9.5.2. Tag 'csrf' ([up](#))

Renders the cross site request forgery meta tags.

**Example:** Using csrf tag in liquid

```
<head>
  {% csrf %}
</head>
```

### 9.5.3. Tag 'content' ([up](#))

Renders body of a page. Use this only inside a layout.

### 9.5.4. Tag 'content\_for' ([up](#))

### 9.5.5. Tag 'debug' ([up](#))

Prints all liquid variables available in a template into an HTML comment.' We recommend **to remove this tag** from public templates.

```
` `{% debug:help %}``
```

### 9.5.6. Tag 'email' ([up](#))

The **email** tag allows you to customize headers of your outgoing emails and is available only inside the email templates.

There are several convenience subtags such as **cc** or **subject** (see the table below) that simplify the job but you can also use a **header** subtag to set an arbitrary SMTP header for the message.

| Subtag      | Description        | Example                                           |
|-------------|--------------------|---------------------------------------------------|
| subject     | dynamic subject    | {% subject = 'Greetings from Example company!' %} |
| cc          | carbon copy        | {% cc = 'boss@example.com' %}                     |
| bcc         | blind carbon copy  | {% bcc = 'all@example.com' %}                     |
| from        | the actual sender  | {% from = 'system@example.com' %}                 |
| reply-to    |                    | {% reply-to = 'support@example.com' %}            |
| header      | custom SMTP header | {% header 'X-SMTP-Group' = 'Important' %}         |
| do_not_send | discard the email  | {% do_not_send %}                                 |

**Example:** Conditional blind carbon copy

```
{% email %}
  {% if plan.system_name == 'enterprise' %}
    {% bcc 'marketing@world-domination.org' %}
  {% endif %}
{% endemail %}
```

**Example:** Disabling emails at all

```
{% email %}
  {% do_not_send %}
{% endemail %}
```

**Example:** Signup email filter

```
{% email %}
  {% if plan.system == 'enterprise' %}
    {% subject = 'Greetings from Example company!' %}
    {% reply-to = 'support@example.com' %}
  {% else %}
    {% do_not_send %}
  {% endif %}
{% endemail %}
```

### 9.5.7. Tag 'flash' (up)

Renders informational or error messages of the system.

**DEPRECATED:** This tag is deprecated, use FlashDrop instead.

**Example:** Using flash tag in liquid

```
{% flash %}
```

9.5.8. Tag 'footer' (up)

Renders a footer html snippet.

**DEPRECATED:** This tag is deprecated, use a CMS partial instead

9.5.9. Tag 'form' (up)

Renders a form tag with an action and class attribute specified, depending on the name of the form. The supported forms are:

| Form                                                                                                                                                                                                                                                          | Allowed Field Names | Spam Protection | Notes                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>&lt;li&gt;application[name]</li></ul> <ul style="list-style-type: none"><li>&lt;li&gt;application[description]</li></ul> <ul style="list-style-type: none"><li>&lt;li&gt;application[&lt;any-extra-field&gt;]</li></ul> | No                  |                 | <ul style="list-style-type: none"><li>&lt;li&gt;application[name]</li></ul> <ul style="list-style-type: none"><li>&lt;li&gt;application[description]</li></ul> <ul style="list-style-type: none"><li>&lt;li&gt;application[&lt;any-extra-field&gt;]</li></ul> |

|    |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |     |
|----|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| No |  | <pre> &lt;ul&gt; &lt;li&gt;account[org_name] &lt;/li&gt; &lt;li&gt;account[org_legalad dress]&lt;/li&gt; &lt;li&gt;account[org_legalad dress_cont]&lt;/li&gt; &lt;li&gt;account[city]&lt;/li&gt; &lt;li&gt;account[state]&lt;/li&gt; &lt;li&gt;account[zip]&lt;/li&gt; &lt;li&gt;account[telephone_n umber]&lt;/li&gt; &lt;li&gt;account[country_id] &lt;/li&gt; &lt;li&gt;account[&lt;any- extra-field&gt;]&lt;/li&gt; &lt;li&gt;account[user] [username]&lt;/li&gt; &lt;li&gt;account[user][email] &lt;/li&gt; &lt;li&gt;account[user] [first_name]&lt;/li&gt; &lt;li&gt;account[user] [last_name]&lt;/li&gt; &lt;li&gt;account[user] [password]&lt;/li&gt; &lt;li&gt;account[user] [password_confirmation] &lt;/li&gt; &lt;li&gt;account[user] [title]&lt;/li&gt; &lt;li&gt;account[user][&lt;any- extra-field&gt;]&lt;/li&gt; &lt;/ul&gt; </pre> | Yes |
|----|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|

**Example:** A form to create an application

```

{% form 'application.create', application %}

    {{ application.errors.name | inline_errors }}

{% endform %}

```

### 9.5.10. Tag 'latest\_forum\_posts' (up)

An HTML table with latest forum posts.

**DEPRECATED:** Use `forum` drop instead.

**Example:** Using `latest_forum_posts` tag liquid

```

{% latest_forum_posts %}

```

### 9.5.11. Tag 'latest\_messages' (up)

Renders a html snippet with the latest messages for the user.

**Example:** Using latest\_messages tag in liquid

```
{% latest_messages %}
```

### 9.5.12. Tag 'logo' (up)

Renders the logo.

**DEPRECATED:** This tag is deprecated, use `{{ provider.logo_url }}` instead.

**Example:** Using menu tag in liquid

```
{% logo %}
```

### 9.5.13. Tag 'menu' (up)

**DEPRECATED:** This tag is deprecated, use `'{% include "menu" %}'` instead.

### 9.5.14. Tag 'oldfooter' (up)

Renders a footer html snippet.

**DEPRECATED:** This tag is deprecated, use a CMS partial instead

### 9.5.15. Tag 'plan\_widget' (up)

Includes a widget to review or change application plan

```
{% if application.can_change_plan? %}
  <a href="#choose-plan-{{ application.id }}"
    id="choose-plan-{{application.id}}">
    Review/Change
  </a>
  {% plan_widget application %}
{% endif %}
```

### 9.5.16. Tag 'portlet' (up)

This tag includes portlet by system name.

### 9.5.17. Tag 'submenu' (up)

Renders a submenu html snippet for a logged in user.

**DEPRECATED:** This tag is deprecated, use a 'submenu' partial instead

**Example:** Using submenu tag in liquid

```
{% submenu %}
```

### 9.5.18. Tag '3scale\_essentials' (up)

### 9.5.19. Tag 'user\_widget' (up)

Renders a user widget html snippet.

**DEPRECATED:** This tag is deprecated, use a CMS partial instead

**Example:** Using user\_widget tag in liquid

```
{% user_widget %}
  <p class="notice">If you are logged in you see profile related links
above.</p>
  <p class="notice">If you are not login you are invited to login or
signup.</p>
```

## 9.6. FILTERS (UP)

### 9.6.1. FormHelpers filters (up)

#### 9.6.1.1. error\_class filter

Outputs error class if argument is not empty **Example:** Using error\_class to show output an error class

#### 9.6.1.2. inline\_errors filter

Outputs error fields inline in paragraph **Example:** Using inline\_errors to show errors inline

```
{{ form.errors.description | inline_errors }}
```

### 9.6.2. ParamFilter filters (up)

#### 9.6.2.1. to\_param filter

Converts a supplied drop to URL parameter if possible. **Example:** Using to\_param filter in liquid

```
<h2>Signup to a service</h2>
<a href="{{ urls.signup }}?{{ service | to_param }}">Signup to {{
service.name }}</a>
```

### 9.6.3. Common filters (up)

#### 9.6.3.1. group\_by filter

Group collection by some key **Example:** Group applications by service

```
{% assign grouped = applications | group_by: 'service' %}
{% for group in grouped %}
```

```
Service: {{ group[0] }}
{% for app in group[1] %}
  Application: {{ app.name }}
{% endfor %}
{% endfor %}
```

### 9.6.3.2. any filter

True if any string in the collection equals to the parameter **Example:** Are there any pending apps of the current account?

```
{% assign has_pending_apps = current_account.applications | map: 'state' |
any: 'live' %}
```

### 9.6.3.3. stylesheet\_link\_tag filter

Stylesheet link

### 9.6.3.4. javascript\_include\_tag filter

Javascript include tag

### 9.6.3.5. image\_tag filter

Outputs an tag using the parameters as its **src** attribute.

```
{{ 'http://example.com/cool.gif' | image_tag }}
## =>
```

### 9.6.3.6. mail\_to filter

Converts email address to a 'mailto' link.

```
{{ 'me@there.is' | mail_to }}
## => <a href="mailto:me@there.is">me@there.is</a>
```

### 9.6.3.7. html\_safe filter

Marks content as HTML safe so that it is not escaped.

### 9.6.3.8. pluralize filter

Convert word to plural form

### 9.6.3.9. delete\_button filter

Generates a button to delete a resource present on the URL. First parameter is a URL, second is a title. You can also add more HTML tag attributes as a third parameter.

```
{{ 'Delete Message' | delete_button: message.url, class: 'my-button' }}
```



### 9.6.3.10. delete\_button\_ajax filter

Generates a button to delete a resource present on the URL using AJAX. First parameter is a URL, second is a title.

```
{{ 'Delete Message' | delete_button_ajax: message.url }}
```

### 9.6.3.11. update\_button filter

Generates a button to 'update' (HTTP PUT request) a resource present on the URL. First parameter is a URL, second is a title. You can also add more HTML tag attributes as a third parameter.

```
{{ 'Resend' | update_button: message.url, class: 'my-button' }}
```

### 9.6.3.12. create\_button filter

Generates a button to create a resource present on the URL. First parameter is a URL, second is a title.

```
{{ 'Create Message' | create_button: message.url }}
```

### 9.6.3.13. create\_button\_ajax filter

### 9.6.3.14. regenerate\_oauth\_secret\_button filter

### 9.6.3.15. link\_to filter

Create link from given text

```
{{ "See your App keys" | link_to: '/my-app-keys' }}
```

## CHAPTER 10. LIQUIDS: DEVELOPER PORTAL

Learn what liquid formatting tags are and how they work in the 3scale system, including the different elements of the markup, the connections between them, and short examples of how to use them in your Developer Portal. Find the [complete list of liquid tags, drops, and filters available here](#)

### 10.1. WHAT ARE LIQUIDS?

Liquid is a simple programming language used for displaying and processing most of the data from the 3scale system available for API providers. Liquid was originally developed by [Shopify](#) and is used in many other CMS engines throughout the web. In the 3scale platform, it is used to expose server-side data to your API developers, greatly extending the usefulness of the CMS while maintaining a high level of security.

#### 10.1.1. Pros and cons

Liquids are mainly used to fetch and display server-side data on your Developer Portal pages. However there is much more power in liquids than just this. They serve very well for:

- Altering the DOM and content of a page based on server-side data
- Adding logic to pages, layouts, and partials
- Manipulating the email templates sent to developers

There are some use cases where liquids don't provide the best solution to the problem, mostly situations where you need to use dynamic data such as input from the user or the page URL.

Some general advice is to use them as the primary way to add logic to the page, but then if you find it impossible or overly complicated, switch to JavaScript (or add them to it, as liquids also work well with JS).

### 10.2. HOW TO USE LIQUIDS

Liquid markup is divided into two types: logic tags and output tags. The logic tags, marked as MISSING, are conditional liquid statements that include standard programming language elements such as the "if" clause, loops, etc.

```
{% if current_user %}           <!-- if the user is logged in -->
  <a href="/logout">Logout</a>    <!-- show the logout link -->
{% else %}                      <!-- if the user is not logged in -->
  <a href="/login">Login</a>      <!-- display the login link -->
{% endif %}
```

Output tags, marked as '({{ }})', are used to display the value of the tag between the curly braces.

```
{{ current_user.username }}    <!-- display the logged-in user's username
value -->
```

For documentation on logic tags, please refer to the [Shopify tutorial](#). The full reference of the 3scale liquid output tags can be found both on [this page](#) as well as in your Admin Portal under **Help > Liquid Reference**.

### 10.2.1. Liquid drops, tags, and their meanings

In the 3scale CMS, you will have access to three types of liquid markup:

- liquid drops (e.g. `{{ current_account.name }}`)
- liquid tags (e.g. `{% content %}`)
- filters (e.g. `{{ form.errors.description | error_class }}`)

You can find a [complete list of liquid tags, drops, and filters available here](#)

As you can see, they're almost the same as the logic and output tags, and they work very similarly. Liquid drops are the most basic structure, and you will be using them most of the time. They give access to certain values stored in the system such as the name of the user and the ID of the application. They're handled by the interpreter in the same way as any other output tags.

On the other hand, liquid tags are a type of logic tag that renders or accesses certain parts of the system for further customization – for example, to render content in the layout or customize email templates.

Filters, as the name suggests, enable the option of filtering results from the drops, converting values, grouping by some key, etc. There is a group of standard liquids filters, which you can find on the [Shopify website](#)) and a group of special 3scale internal filters, which are listed on the [reference page](#).

### 10.2.2. The context

The context describes which variables (drops) are available to use on the current page. The basic set includes the following variables:

- provider
- urls
- current\_user
- current\_account
- today

These variables are available on every page throughout the CMS (except for email templates). However, most of the built-in pages will have some additional variables available. For example, the edit user form will have a user variable exposed (instead of current user – on edit user page, the identity of the user is already known). To check which variables are available on the current page, there is a special tag: `{% debug:help %}`. It adds the list of all the top-level variables available to use as a comment in the source of the page.

### 10.2.3. Hierarchy

The direct consequence of the context is that the liquid drops are organized in a hierarchical structure. The available set of variables only gives you the list of the top level drops that are available. Using them, you can get access to elements much deeper inside the hierarchy. For example, if you would like to show the username of the logged-in user, you would write `{{ current_user.username }}`.

Displaying lower level drops is a little bit more complicated. Assume that you would like to display the name of the only application for a user. Looking at the reference guide, you can see that the method "applications" is a part of the account drop. This means that applications is an array of single-application

tags. If your users are allowed to have more than one application, then you would have to iterate through them using the logic tags. Otherwise, you can refer to the first (and only) application on the account. The code to display this would look like this: `{{ current_account.applications.first.name }}`.

## 10.3. USAGE OF LIQUIDS IN THE CMS

### 10.3.1. Enabling Liquids

Liquid markup processing is enabled by default for all partials and email templates. Enabling them on layouts is done by simply checking the checkbox right under the system\_name input field. However, to enable them on pages, you'll have to go to the advanced options section of the page.

#### ▼ ADVANCED OPTIONS

System name

Content type

Can be [HTML](#), [CSS](#), [Javascript](#) or an arbitrary MIME type.

☒ Liquid enabled

Process Liquid tags and drops?

Handler

Do you use any markup language?

Tag list

Just expand the **Advanced options** section and mark the Liquid enabled checkbox. From now on, all the liquid markup will be processed by the internal engine, and the CMS built-in editor will also add code highlighting for liquid.

### 10.3.2. Different use on pages, partials, and layouts

The use of liquids usually differs slightly between pages, which are single-use elements and partials/layouts, which are the reusable elements of your portal. This means that instead of using multiple layouts or partials with small changes for use on different pages, you can add some logic liquid tags inside and alter the layout depending on the page the user is on.

```
<!-- if we are inside '/documentation' URL -->
<li class="{% if request.request_uri contains "/documentation" %}active{%
endif %}"><!-- add the active class to the menu item -->
  <a href="/documentation">Documentation</a>
</li>
```

### 10.3.3. Use with CSS/JS

Liquid markup doesn't just work with HTML, you can easily combine it with CSS and/or JavaScript code for even more control. To enable liquid in a stylesheet or JS, create them as a page and follow the same steps as if you were enabling it for a normal page. Having done that, you'll be able to add some conditional markup in CSS or use the server-side data in JavaScript. Just remember to set the content type of the page as CSS or JS.

## 10.4. USAGE OF LIQUIDS IN EMAIL TEMPLATES

### 10.4.1. Differences from CMS

As previously mentioned, liquid tags can also be used to customize the email templates sent to your users. All the general rules for writing liquid mentioned before also apply to the email templates, with some exceptions:

- There is no commonly shared list of variables that are available on every template. Instead, you'll have to do some testing using the previously mentioned `{% debug:help %}` tag.
- Since emails are by nature different from web pages, you will have limited or no access to some tags. For example, `{{ request.request_uri }}` will not make sense anymore, as an email does not have a URL.

```
<!-- samples -->
```

## 10.5. TROUBLESHOOTING

### 10.5.1. Debugging

If something is not working as intended (but saved correctly) check that:

- All the tags are closed correctly
- You're referring to variables available on the current page
- You're not trying to access an array – for example `current_account.applications` is an array of applications
- The logic is correct

### 10.5.2. Typical errors and ways to solve them

- If the document cannot be saved due to a liquid error, it's usually because some tags or drops were not closed correctly. Check that all your `{% %}` and `{{ }}` tags were properly closed and that the logic expressions (if, for, etc.) are terminated correctly (with `endif`, `enfor`, etc.) Normally if this is the case, an error will be displayed at the top of the page above the editor with a descriptive error message.
- If everything saved correctly and you don't see any effect, check that you're not referring to an empty element and you're not using a logic tag to display content. (`{% %}` will never render any content, besides usage in tags which is already an alias of a more complex set of tags and drops.)
- If instead of what you wanted to see only a `#` is displayed, it means that you've tried to display an element that is an array. Check the section on the liquid hierarchy in this article ([link](#)).

### 10.5.3. Answers on the forum

If you still have a problem, try looking for an answer on our [forum](#) or ask a question yourself.

## CHAPTER 11. MULTI-SERVICE SIGNUP

By the end of this section, you'll be familiar with the procedure to create and customize a multiple-service signup page.

If you're using the multiple services functionality, you're able to customize the signup procedure to allow customers to subscribe to different services.

### 11.1. PREREQUISITES

You should be familiar with layout and page creation procedures as well as with the basics of Liquid formatting tags. You can check our Liquid tags reference [here](#). "Multiple Service" functionality must also be enabled on your account (available for Pro plan and up).

It's strongly recommend that you read about [signup workflows](#), so you'll have the whole setup prepared and know how it works.

### 11.2. INTRODUCTION

Start the process by creating a new layout, which will serve as the template for your multi-service signup page. Go into the Layouts section of the CMS system, and create the new layout. You can call it *multipleservicesignup* to be able to easily distinguish it from the other layouts. In the editor, paste the general structure of your standard layout (such as home or main layout). Now delete everything you don't need – all the containers, sidebars, additional boxes, etc.

The screenshot shows the Red Hat 3Scale API Management interface. On the left is a sidebar with navigation links: Accounts, Applications, Billing, Portal (selected), Content (selected), Drafts, Redirects, Groups, Feature Visibility, ActiveDocs, Visit Portal, Legal Terms, Signup, Service Subscription, and New Application. The main area is divided into three columns. The first column contains a list of items: Documentation, Homepage, Lalala, Show, Account, Show, Edit, Account Plans, Index, Application Alerts, Index, Applications, Show, Choose service, Edit, and Index. The second column contains configuration fields: Section (Root), Path (/), Layout (Main layout), and an Advanced Options section. The Advanced Options section includes System name, Content type (text/html), a note about MIME types, and a checked checkbox for Liquid enabled.

Having created the backbone of your layout, proceed to customizing the code for signup.

### 11.3. STEP 1: THE LOOP

In order to retrieve all the information about the services that you need to construct the proper signup link, you have to loop through the service objects. Services are a part of the model object.

```
{% for service in provider.services %}
.
.
.
{% endfor %}
```

## 11.4. STEP 2: SIGNUP COLUMNS

You already have your layout and loop accessing the service objects. Now decide how you want to display information about the service and the signup link. For example, divide them into columns with a service description and a signup link at the bottom. Every column will be a div box with a `service-column` class to contain all the necessary information.

```
{% for service in provider.services %}
  <div class="service-column">
    <p>{{ service.name }}</p>
    <p>{{ service.description }}</p>
    .
    .
    .
  </div>
{% endfor %}
```

The container inside serves as a custom description field. `service.name` is the service name, which in this case will be the container's name.

## 11.5. STEP 3: SUBSCRIBE AND LINKS

Now the main part of your custom service signup – to create the signup link, extract the signup URL and the service ID. Take the signup URL from URL's object and the service ID from your service object on which you iterate in the loop. The final link code will look like this:

```
<a href="{{ urls.signup }}?{{ service | toparam }}">Signup to {{
service.name }}</a>
```

You also have to take into account that the user may already have signed up for some of your services. Create a conditional block to check.

```
{% unless service.subscribed? %}
  <a href="{{ urls.signup }}?{{ service | toparam }}">Signup to {{
service.name }}</a>
{% endunless %}
```

With this, you can generate the final code:

```
{% for service in provider.services %}
  <div class="service-column">
    <p>{{ service.name }}</p>
    <p>{{ service.description }}</p>
    {% unless service.subscribed? %}
      <a href="{{ urls.signup }}?{{ service | to_param }}">Signup to {{
service.name }}</a>
    {% endunless %}
  </div>
{% endfor %}
```

## 11.6. STEP 4: STYLING



Add some final touches to the generated markup, depending on the number of services you have. In the case of this example it's two, so the CSS code for the service-column div will be:

```
.service-column {  
    float: left;  
    margin-left: 10%;  
    width: 45%;  
}  
.service-column:first-child {  
    margin-left: 0;  
}
```

In the example, we've used the percentage-based layout to dynamically assign the width of the column basic on the containing div's dimensions.

Now you should have a properly working and good-looking multiple services subscription page. Congratulations!

If you'd like to display the columns in a specific order, try using conditional expressions (if/else/case) conditioning the service name or another value you know.

## CHAPTER 12. DEVELOPER PORTAL OVERVIEW


By the end of this section you should be familiar with the Developer Portal CMS, including its structure, use, and functionality.

You can customize the look and feel of the entire Developer Portal to match your own branding. You have complete control over every element of the portal, so you can make it as easy as possible for developers to learn how to use your API. A successful API Developer Portal will help your developers turn concepts into working apps in no time at all.

### 12.1. CMS OVERVIEW


The CMS consists of a few elements:

- Left menu with access to Content, Drafts, Redirects, Groups, Feature Visibility, ActiveDocs, Legal Terms, Settings and Liquid documentation.
- The main area containing details of the sections above.

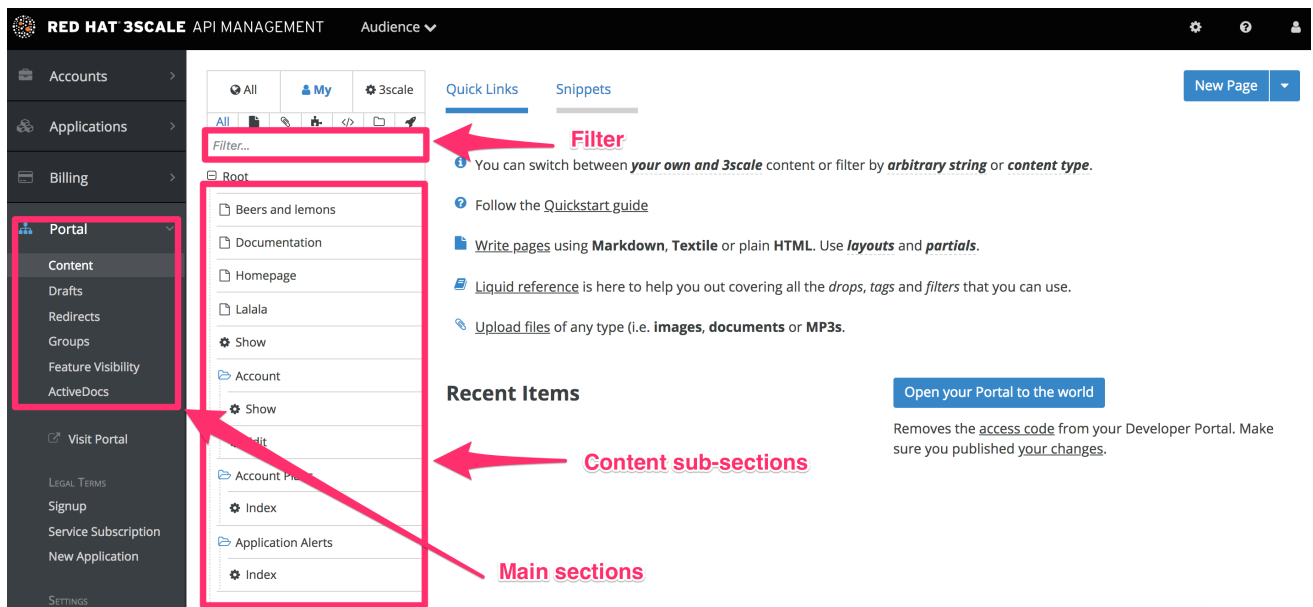

### 12.2. CONTENT

This is the most important part of your view of the CMS system. The content section shows the site structure and hierarchy and provides editing functionality within the same page. This means you can manage the site structure, the pages, and other assets stored in it. The portal's hierarchy is displayed in the form of a directory tree.

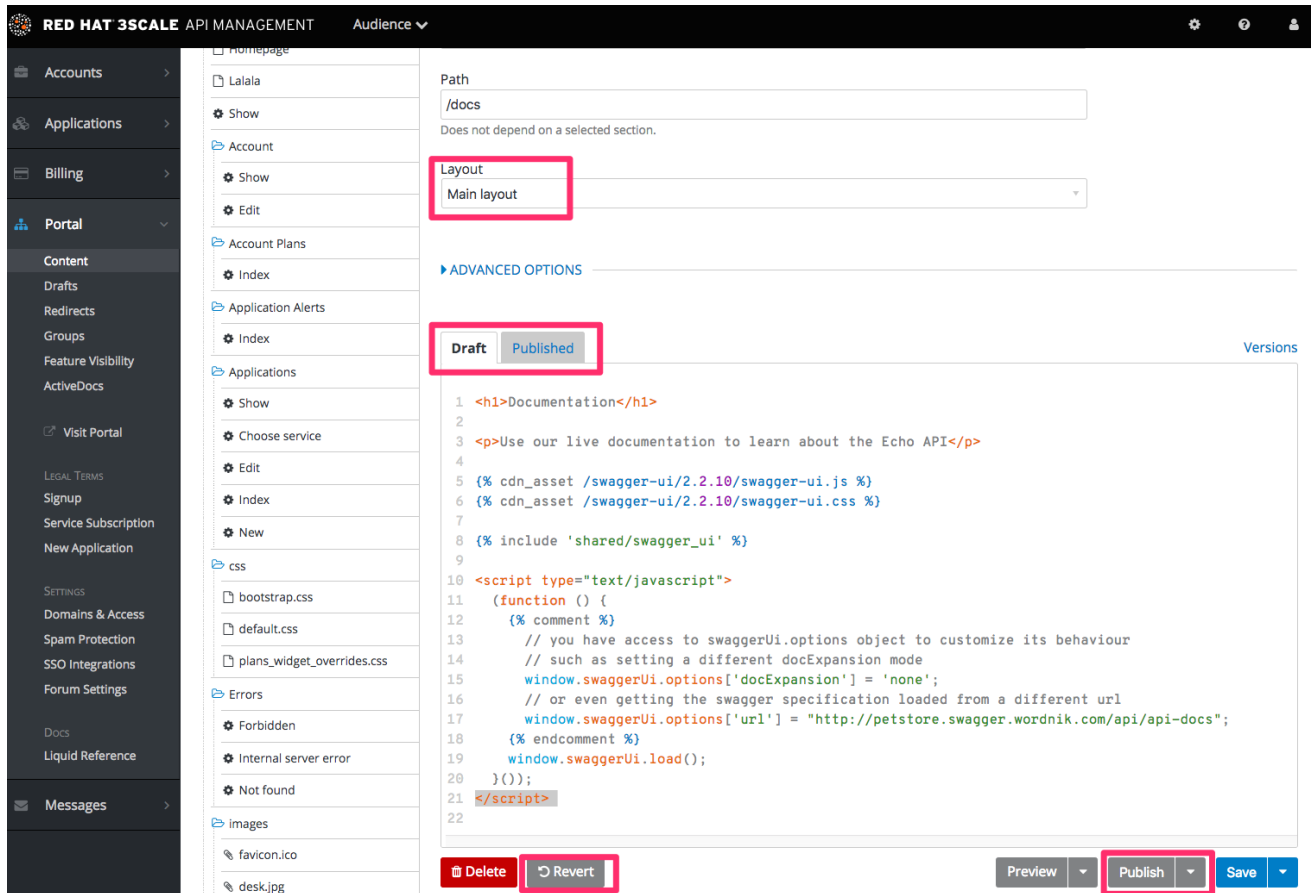


The image above shows a sample view of one of the pages inside the contents section. As you can see, it displays all the files (pages, images, stylesheets, JavaScript, etc.) preserving the site's path hierarchy. As before, sections are functionally equal to directories.


On the right-hand side, you can see the edit page view. Here you can see the page name (which also indicates whether it's a standard or built-in page) and a button to add a new element to the content (page, layout, partial, section, file, or portlet). Below, you can choose which layout the page will use and toggle the liquid tags functionality. The following part is the text editor, which supports code highlighting, tabulations, line numeration, and much more. The tab buttons Draft and Published switch between the draft and published versions of the edited document. The following two icons list the document's versions and open a pop-up edit window, respectively.

To edit page content, simply choose the desired layout, set a few additional options such as content type and URL path, and then input the code in HTML, Markdown, or Textile.

Another important feature in this view is the Preview button. You can choose whether you want to preview the published or draft version of the page. Clicking the button redirects you to CMS mode, where you can see the live (or draft) rendered version of the page with a dark grey vertical bar on the right-hand side. This bar contains links to the page, layout, and partials edit views of the CMS. It allows you to switch between draft and published views.

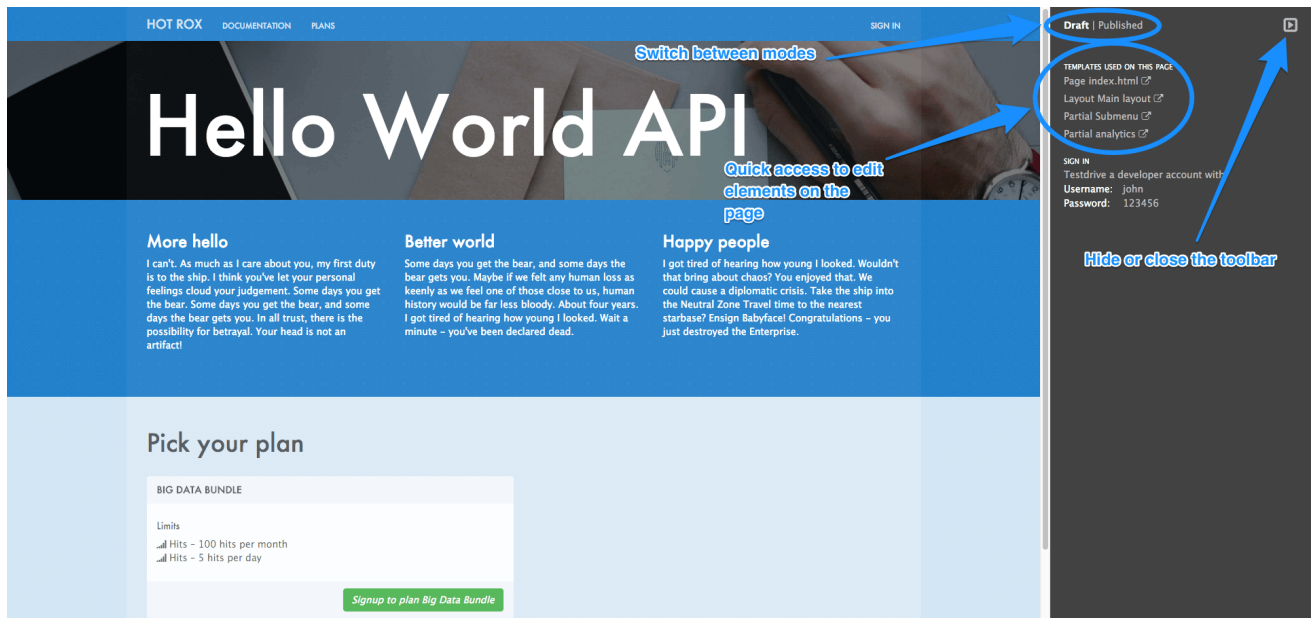

There's also a filter feature, which serves not only as a search field but allows you to limit the elements shown to only stylesheets, JavaScript, or any other types specified.

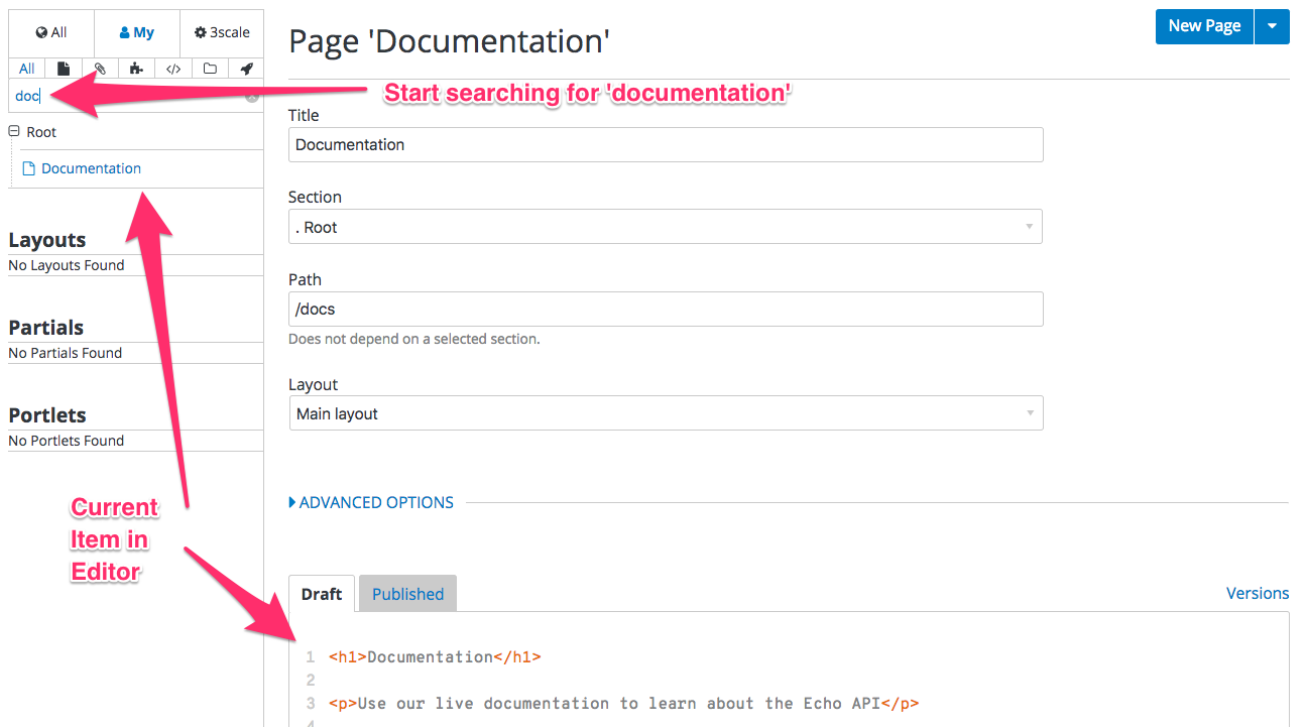

## 12.3. LAYOUTS AND PARTIALS

The layouts and partials sections manage the templates and the reusable parts of the page. Their functionality is similar to that of the content section.

The layouts section consists of definitions of the templates used by pages. Layout is the main structure of the page, and the contents of this template will be rendered on every page that uses it. The partials, portlets, and the actual content of the pages reside inside.

Partials are the reusable parts of code, which repeat in many places on different pages – for example, the footer is the same on every layout, and the sidebar is the same on a few pages with different layouts. To include a partial in a layout, partial, or email template or portlet, type: `{% include "partial_name" %}`. For full reference of liquid tags, check [here](#).

As with the other parts of the portal, layouts and partials also have draft and published states and offer a full version history.

1. Text editor for the layout template.
2. Save draft, publish current version, and revert to the last published state.
3. Switch the text editor between the draft and published versions, list the version history, and launch the pop-up editor.

## 12.4. PORTLETS

The last subsection of the content are the portlets. They give you some more advanced functionality without needing any advanced coding. Our CMS provides three different portlets:

- External RSS feed - fetches the RSS feed from a given source
- Table of contents - generates the links list for the pages in a given section
- Latest forum posts - generates the list of the n latest forum posts

While creating your desired portlet, you have to input the requested data in the setup page such as title, system name, and the URL feed for the external RSS feed portlet.

### 12.4.1. Note

The editor will come pre-filled with standard portlet code using some custom liquid tags. You can try editing the generated structure, but be careful. When in doubt, just leave the code as it is or refer to the [portal formatting tags reference](#).

## 12.5. REDIRECTS AND CHANGES

The last elements of the CMS are the redirects and changes sections. They are much less complicated than the content section but are still important and provide some custom functionality.

Redirects help you set up redirects from one portal URL to another. This is useful, for example, when you deprecate an old page and don't want to change all the links. Redirects cannot be used for built-in CMS pages – **they are only for pages created by you**.

Last but not least is the changes section. It contains a list of all the newly edited and unpublished pages and gives you the choice to publish them individually or all at once.

## CHAPTER 13. RESTRICTED CONTENT


Here you'll learn how to have content in your Developer Portal that is only visible for some users.

You may need to have some pages of your Developer Portal that are only accessible for a specific group of developers, either part of a page or items in a certain menu. Both goals are achievable through the two techniques introduced below.


### 13.1. RESTRICTED PAGES

When creating restricted sections, it's useful to do it so that each section maps to a logical group of users. For this example, assume that there is a group of developers called "partners".

Create a new section in the CMS for every page or group of pages that you want to restrict access to. Uncheck the "public" status field. Then drag and drop any pages you want inside this section.

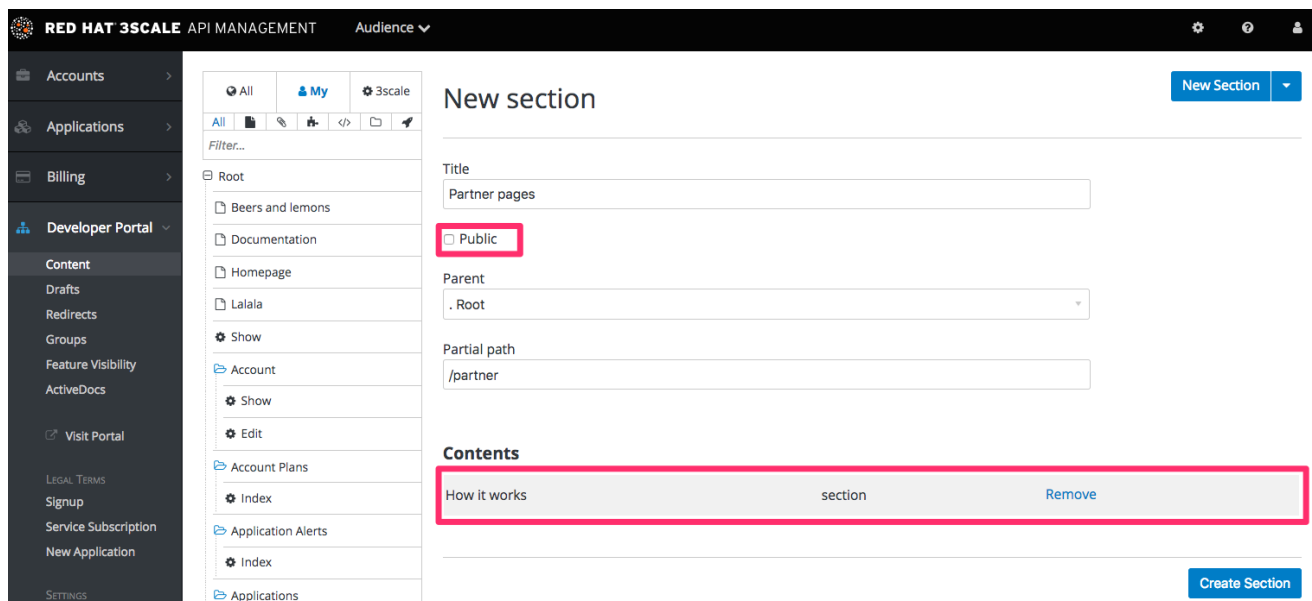

Create a group and give it access to the section you created.

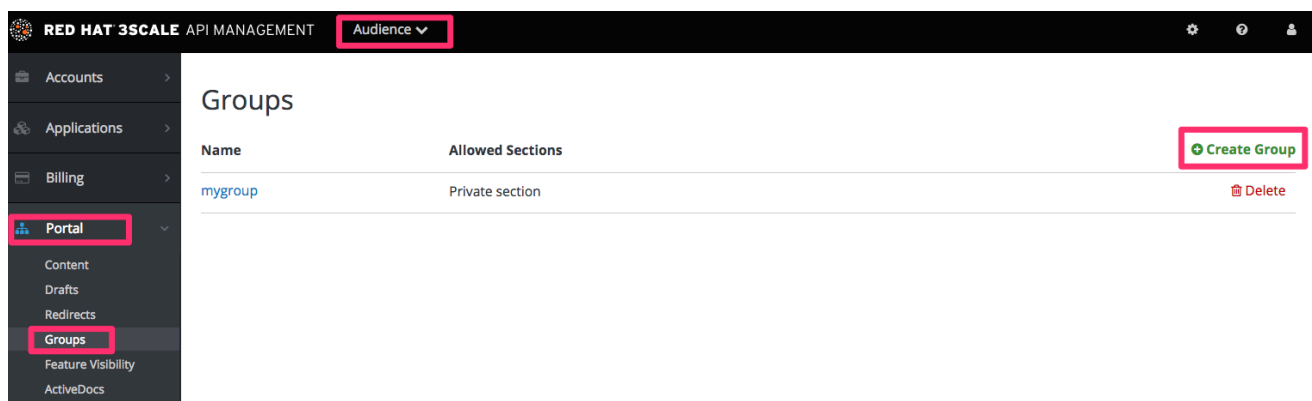

Now every time you have to grant one of your users access to this section, all you have to do is assign them to this group. To do this, go into the corresponding account detail page, then to "Group Permissions." Once there, check the boxes for the sections you want to allow.

## 13.2. RESTRICTED BLOCKS OF CONTENT

Liquid tags are a very powerful way to customize your Developer Portal. Use them here to hide or display parts of a page based on a condition. 3scale allows you to create custom fields for accounts, applications, and users. You can leverage this to store information that is useful for you as the API provider. Here you'll create a custom field attached to all accounts and use it to indicate whether a given account is a partner or not. You can create this field by going to **Audience > Account > Field Definitions**. Add a field to the Account section, and mark it as hidden so it will not be displayed on the sign-up page or anywhere else on the portal.

| Account    |                           |          | Create |
|------------|---------------------------|----------|--------|
| * org_name | "Organization/Group Name" | Required | Edit   |
| * Partner  | "partner"                 | Hidden   | Edit   |

With the custom field in place, you are now able to show special content to partners by wrapping it in a conditional like in the following snippet:

```
{{ if current_account.extra_fields.partner == 'true' }}
  // content only accessible to partners
{{ endif }}
```

Or use the inverse logic if it suits your case better:

```
{{ unless current_account.extra_fields.partner == 'true' }}
  // content forbidden for partners
{{ endunless }}
```

From here on, whenever you want to show these pieces of hidden content to a user, all you need to do is type in 'true' in the partner field of their account detail page.

### 13.2.1. Pro tip: How to automate setting extra fields

In some cases, you'll want to provide access to restricted content to developers based on a change in state. For instance, when they upgrade application plan.



You can streamline the process by using [webhooks](#) together with the Account Management API. Find the Account Management API in the 3scale ActiveDocs, available in your Admin Portal, under the **Documentation (question mark icon (?) in the top right corner) → 3scale API Docs** section. Based on the developer's new plan – which you can know from the message sent by the webhook request – you can grant access to the private content by calling the API to update the "partner" field.

### 13.3. REQUIRING USER LOGIN

In addition to the two ways to restrict access to content described above, there is another technique that can be useful: requiring a logged-in user.

This is very easy to achieve using Liquid tags. All you have to do is wrap the content that will be available only for logged-in users inside the following conditional:

```
{{ if current_user }}  
    // only visible if the user is logged in  
{{ endif }}
```

## CHAPTER 14. CONFIGURE SIGNUP FLOWS

In this section, you'll see which settings to configure to adjust signup workflows.


Signup workflows are a critical aspect of the developer experience you provide through your Developer Portal. The process can range from being completely automatic and self-service to the other extreme of requiring total control over who gains access to what, with various levels of granularity.

The 3scale platform allows you to model your API with a combination of account (optional), service (optional), and application plans. For each of these plans, you can control whether there is an approval gate that you operate. For each one, you also determine whether there is a default, or the developer is required to take the next step and make a choice.

For the extreme of maximum automation and self-service, remove all approval steps and enable all possible default plans. This way, a key can be issued to provide access to your API immediately after signup.

### 14.1. STEP 1: REMOVE ALL APPROVAL STEPS

To remove approvals, go to **Audience > Accounts > Usage Rules** and in the **Signup** section, make sure the option of **Developers are allowed to sign up themselves** is checked.

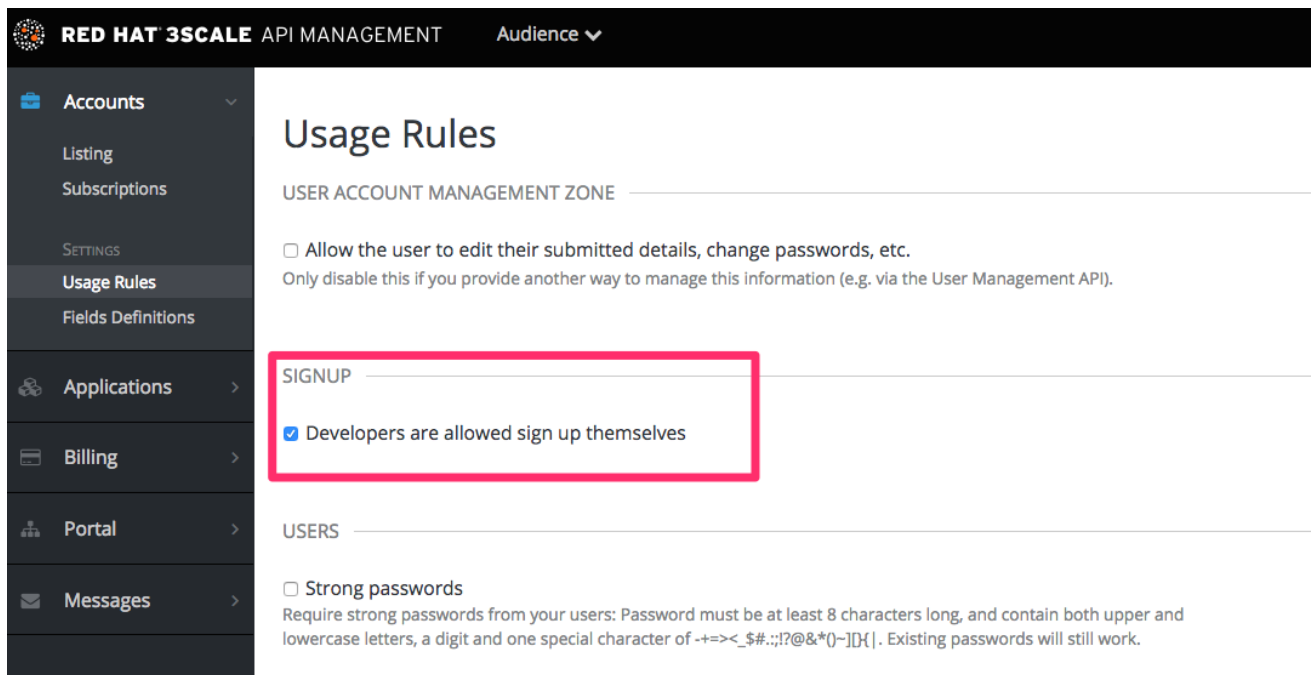

The screenshot shows the Red Hat 3scale API Management interface. The top navigation bar includes the Red Hat 3scale logo, 'API MANAGEMENT', and a dropdown menu for 'Audience'. The left sidebar contains a navigation menu with 'Accounts' (selected), 'Applications', 'Billing', 'Portal', and 'Messages'. Under 'Accounts', there are sub-items: 'Listing', 'Subscriptions', 'SETTINGS', 'Usage Rules' (highlighted), and 'Fields Definitions'. The main content area is titled 'Usage Rules' and is divided into sections: 'USER ACCOUNT MANAGEMENT ZONE', 'SIGNUP', and 'USERS'. In the 'SIGNUP' section, the checkbox 'Developers are allowed sign up themselves' is checked and highlighted with a red box. Below this, the 'USERS' section contains a checkbox for 'Strong passwords' and a description: 'Require strong passwords from your users: Password must be at least 8 characters long, and contain both upper and lowercase letters, a digit and one special character of -+=<\_\$.:;!@&\*()-][X|. Existing passwords will still work.'

Optionally, if you have account and service plans enabled, scroll down the page and make sure the option **Change plan directly** is enabled in both cases:

RED HAT 3SCALE API MANAGEMENT Audience ▾

Accounts ▾

- Listing
- Account Plans
- Subscriptions
- SETTINGS
- Usage Rules
- Fields Definitions

ADVANCED PLANS

☒ Account Plans  
Only consider using Account Plans if Application Plans don't suit your use case - for example if you offer additional non-API services.

ACCOUNT PLANS CHANGING

☐ Request a plan change

☒ Change the plan directly

## 14.2. STEP 2: ENABLE ALL POSSIBLE DEFAULT PLANS

### Application plans

RED HAT 3SCALE API MANAGEMENT API: Echo API ▾

Overview

Analytics

Applications ▾

- Listing
- Application Plans

Subscriptions

ActiveDocs

Integration

### Application Plans

Application Plans establish the rules (limits, pricing, features) for using your API; every developer's application accessing your API will be accessing it within the constraints of an Application Plan. From a business perspective, Application Plans allow you to target different audiences by using multiple plans (i.e. 'basic', 'pro', 'premium') with different sets of rules.

Default Plan: Basic, Unlimited, Plan A, Plan B

| Name      | Applications | State     |         |      |        |
|-----------|--------------|-----------|---------|------|--------|
| Basic     | 3            | published | Hide    | Copy | Delete |
| Unlimited | 4            | published | Hide    | Copy | Delete |
| Plan A    | 0            | published | Hide    | Copy | Delete |
| Plan B    | 0            | hidden    | Publish | Copy | Delete |

Create Application Plan

Optionally, if you have account and service plans enabled, choose default plans for those too

### Account plans (optional)

RED HAT 3SCALE API MANAGEMENT Audience ▾

Accounts ▾

- Listing
- Account Plans
- Subscriptions
- SETTINGS
- Usage Rules
- Fields Definitions
- Applications
- Billing
- Developer Portal

### Account plans

Account plans create "tiers" of usage within the developer portal, allowing you to distinguish between grades of support, content and other services partners at different levels receive.

Default Plan: Default

Default account plan (if any) is contracted automatically on sign up.

Edit the details of the plan from this link

| Name    | Accounts | State  |         |      |        |
|---------|----------|--------|---------|------|--------|
| Default | 5        | hidden | Publish | Copy | Delete |

Create Account Plan

### Service plans (optional)

**RED HAT 3SCALE** API MANAGEMENT **API: Echo API**

## Service Plans

Service plans allow you to define grades of service for each of the services (APIs) available through your developer portal. The plans allow you to define pricing per service and features available.

Default Plan  
Default  
Default service plan (if any) is contracted automatically on sign up.

[Click on this link to edit features, etc.](#)

| Name    | Subscriptions | State     |      |      |        |
|---------|---------------|-----------|------|------|--------|
| Default | 6             | published | Hide | Copy | Delete |

[Create Service Plan](#)

## 14.3. STEP 3: TEST THE WORKFLOW

Once you've made your desired settings changes, test out the results by going to your Developer Portal and attempting to sign up as a new developer. Experiment and make any necessary adjustments to get exactly the right workflow for your API. When you're happy with the workflow, it's a good time to check your email notifications to make sure they provide the right information for your developers.

**RED HAT 3SCALE** API MANAGEMENT **Audience**

## Email Templates

| Name                                               | Description                                             |          |
|----------------------------------------------------|---------------------------------------------------------|----------|
| Buyer Account approved                             | After provider approves sign up, notification for buyer | Edit     |
| Buyer Account confirmed                            | Buyer Account confirmed                                 | Override |
| Credit card expired notification for buyer         | Credit card expired notification for buyer              | Override |
| Buyer account rejected                             | Buyer account rejected                                  | Override |
| Alert notification for buyer (< 100%)              | Alert notification for buyer when near 100% threshold   | Override |
| Alert messenger limit alert for provider of master | No description.                                         | Override |
| Alert notification for buyer (>= 100%)             | Alert notification for buyer when over 100% threshold   | Override |

## CHAPTER 15. SSO FOR DEVELOPER PORTAL

Single sign-on (SSO) allows you to manage access control of multiple independent systems. By following this guide, you'll be able to allow users that are logged in to your system to log in automatically to your 3scale-powered Developer Portal without being prompted to log in again.

This article shows how existing user credentials of your website can be used to automatically log in to your 3scale-powered Developer Portal.

This feature is meant for API providers that already own the identity of their API consumers (username and password) – such as when the API provider is also the identity provider.

### 15.1. STEP 1: CREATE YOUR USERS IN THE 3SCALE PLATFORM

First of all, the API consumer must have an account in your Developer portal. You can import your users to 3scale using the Account Management API or create them manually. Find the Account Management API in the 3scale ActiveDocs, available in your Admin Portal, under the **Documentation (question mark icon (?) in the top right corner)** → **3scale API Docs** section.

### 15.2. STEP 2: REQUEST A LOGIN LINK

Once the user exists, you can use an API request call to generate a URL with a built-in SSO token:

```
curl -X POST -d
"provider_key=YOUR_PROVIDER_KEY&username=USERNAME&expires_in=60"
https://YOUR_ADMIN_PORTAL.3scale.net/admin/api/sso_tokens.xml
```

There are 2 parameters in this call: username to specify who you are requesting the token for and expires\_in which is the number of seconds that the token will be valid for (it defaults to 10 minutes).

You can also pass an additional parameter redirect\_url with a location to redirect the user after a successful login. This parameter should be [percent encoded](#). The XML response will contain a URL with a secret token included:

```
<?xml version="1.0" encoding="UTF-8"?>
<sso_url>
https://YOUR_DEVELOPER_PORTAL/session/create?
expires_at=1365087501&token=Q0dNWGtjL2h2MnloR11yWmNwazVZY0NhenlabnBoRUNaNU
lyWjZaVG8wMnBGdVNHt0VGN1NUb3FRc1pwSnRrc1BZSTIwOUFwRkVTc3NuK1JTbjUrMEE9PS0t
Y1ZrOGFlZzFJNkxna1hrQzQyZ0NGQT09--712f2990ac9248ab4b8962be6467fb149b346000
</sso_url>
```



#### NOTE

You can pass either user\_id or username to identify the 3scale user. Typically, the username will be the same for your system and 3scale portal. In that case, using the username should be easy since it does not require any additional information to be stored on your side. However, if you need to do some pairing and machine processes to the URLs anyway, you might be better off with user\_id.

### 15.3. STEP 3: REDIRECT USER WITH AUTOMATIC LOGIN

The response contains an SSO login URL with a token:

```
https://YOUR_DEVELOPER_PORTAL/session/create?  
expires_at=1365087501&token=Q0dNWGtjL2h2MnloR11yWmNwazVZY0NhenlabnBoRUNaNU  
lyWjZaVG8wMnBGdVNhT0VGN1NUb3FRc1pwSnRrc1BZSTIwOUFwRkVTc3NuK1JTbjUrMEE9PS0t  
Y1ZrOGFlodzFJNkxna1hrQzQyZ0NGQT09--712f2990ac9248ab4b8962be6467fb149b346000
```

The URL contains all the required information for the 3scale Developer Portal SSO to log you in. You can embed it directly into web. However bear in mind that the URL can expire before the user clicks it, so it's recommended to have a generic link on your page that will dynamically request a fresh SSO URL and redirect to it. This way, the user will be seamlessly logged in to your 3scale-powered Developer Portal.



## NOTE

The URL needs to be unescaped. If you want to try it by hand in a browser or cut and paste, remember to replace the "&" for "&" in your browser. Also any "%" encodings in the token need to be replaced by their unescaped character.

## CHAPTER 16. SETTING TERMS AND CONDITIONS

When you allow developers to sign up for your API, you will probably want to get them to agree to your Terms and Conditions to make some of your policies clear before you grant them access.

There may be different versions of your Terms and Conditions you want developers to abide by. These are easy to set up at different points throughout the registration process. For example:

1. Signup Terms and Conditions
2. Application Terms and Conditions
3. Service/subscription Terms and Conditions (only available when you have multiple services)


Additionally, if you are charging for use of your API, you may want to make your credit card policies explicit. 3scale provides an easy way to set up the following kinds of credit card policy URLs:

1. Legal Terms
2. Privacy
3. Refunds

### 16.1. TERMS AND CONDITIONS

This part of the workflow is easy to set up in the Admin Portal by following the steps below.

Go to **Audience > Developer Portal > Signup**, where you will be presented with a blank page to populate with your signup legal terms. You can use any combination of HTML, JavaScript, and CSS. There is also some toggling code provided by clicking Insert toggling code. The content you write in this box will appear just above the Sign Up button on the Signup page of your Developer Portal.

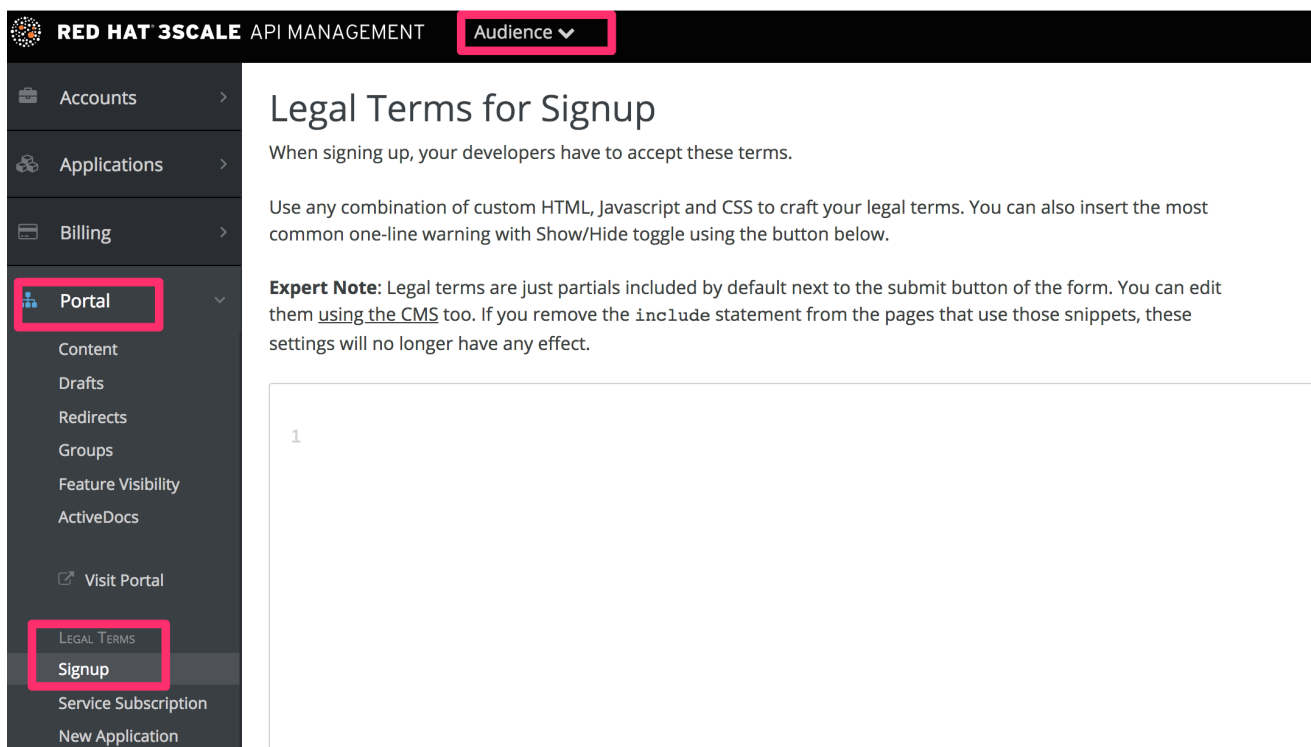

**RED HAT 3SCALE** API MANAGEMENT Audience ▾

- Accounts >
- Applications >
- Billing >
- Portal ▾**
  - Content
  - Drafts
  - Redirects
  - Groups
  - Feature Visibility
  - ActiveDocs
  - Visit Portal
  - LEGAL TERMS**
  - Signup**
  - Service Subscription
  - New Application

### Legal Terms for Signup

When signing up, your developers have to accept these terms.

Use any combination of custom HTML, Javascript and CSS to craft your legal terms. You can also insert the most common one-line warning with Show/Hide toggle using the button below.

**Expert Note:** Legal terms are just partials included by default next to the submit button of the form. You can edit them [using the CMS](#) too. If you remove the `include` statement from the pages that use those snippets, these settings will no longer have any effect.

1

Once you've filled out your Terms and Conditions, save them by clicking Update.

If you've used the toggling code, it will display "By signing up you agree to the following Legal Terms and Conditions" followed by a link that toggles between showing and hiding the Terms and Conditions you specified.

**SIGN UP**

You are signing up to plan Big Data Bundle.

ORGANIZATION/GROUP NAME

USERNAME

EMAIL

PASSWORD

PASSWORD CONFIRMATION

By signing up you agree to the following Legal Terms and Conditions ([show](#))

**Sign up**

This is placed on the Signup page by default, but it's a partial (`signup_licence`) that can be included anywhere on your CMS. To remove this from the Signup page, simply remove the `{% include 'signup_licence' %}` line from the page. Similarly, if you want to include it somewhere else, you can use the same partial by means of the snippet, which can be placed anywhere on your Developer Portal.

You might also want your users to accept another set of Terms and Conditions when they create a new application (`new_application_licence` partial) and/or when they subscribe to a new service (`service_subscription_licence` partial). To set these up, you can follow the same procedure outlined above.

## 16.2. CREDIT CARD POLICIES

You can also define other URLs where different policies reside. Set them up by going to **Audience > Billing > Credit Card Policies** and setting the path where your policy pages will be located.



In order for these links to work, you will then need to create new pages in the CMS.

Once that is done, you can reference them using the URL's liquid drop. For example:

```
<a href="{{ urls.credit_card_terms }}">Legal Terms</a>
<a href="{{ urls.credit_card_privacy }}">Privacy</a>
<a href="{{ urls.credit_card_refunds }}">Refunds</a>
```

And that's it!