



# **Red Hat Decision Manager 7.1**

## **Getting started with Red Hat Business Optimizer**



# Red Hat Decision Manager 7.1 Getting started with Red Hat Business Optimizer

---

Red Hat Customer Content Services  
brms-docs@redhat.com

## Legal Notice

Copyright © 2018 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

## Abstract

This documents describes how to start using Red Hat Business Optimizer.

# Table of Contents

<b>PREFACE</b>	<b>3</b>
<b>CHAPTER 1. INTRODUCTION TO RED HAT BUSINESS OPTIMIZER</b>	<b>4</b>
1.1. PLANNING PROBLEMS	4
1.2. NP_COMPLETENESS IN PLANNING PROBLEMS	5
1.3. SOLUTIONS TO PLANNING PROBLEMS	5
1.4. CONSTRAINTS ON PLANNING PROBLEMS	6
<b>CHAPTER 2. GETTING STARTED: A CLOUD BALANCING EXAMPLE</b>	<b>7</b>
2.1. DOMAIN MODEL DESIGN	9
2.1.1. Designing a domain model	10
2.1.2. The Computer Class	11
2.1.3. The Process Class	11
2.1.4. The CloudBalance Class	12
2.2. RUNNING THE CLOUD BALANCING HELLO WORLD	13
2.3. SOLVER CONFIGURATION	15
2.4. SCORE CONFIGURATION	16
2.4.1. Configuring score calculation using Java	17
2.4.2. Configuring score calculation using Drools	19
2.5. FURTHER DEVELOPMENT OF THE SOLVER	20
<b>CHAPTER 3. EXAMPLES PROVIDED WITH RED HAT BUSINESS OPTIMIZER</b>	<b>21</b>
3.1. DOWNLOADING AND RUNNING THE EXAMPLES	21
3.1.1. Downloading Red Hat Business Optimizer examples	21
3.1.2. Running Business Optimizer examples	21
3.1.3. Running the Red Hat Business Optimizer examples in an IDE (IntelliJ, Eclipse, or Netbeans)	22
3.1.4. Running the web examples	23
3.2. TABLE OF BUSINESS OPTIMIZER EXAMPLES	24
3.3. N QUEENS	30
3.3.1. Domain model for N queens	32
3.4. CLOUD BALANCING	33
3.5. TRAVELING SALESMAN (TSP - TRAVELING SALESMAN PROBLEM)	34
3.6. DINNER PARTY	34
3.7. TENNIS CLUB SCHEDULING	35
3.8. MEETING SCHEDULING	36
3.9. COURSE TIMETABLING (ITC 2007 TRACK 3 - CURRICULUM COURSE SCHEDULING)	37
3.10. MACHINE REASSIGNMENT (GOOGLE ROADEF 2012)	39
3.11. VEHICLE ROUTING	43
3.11.1. Domain model for Vehicle routing	49
3.12. PROJECT JOB SCHEDULING	54
3.13. TASK ASSIGNING	56
3.14. EXAM TIMETABLING (ITC 2007 TRACK 1 - EXAMINATION)	58
3.14.1. Domain model for Exam timetabling	60
3.15. NURSE ROSTERING (INRC 2010)	61
3.16. TRAVELING TOURNAMENT PROBLEM (TTP)	67
3.17. CHEAP TIME SCHEDULING	70
3.18. INVESTMENT ASSET CLASS ALLOCATION (PORTFOLIO OPTIMIZATION)	73
3.19. CONFERENCE SCHEDULING	73
3.20. ROCK TOUR	76
3.21. FLIGHT CREW SCHEDULING	76
<b>APPENDIX A. VERSIONING INFORMATION</b>	<b>78</b>



## PREFACE

As a business rules developer, you can use the Red Hat Business Optimizer to find the optimal solution to planning problems based on a set of limited resources and under specific constraints.

Use this document to start developing solvers with Red Hat Business Optimizer.

# CHAPTER 1. INTRODUCTION TO RED HAT BUSINESS OPTIMIZER

Red Hat Business Optimizer is a lightweight, embeddable planning engine that optimizes planning problems. It helps normal Java programmers solve planning problems efficiently, and it combines optimization heuristics and metaheuristics with very efficient score calculations.

For example, Red Hat Business Optimizer helps solve various use cases:

- *Employee/Patient Rosters*: It helps create timetables for nurses and keeps track of patient bed management.
- *Educational Timetables*: It helps schedule lessons, courses, exams, and conference presentations.
- *Shop Schedules*: It tracks car assembly lines, machine queue planning, and workforce task planning.
- *Cutting Stock*: It minimizes waste by reducing the consumption of resources such as paper and steel.

Every organization faces planning problems; that is, they provide products and services with a limited set of constrained resources (employees, assets, time, and money).

Red Hat Business Optimizer is open source software under the Apache Software License 2.0. It is 100% pure Java and runs on most Java virtual machines.

## 1.1. PLANNING PROBLEMS

A *planning problem* has an optimal goal, based on limited resources and under specific constraints. Optimal goals can be any number of things, such as:

- Maximized profits - the optimal goal results in the highest possible profit.
- Minimized ecological footprint - the optimal goal has the least amount of environmental impact.
- Maximized satisfaction for employees or customers - the optimal goal prioritizes the needs of employees or customers.

The ability to achieve these goals relies on the number of resources available. For example, the following resources might be limited:

- The number of people
- Amount of time
- Budget
- Physical assets, for example, machinery, vehicles, computers, buildings, and so on

You must also take into account the specific constraints related to these resources, such as the number of hours a person works, their ability to use certain machines, or compatibility between pieces of equipment.

Red Hat Business Optimizer helps Java programmers solve constraint satisfaction problems efficiently. It combines optimization heuristics and metaheuristics with efficient score calculation.



## 1.2. NP\_COMPLETENESS IN PLANNING PROBLEMS

The provided use cases are *probably* **NP-complete** or **NP-hard**, which means the following statements apply:

- It is easy to verify a given solution to a problem in reasonable time.
- There is no simple way to find the optimal solution of a problem in reasonable time.

The implication is that solving your problem is probably harder than you anticipated, because the two common techniques will not suffice:

- A brute force algorithm (even a more advanced variant) will take too long.
- A quick algorithm, for example in the **bin packing problem**, *putting in the largest items first* will return a solution that is far from optimal.

By using advanced optimization algorithms, Business Optimizer finds a good solution in reasonable time for such planning problems.

## 1.3. SOLUTIONS TO PLANNING PROBLEMS

A planning problem has a number of solutions.

There are several categories of solutions:

### Possible solution

A possible solution is any solution, whether or not it breaks any number of constraints. Planning problems often have an incredibly large number of possible solutions. Many of those solutions are worthless.

### Feasible solution

A feasible solution is a solution that does not break any (negative) hard constraints. The number of feasible solutions tends to be relative to the number of possible solutions. Sometimes there are no feasible solutions. Every feasible solution is a possible solution.

### Optimal solution

An optimal solution is a solution with the highest score. Planning problems usually have a few optimal solutions. They always have at least one optimal solution, even in the case that there are no feasible solutions and the optimal solution is not feasible.

### Best solution found

The best solution found is the solution with the highest score found by an implementation in a given amount of time. The best solution found is likely to be feasible and, given enough time, it's an optimal solution.

Counterintuitively, the number of possible solutions is huge (if calculated correctly), even with a small data set.

In the examples provided in the **planner-engine** distribution folder, most instances have a vast number of possible solutions. As there is no guaranteed way to find the optimal solution, any implementation is forced to evaluate at least a subset of all those possible solutions.

Business Optimizer supports several optimization algorithms to efficiently wade through that incredibly large number of possible solutions.

Depending on the use case, some optimization algorithms perform better than others, but it is impossible to tell in advance. Using Business Optimizer, you can switch the optimization algorithm by changing the solver configuration in a few lines of XML or code.

## 1.4. CONSTRAINTS ON PLANNING PROBLEMS

Usually, a planning problem has at least two levels of constraints:

- A *(negative) hard constraint* must not be broken.  
For example, one teacher can not teach two different lessons at the same time.
- A *(negative) soft constraint* should not be broken if it can be avoided.  
For example, Teacher A does not like to teach on Friday afternoons.

Some problems also have positive constraints:

- A *positive soft constraint (or reward)* should be fulfilled if possible.  
For example, Teacher B likes to teach on Monday mornings.

Some basic problems only have hard constraints. Some problems have three or more levels of constraints, for example, hard, medium, and soft constraints.

These constraints define the *score calculation* (otherwise known as the *fitness function*) of a planning problem. Each solution of a planning problem can be graded with a score. With Business Optimizer, score constraints are written in an object oriented language, such as Java code or Drools rules.

This type of code is flexible and scalable.

## CHAPTER 2. GETTING STARTED: A CLOUD BALANCING EXAMPLE

An example demonstrates development of a basic Red Hat Business Optimizer solver.

Suppose your company owns a number of cloud computers and needs to run a number of processes on those computers. You must assign each process to a computer.

The following hard constraints must be fulfilled:

- Every computer must be able to handle the minimum hardware requirements of the sum of its processes:
  - **CPU capacity:** The CPU power of a computer must be at least the sum of the CPU power required by the processes assigned to that computer.
  - **Memory capacity:** The RAM memory of a computer must be at least the sum of the RAM memory required by the processes assigned to that computer.
  - **Network capacity:** The network bandwidth of a computer must be at least the sum of the network bandwidth required by the processes assigned to that computer.


The following soft constraints should be optimized:

- Each computer that has one or more processes assigned incurs a maintenance cost (which is fixed per computer).
  - **Cost:** Minimize the total maintenance cost.

This problem is a form of *bin packing*. In the following simplified example, we assign four processes to two computers with two constraints (CPU and RAM) with a simple algorithm:

# Cloud balance

Assign each process to a computer.

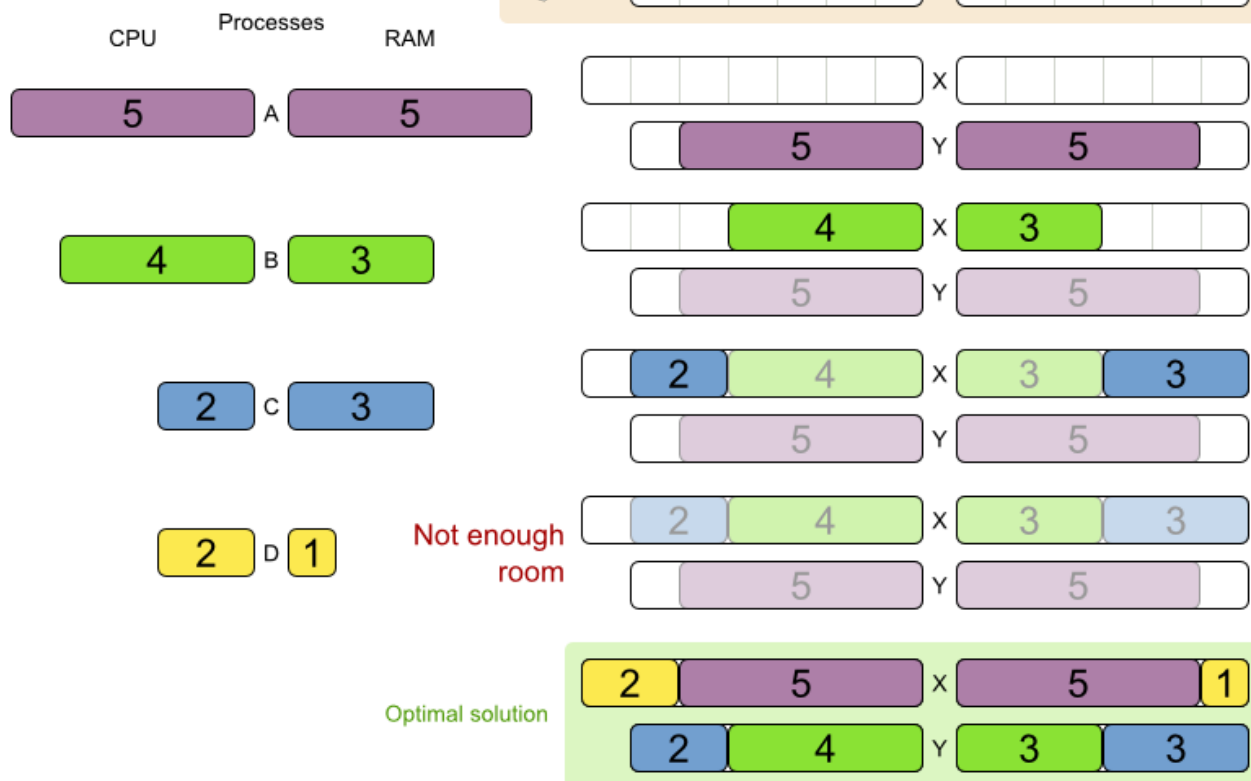


The simple algorithm used here is the *First Fit Decreasing* algorithm, which assigns the bigger processes first and assigns the smaller processes to the remaining space. As you can see, it is not optimal, as it does not leave enough room to assign the yellow process **D**.

Business Optimizer finds a more optimal solution by using additional, smarter algorithms. It also scales: both in data (more processes, more computers) and constraints (more hardware requirements, other constraints).

The following summary applies to this example, as well as to an advanced implementation with more constraints that is described in [Section 3.10, "Machine reassignment \(Google ROADEF 2012\)"](#):

# Cloud optimization

Assign processes to machines more efficiently.

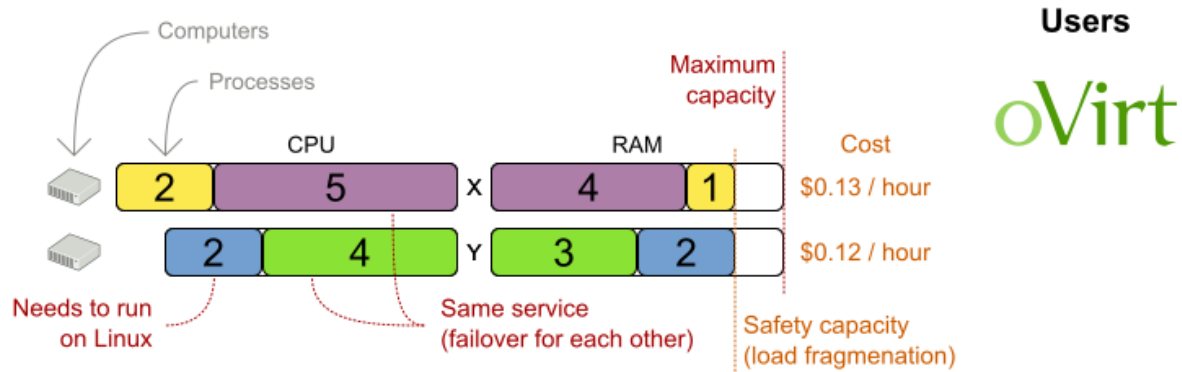

Users  
oVirt

CloudBalancing benchmark

**Cloud hosting cost**

Average

**-18%**

Min/Max

-16%  
-21%

# datasets

5

Biggest dataset

1600 computers  
4800 processes

OptaPlanner versus traditional algorithm with domain knowledge

5 mins Simulated Annealing vs First Fit Decreasing

MachineReassignment benchmark

**Hardware congestion**

Average

**-63%**

Min/Max

-25%  
-97%

# datasets

20

Biggest dataset

50k machines  
5k processes

OptaPlanner versus arbitrary feasible assignments

5 mins Tabu Search vs First Feasible Fit

Don't believe us? Run our open benchmarks yourself: <http://www.optaplanner.org/code/benchmarks.html>

**Table 2.1. Cloud balancing problem size**

Problem size	Computers	Processes	Search space
2computers-6processes	2	6	64
3computers-9processes	3	9	10 <sup>4</sup>
4computers-012processes	4	12	10 <sup>7</sup>
100computers-300processes	100	300	10 <sup>600</sup>
200computers-600processes	200	600	10 <sup>1380</sup>
400computers-1200processes	400	1200	10 <sup>3122</sup>
800computers-2400processes	800	2400	10 <sup>6967</sup>

## 2.1. DOMAIN MODEL DESIGN

Using a *domain model* helps determine which classes are planning entities and which of their properties are planning variables. It also helps to simplify constraints, improve performance, and increase flexibility for future needs.

### 2.1.1. Designing a domain model

To create a domain model, define all the objects that represent the input data for the problem. In this example, the objects are processes and computers.


A separate object in the domain model must represent a full data set of the problem, which contains the input data as well as a solution. In this example, this object holds a list of computers and a list of processes. Each process is assigned to a computer; the distribution of processes between computers is the solution.

#### Procedure

1. Draw a class diagram of your domain model.
2. Normalize it to remove duplicate data.
3. Write down some *sample instances* for each class. Sample instances are entity properties that are relevant for planning purposes.
  - **Computer**: Represents a computer with certain hardware and maintenance costs. In this example, the sample instances for the **Computer** class are **cpuPower**, **memory**, **networkBandwidth**, **cost**.
  - **Process**: Represents a process with a demand. Needs to be assigned to a **Computer** by Planner. Sample instances for **Process** are **requiredCpuPower**, **requiredMemory**, and **requiredNetworkBandwidth**.
  - **CloudBalance**: Represents the distribution of processes between computers. Contains every **Computer** and **Process** for a certain data set. For an object representing the full data set and solution, a sample instance holding the *score* must be present. Business Optimizer can calculate and compare the scores for different solutions; the solution with the highest score is the optimal solution. Therefore, the sample instance for **CloudBalance** is **score**.
4. Determine which relationships (or fields) change during planning:
  - *Planning entity*: The class (or classes) that Business Optimizer can change during solving. In this example, it is the class **Process**, because we can move processes to different computers.
    - A class representing input data that Business Optimizer can not change is known as a *problem fact*.
  - *Planning variable*: The property (or properties) of a planning entity class that changes during solving. In this example, it is the property **computer** on the class **Process**.
  - *Planning solution*: The class that represents a solution to the problem. This class must represent the full data set and contain all planning entities. In this example that is the class **CloudBalance**.

In the UML class diagram below, the Business Optimizer concepts are already annotated:

## Cloud balance class diagram

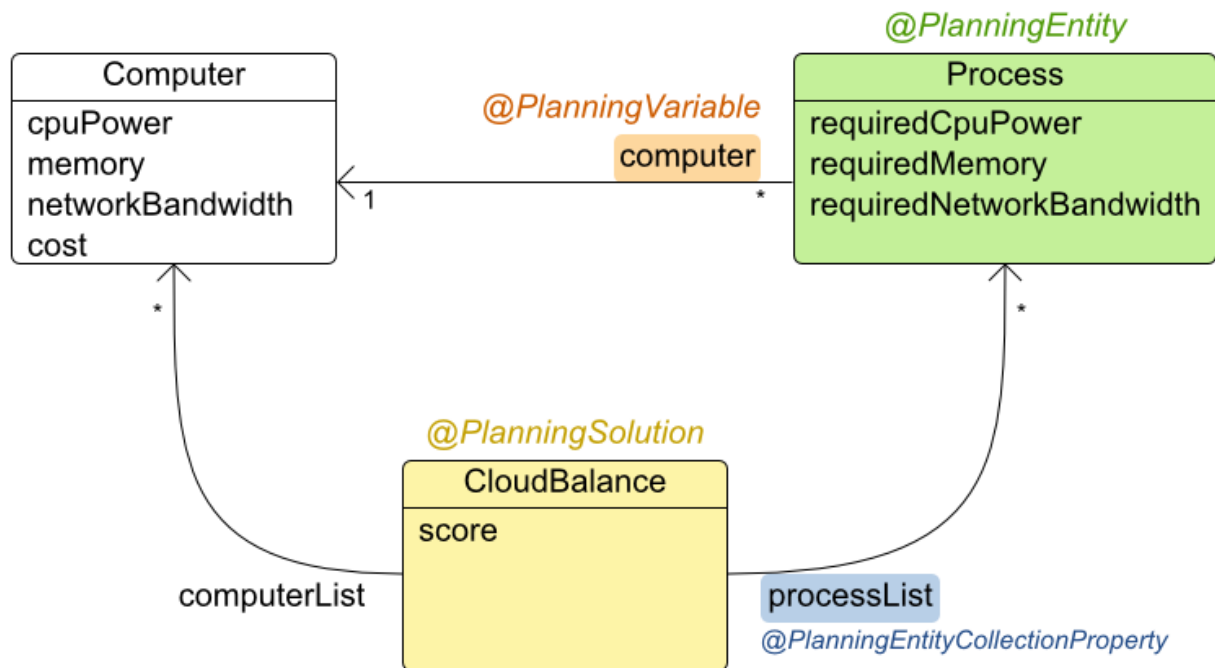

You can find the class definitions for this example in the `examples/sources/src/main/java/org/optaplanner/examples/cloudbalancing/domain` directory.

### 2.1.2. The computer Class

The **Computer** class is a Java object that stores data, sometimes known as a POJO (Plain Old Java Object). Usually, you will have more of this kind of classes with input data.

#### Example 2.1. CloudComputer.java

```

public class CloudComputer ... {

    private int cpuPower;
    private int memory;
    private int networkBandwidth;
    private int cost;

    ... // getters
}
  
```

### 2.1.3. The Process Class

The **Process** class is the class that is modified during solving.

We need to tell Business Optimizer that it can change the property **computer**. To do this, annotate the class with **@PlanningEntity** and annotate the **getComputer()** getter with **@PlanningVariable**.

Of course, the property **computer** needs a setter too, so Business Optimizer can change it during solving.

### Example 2.2. CloudProcess.java

```
@PlanningEntity(...)
public class CloudProcess ... {

    private int requiredCpuPower;
    private int requiredMemory;
    private int requiredNetworkBandwidth;

    private CloudComputer computer;

    ... // getters

    @PlanningVariable(valueRangeProviderRefs = {"computerRange"})
    public CloudComputer getComputer() {
        return computer;
    }

    public void setComputer(CloudComputer computer) {
        computer = computer;
    }

    //
    *****
    // Complex methods
    //
    *****

    ...
}
```

Business Optimizer needs to know which values it can choose from to assign to the property **computer**. Those values are retrieved from the method **CloudBalance.getComputerList()** on the planning solution, which returns a list of all computers in the current data set.

The **@PlanningVariable**'s **valueRangeProviderRefs** parameter on **CloudProcess.getComputer()** needs to match with the **@ValueRangeProvider**'s **id** on **CloudBalance.getComputerList()**.



#### NOTE

You can also use annotations on fields instead of getters.

### 2.1.4. The cloudBalance Class

The **CloudBalance** class has a **@PlanningSolution** annotation.



This class holds a list of all computers and processes. It represents both the planning problem and (if it is initialized) the planning solution.

The **CloudBalance** class has the following key attributes:

- It holds a collection of processes that Business Optimizer can change. We annotate the getter **getProcessList()** with **@PlanningEntityCollectionProperty**, so that Business Optimizer can retrieve the processes that it can change. To save a solution, Business Optimizer initializes a new instance of the class with the list of changed processes.
- 1. It also has a **@PlanningScore** annotated property **score**, which is the **Score** of that solution in its current state. Business Optimizer automatically updates it when it calculates a **Score** for a solution instance; therefore, this property needs a setter.
- 2. Especially for score calculation with Drools, the property **computerList** needs to be annotated with a **@ProblemFactCollectionProperty** so that Business Optimizer can retrieve a list of computers (problem facts) and make it available to the Drools engine.

### Example 2.3. CloudBalance.java

```
@PlanningSolution
public class CloudBalance ... {

    private List<CloudComputer> computerList;

    private List<CloudProcess> processList;

    private HardSoftScore score;

    @ValueRangeProvider(id = "computerRange")
    @ProblemFactCollectionProperty
    public List<CloudComputer> getComputerList() {
        return computerList;
    }

    @PlanningEntityCollectionProperty
    public List<CloudProcess> getProcessList() {
        return processList;
    }

    @PlanningScore
    public HardSoftScore getScore() {
        return score;
    }

    public void setScore(HardSoftScore score) {
        this.score = score;
    }

    ...
}
```

## 2.2. RUNNING THE CLOUD BALANCING HELLO WORLD

You can run a sample "hello world" application to demonstrate the solver.

## Procedure

1. Download and configure the examples in your preferred IDE. For instructions on downloading and configuring examples in an IDE, see [Section 3.1.3, "Running the Red Hat Business Optimizer examples in an IDE \(IntelliJ, Eclipse, or Netbeans\)"](#).
2. Create a run configuration with the following main class:  
**org.optaplanner.examples.cloudbalancing.app.CloudBalancingHelloWorld**  
 By default, the Cloud Balancing Hello World is configured to run for 120 seconds.

## Result

The application executes the following code:

### Example 2.4. CloudBalancingHelloWorld.java

```
public class CloudBalancingHelloWorld {

    public static void main(String[] args) {
        // Build the Solver
        SolverFactory<CloudBalance> solverFactory =
        SolverFactory.createFromXmlResource("org/optaplanner/examples/cloudbalan
        cing/solver/cloudBalancingSolverConfig.xml");
        Solver<CloudBalance> solver = solverFactory.buildSolver();

        // Load a problem with 400 computers and 1200 processes
        CloudBalance unsolvedCloudBalance = new
        CloudBalancingGenerator().createCloudBalance(400, 1200);

        // Solve the problem
        CloudBalance solvedCloudBalance =
        solver.solve(unsolvedCloudBalance);

        // Display the result
        System.out.println("\nSolved cloudBalance with 400 computers and
        1200 processes:\n" + toDisplayString(solvedCloudBalance));
    }

    ...
}
```

The code example does the following:

1. Build the **Solver** based on a solver configuration (in this case an XML file, **cloudBalancingSolverConfig.xml**, from the classpath).  
 Building the **Solver** is the most complicated part of this procedure. For more details, see [Section 2.3, "Solver Configuration"](#).

```
SolverFactory<CloudBalance> solverFactory =
SolverFactory.createFromXmlResource(
```

```
"org/optaplanner/examples/cloudbalancing/solver/cloudBalancingSolver
Config.xml");
    Solver solver<CloudBalance> = solverFactory.buildSolver();
```

2. Load the problem.

**CloudBalancingGenerator** generates a random problem: you will replace this with a class that loads a real problem, for example from a database.

```
CloudBalance unsolvedCloudBalance = new
CloudBalancingGenerator().createCloudBalance(400, 1200);
```

3. Solve the problem.

```
CloudBalance solvedCloudBalance =
solver.solve(unsolvedCloudBalance);
```

4. Display the result.

```
System.out.println("\nSolved cloudBalance with 400 computers
and 1200 processes:\n"
    + toDisplayString(solvedCloudBalance));
```

## 2.3. SOLVER CONFIGURATION

The solver configuration file determines how the solving process works; it is considered a part of the code. The file is named

**examples/sources/src/main/resources/org/optaplanner/examples/cloudbalancing/solver/cloudBalancingSolverConfig.xml**.

### Example 2.5. cloudBalancingSolverConfig.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<solver>
  <!-- Domain model configuration -->
  <scanAnnotatedClasses/>

  <!-- Score configuration -->
  <scoreDirectorFactory>

    <easyScoreCalculatorClass>org.optaplanner.examples.cloudbalancing.option
al.score.CloudBalancingEasyScoreCalculator</easyScoreCalculatorClass>
    <!--
  <scoreDrl>org/optaplanner/examples/cloudbalancing/solver/cloudBalancingS
coreRules.drl</scoreDrl>-->
  </scoreDirectorFactory>

  <!-- Optimization algorithms configuration -->
  <termination>
    <secondsSpentLimit>30</secondsSpentLimit>
  </termination>
</solver>
```

This solver configuration consists of three parts:

1. **Domain model configuration:** *What can Business Optimizer change?*

We need to make Business Optimizer aware of our domain classes. In this configuration, it will automatically scan all classes in your classpath (for a **@PlanningEntity** or **@PlanningSolution** annotation):

```
<scanAnnotatedClasses/>
```

2. **Score configuration:** *How should Business Optimizer optimize the planning variables? What is our goal?*

Since we have hard and soft constraints, we use a **HardSoftScore**. But we need to tell Business Optimizer how to calculate the score, depending on our business requirements. Further down, we will look into two alternatives to calculate the score: using a basic Java implementation and using Drools DRL.

```
<scoreDirectorFactory>

<easyScoreCalculatorClass>org.optaplanner.examples.cloudbalancing.op
tional.score.CloudBalancingEasyScoreCalculator</easyScoreCalculatorC
lass>
    <!--
    <scoreDrl>org/optaplanner/examples/cloudbalancing/solver/cloudBalanc
ingScoreRules.drl</scoreDrl>-->
</scoreDirectorFactory>
```

3. **Optimization algorithms configuration:** *How should Business Optimizer optimize it?* In this case, we use the default optimization algorithms (because no explicit optimization algorithms are configured) for 30 seconds:


```
<termination>
    <secondsSpentLimit>30</secondsSpentLimit>
</termination>
```

Business Optimizer should get a good result in seconds (and even in less than 15 milliseconds if the real-time planning feature is used), but the more time it has, the better the result will be. Advanced use cases might use different termination criteria than a hard time limit.

The default algorithms will already easily surpass human planners and most in-house implementations. You can use the advanced Benchmarker feature to power tweak to get even better results.

## 2.4. SCORE CONFIGURATION

Business Optimizer will search for the **Solution** with the highest **Score**. This example uses a **HardSoftScore**, which means Business Optimizer will look for the solution with no hard constraints broken (fulfill hardware requirements) and as little as possible soft constraints broken (minimize maintenance cost).

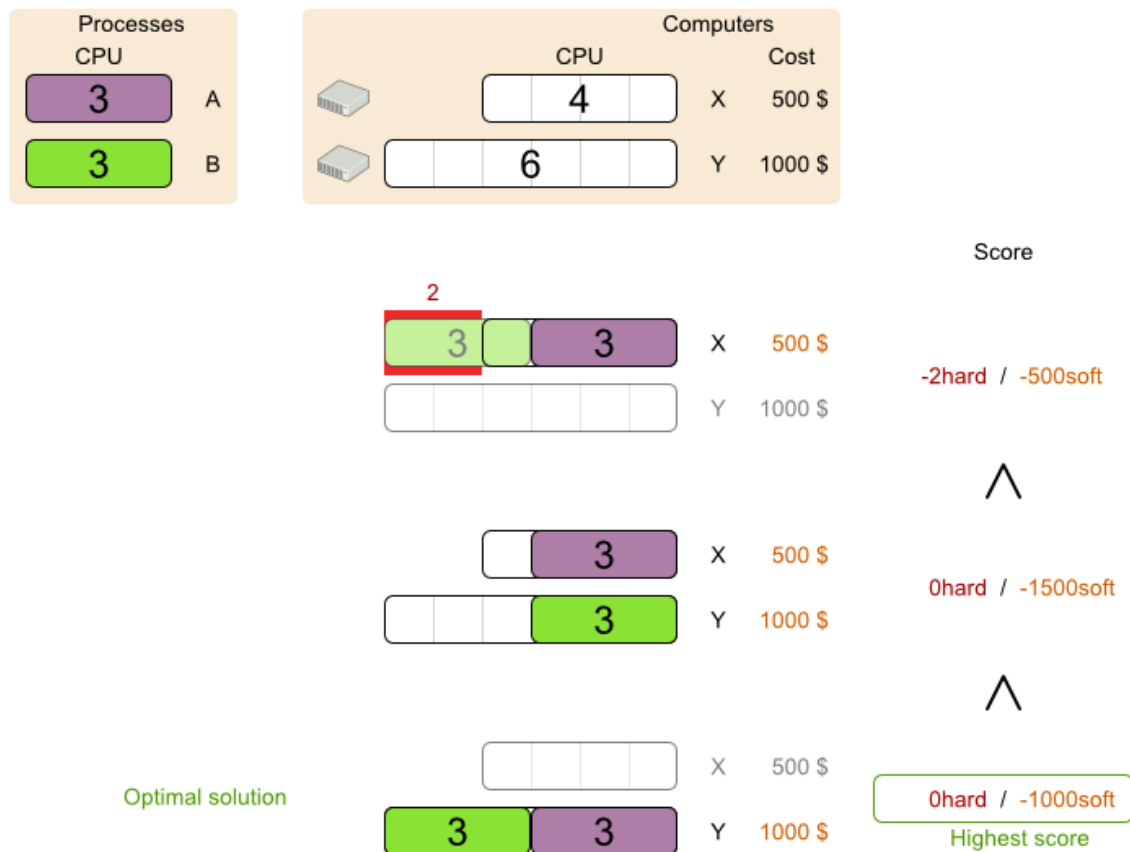

Of course, Business Optimizer needs to be told about these domain-specific score constraints. You can define constraints using the Java or Drools languages.

### 2.4.1. Configuring score calculation using Java

One way to define a score function is to implement the interface **EasyScoreCalculator** in plain Java.

#### Procedure

1. In the **cloudBalancingSolverConfig.xml** file, add or uncomment the setting:

```
<scoreDirectorFactory>
  <easyScoreCalculatorClass>org.optaplanner.examples.cloudbalancing.op
    tional.score.CloudBalancingEasyScoreCalculator</easyScoreCalculatorC
    lass>
</scoreDirectorFactory>
```

2. Implement the **calculateScore(Solution)** method to return a **HardSoftScore** instance.

#### Example 2.6. CloudBalancingEasyScoreCalculator.java

```
public class CloudBalancingEasyScoreCalculator implements
    EasyScoreCalculator<CloudBalance> {

    /**
     * A very simple implementation. The double loop can easily be
```

```

    removed by using Maps as shown in
    * {@link
    CloudBalancingMapBasedEasyScoreCalculator#calculateScore(CloudBalance)}.
    */
    public HardSoftScore calculateScore(CloudBalance cloudBalance)
    {
        int hardScore = 0;
        int softScore = 0;
        for (CloudComputer computer :
cloudBalance.getComputerList()) {
            int cpuPowerUsage = 0;
            int memoryUsage = 0;
            int networkBandwidthUsage = 0;
            boolean used = false;

            // Calculate usage
            for (CloudProcess process :
cloudBalance.getProcessList()) {
                if (computer.equals(process.getComputer())) {
                    cpuPowerUsage +=
process.getRequiredCpuPower();
                    memoryUsage += process.getRequiredMemory();
                    networkBandwidthUsage +=
process.getRequiredNetworkBandwidth();
                    used = true;
                }
            }

            // Hard constraints
            int cpuPowerAvailable = computer.getCpuPower() -
cpuPowerUsage;
            if (cpuPowerAvailable < 0) {
                hardScore += cpuPowerAvailable;
            }
            int memoryAvailable = computer.getMemory() -
memoryUsage;
            if (memoryAvailable < 0) {
                hardScore += memoryAvailable;
            }
            int networkBandwidthAvailable =
computer.getNetworkBandwidth() - networkBandwidthUsage;
            if (networkBandwidthAvailable < 0) {
                hardScore += networkBandwidthAvailable;
            }

            // Soft constraints
            if (used) {
                softScore -= computer.getCost();
            }
        }
        return HardSoftScore.valueOf(hardScore, softScore);
    }
}

```

Even if we optimize the code above to use **Maps** to iterate through the **processList** only once, *it is still slow* because it does not do incremental score calculation.

To fix that, either use incremental Java score calculation or Drools score calculation. Incremental Java score calculation is not covered in this guide.

## 2.4.2. Configuring score calculation using Drools

You can use Drools rule language (DRL) to define constraints. Drools score calculation uses incremental calculation, where every score constraint is written as one or more score rules.

Using the decision engine for score calculation enables you to integrate with other Drools technologies, such as decision tables (XLS or web based), Decision Central, and other supported features.

### Procedure

1. Add a **scoreDrl** resource in the classpath to use the decision engine as a score function. In the **cloudBalancingSolverConfig.xml** file, add or uncomment the setting:

```
<scoreDirectorFactory>

<scoreDrl>org/optaplanner/examples/cloudbalancing/solver/cloudBalanc
ingScoreRules.drl</scoreDrl>
</scoreDirectorFactory>
```

2. Create the hard constraints. These constraints ensure that all computers have enough CPU, RAM and network bandwidth to support all their processes:

#### Example 2.7. cloudBalancingScoreRules.drl - Hard Constraints

```
...

import
org.optaplanner.examples.cloudbalancing.domain.CloudBalance;
import
org.optaplanner.examples.cloudbalancing.domain.CloudComputer;
import
org.optaplanner.examples.cloudbalancing.domain.CloudProcess;

global HardSoftScoreHolder scoreHolder;

//
#####
#####
// Hard constraints
//
#####
#####

rule "requiredCpuPowerTotal"
    when
        $computer : CloudComputer($cpuPower : cpuPower)
        accumulate(
            CloudProcess(
                computer == $computer,
                $requiredCpuPower : requiredCpuPower);
```

```

        $requiredCpuPowerTotal : sum($requiredCpuPower);
        $requiredCpuPowerTotal > $cpuPower
    )
    then
        scoreHolder.addHardConstraintMatch(kcontext, $cpuPower -
$requiredCpuPowerTotal);
    end

    rule "requiredMemoryTotal"
        ...
    end

    rule "requiredNetworkBandwidthTotal"
        ...
    end

```

3. Create a soft constraint. This constraint minimizes the maintenance cost. It is applied only if hard constraints are met:

#### Example 2.8. cloudBalancingScoreRules.drl - Soft Constraints

```

//
#####
#####
// Soft constraints
//
#####
#####

rule "computerCost"
    when
        $computer : CloudComputer($cost : cost)
        exists CloudProcess(computer == $computer)
    then
        scoreHolder.addSoftConstraintMatch(kcontext, - $cost);
    end

```

## 2.5. FURTHER DEVELOPMENT OF THE SOLVER

Now that this example works, you can try developing it further. For example, you can enrich the domain model and add extra constraints such as these:

- Each **Process** belongs to a **Service**. A computer might crash, so processes running the same service should (or must) be assigned to different computers.
- Each **Computer** is located in a **Building**. A building might burn down, so processes of the same services should (or must) be assigned to computers in different buildings.



## CHAPTER 3. EXAMPLES PROVIDED WITH RED HAT BUSINESS OPTIMIZER

Several Red Hat Business Optimizer examples are shipped with Red Hat Decision Manager. You can review the code for examples and modify it as necessary to suit your needs.

### 3.1. DOWNLOADING AND RUNNING THE EXAMPLES

You can download the Red Hat Business Optimizer examples from the Red Hat Software Downloads website and run them.

#### 3.1.1. Downloading Red Hat Business Optimizer examples

You can download the examples as a part of the Red Hat Decision Manager add-ons package.

##### Procedure

1. Download the **rhdm-7.1.0-add-ons.zip** file from the [Software Downloads](#) page.
2. Decompress the file.
3. Decompress the **rhdm-7.1-planner-engine.zip** file from the decompressed directory.

##### Result

In the decompressed **rhdm-7.1-planner-engine** directory, you can find example source code under the following subdirectories: **\* examples/sources/src/main/java/org/optaplanner/examples**  
**\* examples/sources/src/main/resources/org/optaplanner/examples \***  
**webexamples/sources/src/main/java/org/optaplanner/examples \***  
**webexamples/sources/src/main/resources/org/optaplanner/examples**

The table of examples in [Section 3.2, “Table of Business Optimizer examples”](#) lists directory names that are used for individual examples.

#### 3.1.2. Running Business Optimizer examples

Red Hat Business Optimizer includes a number of examples to demonstrate a variety of use cases.

##### Prerequisite

You have downloaded and decompressed the examples. For instructions about these actions, see [Section 3.1.1, “Downloading Red Hat Business Optimizer examples”](#).

##### Procedure

1. In the **rhdm-7.1.0-planner-engine** folder, open the **examples** directory and use the appropriate script to run the examples:  
Linux or Mac:


```
$ cd examples
$ ./runExamples.sh
```

Windows:

—

```
$ cd examples
$ runExamples.bat
```

Select and run an example from the GUI application window:

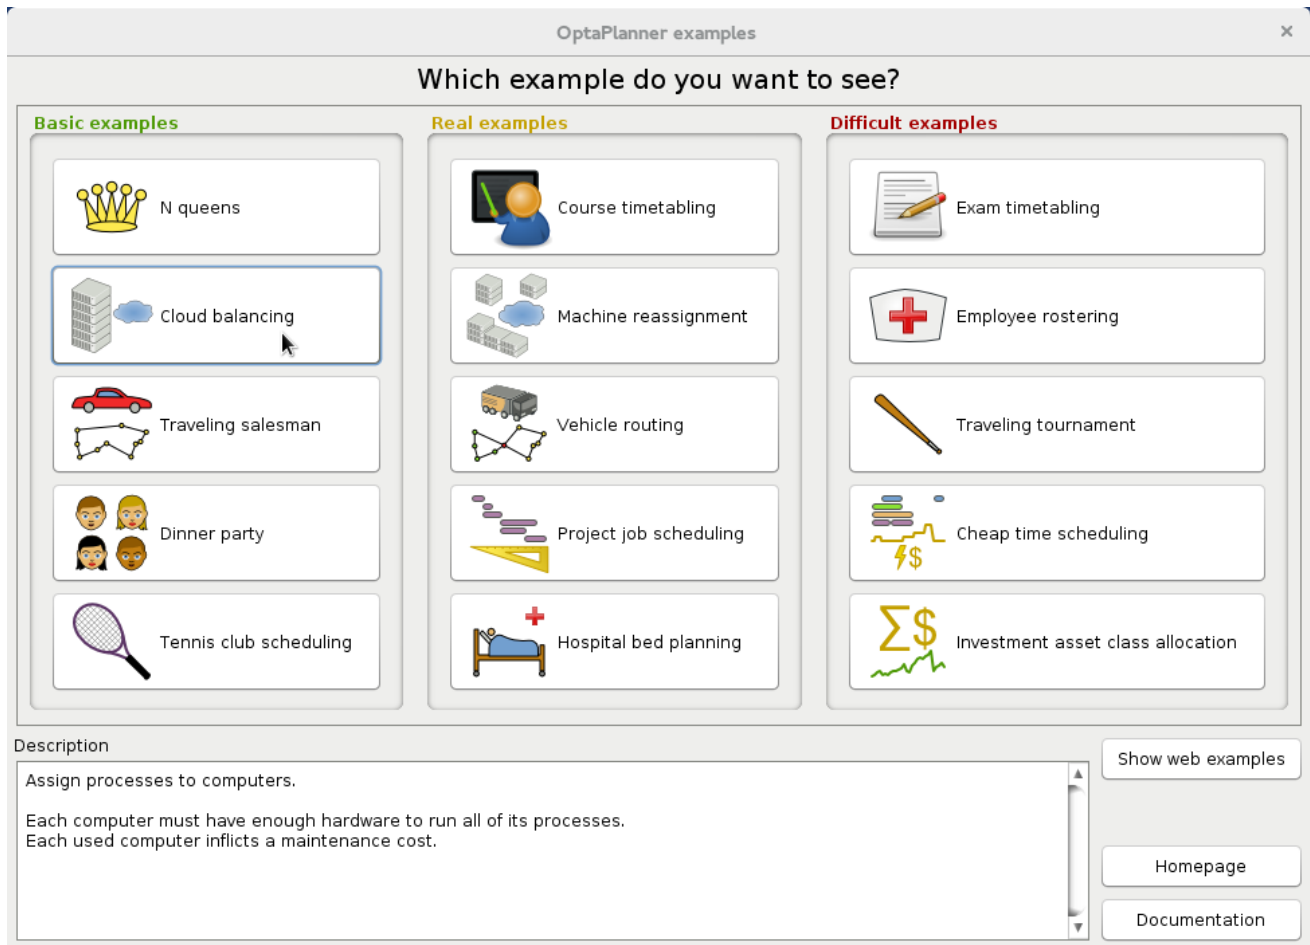

## NOTE

Red Hat Business Optimizer itself has no GUI dependencies. It runs just as well on a server or a mobile JVM as it does on the desktop.

### 3.1.3. Running the Red Hat Business Optimizer examples in an IDE (IntelliJ, Eclipse, or Netbeans)

If you use an integrated development environment (IDE), such as IntelliJ, Eclipse, or Netbeans, you can run your downloaded Red Hat Business Optimizer examples within your development environment.

#### Prerequisite

You have downloaded and extracted the examples. For instructions about these actions, see [Section 3.1.1, “Downloading Red Hat Business Optimizer examples”](#).

#### Procedure

1. Open the Red Hat Business Optimizer examples as a new project:
  - a. For IntelliJ or Netbeans, open **examples/sources/pom.xml** as the new project. The Maven integration guides you through the rest of the installation; skip the rest of the steps in this procedure.

- b. For Eclipse, open a new project for the directory **examples/sources**.
2. Add all the JARs to the classpath from the directory **binaries** and the directory **examples/binaries**, except for the **examples/binaries/optaplanner-examples-\*.jar** file.
3. Add the Java source directory **src/main/java** and the Java resources directory **src/main/resources**.
4. Create a run configuration:
  - Main class: **org.optaplanner.examples.app.OptaPlannerExamplesApp**
  - VM parameters (optional): **-Xmx512M -server -Dorg.optaplanner.examples.dataDir=examples/sources/data**
  - Working directory: **examples/sources**
5. Run the run configuration.

### 3.1.4. Running the web examples

Besides the GUI examples, Red Hat Decision Manager also includes a set of web examples for Red Hat Business Optimizer. The web examples include:

- Vehicle routing: Calculating the shortest possible route to pick up all items required for a number of different customers using either [Leaflet](#) or [Google Maps](#) visualizations.
- Cloud balancing: Assigning processes across computers with different specifications and costs.

#### Prerequisites

You have downloaded and decompressed the Red Hat Business Optimizer examples from the Red Hat Decision Manager add-ons package. For instructions, see [Section 3.1.1, “Downloading Red Hat Business Optimizer examples”](#).

The web examples require several JEE APIs to run, such as the following APIs:

- Servlet
- JAX-RS
- CDI

These APIs are not required for Business Optimizer itself.

#### Procedure

1. Download a JEE application server, such as JBoss EAP or [WildFly](#) and unzip it.
2. In the decompressed **rhdm-7.1.0-planner-engine** directory, open the subdirectory **webexamples/binaries** and deploy the **optaplanner-webexamples-\*.war** file on the JEE application server.  
If using JBoss EAP in standalone mode, this can be done by adding the **optaplanner-webexamples-\*.war** file to the **JBOSS\_home/standalone/deployments** folder.

3. Open the following address in a web browser: <http://localhost:8080/optaplanner-webexamples/>.

## 3.2. TABLE OF BUSINESS OPTIMIZER EXAMPLES

Some of the Business Optimizer examples solve problems that are presented in academic contests. The **Contest** column in the following table lists the contests. It also identifies an example as being either *realistic* or *unrealistic* for the purpose of a contest. A *realistic contest* is an official, independent contest

A *realistic contest* is an official, independent contest that meets the following standards:

- Clearly defined real-world use cases
- Real-world constraints
- Multiple real-world datasets
- Reproducible results within a specific time limit on specific hardware
- Serious participation from the academic and/or enterprise Operations Research community.

Realistic contests provide an objective comparison of Business Optimizer with competitive software and academic research.

**Table 3.1. Examples overview**

Example	Domain	Size	Contest	Directory name
<a href="#">N queens</a>	<ul style="list-style-type: none"> <li>• 1 entity class               <ul style="list-style-type: none"> <li>◦ 1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Entity <math>\Leftarrow</math> <b>256</b></li> <li>• Value <math>\Leftarrow</math> <b>256</b></li> <li>• Search space <math>\Leftarrow</math> <b><math>10^{616}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>• Pointless (<a href="#">cheatable</a>)</li> </ul>	<b>nqueens</b>
<a href="#">Cloud balancing</a>	<ul style="list-style-type: none"> <li>• 1 entity class               <ul style="list-style-type: none"> <li>◦ 1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Entity <math>\Leftarrow</math> <b>2400</b></li> <li>• Value <math>\Leftarrow</math> <b>800</b></li> <li>• Search space <math>\Leftarrow</math> <b><math>10^{6967}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>• No</li> <li>• Defined by us</li> </ul>	<b>cloudbalancing</b>

Example	Domain	Size	Contest	Directory name
Traveling salesman	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>1 chained variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>980</b></li> <li>Value <math>\Leftarrow</math> <b>980</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{2504}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Unrealistic</li> <li>TSP web</li> </ul>	<b>tsp</b>
Dinner party	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>144</b></li> <li>Value <math>\Leftarrow</math> <b>72</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{310}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Unrealistic</li> </ul>	<b>dinnerParty</b>
Tennis club scheduling	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>72</b></li> <li>Value <math>\Leftarrow</math> <b>7</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{60}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>tennis</b>
Meeting scheduling	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>2 variables</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>10</b></li> <li>Value <math>\Leftarrow</math> <b>320</b> and <math>\Leftarrow</math> <b>5</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{320}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>meetingscheduling</b>

Example	Domain	Size	Contest	Directory name
<a href="#">Course timetabling</a>	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>2 variables</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>434</b></li> <li>Value <math>\Leftarrow</math> <b>25</b> and <math>\Leftarrow</math> <b>20</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{117}1</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Realistic</li> <li><a href="#">ITC 2007 track 3</a></li> </ul>	<b>curriculumCourse</b>
<a href="#">Machine reassignment</a>	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>50000</b></li> <li>Value <math>\Leftarrow</math> <b>5000</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{184}948</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Nearly realistic</li> <li><a href="#">ROADEF 2012</a></li> </ul>	<b>machineReassignment</b>
<a href="#">Vehicle routing</a>	<ul style="list-style-type: none"> <li>1 entity class               <ul style="list-style-type: none"> <li>1 chained variable</li> </ul> </li> <li>1 shadow entity class               <ul style="list-style-type: none"> <li>1 automatic shadow variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>2740</b></li> <li>Value <math>\Leftarrow</math> <b>2795</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{838}0</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Unrealistic</li> <li><a href="#">VRP web</a></li> </ul>	<b>vehiclerouting</b>

Example	Domain	Size	Contest	Directory name
Vehicle routing with time windows	<ul style="list-style-type: none"> <li>All of Vehicle routing</li> <li>1 shadow variable</li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>2740</b></li> <li>Value <math>\Leftarrow</math> <b>2795</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{8380}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Unrealistic</li> <li>VRP web</li> </ul>	<b>vehiclerouting</b>
Project job scheduling	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>2 variables</li> <li>1 shadow variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>640</b></li> <li>Value <math>\Leftarrow</math> ? and <math>\Leftarrow</math> ?</li> <li>Search space <math>\Leftarrow</math> ?</li> </ul>	<ul style="list-style-type: none"> <li>Nearly realistic</li> <li>MISTA 2013</li> </ul>	<b>projectjobsheduling</b>
Task assigning	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>1 chained variable</li> <li>1 shadow variable</li> </ul> </li> <li>1 shadow entity class <ul style="list-style-type: none"> <li>1 automatic shadow variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>500</b></li> <li>Value <math>\Leftarrow</math> <b>520</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{1168}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>taskassigning</b>

Example	Domain	Size	Contest	Directory name
<a href="#">Exam timetabling</a>	<ul style="list-style-type: none"> <li>2 entity classes (same hierarchy) <ul style="list-style-type: none"> <li>2 variables</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>1096</b></li> <li>Value <math>\Leftarrow</math> <b>80</b> and <math>\Leftarrow</math> <b>49</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{3374}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Realistic</li> <li><a href="#">ITC 2007 track 1</a></li> </ul>	<ul style="list-style-type: none"> <li><b>examination</b></li> </ul>
<a href="#">Nurse rostering</a>	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>752</b></li> <li>Value <math>\Leftarrow</math> <b>50</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{1277}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Realistic</li> <li><a href="#">INRC 2010</a></li> </ul>	<b>nurserostering</b>
<a href="#">Traveling tournament</a>	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>1560</b></li> <li>Value <math>\Leftarrow</math> <b>78</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{2301}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Unrealistic</li> <li><a href="#">TTP</a></li> </ul>	<b>travelingtournament</b>
<a href="#">Cheap time scheduling</a>	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>2 variables</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>500</b></li> <li>Value <math>\Leftarrow</math> <b>100</b> and <math>\Leftarrow</math> <b>288</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{20078}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>Nearly realistic</li> <li><a href="#">ICON Energy</a></li> </ul>	<b>cheaptimescheduling</b>




Example	Domain	Size	Contest	Directory name
Investment	<ul style="list-style-type: none"> <li>1 entity class</li> <li>1 variable</li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>11</b></li> <li>Value = <b>1000</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^4</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>investment</b>
Conference scheduling	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>2 variables</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>216</b></li> <li>Value <math>\Leftarrow</math> <b>18</b> and <math>\Leftarrow</math> <b>20</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{552}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>conferencesc heduling</b>
Rock tour	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>1 chained variable</li> <li>4 shadow variables</li> </ul> </li> <li>1 shadow entity class <ul style="list-style-type: none"> <li>1 automatic shadow variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>47</b></li> <li>Value <math>\Leftarrow</math> <b>48</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{59}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>rocktour</b>

Example	Domain	Size	Contest	Directory name
Flight crew scheduling	<ul style="list-style-type: none"> <li>1 entity class <ul style="list-style-type: none"> <li>1 variable</li> </ul> </li> <li>1 shadow entity class <ul style="list-style-type: none"> <li>1 automatic shadow variable</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Entity <math>\Leftarrow</math> <b>4375</b></li> <li>Value <math>\Leftarrow</math> <b>750</b></li> <li>Search space <math>\Leftarrow</math> <b><math>10^{12578}</math></b></li> </ul>	<ul style="list-style-type: none"> <li>No</li> <li>Defined by us</li> </ul>	<b>flightcrewsheduling</b>

### 3.3. N QUEENS

Place  $n$  queens on a  $n$  sized chessboard so that no two queens can attack each other. The most common  $n$  queens puzzle is the eight queens puzzle, with  $n = 8$ :

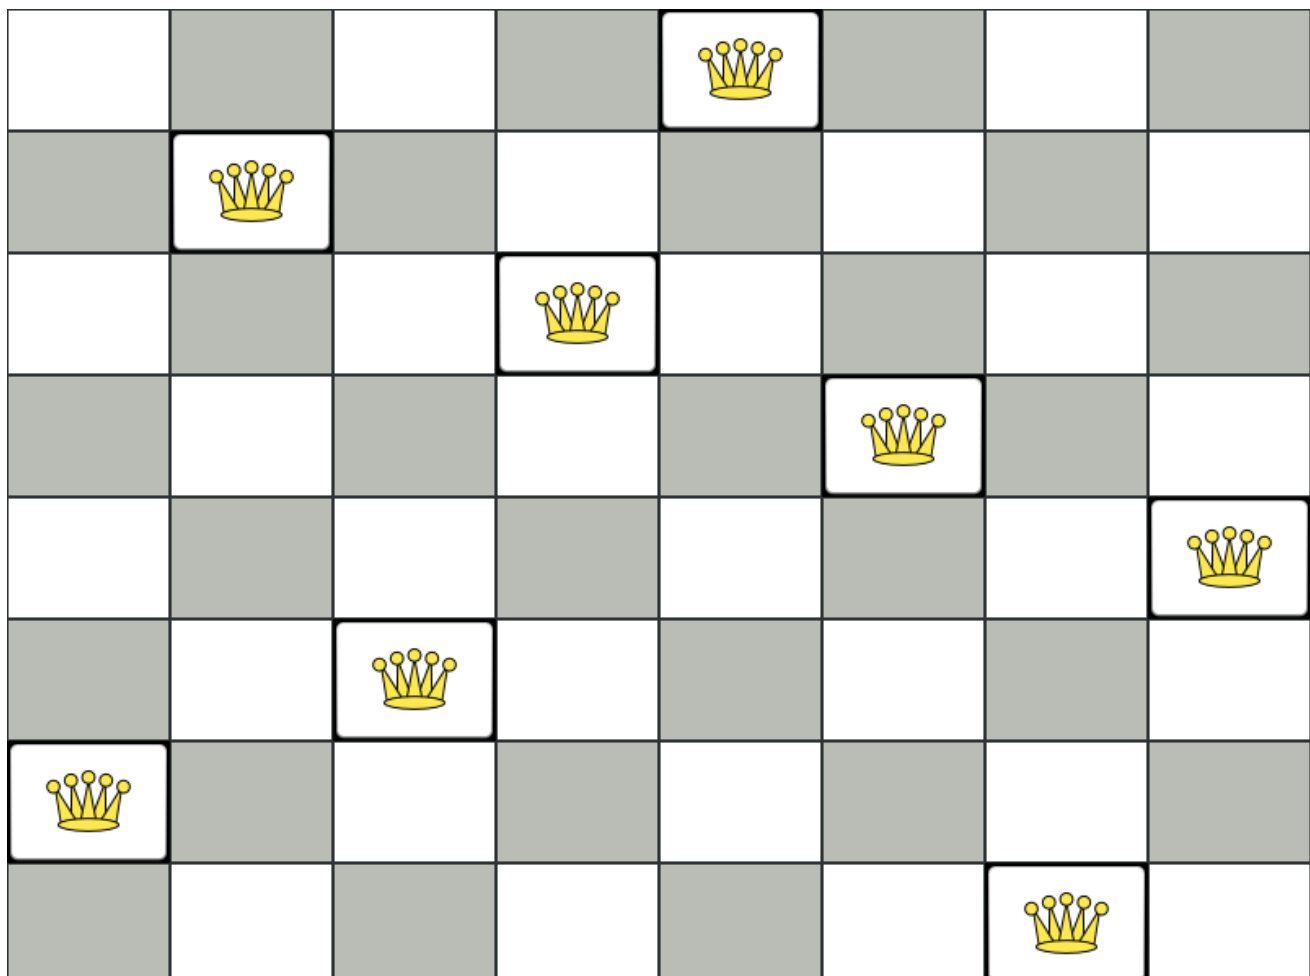


Constraints:

- Use a chessboard of  $n$  columns and  $n$  rows.
- Place  $n$  queens on the chessboard.
- No two queens can attack each other. A queen can attack any other queen on the same horizontal, vertical or diagonal line.

This documentation heavily uses the four queens puzzle as the primary example.

A proposed solution could be:


**Figure 3.1. A wrong solution for the Four queens puzzle**

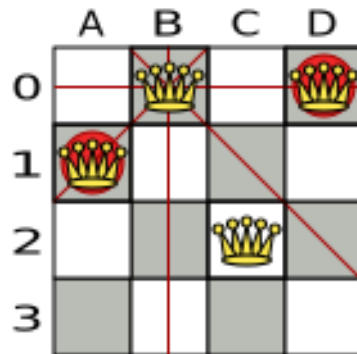

The above solution is wrong because queens **A1** and **B0** can attack each other (so can queens **B0** and **D0**). Removing queen **B0** would respect the "no two queens can attack each other" constraint, but would break the "place  $n$  queens" constraint.

Below is a correct solution:

**Figure 3.2. A correct solution for the Four queens puzzle**

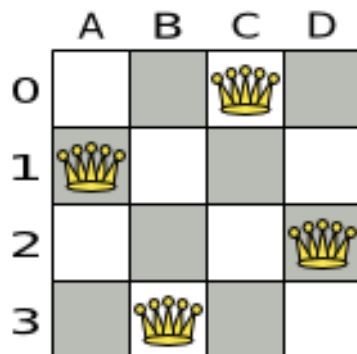

All the constraints have been met, so the solution is correct.

Note that most  $n$  queens puzzles have multiple correct solutions. We will focus on finding a single correct solution for a given  $n$ , not on finding the number of possible correct solutions for a given  $n$ .

### Problem size

4queens	has	4 queens with a search space of	256.
8queens	has	8 queens with a search space of	$10^7$ .
16queens	has	16 queens with a search space of	$10^{19}$ .

```
32queens  has 32 queens with a search space of 10^48.
64queens  has 64 queens with a search space of 10^115.
256queens has 256 queens with a search space of 10^616.
```

The implementation of the  $n$  queens example has not been optimized because it functions as a beginner example. Nevertheless, it can easily handle 64 queens. With a few changes it has been shown to easily handle 5000 queens and more.

### 3.3.1. Domain model for N queens

This example uses the domain model to solve the four queens problem.

- **Creating a Domain Model**

A good domain model will make it easier to understand and solve your planning problem.

This is the domain model for the  $n$  queens example:

```
public class Column {
    private int index;

    // ... getters and setters
}

public class Row {
    private int index;

    // ... getters and setters
}

public class Queen {
    private Column column;
    private Row row;

    public int getAscendingDiagonalIndex() {...}
    public int getDescendingDiagonalIndex() {...}

    // ... getters and setters
}
```

- **Calculating the Search Space.**

A **Queen** instance has a **Column** (for example: 0 is column A, 1 is column B, ...) and a **Row** (its row, for example: 0 is row 0, 1 is row 1, ...).

The ascending diagonal line and the descending diagonal line can be calculated based on the column and the row.

The column and row indexes start from the upper left corner of the chessboard.

```
public class NQueens {
    private int n;
```

```

private List<Column> columnList;
private List<Row> rowList;

private List<Queen> queenList;

private SimpleScore score;

// ... getters and setters
}


```

### 1. Finding the Solution

A single **NQueens** instance contains a list of all **Queen** instances. It is the **Solution** implementation which will be supplied to, solved by, and retrieved from the Solver.

Notice that in the four queens example, NQueens's **getN()** method will always return four.

**Figure 3.3. A solution for Four Queens**

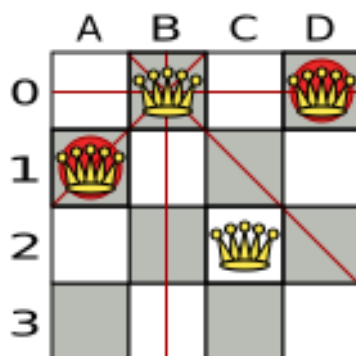

**Table 3.2. Details of the solution in the domain model**

	columnIndex	rowIndex	ascendingDiagonalIndex (columnIndex + rowIndex)	descendingDiagonalIndex (columnIndex - rowIndex)
A1	0	1	1 (**)	-1
B0	1	0 (*)	1 (**)	1
C2	2	2	4	0
D0	3	0 (*)	3	3

When two queens share the same column, row or diagonal line, such as (\*) and (\*\*), they can attack each other.

## 3.4. CLOUD BALANCING

For information about this example, see [Chapter 2, Getting started: A cloud balancing example](#).

### 3.5. TRAVELING SALESMAN (TSP - TRAVELING SALESMAN PROBLEM)

Given a list of cities, find the shortest tour for a salesman that visits each city exactly once.

The problem is defined by [Wikipedia](#). It is [one of the most intensively studied problems](#) in computational mathematics. Yet, in the real world, it is often only part of a planning problem, along with other constraints, such as employee shift rostering constraints.

#### Problem size


dj38	has	38 cities with a search space of	$10^{43}$ .
europa40	has	40 cities with a search space of	$10^{46}$ .
st70	has	70 cities with a search space of	$10^{98}$ .
pcb442	has	442 cities with a search space of	$10^{976}$ .
lu980	has	980 cities with a search space of	$10^{2504}$ .

#### Problem difficulty

Despite TSP's simple definition, the problem is surprisingly hard to solve. Because it is an NP-hard problem (like most planning problems), the optimal solution for a specific problem dataset can change a lot when that problem dataset is slightly altered:

### TSP optimal solution volatility

How much does the optimal solution change if we add 1 new location?

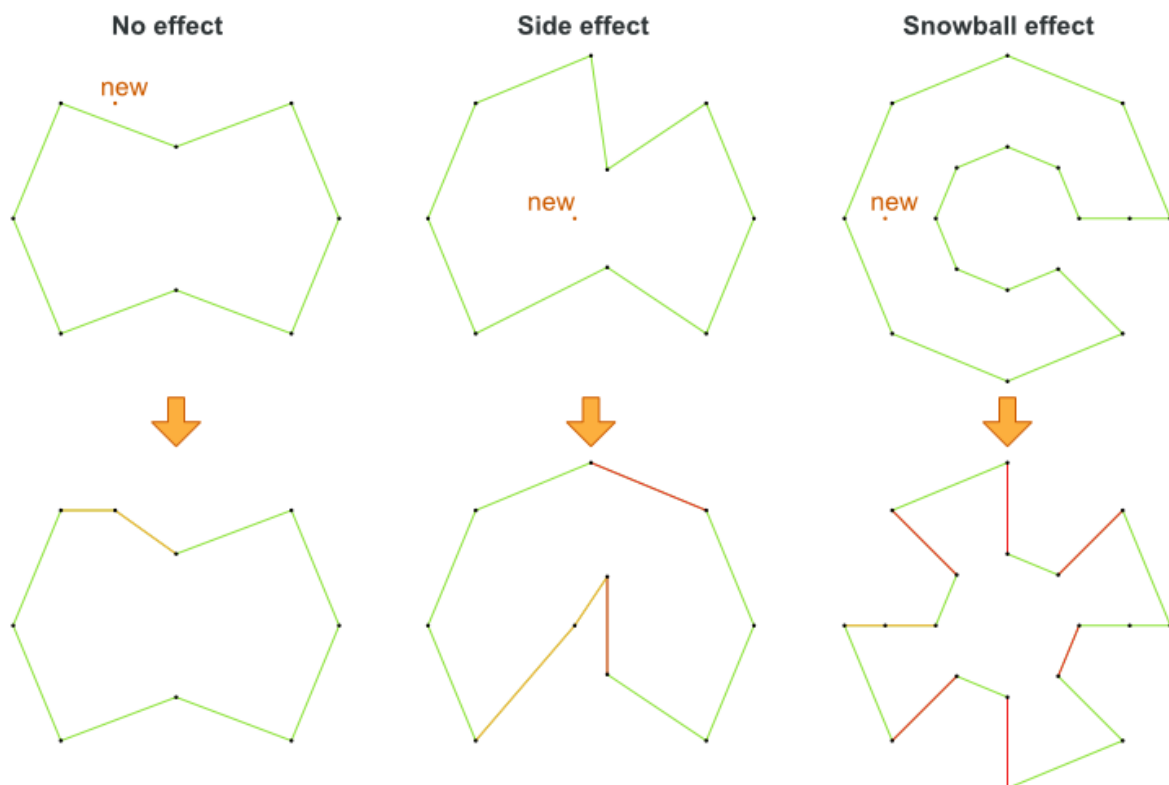

### 3.6. DINNER PARTY

Miss Manners is throwing another dinner party.

- This time she invited 144 guests and prepared 12 round tables with 12 seats each.
- Every guest should sit next to someone (left and right) of the opposite gender.
- And that neighbour should have at least one hobby in common with the guest.
- At every table, there should be two politicians, two doctors, two socialites, two coaches, two teachers and two programmers.
- And the two politicians, two doctors, two coaches and two programmers should not be the same kind at a table.

Drools Expert also has the normal Miss Manners example (which is much smaller) and employs an exhaustive heuristic to solve it. Planner's implementation is far more scalable because it uses heuristics to find the best solution and Drools Expert to calculate the score of each solution.

### Problem size

wedding01 has 18 jobs, 144 guests, 288 hobby practitioners, 12 tables and 144 seats with a search space of  $10^{310}$ .

## 3.7. TENNIS CLUB SCHEDULING

Every week the tennis club has four teams playing round robin against each other. Assign those four spots to the teams fairly.

Hard constraints:

- Conflict: A team can only play once per day.
- Unavailability: Some teams are unavailable on some dates.

Medium constraints:

- Fair assignment: All teams should play an (almost) equal number of times.

Soft constraints:


- Evenly confrontation: Each team should play against every other team an equal number of times.

### Problem size

munich-7teams has 7 teams, 18 days, 12 unavailabilityPenalties and 72 teamAssignments with a search space of  $10^{60}$ .

Figure 3.4. Domain model

## Tennis class diagram

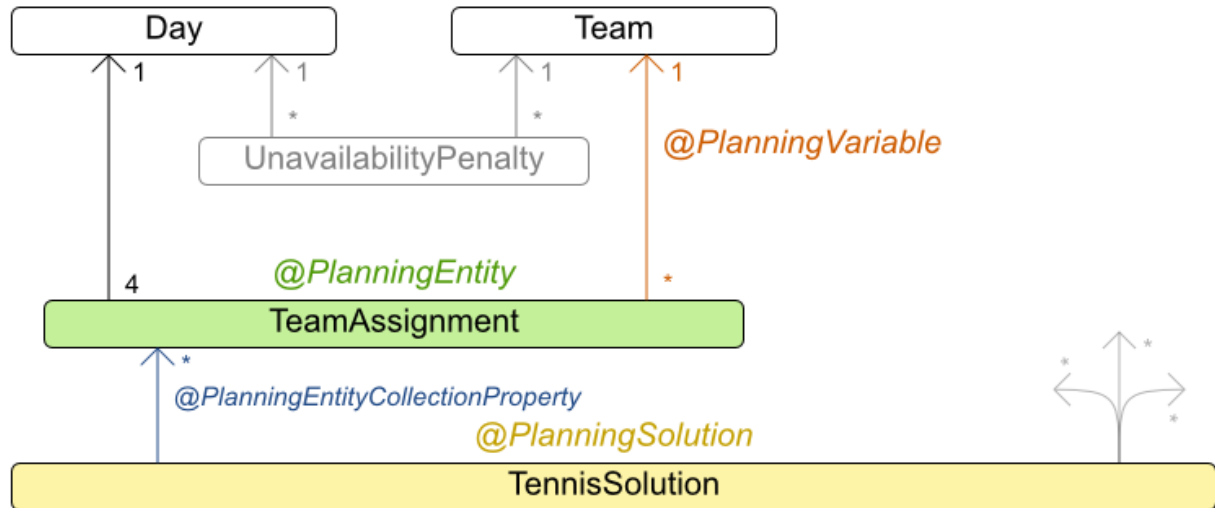

### 3.8. MEETING SCHEDULING

Assign each meeting to a starting time and a room. Meetings have different durations.

Hard constraints:

- Room conflict: two meetings must not use the same room at the same time.
- Required attendance: A person cannot have two required meetings at the same time.
- Required room capacity: A meeting must not be in a room that doesn't fit all of the meeting's attendees.
- Start and end on same day: A meeting shouldn't be scheduled over multiple days.

Medium constraints:

- Preferred attendance: A person cannot have two preferred meetings at the same time, nor a preferred and a required meeting at the same time.

Soft constraints:

- Sooner rather than later: Schedule all meetings as soon as possible.
- A break between meetings: Any two meetings should have at least one time grain break between them.



- Overlapping meetings: To minimize the number of meetings in parallel so people don't have to choose one meeting over the other.
- Assign larger rooms first: If a larger room is available any meeting should be assigned to that room in order to accommodate as many people as possible even if they haven't signed up to that meeting.
- Room stability: If a person has two consecutive meetings with two or less time grains break between them they better be in the same room.

### Problem size

50meetings-160timegrains-5rooms has 50 meetings, 160 timeGrains and 5 rooms with a search space of  $10^{145}$ .

100meetings-320timegrains-5rooms has 100 meetings, 320 timeGrains and 5 rooms with a search space of  $10^{320}$ .

200meetings-640timegrains-5rooms has 200 meetings, 640 timeGrains and 5 rooms with a search space of  $10^{701}$ .

400meetings-1280timegrains-5rooms has 400 meetings, 1280 timeGrains and 5 rooms with a search space of  $10^{1522}$ .

800meetings-2560timegrains-5rooms has 800 meetings, 2560 timeGrains and 5 rooms with a search space of  $10^{3285}$ .

## 3.9. COURSE TIMETABLING (ITC 2007 TRACK 3 - CURRICULUM COURSE SCHEDULING)

Schedule each lecture into a timeslot and into a room.

Hard constraints:

- Teacher conflict: A teacher must not have two lectures in the same period.
- Curriculum conflict: A curriculum must not have two lectures in the same period.
- Room occupancy: Two lectures must not be in the same room in the same period.
- Unavailable period (specified per dataset): A specific lecture must not be assigned to a specific period.

Soft constraints:

- Room capacity: A room's capacity should not be less than the number of students in its lecture.
- Minimum working days: Lectures of the same course should be spread out into a minimum number of days.
- Curriculum compactness: Lectures belonging to the same curriculum should be adjacent to each other (so in consecutive periods).
- Room stability: Lectures of the same course should be assigned to the same room.

The problem is defined by [the International Timetabling Competition 2007 track 3](#).

### Problem size

comp01 has 24 teachers, 14 curricula, 30 courses, 160 lectures, 30 periods, 6 rooms and 53 unavailable period constraints with a search space of  $10^{360}$ .

comp02 has 71 teachers, 70 curricula, 82 courses, 283 lectures, 25 periods, 16 rooms and 513 unavailable period constraints with a search space of  $10^{736}$ .

comp03 has 61 teachers, 68 curricula, 72 courses, 251 lectures, 25 periods, 16 rooms and 382 unavailable period constraints with a search space of  $10^{653}$ .

comp04 has 70 teachers, 57 curricula, 79 courses, 286 lectures, 25 periods, 18 rooms and 396 unavailable period constraints with a search space of  $10^{758}$ .

comp05 has 47 teachers, 139 curricula, 54 courses, 152 lectures, 36 periods, 9 rooms and 771 unavailable period constraints with a search space of  $10^{381}$ .

comp06 has 87 teachers, 70 curricula, 108 courses, 361 lectures, 25 periods, 18 rooms and 632 unavailable period constraints with a search space of  $10^{957}$ .

comp07 has 99 teachers, 77 curricula, 131 courses, 434 lectures, 25 periods, 20 rooms and 667 unavailable period constraints with a search space of  $10^{1171}$ .

comp08 has 76 teachers, 61 curricula, 86 courses, 324 lectures, 25 periods, 18 rooms and 478 unavailable period constraints with a search space of  $10^{859}$ .

comp09 has 68 teachers, 75 curricula, 76 courses, 279 lectures, 25 periods, 18 rooms and 405 unavailable period constraints with a search space of  $10^{740}$ .

comp10 has 88 teachers, 67 curricula, 115 courses, 370 lectures, 25 periods, 18 rooms and 694 unavailable period constraints with a search space of  $10^{981}$ .

comp11 has 24 teachers, 13 curricula, 30 courses, 162 lectures, 45 periods, 5 rooms and 94 unavailable period constraints with a search space of  $10^{381}$ .


comp12 has 74 teachers, 150 curricula, 88 courses, 218 lectures, 36 periods, 11 rooms and 1368 unavailable period constraints with a search space of  $10^{566}$ .

comp13 has 77 teachers, 66 curricula, 82 courses, 308 lectures, 25 periods, 19 rooms and 468 unavailable period constraints with a search space of  $10^{824}$ .

comp14 has 68 teachers, 60 curricula, 85 courses, 275 lectures, 25 periods, 17 rooms and 486 unavailable period constraints with a search space of  $10^{722}$ .

Figure 3.5. Domain model

## Curriculum course class diagram

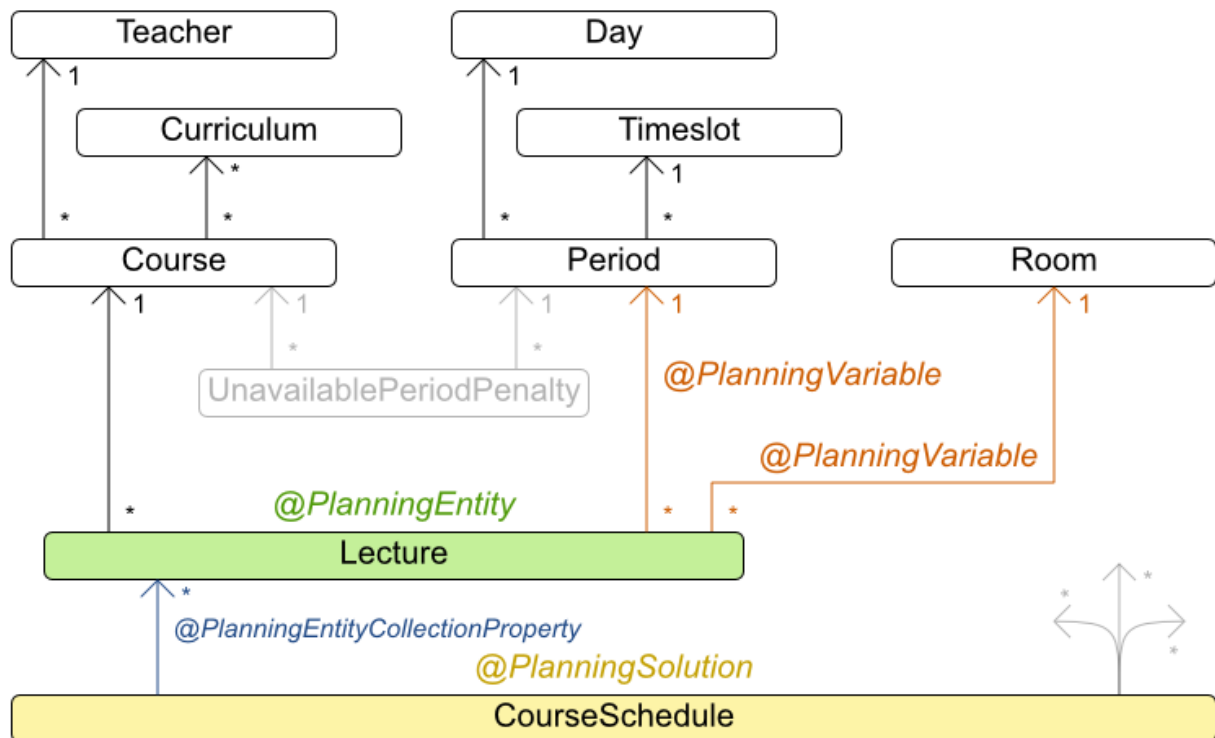

### 3.10. MACHINE REASSIGNMENT (GOOGLE ROADEF 2012)

Assign each process to a machine. All processes already have an original (unoptimized) assignment. Each process requires an amount of each resource (such as CPU or RAM). This is a more complex version of the Cloud Balancing example.

Hard constraints:

- **Maximum capacity:** The maximum capacity for each resource for each machine must not be exceeded.
- **Conflict:** Processes of the same service must run on distinct machines.
- **Spread:** Processes of the same service must be spread out across locations.
- **Dependency:** The processes of a service depending on another service must run in the neighborhood of a process of the other service.
- **Transient usage:** Some resources are transient and count towards the maximum capacity of both the original machine as the newly assigned machine.


Soft constraints:

- **Load:** The safety capacity for each resource for each machine should not be exceeded.

- Balance: Leave room for future assignments by balancing the available resources on each machine.
- Process move cost: A process has a move cost.
- Service move cost: A service has a move cost.
- Machine move cost: Moving a process from machine A to machine B has another A-B specific move cost.


The problem is defined by [the Google ROADEF/EURO Challenge 2012](#).

## Cloud optimization is like Tetris

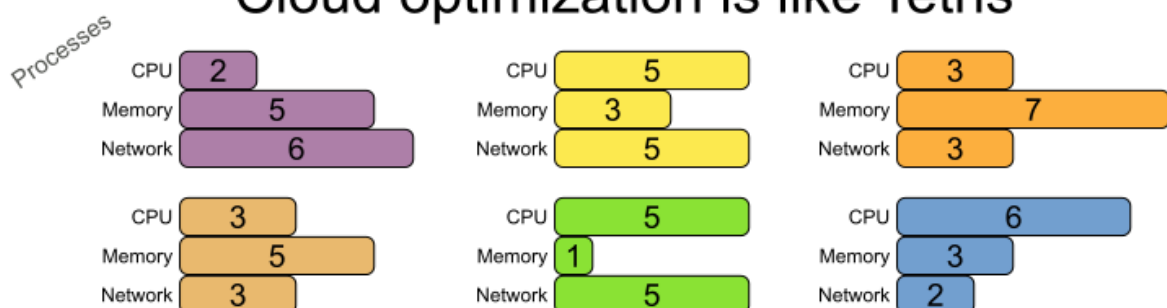

### Traditional algorithm

(Construction Heuristic)

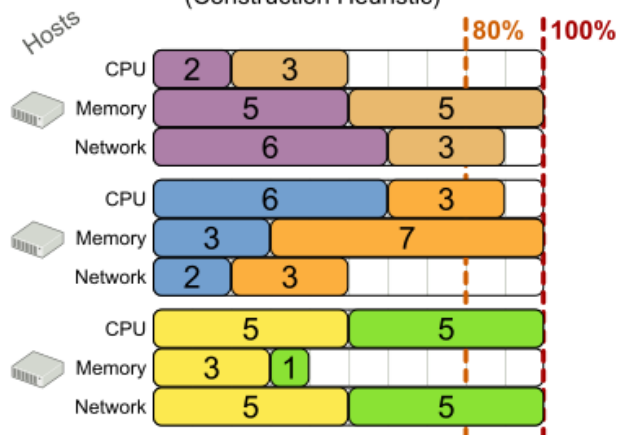

### OptaPlanner

(Construction Heuristic + Local Search)


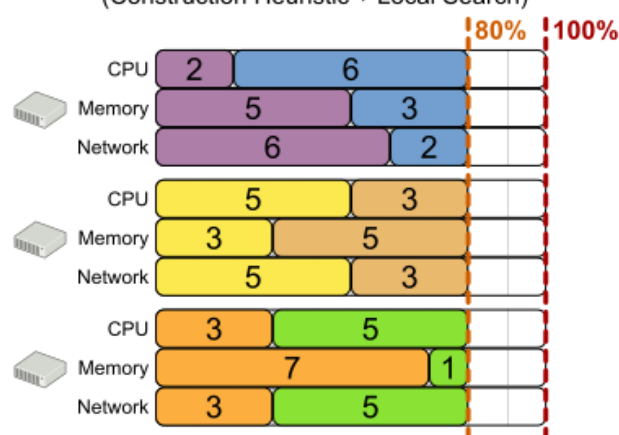


Figure 3.6. Value proposition

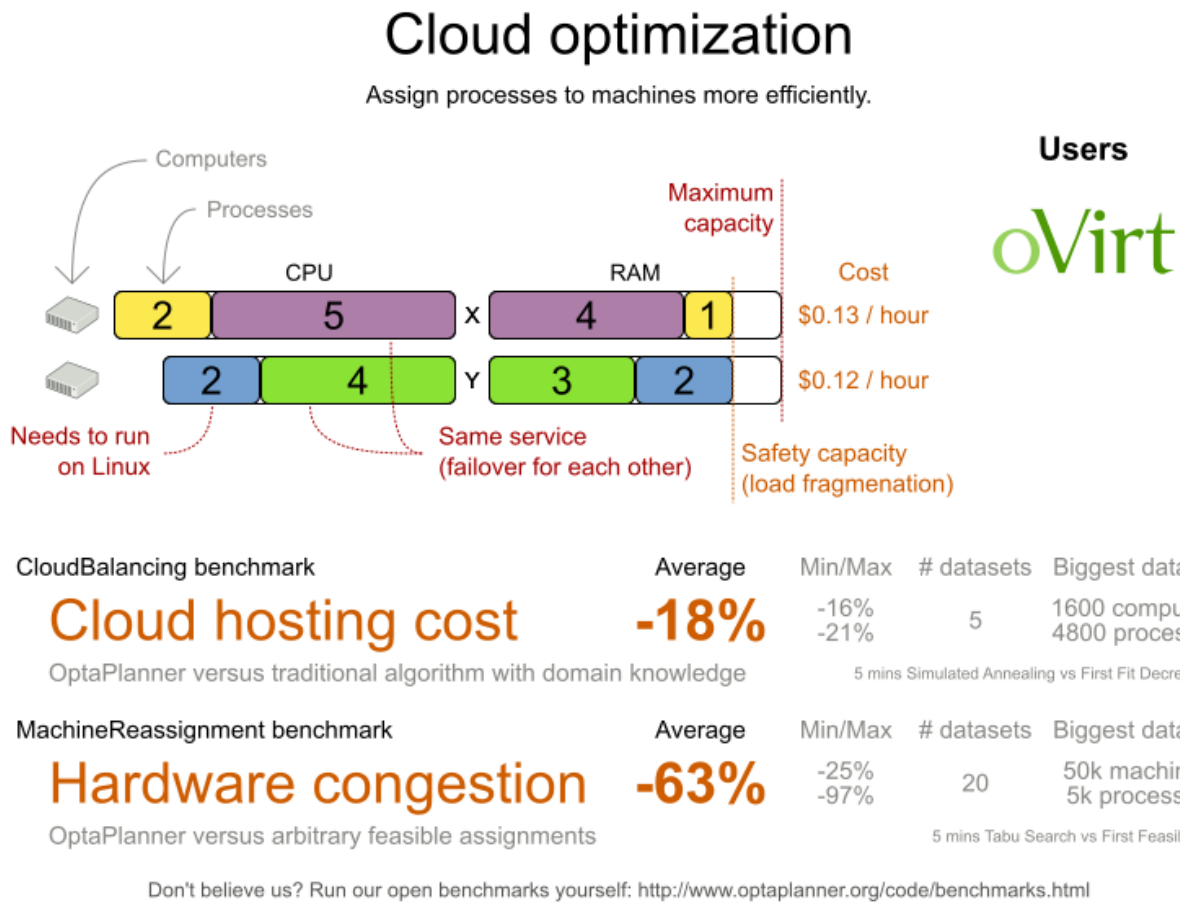

### Problem size

```

model_a1_1 has 2 resources, 1 neighborhoods, 4 locations, 4
machines, 79 services, 100 processes and 1 balancePenalties with a
search space of 10^60.
model_a1_2 has 4 resources, 2 neighborhoods, 4 locations, 100
machines, 980 services, 1000 processes and 0 balancePenalties with a
search space of 10^2000.
model_a1_3 has 3 resources, 5 neighborhoods, 25 locations, 100
machines, 216 services, 1000 processes and 0 balancePenalties with a
search space of 10^2000.
model_a1_4 has 3 resources, 50 neighborhoods, 50 locations, 50
machines, 142 services, 1000 processes and 1 balancePenalties with a
search space of 10^1698.
model_a1_5 has 4 resources, 2 neighborhoods, 4 locations, 12
machines, 981 services, 1000 processes and 1 balancePenalties with a
search space of 10^1079.
model_a2_1 has 3 resources, 1 neighborhoods, 1 locations, 100
machines, 1000 services, 1000 processes and 0 balancePenalties with a
search space of 10^2000.
model_a2_2 has 12 resources, 5 neighborhoods, 25 locations, 100
machines, 170 services, 1000 processes and 0 balancePenalties with a
search space of 10^2000.
model_a2_3 has 12 resources, 5 neighborhoods, 25 locations, 100
machines, 129 services, 1000 processes and 0 balancePenalties with a
search space of 10^2000.

```

model\_a2\_4 has 12 resources, 5 neighborhoods, 25 locations, 50 machines, 180 services, 1000 processes and 1 balancePenalties with a search space of  $10^{1698}$ .

model\_a2\_5 has 12 resources, 5 neighborhoods, 25 locations, 50 machines, 153 services, 1000 processes and 0 balancePenalties with a search space of  $10^{1698}$ .

model\_b\_1 has 12 resources, 5 neighborhoods, 10 locations, 100 machines, 2512 services, 5000 processes and 0 balancePenalties with a search space of  $10^{10000}$ .

model\_b\_2 has 12 resources, 5 neighborhoods, 10 locations, 100 machines, 2462 services, 5000 processes and 1 balancePenalties with a search space of  $10^{10000}$ .

model\_b\_3 has 6 resources, 5 neighborhoods, 10 locations, 100 machines, 15025 services, 20000 processes and 0 balancePenalties with a search space of  $10^{40000}$ .

model\_b\_4 has 6 resources, 5 neighborhoods, 50 locations, 500 machines, 1732 services, 20000 processes and 1 balancePenalties with a search space of  $10^{53979}$ .

model\_b\_5 has 6 resources, 5 neighborhoods, 10 locations, 100 machines, 35082 services, 40000 processes and 0 balancePenalties with a search space of  $10^{80000}$ .

model\_b\_6 has 6 resources, 5 neighborhoods, 50 locations, 200 machines, 14680 services, 40000 processes and 1 balancePenalties with a search space of  $10^{92041}$ .


model\_b\_7 has 6 resources, 5 neighborhoods, 50 locations, 4000 machines, 15050 services, 40000 processes and 1 balancePenalties with a search space of  $10^{144082}$ .

model\_b\_8 has 3 resources, 5 neighborhoods, 10 locations, 100 machines, 45030 services, 50000 processes and 0 balancePenalties with a search space of  $10^{100000}$ .

model\_b\_9 has 3 resources, 5 neighborhoods, 100 locations, 1000 machines, 4609 services, 50000 processes and 1 balancePenalties with a search space of  $10^{150000}$ .

model\_b\_10 has 3 resources, 5 neighborhoods, 100 locations, 5000 machines, 4896 services, 50000 processes and 1 balancePenalties with a search space of  $10^{184948}$ .



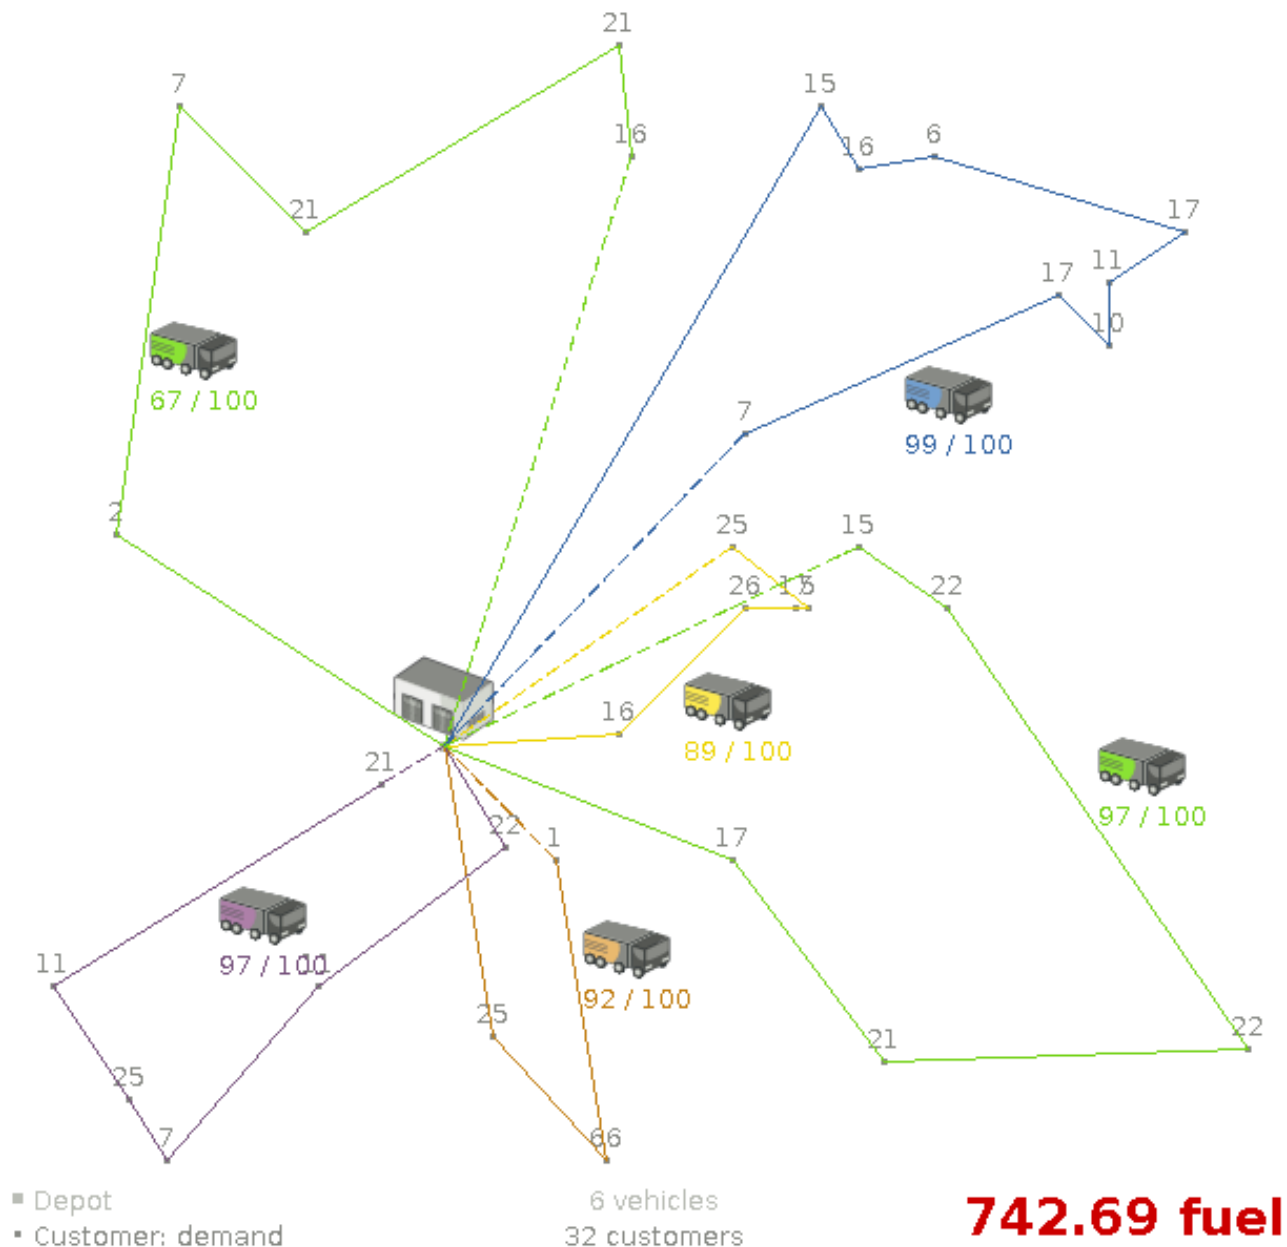

Besides the basic case (CVRP), there is also a variant with time windows (CVRPTW).

Hard constraints:

- Vehicle capacity: a vehicle cannot carry more items than its capacity.
- Time windows (only in CVRPTW):
  - Travel time: Traveling from one location to another takes time.
  - Customer service duration: a vehicle must stay at the customer for the length of the service duration.
  - Customer ready time: a vehicle may arrive before the customer's ready time, but it must wait until the ready time before servicing.
  - Customer due time: a vehicle must arrive on time, before the customer's due time.


Soft constraints:

- Total distance: minimize the total distance driven (fuel consumption) of all vehicles.



The capacitated vehicle routing problem (CVRP) and its timewindowed variant (CVRPTW) are defined by [the VRP web](#).

**Figure 3.8. Value proposition**

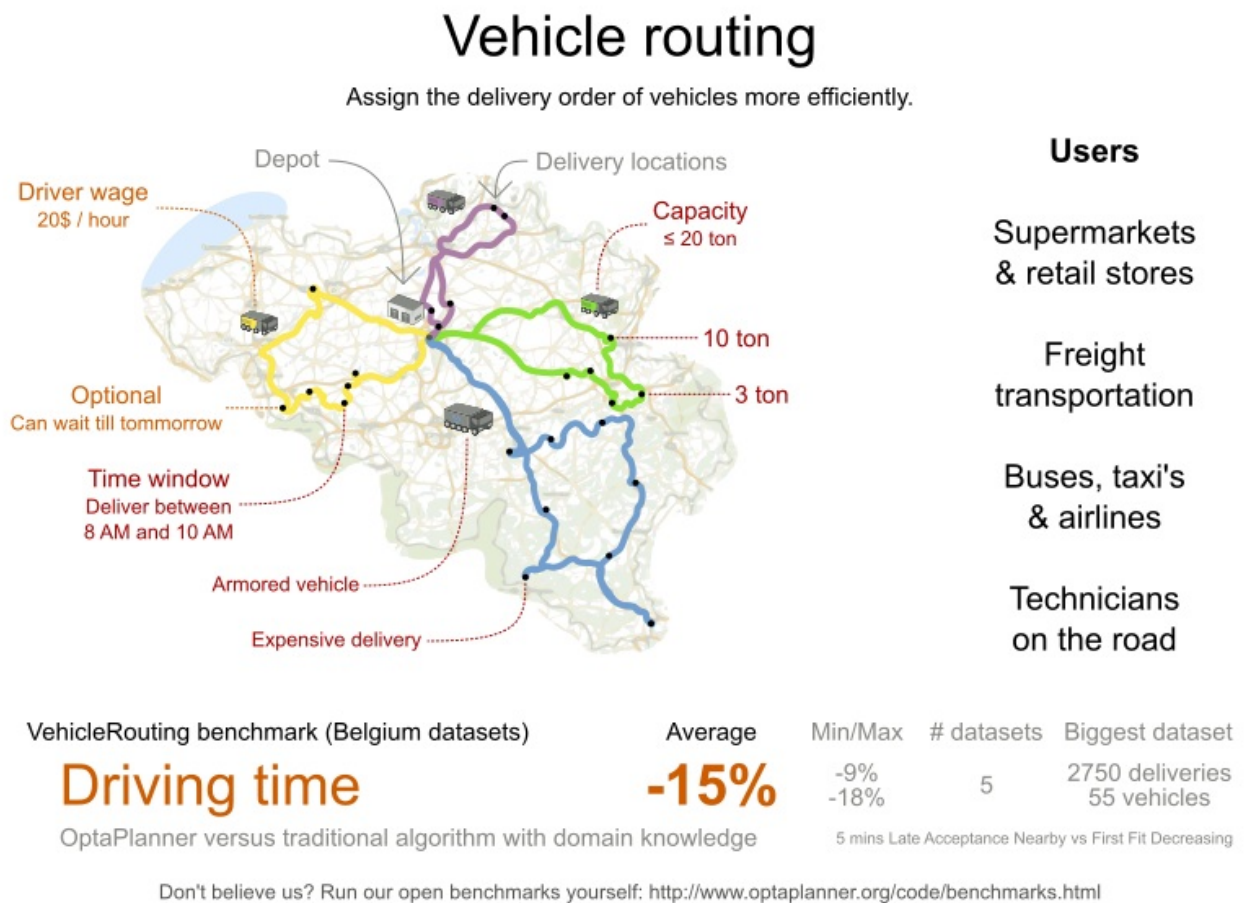

## Problem size

CVRP instances (without time windows):

belgium-n50-k10	has	1 depots, 10 vehicles and	49 customers
with a search space of	$10^{74}$ .		
belgium-n100-k10	has	1 depots, 10 vehicles and	99 customers
with a search space of	$10^{170}$ .		
belgium-n500-k20	has	1 depots, 20 vehicles and	499 customers
with a search space of	$10^{1168}$ .		
belgium-n1000-k20	has	1 depots, 20 vehicles and	999 customers
with a search space of	$10^{2607}$ .		
belgium-n2750-k55	has	1 depots, 55 vehicles and	2749 customers
with a search space of	$10^{8380}$ .		
belgium-road-km-n50-k10	has	1 depots, 10 vehicles and	49 customers
with a search space of	$10^{74}$ .		
belgium-road-km-n100-k10	has	1 depots, 10 vehicles and	99 customers
with a search space of	$10^{170}$ .		
belgium-road-km-n500-k20	has	1 depots, 20 vehicles and	499 customers
with a search space of	$10^{1168}$ .		
belgium-road-km-n1000-k20	has	1 depots, 20 vehicles and	999 customers
with a search space of	$10^{2607}$ .		
belgium-road-km-n2750-k55	has	1 depots, 55 vehicles and	2749 customers
with a search space of	$10^{8380}$ .		

belgium-road-time-n50-k10 has 1 depots, 10 vehicles and 49 customers with a search space of  $10^{74}$ .  
 belgium-road-time-n100-k10 has 1 depots, 10 vehicles and 99 customers with a search space of  $10^{170}$ .  
 belgium-road-time-n500-k20 has 1 depots, 20 vehicles and 499 customers with a search space of  $10^{1168}$ .  
 belgium-road-time-n1000-k20 has 1 depots, 20 vehicles and 999 customers with a search space of  $10^{2607}$ .  
 belgium-road-time-n2750-k55 has 1 depots, 55 vehicles and 2749 customers with a search space of  $10^{8380}$ .  
 belgium-d2-n50-k10 has 2 depots, 10 vehicles and 48 customers with a search space of  $10^{74}$ .  
 belgium-d3-n100-k10 has 3 depots, 10 vehicles and 97 customers with a search space of  $10^{170}$ .  
 belgium-d5-n500-k20 has 5 depots, 20 vehicles and 495 customers with a search space of  $10^{1168}$ .  
 belgium-d8-n1000-k20 has 8 depots, 20 vehicles and 992 customers with a search space of  $10^{2607}$ .  
 belgium-d10-n2750-k55 has 10 depots, 55 vehicles and 2740 customers with a search space of  $10^{8380}$ .

A-n32-k5 has 1 depots, 5 vehicles and 31 customers with a search space of  $10^{40}$ .  
 A-n33-k5 has 1 depots, 5 vehicles and 32 customers with a search space of  $10^{41}$ .  
 A-n33-k6 has 1 depots, 6 vehicles and 32 customers with a search space of  $10^{42}$ .  
 A-n34-k5 has 1 depots, 5 vehicles and 33 customers with a search space of  $10^{43}$ .  
 A-n36-k5 has 1 depots, 5 vehicles and 35 customers with a search space of  $10^{46}$ .  
 A-n37-k5 has 1 depots, 5 vehicles and 36 customers with a search space of  $10^{48}$ .  
 A-n37-k6 has 1 depots, 6 vehicles and 36 customers with a search space of  $10^{49}$ .  
 A-n38-k5 has 1 depots, 5 vehicles and 37 customers with a search space of  $10^{49}$ .  
 A-n39-k5 has 1 depots, 5 vehicles and 38 customers with a search space of  $10^{51}$ .  
 A-n39-k6 has 1 depots, 6 vehicles and 38 customers with a search space of  $10^{52}$ .  
 A-n44-k7 has 1 depots, 7 vehicles and 43 customers with a search space of  $10^{61}$ .  
 A-n45-k6 has 1 depots, 6 vehicles and 44 customers with a search space of  $10^{62}$ .  
 A-n45-k7 has 1 depots, 7 vehicles and 44 customers with a search space of  $10^{63}$ .  
 A-n46-k7 has 1 depots, 7 vehicles and 45 customers with a search space of  $10^{65}$ .  
 A-n48-k7 has 1 depots, 7 vehicles and 47 customers with a search space of  $10^{68}$ .  
 A-n53-k7 has 1 depots, 7 vehicles and 52 customers with a search space of  $10^{77}$ .  
 A-n54-k7 has 1 depots, 7 vehicles and 53 customers with a search space of  $10^{79}$ .  
 A-n55-k9 has 1 depots, 9 vehicles and 54 customers with a search space

of  $10^{82}$ .  
 A-n60-k9 has 1 depots, 9 vehicles and 59 customers with a search space of  $10^{91}$ .  
 A-n61-k9 has 1 depots, 9 vehicles and 60 customers with a search space of  $10^{93}$ .  
 A-n62-k8 has 1 depots, 8 vehicles and 61 customers with a search space of  $10^{94}$ .  
 A-n63-k9 has 1 depots, 9 vehicles and 62 customers with a search space of  $10^{97}$ .  
 A-n63-k10 has 1 depots, 10 vehicles and 62 customers with a search space of  $10^{98}$ .  
 A-n64-k9 has 1 depots, 9 vehicles and 63 customers with a search space of  $10^{99}$ .  
 A-n65-k9 has 1 depots, 9 vehicles and 64 customers with a search space of  $10^{101}$ .  
 A-n69-k9 has 1 depots, 9 vehicles and 68 customers with a search space of  $10^{108}$ .  
 A-n80-k10 has 1 depots, 10 vehicles and 79 customers with a search space of  $10^{130}$ .  
 F-n45-k4 has 1 depots, 4 vehicles and 44 customers with a search space of  $10^{60}$ .  
 F-n72-k4 has 1 depots, 4 vehicles and 71 customers with a search space of  $10^{108}$ .  
 F-n135-k7 has 1 depots, 7 vehicles and 134 customers with a search space of  $10^{240}$ .

CVRPTW instances (with time windows):

belgium-tw-d2-n50-k10 has 2 depots, 10 vehicles and 48 customers with a search space of  $10^{74}$ .  
 belgium-tw-d3-n100-k10 has 3 depots, 10 vehicles and 97 customers with a search space of  $10^{170}$ .  
 belgium-tw-d5-n500-k20 has 5 depots, 20 vehicles and 495 customers with a search space of  $10^{1168}$ .  
 belgium-tw-d8-n1000-k20 has 8 depots, 20 vehicles and 992 customers with a search space of  $10^{2607}$ .  
 belgium-tw-d10-n2750-k55 has 10 depots, 55 vehicles and 2740 customers with a search space of  $10^{8380}$ .  
 belgium-tw-n50-k10 has 1 depots, 10 vehicles and 49 customers with a search space of  $10^{74}$ .  
 belgium-tw-n100-k10 has 1 depots, 10 vehicles and 99 customers with a search space of  $10^{170}$ .  
 belgium-tw-n500-k20 has 1 depots, 20 vehicles and 499 customers with a search space of  $10^{1168}$ .  
 belgium-tw-n1000-k20 has 1 depots, 20 vehicles and 999 customers with a search space of  $10^{2607}$ .  
 belgium-tw-n2750-k55 has 1 depots, 55 vehicles and 2749 customers with a search space of  $10^{8380}$ .

Solomon\_025\_C101 has 1 depots, 25 vehicles and 25 customers with a search space of  $10^{40}$ .  
 Solomon\_025\_C201 has 1 depots, 25 vehicles and 25 customers with a search space of  $10^{40}$ .  
 Solomon\_025\_R101 has 1 depots, 25 vehicles and 25 customers with a search space of  $10^{40}$ .  
 Solomon\_025\_R201 has 1 depots, 25 vehicles and 25 customers with

```

a search space of      10^40.
Solomon_025_RC101      has 1 depots, 25 vehicles and 25 customers with
a search space of      10^40.
Solomon_025_RC201      has 1 depots, 25 vehicles and 25 customers with
a search space of      10^40.
Solomon_100_C101        has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Solomon_100_C201        has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Solomon_100_R101        has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Solomon_100_R201        has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Solomon_100_RC101       has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Solomon_100_RC201       has 1 depots, 25 vehicles and 100 customers with
a search space of      10^185.
Hombberger_0200_C1_2_1  has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0200_C2_2_1  has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0200_R1_2_1  has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0200_R2_2_1  has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0200_RC1_2_1 has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0200_RC2_2_1 has 1 depots, 50 vehicles and 200 customers with
a search space of      10^429.
Hombberger_0400_C1_4_1  has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0400_C2_4_1  has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0400_R1_4_1  has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0400_R2_4_1  has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0400_RC1_4_1 has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0400_RC2_4_1 has 1 depots, 100 vehicles and 400 customers with a
search space of      10^978.
Hombberger_0600_C1_6_1  has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0600_C2_6_1  has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0600_R1_6_1  has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0600_R2_6_1  has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0600_RC1_6_1 has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0600_RC2_6_1 has 1 depots, 150 vehicles and 600 customers with a
search space of      10^1571.
Hombberger_0800_C1_8_1  has 1 depots, 200 vehicles and 800 customers with a
search space of      10^2195.
Hombberger_0800_C2_8_1  has 1 depots, 200 vehicles and 800 customers with a

```

search space of  $10^{2195}$ .

Homberger\_0800\_R1\_8\_1 has 1 depots, 200 vehicles and 800 customers with a search space of  $10^{2195}$ .

Homberger\_0800\_R2\_8\_1 has 1 depots, 200 vehicles and 800 customers with a search space of  $10^{2195}$ .

Homberger\_0800\_RC1\_8\_1 has 1 depots, 200 vehicles and 800 customers with a search space of  $10^{2195}$ .

Homberger\_0800\_RC2\_8\_1 has 1 depots, 200 vehicles and 800 customers with a search space of  $10^{2195}$ .

Homberger\_1000\_C110\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .

Homberger\_1000\_C210\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .

Homberger\_1000\_R110\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .


Homberger\_1000\_R210\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .

Homberger\_1000\_RC110\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .

Homberger\_1000\_RC210\_1 has 1 depots, 250 vehicles and 1000 customers with a search space of  $10^{2840}$ .

### 3.11.1. Domain model for Vehicle routing

## Vehicle routing class diagram

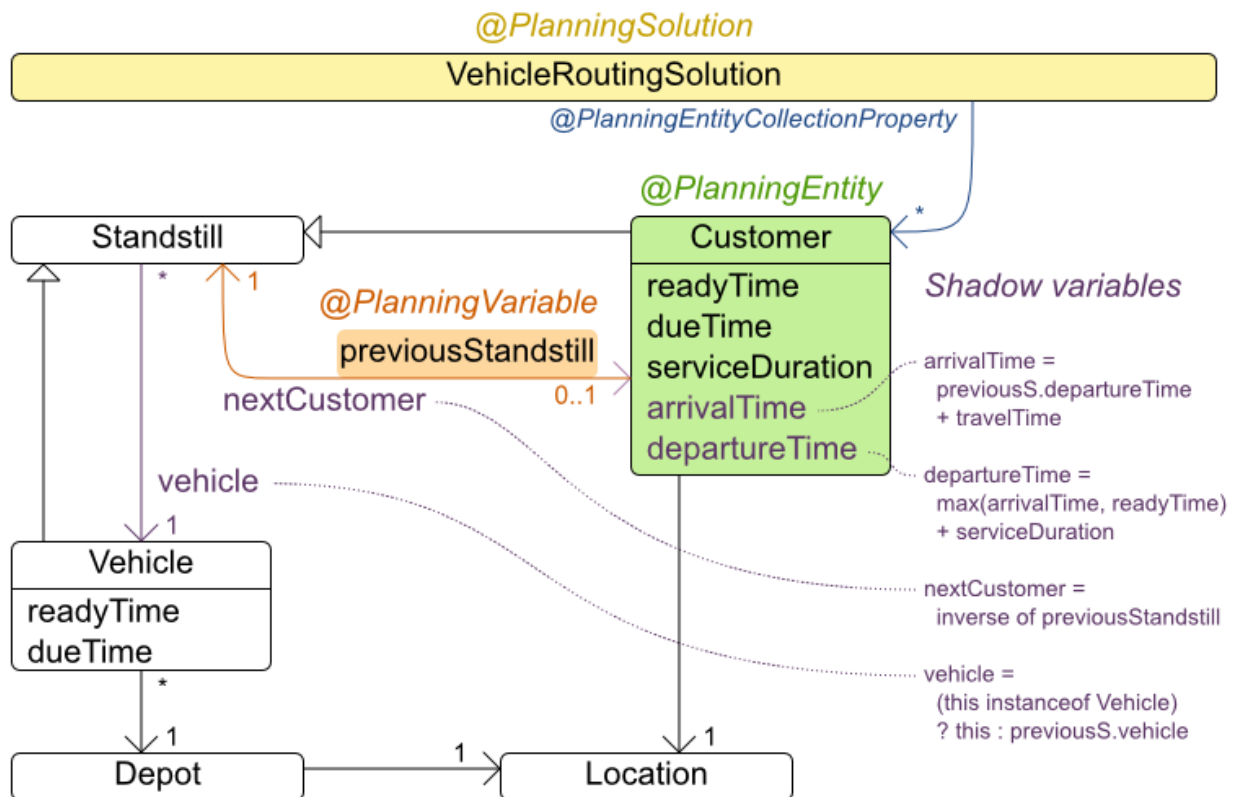

The vehicle routing with timewindows domain model makes heavily use of the shadow variable feature. This allows it to express its constraints more naturally, because properties such as **arrivalTime** and **departureTime**, are directly available on the domain model.

## Road Distances Instead of Air Distances

In the real world, vehicles cannot follow a straight line from location to location: they have to use roads and highways. From a business point of view, this matters a lot:

# Vehicle routing distance type


Can we optimize for air distances, when we need road distances or driving times?

Optimized for ...

... air distance

... road distance


... driving time

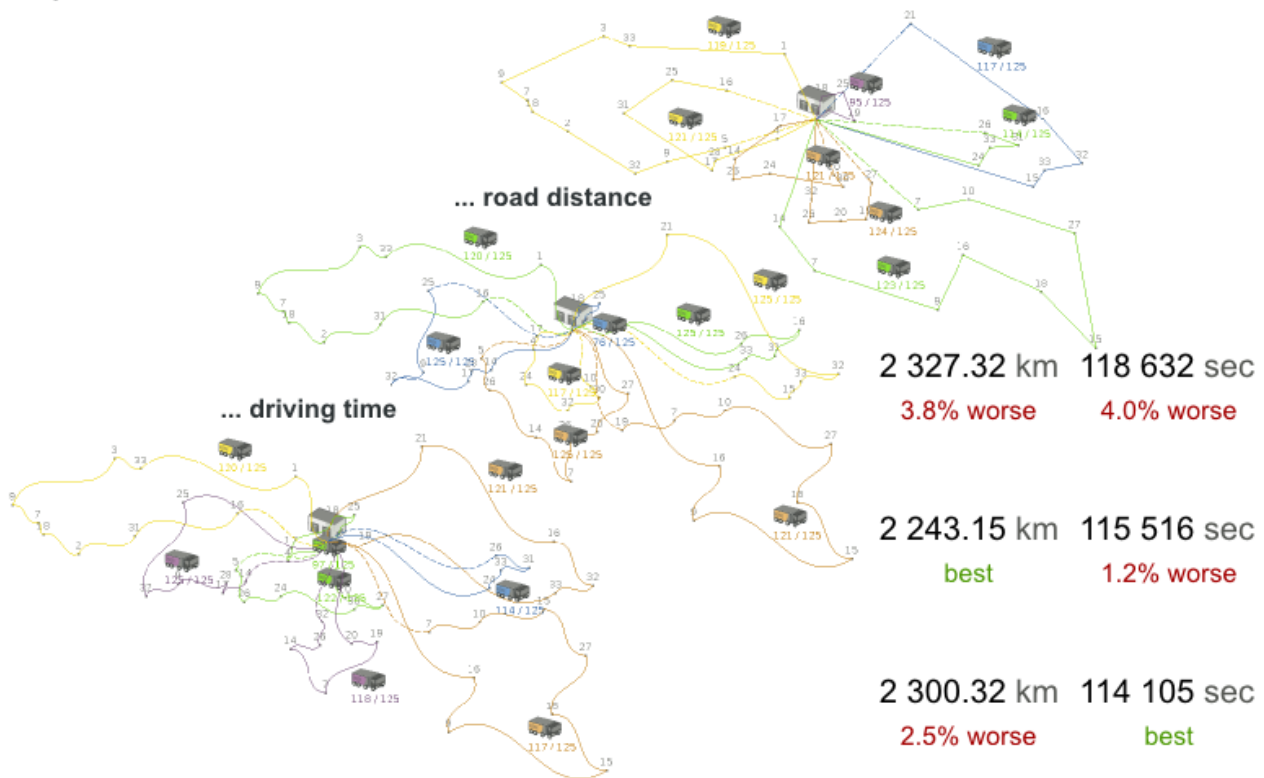

For the optimization algorithm, this does not matter much, as long as the distance between two points can be looked up (and are preferably precalculated). The road cost does not even need to be a distance, it can also be travel time, fuel cost, or a weighted function of those. There are several technologies available to precalculate road costs, such as [GraphHopper](#) (embeddable, offline Java engine), [Open MapQuest](#) (web service) and [Google Maps Client API](#) (web service).

# Integration with real maps


Google Maps or GraphHopper (OpenStreetMap) calculate distances, OptaPlanner optimizes the trips.

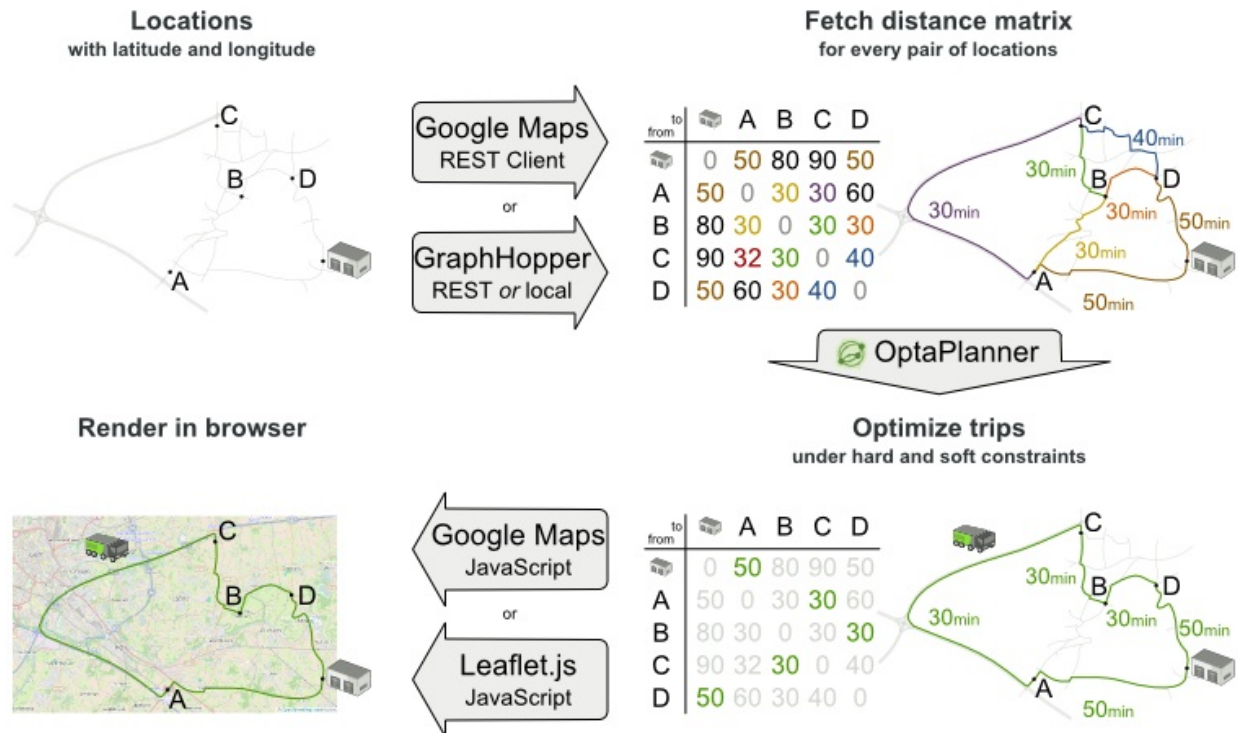


There are also several technologies to render it, such as [Leaflet](#) and [Google Maps for developers](#): the `optaplanner-webexamples-*.war` has an example which demonstrates such rendering:



## Leaflet.js

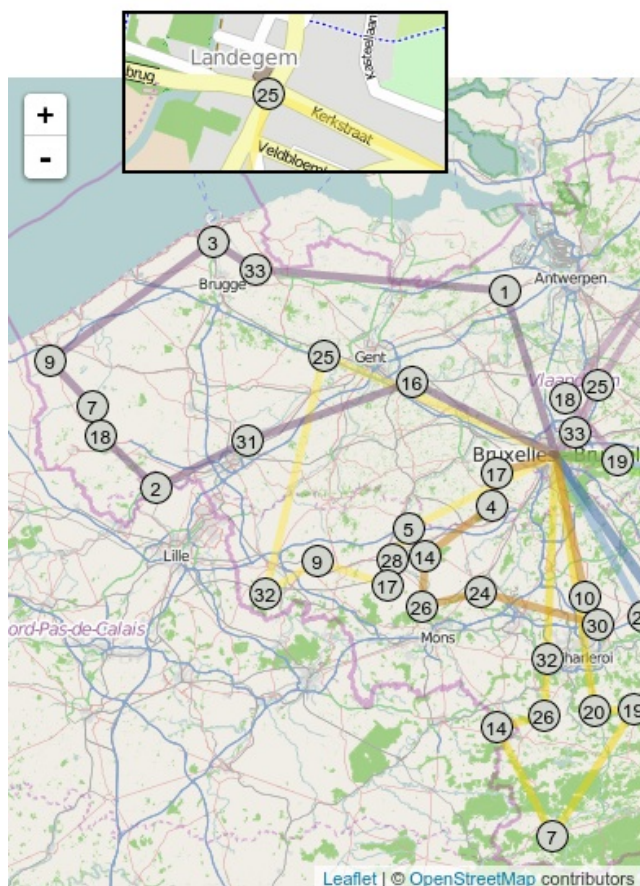


## Google Maps

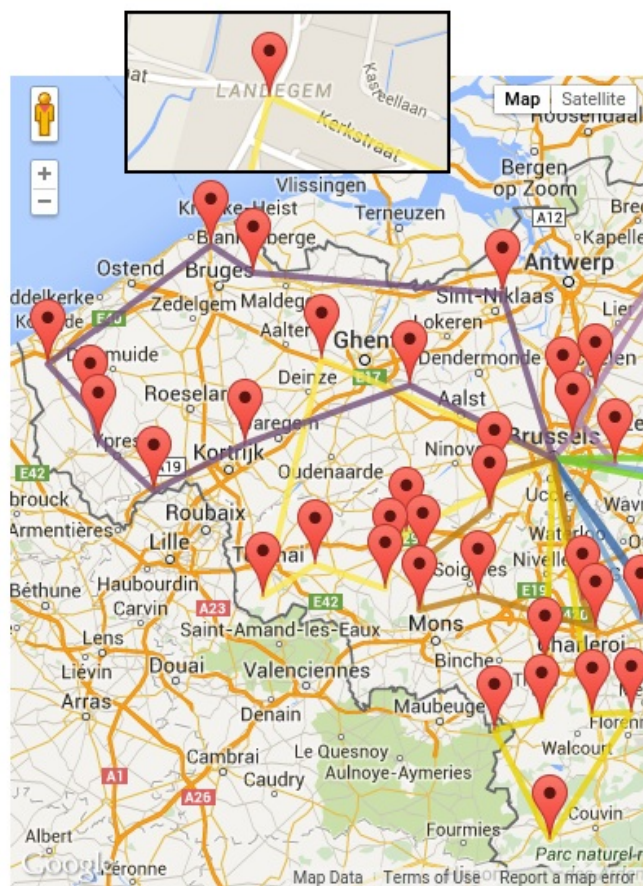

It is even possible to render the actual road routes with GraphHopper or Google Map Directions, but because of route overlaps on highways, it can become harder to see the standstill order:




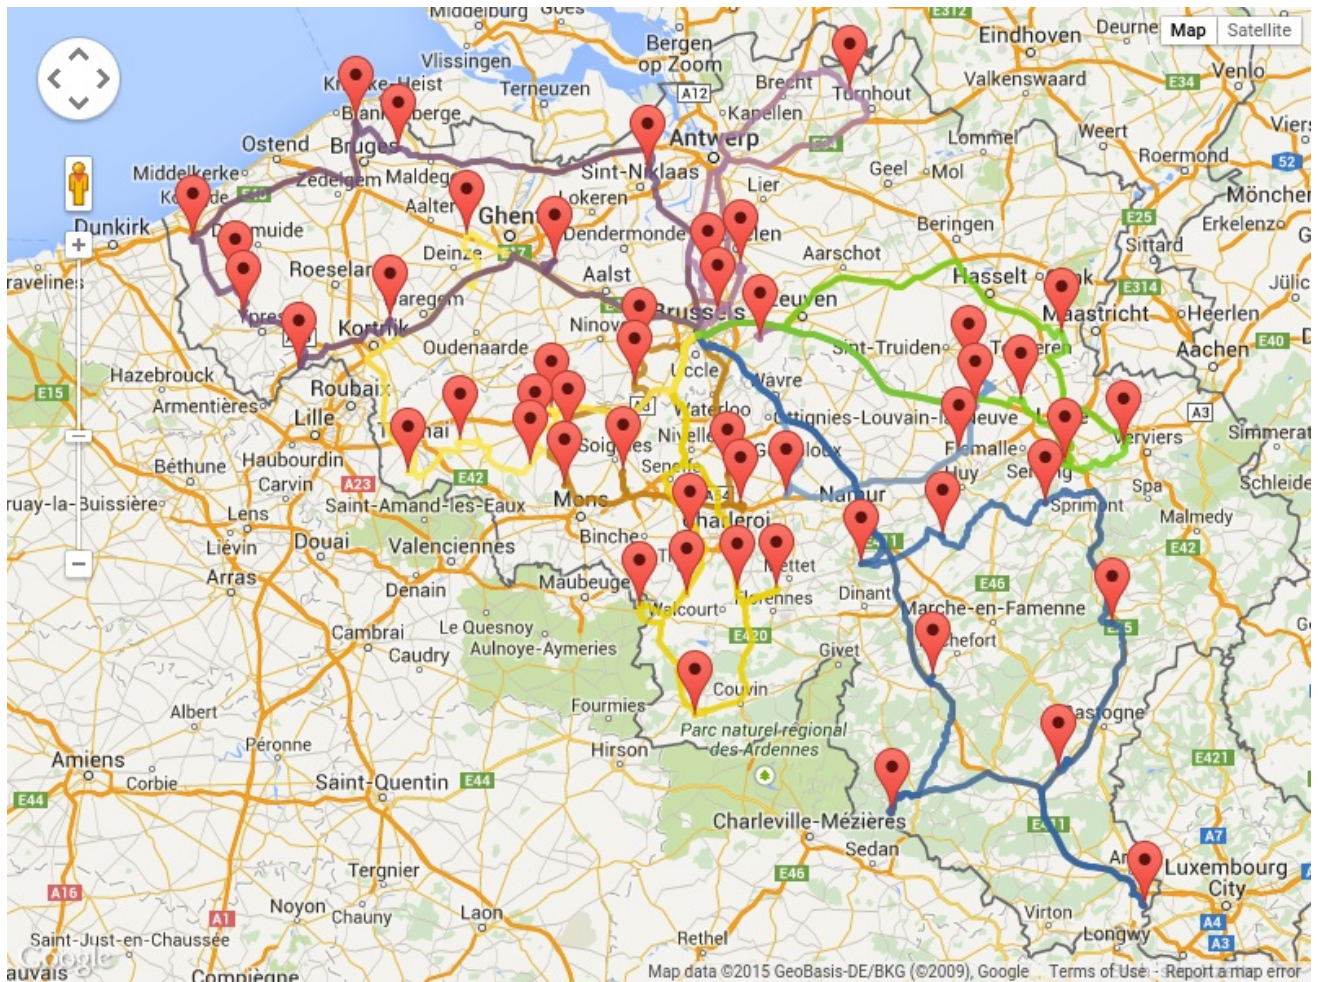

Take special care that the road costs between two points use the same optimization criteria as the one used in Planner. For example, GraphHopper etc will by default return the fastest route, not the shortest route. Don't use the km (or miles) distances of the fastest GPS routes to optimize the shortest trip in Planner: this leads to a suboptimal solution as shown below:

# Road distance triangle inequality

Routes and trips must optimize the same property to avoid suboptimal solutions.

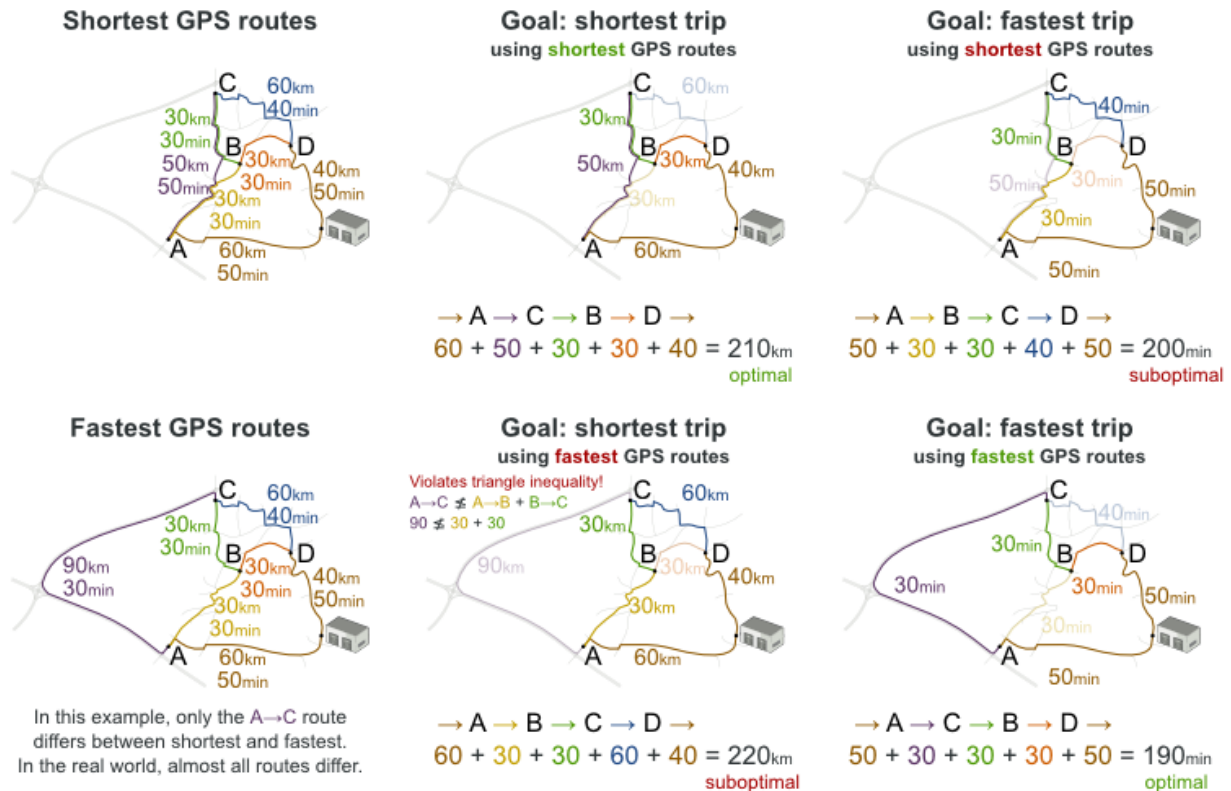


Contrary to popular belief, most users do not want the shortest route: they want the fastest route instead. They prefer highways over normal roads. They prefer normal roads over dirt roads. In the real world, the fastest and shortest route are rarely the same.

## 3.12. PROJECT JOB SCHEDULING

Schedule all jobs in time and execution mode to minimize project delays. Each job is part of a project. A job can be executed in different ways: each way is an execution mode that implies a different duration but also different resource usages. This is a form of flexible *job shop scheduling*.

# Project job scheduling

For each job, choose an execution mode and a start time.

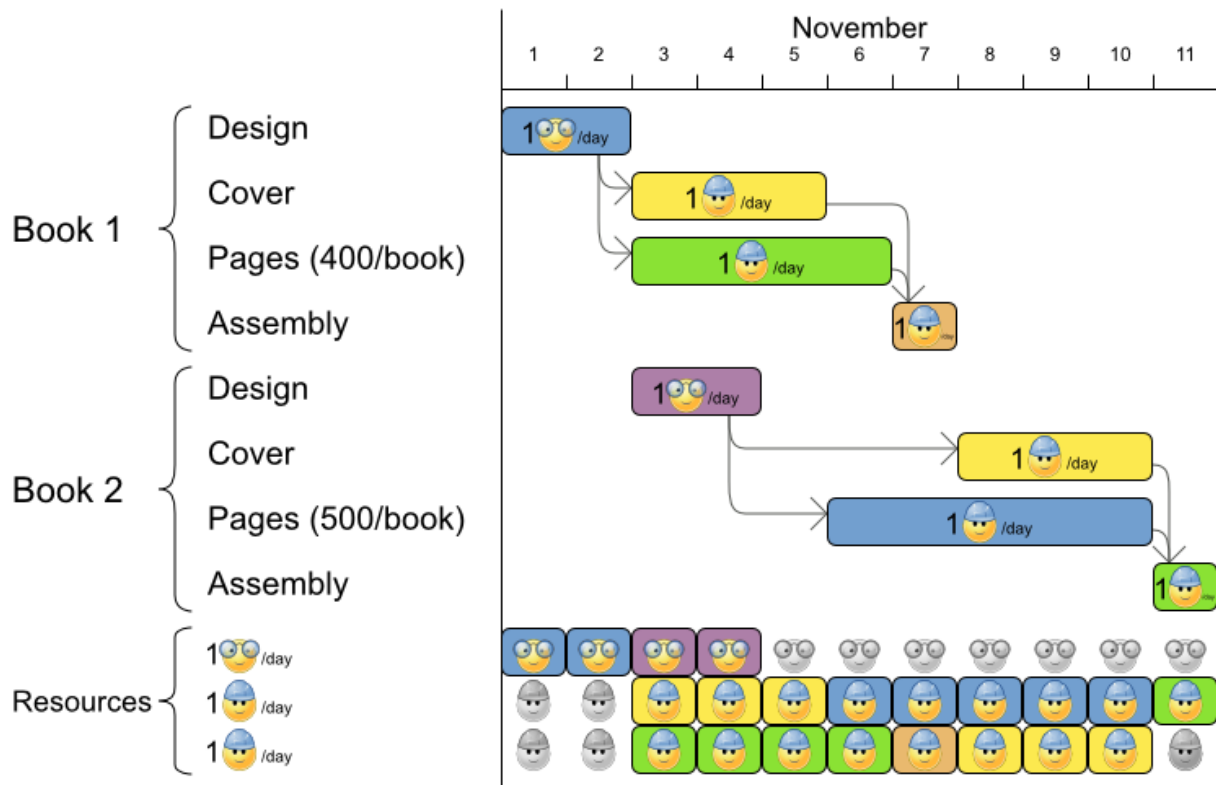

Hard constraints:

- Job precedence: a job can only start when all its predecessor jobs are finished.
- Resource capacity: do not use more resources than available.
  - Resources are local (shared between jobs of the same project) or global (shared between all jobs)
  - Resource are renewable (capacity available per day) or nonrenewable (capacity available for all days)

Medium constraints:

- Total project delay: minimize the duration (makespan) of each project.

Soft constraints:

- Total makespan: minimize the duration of the whole multi-project schedule.

The problem is defined by [the MISTA 2013 challenge](#).

## Problem size

Schedule A-1 has 2 projects, 24 jobs, 64 execution modes, 7 resources and 150 resource requirements.  
 Schedule A-2 has 2 projects, 44 jobs, 124 execution modes, 7 resources and 420 resource requirements.

```

Schedule A-3 has 2 projects, 64 jobs, 184 execution modes, 7
resources and 630 resource requirements.
Schedule A-4 has 5 projects, 60 jobs, 160 execution modes, 16
resources and 390 resource requirements.
Schedule A-5 has 5 projects, 110 jobs, 310 execution modes, 16
resources and 900 resource requirements.
Schedule A-6 has 5 projects, 160 jobs, 460 execution modes, 16
resources and 1440 resource requirements.
Schedule A-7 has 10 projects, 120 jobs, 320 execution modes, 22
resources and 900 resource requirements.
Schedule A-8 has 10 projects, 220 jobs, 620 execution modes, 22
resources and 1860 resource requirements.
Schedule A-9 has 10 projects, 320 jobs, 920 execution modes, 31
resources and 2880 resource requirements.
Schedule A-10 has 10 projects, 320 jobs, 920 execution modes, 31
resources and 2970 resource requirements.
Schedule B-1 has 10 projects, 120 jobs, 320 execution modes, 31
resources and 900 resource requirements.
Schedule B-2 has 10 projects, 220 jobs, 620 execution modes, 22
resources and 1740 resource requirements.
Schedule B-3 has 10 projects, 320 jobs, 920 execution modes, 31
resources and 3060 resource requirements.
Schedule B-4 has 15 projects, 180 jobs, 480 execution modes, 46
resources and 1530 resource requirements.
Schedule B-5 has 15 projects, 330 jobs, 930 execution modes, 46
resources and 2760 resource requirements.
Schedule B-6 has 15 projects, 480 jobs, 1380 execution modes, 46
resources and 4500 resource requirements.
Schedule B-7 has 20 projects, 240 jobs, 640 execution modes, 61
resources and 1710 resource requirements.
Schedule B-8 has 20 projects, 440 jobs, 1240 execution modes, 42
resources and 3180 resource requirements.
Schedule B-9 has 20 projects, 640 jobs, 1840 execution modes, 61
resources and 5940 resource requirements.
Schedule B-10 has 20 projects, 460 jobs, 1300 execution modes, 42
resources and 4260 resource requirements.

```

### 3.13. TASK ASSIGNING

Assign each task to a spot in an employee's queue. Each task has a duration which is affected by the employee's affinity level with the task's customer.

Hard constraints:

- Skill: Each task requires one or more skills. The employee must possess all these skills.

Soft level 0 constraints:

- Critical tasks: Complete critical tasks first, sooner than major and minor tasks.

Soft level 1 constraints:

- Minimize makespan: Reduce the time to complete all tasks.
  - Start with the longest working employee first, then the second longest working employee and so forth, to create fairness and load balancing.


Soft level 2 constraints:

- Major tasks: Complete major tasks as soon as possible, sooner than minor tasks.

Soft level 3 constraints:

- Minor tasks: Complete minor tasks as soon as possible.

**Figure 3.9. Value proposition**

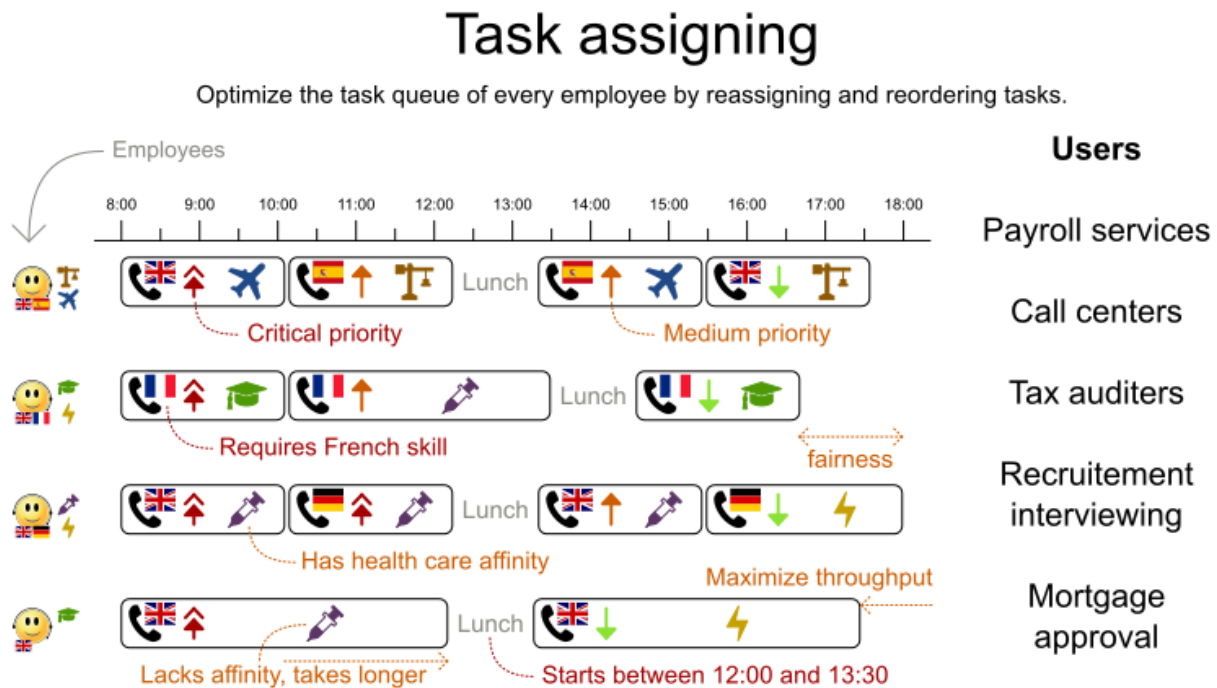


## Problem size

24tasks-8employees has 24 tasks, 6 skills, 8 employees, 4 task types and 4 customers with a search space of  $10^{30}$ .  
 50tasks-5employees has 50 tasks, 5 skills, 5 employees, 10 task types and 10 customers with a search space of  $10^{69}$ .  
 100tasks-5employees has 100 tasks, 5 skills, 5 employees, 20 task types and 15 customers with a search space of  $10^{164}$ .  
 500tasks-20employees has 500 tasks, 6 skills, 20 employees, 100 task types and 60 customers with a search space of  $10^{1168}$ .



Figure 3.10. Domain model


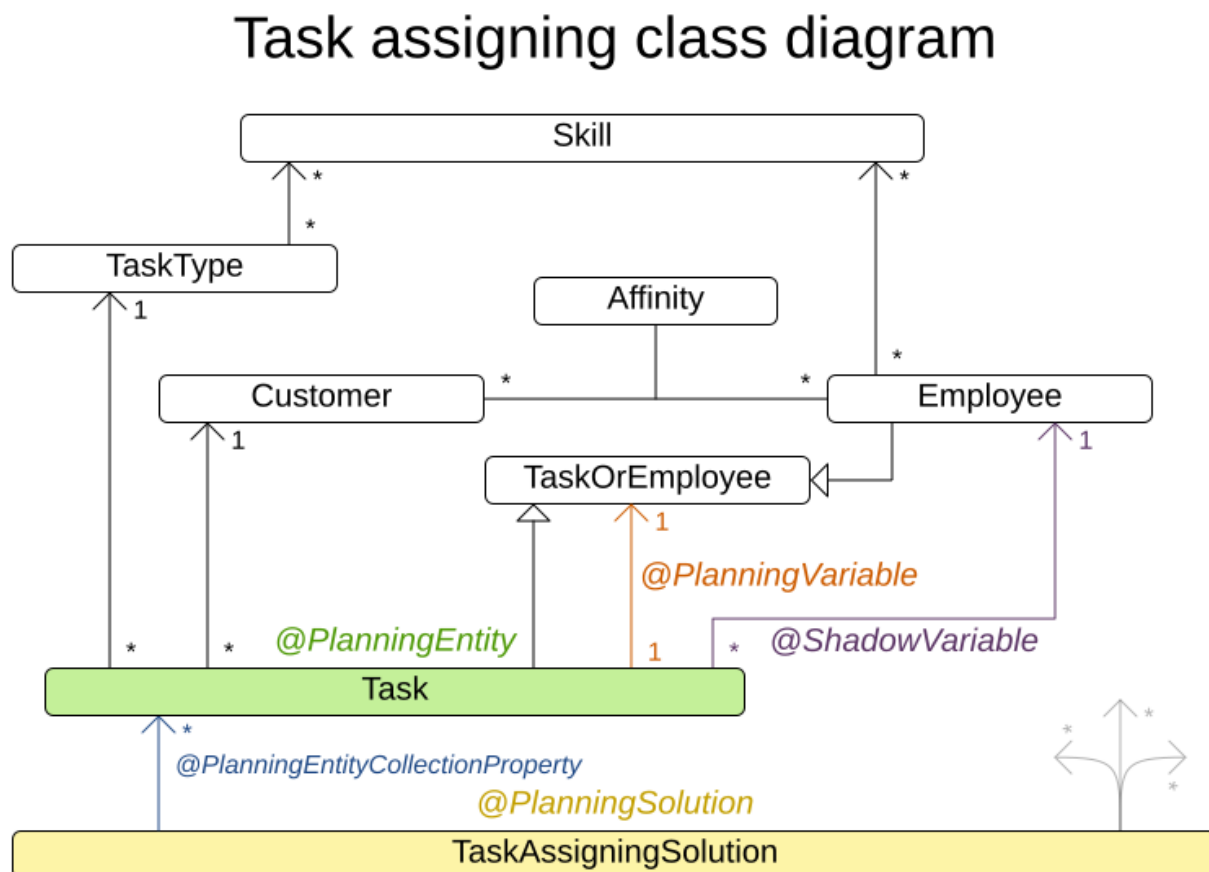


### 3.14. EXAM TIMETABLING (ITC 2007 TRACK 1 - EXAMINATION)

Schedule each exam into a period and into a room. Multiple exams can share the same room during the same period.

## Examination timetabling

Assign each exam a period and a room.

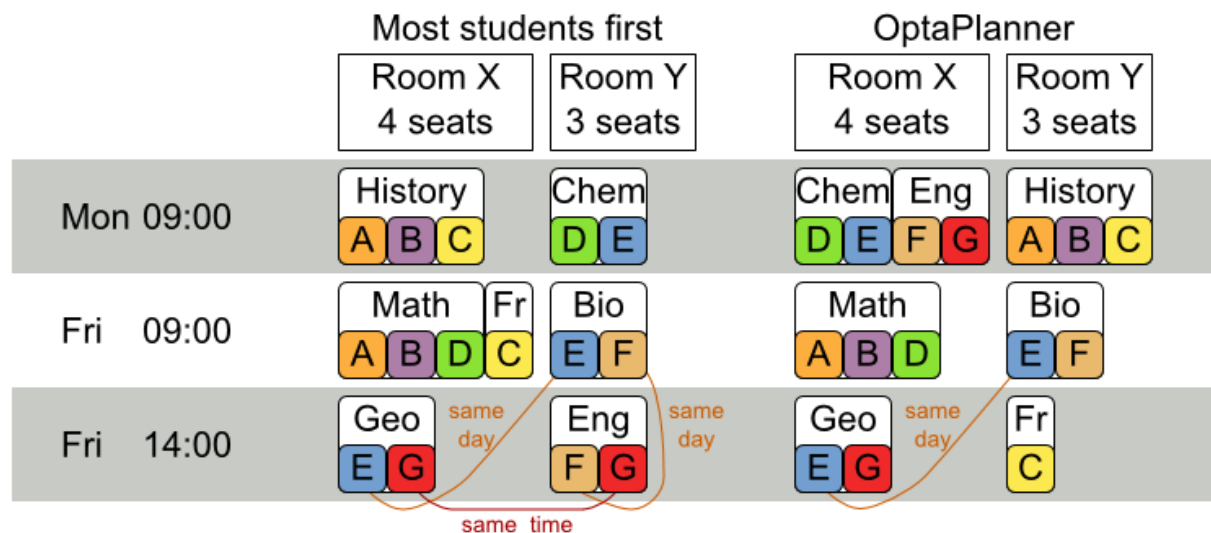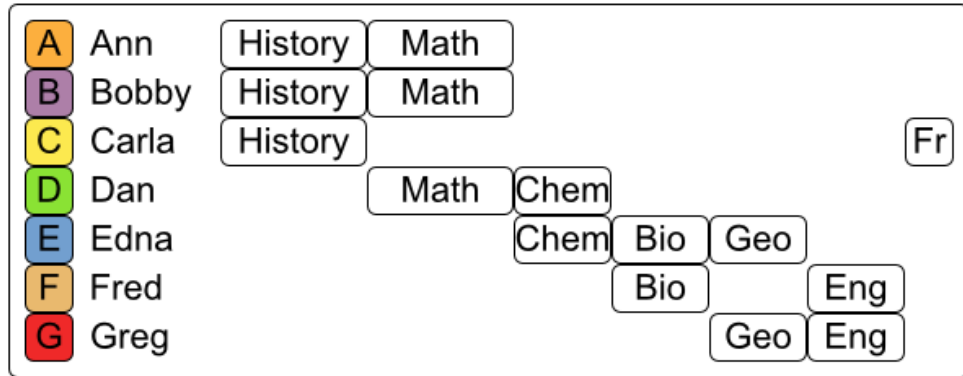

Hard constraints:

- Exam conflict: Two exams that share students must not occur in the same period.
- Room capacity: A room's seating capacity must suffice at all times.
- Period duration: A period's duration must suffice for all of its exams.
- Period related hard constraints (specified per dataset):
  - Coincidence: Two specified exams must use the same period (but possibly another room).
  - Exclusion: Two specified exams must not use the same period.
  - After: A specified exam must occur in a period after another specified exam's period.
- Room related hard constraints (specified per dataset):
  - Exclusive: One specified exam should not have to share its room with any other exam.

Soft constraints (each of which has a parametrized penalty):

- The same student should not have two exams in a row.
- The same student should not have two exams on the same day.
- Period spread: Two exams that share students should be a number of periods apart.
- Mixed durations: Two exams that share a room should not have different durations.

- Front load: Large exams should be scheduled earlier in the schedule.
- Period penalty (specified per dataset): Some periods have a penalty when used.
- Room penalty (specified per dataset): Some rooms have a penalty when used.

It uses large test data sets of real-life universities.

The problem is defined by [the International Timetabling Competition 2007 track 1](#). Geoffrey De Smet finished 4th in that competition with a very early version of Planner. Many improvements have been made since then.

## Problem Size


```
exam_comp_set1 has 7883 students, 607 exams, 54 periods, 7 rooms, 12
period constraints and 0 room constraints with a search space of 10^1564.
exam_comp_set2 has 12484 students, 870 exams, 40 periods, 49 rooms, 12
period constraints and 2 room constraints with a search space of 10^2864.
exam_comp_set3 has 16365 students, 934 exams, 36 periods, 48 rooms, 168
period constraints and 15 room constraints with a search space of 10^3023.
exam_comp_set4 has 4421 students, 273 exams, 21 periods, 1 rooms, 40
period constraints and 0 room constraints with a search space of 10^360.
exam_comp_set5 has 8719 students, 1018 exams, 42 periods, 3 rooms, 27
period constraints and 0 room constraints with a search space of 10^2138.
exam_comp_set6 has 7909 students, 242 exams, 16 periods, 8 rooms, 22
period constraints and 0 room constraints with a search space of 10^509.
exam_comp_set7 has 13795 students, 1096 exams, 80 periods, 15 rooms, 28
period constraints and 0 room constraints with a search space of 10^3374.
exam_comp_set8 has 7718 students, 598 exams, 80 periods, 8 rooms, 20
period constraints and 1 room constraints with a search space of 10^1678.
```

### 3.14.1. Domain model for Exam timetabling

The following diagram shows the main examination domain classes:



Figure 3.11. Examination domain class diagram

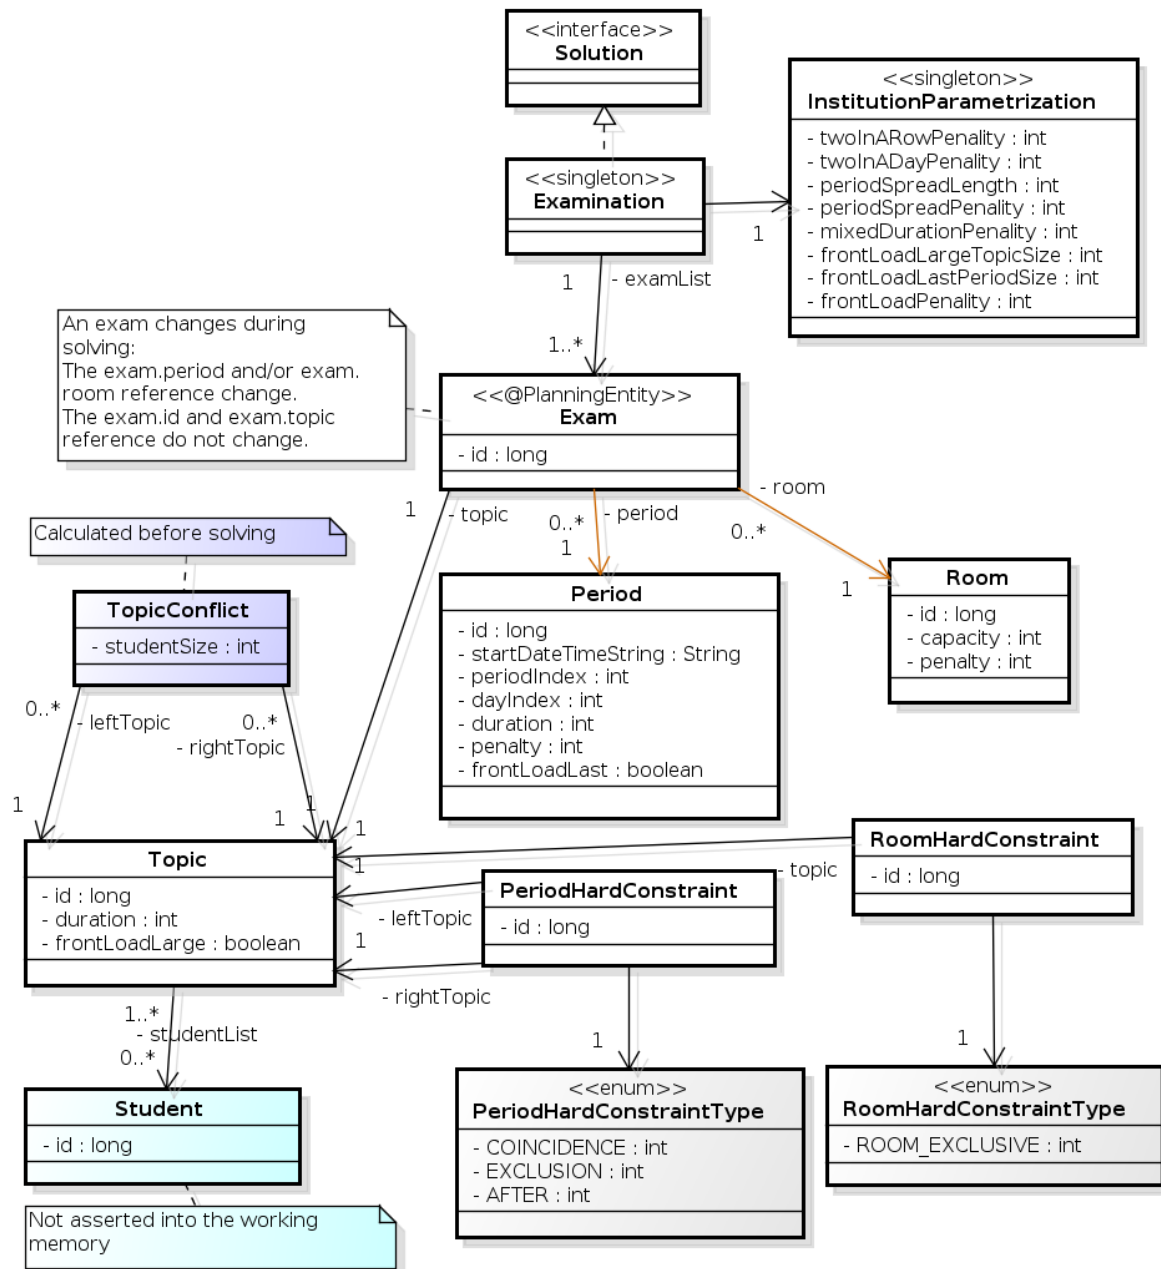


Notice that we've split up the exam concept into an **Exam** class and a **Topic** class. The **Exam** instances change during solving (this is the planning entity class), when their period or room property changes. The **Topic**, **Period** and **Room** instances never change during solving (these are problem facts, just like some other classes).

### 3.15. NURSE ROSTERING (INRC 2010)

For each shift, assign a nurse to work that shift.

# Employee shift rostering

Populate each work shift with a nurse.

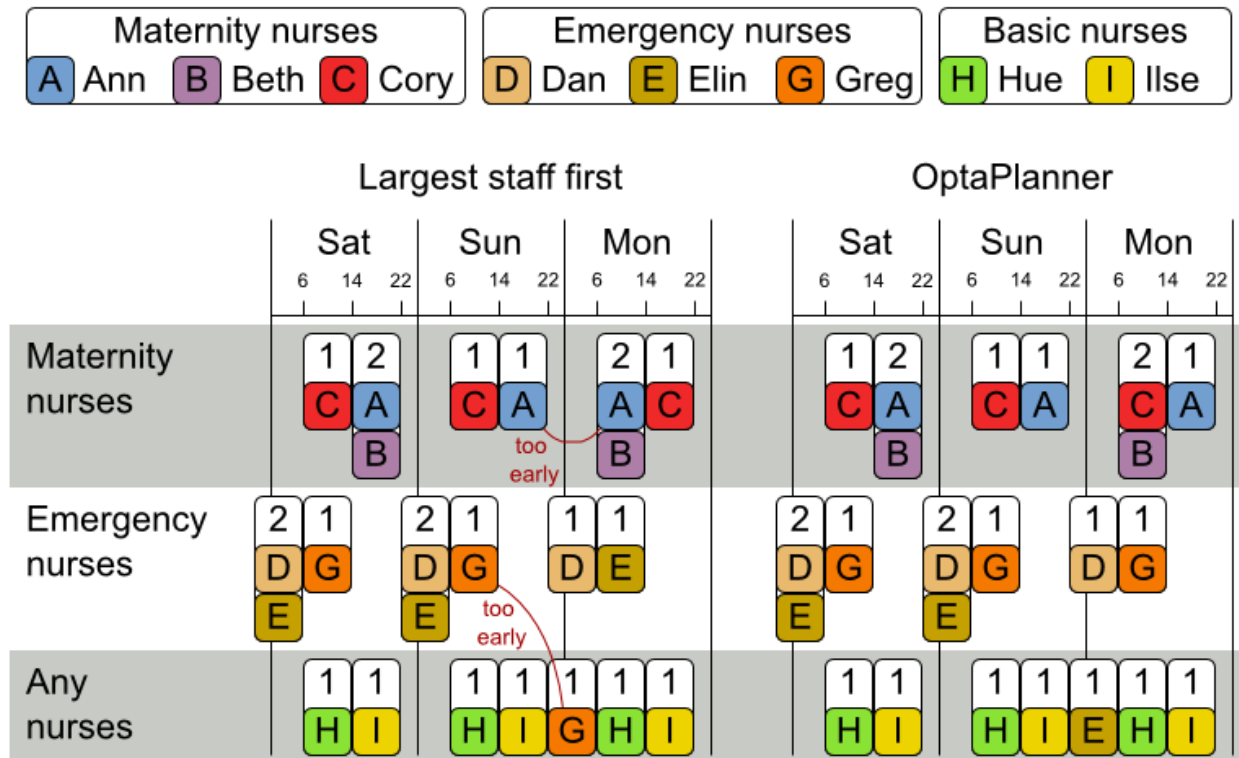

Hard constraints:

- **No unassigned shifts** (built-in): Every shift need to be assigned to an employee.
- **Shift conflict**: An employee can have only one shift per day.


Soft constraints:

- Contract obligations. The business frequently violates these, so they decided to define these as soft constraints instead of hard constraints.
  - **Minimum and maximum assignments**: Each employee needs to work more than x shifts and less than y shifts (depending on their contract).
  - **Minimum and maximum consecutive working days**: Each employee needs to work between x and y days in a row (depending on their contract).
  - **Minimum and maximum consecutive free days**: Each employee needs to be free between x and y days in a row (depending on their contract).
  - **Minimum and maximum consecutive working weekends**: Each employee needs to work between x and y weekends in a row (depending on their contract).
  - **Complete weekends**: Each employee needs to work every day in a weekend or not at all.
  - **Identical shift types during weekend**: Each weekend shift for the same weekend of the same employee must be the same shift type.

- **Unwanted patterns:** A combination of unwanted shift types in a row. For example: a late shift followed by an early shift followed by a late shift.
- Employee wishes:
  - **Day on request:** An employee wants to work on a specific day.
  - **Day off request:** An employee does not want to work on a specific day.
  - **Shift on request:** An employee wants to be assigned to a specific shift.
  - **Shift off request:** An employee does not want to be assigned to a specific shift.
- **Alternative skill:** An employee assigned to a skill should have a proficiency in every skill required by that shift.

The problem is defined by [the International Nurse Rostering Competition 2010](#).

Figure 3.12. Value proposition

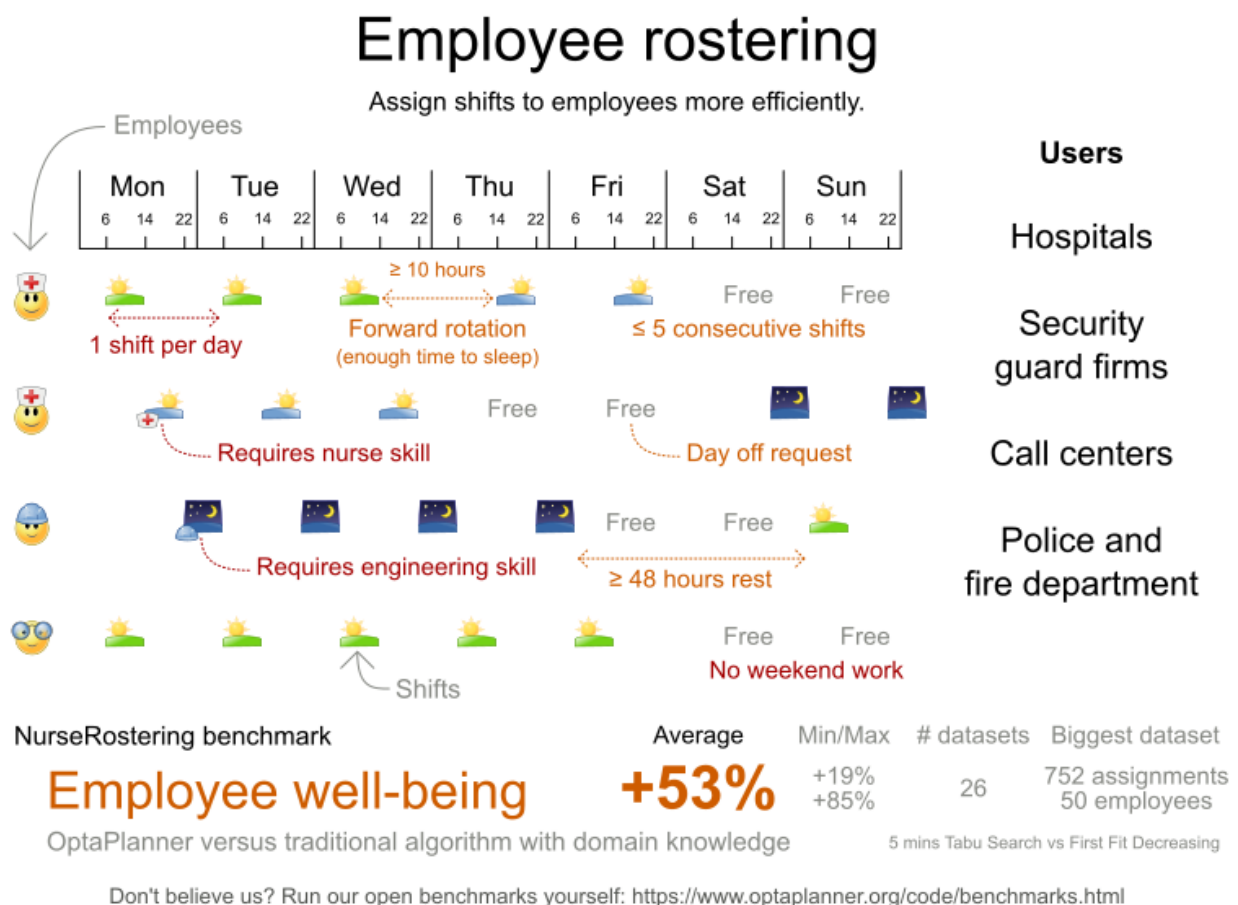

### Problem size

There are three dataset types:

- sprint: must be solved in seconds.
- medium: must be solved in minutes.
- long: must be solved in hours.

toy1 has 1 skills, 3 shiftTypes, 2 patterns, 1 contracts, 6 employees, 7 shiftDates, 35 shiftAssignments and 0 requests with a search space of  $10^{27}$ .

toy2 has 1 skills, 3 shiftTypes, 3 patterns, 2 contracts, 20 employees, 28 shiftDates, 180 shiftAssignments and 140 requests with a search space of  $10^{234}$ .

sprint01 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint02 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint03 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint04 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint05 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint06 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint07 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint08 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint09 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint10 has 1 skills, 4 shiftTypes, 3 patterns, 4 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_hint01 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_hint02 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_hint03 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_late01 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_late02 has 1 skills, 3 shiftTypes, 4 patterns, 3 contracts, 10 employees, 28 shiftDates, 144 shiftAssignments and 139 requests with a search space of  $10^{144}$ .

sprint\_late03 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10 employees, 28 shiftDates, 160 shiftAssignments and 150 requests with a search space of  $10^{160}$ .

sprint\_late04 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10

employees, 28 shiftDates, 160 shiftAssignments and 150 requests with a search space of  $10^{160}$ .

sprint\_late05 has 1 skills, 4 shiftTypes, 8 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_late06 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_late07 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

sprint\_late08 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 0 requests with a search space of  $10^{152}$ .

sprint\_late09 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 0 requests with a search space of  $10^{152}$ .

sprint\_late10 has 1 skills, 4 shiftTypes, 0 patterns, 3 contracts, 10 employees, 28 shiftDates, 152 shiftAssignments and 150 requests with a search space of  $10^{152}$ .

medium01 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 31 employees, 28 shiftDates, 608 shiftAssignments and 403 requests with a search space of  $10^{906}$ .

medium02 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 31 employees, 28 shiftDates, 608 shiftAssignments and 403 requests with a search space of  $10^{906}$ .

medium03 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 31 employees, 28 shiftDates, 608 shiftAssignments and 403 requests with a search space of  $10^{906}$ .

medium04 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 31 employees, 28 shiftDates, 608 shiftAssignments and 403 requests with a search space of  $10^{906}$ .

medium05 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 31 employees, 28 shiftDates, 608 shiftAssignments and 403 requests with a search space of  $10^{906}$ .

medium\_hint01 has 1 skills, 4 shiftTypes, 7 patterns, 4 contracts, 30 employees, 28 shiftDates, 428 shiftAssignments and 390 requests with a search space of  $10^{632}$ .

medium\_hint02 has 1 skills, 4 shiftTypes, 7 patterns, 3 contracts, 30 employees, 28 shiftDates, 428 shiftAssignments and 390 requests with a search space of  $10^{632}$ .

medium\_hint03 has 1 skills, 4 shiftTypes, 7 patterns, 4 contracts, 30 employees, 28 shiftDates, 428 shiftAssignments and 390 requests with a search space of  $10^{632}$ .

medium\_late01 has 1 skills, 4 shiftTypes, 7 patterns, 4 contracts, 30 employees, 28 shiftDates, 424 shiftAssignments and 390 requests with a search space of  $10^{626}$ .

medium\_late02 has 1 skills, 4 shiftTypes, 7 patterns, 3 contracts, 30 employees, 28 shiftDates, 428 shiftAssignments and 390 requests with a search space of  $10^{632}$ .

medium\_late03 has 1 skills, 4 shiftTypes, 0 patterns, 4 contracts, 30 employees, 28 shiftDates, 428 shiftAssignments and 390 requests with a search space of  $10^{632}$ .

medium\_late04 has 1 skills, 4 shiftTypes, 7 patterns, 3 contracts, 30 employees, 28 shiftDates, 416 shiftAssignments and 390 requests with a

search space of  $10^{614}$ .

medium\_late05 has 2 skills, 5 shiftTypes, 7 patterns, 4 contracts, 30 employees, 28 shiftDates, 452 shiftAssignments and 390 requests with a search space of  $10^{667}$ .

long01 has 2 skills, 5 shiftTypes, 3 patterns, 3 contracts, 49 employees, 28 shiftDates, 740 shiftAssignments and 735 requests with a search space of  $10^{1250}$ .

long02 has 2 skills, 5 shiftTypes, 3 patterns, 3 contracts, 49 employees, 28 shiftDates, 740 shiftAssignments and 735 requests with a search space of  $10^{1250}$ .

long03 has 2 skills, 5 shiftTypes, 3 patterns, 3 contracts, 49 employees, 28 shiftDates, 740 shiftAssignments and 735 requests with a search space of  $10^{1250}$ .

long04 has 2 skills, 5 shiftTypes, 3 patterns, 3 contracts, 49 employees, 28 shiftDates, 740 shiftAssignments and 735 requests with a search space of  $10^{1250}$ .

long05 has 2 skills, 5 shiftTypes, 3 patterns, 3 contracts, 49 employees, 28 shiftDates, 740 shiftAssignments and 735 requests with a search space of  $10^{1250}$ .

long\_hint01 has 2 skills, 5 shiftTypes, 9 patterns, 3 contracts, 50 employees, 28 shiftDates, 740 shiftAssignments and 0 requests with a search space of  $10^{1257}$ .

long\_hint02 has 2 skills, 5 shiftTypes, 7 patterns, 3 contracts, 50 employees, 28 shiftDates, 740 shiftAssignments and 0 requests with a search space of  $10^{1257}$ .

long\_hint03 has 2 skills, 5 shiftTypes, 7 patterns, 3 contracts, 50 employees, 28 shiftDates, 740 shiftAssignments and 0 requests with a search space of  $10^{1257}$ .

long\_late01 has 2 skills, 5 shiftTypes, 9 patterns, 3 contracts, 50 employees, 28 shiftDates, 752 shiftAssignments and 0 requests with a search space of  $10^{1277}$ .

long\_late02 has 2 skills, 5 shiftTypes, 9 patterns, 4 contracts, 50 employees, 28 shiftDates, 752 shiftAssignments and 0 requests with a search space of  $10^{1277}$ .


long\_late03 has 2 skills, 5 shiftTypes, 9 patterns, 3 contracts, 50 employees, 28 shiftDates, 752 shiftAssignments and 0 requests with a search space of  $10^{1277}$ .

long\_late04 has 2 skills, 5 shiftTypes, 9 patterns, 4 contracts, 50 employees, 28 shiftDates, 752 shiftAssignments and 0 requests with a search space of  $10^{1277}$ .

long\_late05 has 2 skills, 5 shiftTypes, 9 patterns, 3 contracts, 50 employees, 28 shiftDates, 740 shiftAssignments and 0 requests with a search space of  $10^{1257}$ .


Figure 3.13. Domain model

## Nurse rostering class diagram

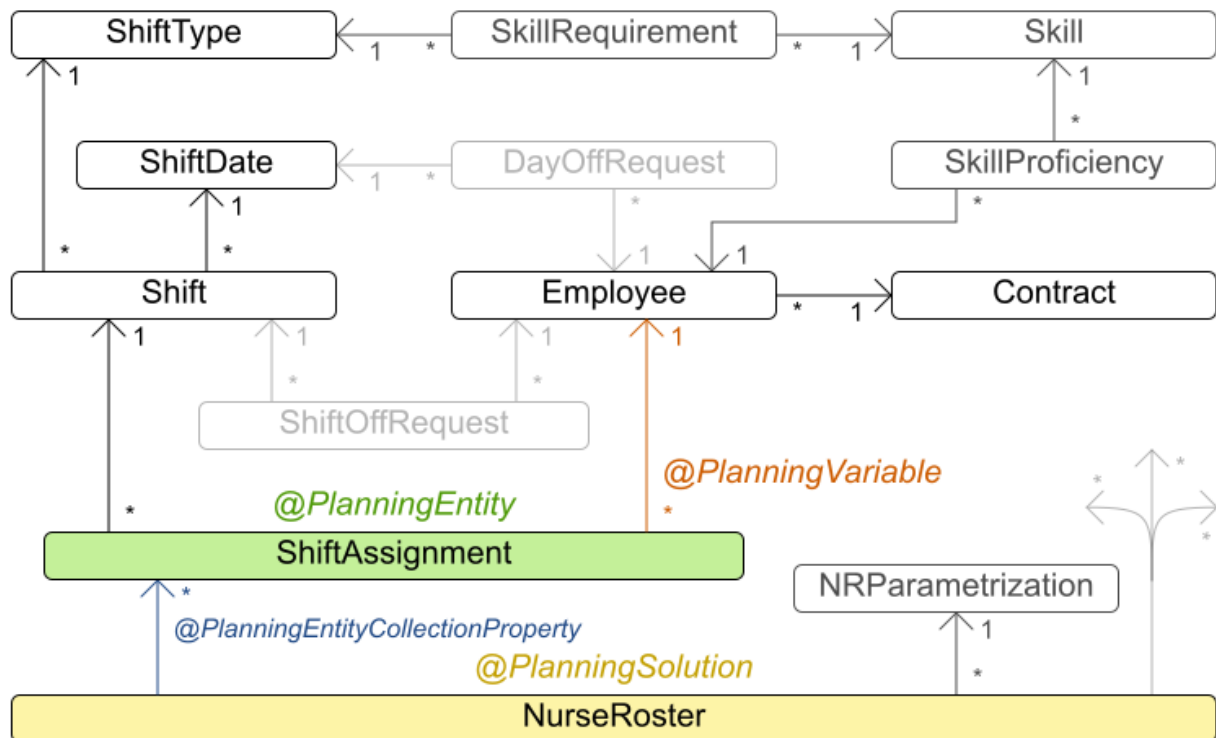

### 3.16. TRAVELING TOURNAMENT PROBLEM (TTP)

Schedule matches between  $n$  teams.

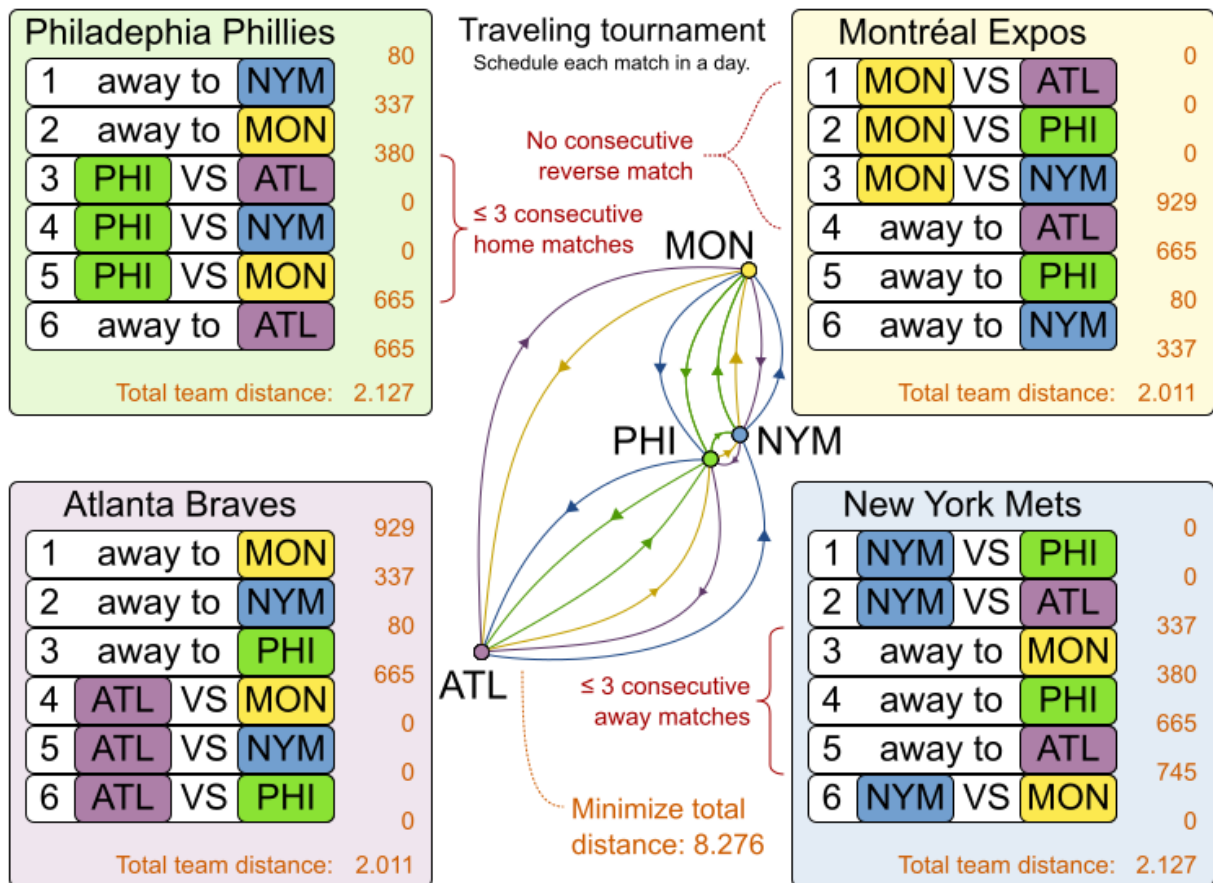

Hard constraints:

- Each team plays twice against every other team: once home and once away.
- Each team has exactly one match on each timeslot.
- No team must have more than three consecutive home or three consecutive away matches.
- No repeaters: no two consecutive matches of the same two opposing teams.

Soft constraints:

- Minimize the total distance traveled by all teams.

The problem is defined on [Michael Trick's website](#) (which contains the world records too).

### Problem size

1-n104	has 6 days,	4 teams and	12 matches with a search space of $10^5$ .
1-n106	has 10 days,	6 teams and	30 matches with a search space of $10^{19}$ .
1-n108	has 14 days,	8 teams and	56 matches with a search space of $10^{43}$ .
1-n110	has 18 days,	10 teams and	90 matches with a search space of $10^{79}$ .
1-n112	has 22 days,	12 teams and	132 matches with a search space of $10^{126}$ .



1-nl14	has 26 days, 14 teams and	182 matches with a search space of
10 <sup>186</sup> .		
1-nl16	has 30 days, 16 teams and	240 matches with a search space of
10 <sup>259</sup> .		
2-bra24	has 46 days, 24 teams and	552 matches with a search space of
10 <sup>692</sup> .		
3-nfl16	has 30 days, 16 teams and	240 matches with a search space of
10 <sup>259</sup> .		
3-nfl18	has 34 days, 18 teams and	306 matches with a search space of
10 <sup>346</sup> .		
3-nfl20	has 38 days, 20 teams and	380 matches with a search space of
10 <sup>447</sup> .		
3-nfl22	has 42 days, 22 teams and	462 matches with a search space of
10 <sup>562</sup> .		
3-nfl24	has 46 days, 24 teams and	552 matches with a search space of
10 <sup>692</sup> .		
3-nfl26	has 50 days, 26 teams and	650 matches with a search space of
10 <sup>838</sup> .		
3-nfl28	has 54 days, 28 teams and	756 matches with a search space of
10 <sup>999</sup> .		
3-nfl30	has 58 days, 30 teams and	870 matches with a search space of
10 <sup>1175</sup> .		
3-nfl32	has 62 days, 32 teams and	992 matches with a search space of
10 <sup>1367</sup> .		
4-super04	has 6 days, 4 teams and	12 matches with a search space of
10 <sup>5</sup> .		
4-super06	has 10 days, 6 teams and	30 matches with a search space of
10 <sup>19</sup> .		
4-super08	has 14 days, 8 teams and	56 matches with a search space of
10 <sup>43</sup> .		
4-super10	has 18 days, 10 teams and	90 matches with a search space of
10 <sup>79</sup> .		
4-super12	has 22 days, 12 teams and	132 matches with a search space of
10 <sup>126</sup> .		
4-super14	has 26 days, 14 teams and	182 matches with a search space of
10 <sup>186</sup> .		
5-galaxy04	has 6 days, 4 teams and	12 matches with a search space of
10 <sup>5</sup> .		
5-galaxy06	has 10 days, 6 teams and	30 matches with a search space of
10 <sup>19</sup> .		
5-galaxy08	has 14 days, 8 teams and	56 matches with a search space of
10 <sup>43</sup> .		
5-galaxy10	has 18 days, 10 teams and	90 matches with a search space of
10 <sup>79</sup> .		
5-galaxy12	has 22 days, 12 teams and	132 matches with a search space of
10 <sup>126</sup> .		
5-galaxy14	has 26 days, 14 teams and	182 matches with a search space of
10 <sup>186</sup> .		
5-galaxy16	has 30 days, 16 teams and	240 matches with a search space of
10 <sup>259</sup> .		
5-galaxy18	has 34 days, 18 teams and	306 matches with a search space of
10 <sup>346</sup> .		
5-galaxy20	has 38 days, 20 teams and	380 matches with a search space of
10 <sup>447</sup> .		
5-galaxy22	has 42 days, 22 teams and	462 matches with a search space of
10 <sup>562</sup> .		

```
5-galaxy24 has 46 days, 24 teams and 552 matches with a search space of
10^692.
5-galaxy26 has 50 days, 26 teams and 650 matches with a search space of
10^838.
5-galaxy28 has 54 days, 28 teams and 756 matches with a search space of
10^999.
5-galaxy30 has 58 days, 30 teams and 870 matches with a search space of
10^1175.
5-galaxy32 has 62 days, 32 teams and 992 matches with a search space of
10^1367.
5-galaxy34 has 66 days, 34 teams and 1122 matches with a search space of
10^1576.
5-galaxy36 has 70 days, 36 teams and 1260 matches with a search space of
10^1801.
5-galaxy38 has 74 days, 38 teams and 1406 matches with a search space of
10^2042.
5-galaxy40 has 78 days, 40 teams and 1560 matches with a search space of
10^2301.
```

### 3.17. CHEAP TIME SCHEDULING

Schedule all tasks in time and on a machine to minimize power cost. Power prices differs in time. This is a form of *job shop scheduling*.

Hard constraints:

- Start time limits: Each task must start between its earliest start and latest start limit.
- Maximum capacity: The maximum capacity for each resource for each machine must not be exceeded.
- Startup and shutdown: Each machine must be active in the periods during which it has assigned tasks. Between tasks it is allowed to be idle to avoid startup and shutdown costs.

Medium constraints:

- Power cost: Minimize the total power cost of the whole schedule.
  - Machine power cost: Each active or idle machine consumes power, which infers a power cost (depending on the power price during that time).
  - Task power cost: Each task consumes power too, which infers a power cost (depending on the power price during its time).
  - Machine startup and shutdown cost: Every time a machine starts up or shuts down, an extra cost is inflicted.

Soft constraints (addendum to the original problem definition):

- Start early: Prefer starting a task sooner rather than later.

The problem is defined by [the ICON challenge](#).

#### Problem size

```
sample01 has 3 resources, 2 machines, 288 periods and 25 tasks with
```

a search space of	10 <sup>53</sup> .		
sample02 has 3 resources,		2 machines, 288 periods and	50 tasks with
a search space of	10 <sup>114</sup> .		
sample03 has 3 resources,		2 machines, 288 periods and	100 tasks with
a search space of	10 <sup>226</sup> .		
sample04 has 3 resources,		5 machines, 288 periods and	100 tasks with
a search space of	10 <sup>266</sup> .		
sample05 has 3 resources,		2 machines, 288 periods and	250 tasks with
a search space of	10 <sup>584</sup> .		
sample06 has 3 resources,		5 machines, 288 periods and	250 tasks with
a search space of	10 <sup>673</sup> .		
sample07 has 3 resources,		2 machines, 288 periods and	1000 tasks with
a search space of	10 <sup>2388</sup> .		
sample08 has 3 resources,		5 machines, 288 periods and	1000 tasks with
a search space of	10 <sup>2748</sup> .		
sample09 has 4 resources,		20 machines, 288 periods and	2000 tasks with
a search space of	10 <sup>6668</sup> .		
instance00 has 1 resources,		10 machines, 288 periods and	200 tasks with
a search space of	10 <sup>595</sup> .		
instance01 has 1 resources,		10 machines, 288 periods and	200 tasks with
a search space of	10 <sup>599</sup> .		
instance02 has 1 resources,		10 machines, 288 periods and	200 tasks with
a search space of	10 <sup>599</sup> .		
instance03 has 1 resources,		10 machines, 288 periods and	200 tasks with
a search space of	10 <sup>591</sup> .		
instance04 has 1 resources,		10 machines, 288 periods and	200 tasks with
a search space of	10 <sup>590</sup> .		
instance05 has 2 resources,		25 machines, 288 periods and	200 tasks with
a search space of	10 <sup>667</sup> .		
instance06 has 2 resources,		25 machines, 288 periods and	200 tasks with
a search space of	10 <sup>660</sup> .		
instance07 has 2 resources,		25 machines, 288 periods and	200 tasks with
a search space of	10 <sup>662</sup> .		
instance08 has 2 resources,		25 machines, 288 periods and	200 tasks with
a search space of	10 <sup>651</sup> .		
instance09 has 2 resources,		25 machines, 288 periods and	200 tasks with
a search space of	10 <sup>659</sup> .		
instance10 has 2 resources,		20 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1657</sup> .		
instance11 has 2 resources,		20 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1644</sup> .		
instance12 has 2 resources,		20 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1637</sup> .		
instance13 has 2 resources,		20 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1659</sup> .		
instance14 has 2 resources,		20 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1643</sup> .		
instance15 has 3 resources,		40 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1782</sup> .		
instance16 has 3 resources,		40 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1778</sup> .		
instance17 has 3 resources,		40 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1764</sup> .		
instance18 has 3 resources,		40 machines, 288 periods and	500 tasks with
a search space of	10 <sup>1769</sup> .		
instance19 has 3 resources,		40 machines, 288 periods and	500 tasks with

```

a search space of 10^1778.
instance20 has 3 resources, 50 machines, 288 periods and 1000 tasks with
a search space of 10^3689.
instance21 has 3 resources, 50 machines, 288 periods and 1000 tasks with
a search space of 10^3678.
instance22 has 3 resources, 50 machines, 288 periods and 1000 tasks with
a search space of 10^3706.
instance23 has 3 resources, 50 machines, 288 periods and 1000 tasks with
a search space of 10^3676.
instance24 has 3 resources, 50 machines, 288 periods and 1000 tasks with
a search space of 10^3681.
instance25 has 3 resources, 60 machines, 288 periods and 1000 tasks with
a search space of 10^3774.
instance26 has 3 resources, 60 machines, 288 periods and 1000 tasks with
a search space of 10^3737.
instance27 has 3 resources, 60 machines, 288 periods and 1000 tasks with
a search space of 10^3744.
instance28 has 3 resources, 60 machines, 288 periods and 1000 tasks with
a search space of 10^3731.
instance29 has 3 resources, 60 machines, 288 periods and 1000 tasks with
a search space of 10^3746.
instance30 has 4 resources, 70 machines, 288 periods and 2000 tasks with
a search space of 10^7718.
instance31 has 4 resources, 70 machines, 288 periods and 2000 tasks with
a search space of 10^7740.
instance32 has 4 resources, 70 machines, 288 periods and 2000 tasks with
a search space of 10^7686.
instance33 has 4 resources, 70 machines, 288 periods and 2000 tasks with
a search space of 10^7672.
instance34 has 4 resources, 70 machines, 288 periods and 2000 tasks with
a search space of 10^7695.
instance35 has 4 resources, 80 machines, 288 periods and 2000 tasks with
a search space of 10^7807.
instance36 has 4 resources, 80 machines, 288 periods and 2000 tasks with
a search space of 10^7814.
instance37 has 4 resources, 80 machines, 288 periods and 2000 tasks with
a search space of 10^7764.
instance38 has 4 resources, 80 machines, 288 periods and 2000 tasks with
a search space of 10^7736.
instance39 has 4 resources, 80 machines, 288 periods and 2000 tasks with
a search space of 10^7783.
instance40 has 4 resources, 90 machines, 288 periods and 4000 tasks with
a search space of 10^15976.
instance41 has 4 resources, 90 machines, 288 periods and 4000 tasks with
a search space of 10^15935.
instance42 has 4 resources, 90 machines, 288 periods and 4000 tasks with
a search space of 10^15887.
instance43 has 4 resources, 90 machines, 288 periods and 4000 tasks with
a search space of 10^15896.
instance44 has 4 resources, 90 machines, 288 periods and 4000 tasks with
a search space of 10^15885.
instance45 has 4 resources, 100 machines, 288 periods and 5000 tasks with
a search space of 10^20173.
instance46 has 4 resources, 100 machines, 288 periods and 5000 tasks with
a search space of 10^20132.
instance47 has 4 resources, 100 machines, 288 periods and 5000 tasks with

```

```
a search space of 10^20126.
instance48 has 4 resources, 100 machines, 288 periods and 5000 tasks with
a search space of 10^20110.
instance49 has 4 resources, 100 machines, 288 periods and 5000 tasks with
a search space of 10^20078.
```

### 3.18. INVESTMENT ASSET CLASS ALLOCATION (PORTFOLIO OPTIMIZATION)

Decide the relative quantity to invest in each asset class.

Hard constraints:

- Risk maximum: the total standard deviation must not be higher than the standard deviation maximum.
  - Total standard deviation calculation takes asset class correlations into account by applying [Markowitz Portfolio Theory](#).
- Region maximum: Each region has a quantity maximum.
- Sector maximum: Each sector has a quantity maximum.

Soft constraints:

- Maximize expected return.

#### Problem size

```
de_smet_1 has 1 regions, 3 sectors and 11 asset classes with a search
space of 10^4.
irrinki_1 has 2 regions, 3 sectors and 6 asset classes with a search space
of 10^3.
```

Larger datasets have not been created or tested yet, but should not pose a problem. A good source of data is [this Asset Correlation website](#).

### 3.19. CONFERENCE SCHEDULING

Assign each conference talk to a timeslot and a room. Timeslots can overlap. Read/write to/from an \*.xlsx file that can be edited with LibreOffice or Excel too.

Hard constraints:

- Talk type of timeslot: The type of a talk must match the timeslot's talk type.
- Room unavailable timeslots: A talk's room must be available during the talk's timeslot.
- Room conflict: Two talks can't use the same room during overlapping timeslots.
- Speaker unavailable timeslots: Every talk's speaker must be available during the talk's timeslot.
- Speaker conflict: Two talks can't share a speaker during overlapping timeslots.
- Generic purpose timeslot and room tags


- Speaker required timeslot tag: If a speaker has a required timeslot tag, then all his/her talks must be assigned to a timeslot with that tag.
- Speaker prohibited timeslot tag: If a speaker has a prohibited timeslot tag, then all his/her talks cannot be assigned to a timeslot with that tag.
- Talk required timeslot tag: If a talk has a required timeslot tag, then it must be assigned to a timeslot with that tag.
- Talk prohibited timeslot tag: If a talk has a prohibited timeslot tag, then it cannot be assigned to a timeslot with that tag.
- Speaker required room tag: If a speaker has a required room tag, then all his/her talks must be assigned to a room with that tag.
- Speaker prohibited room tag: If a speaker has a prohibited room tag, then all his/her talks cannot be assigned to a room with that tag.
- Talk required room tag: If a talk has a required room tag, then it must be assigned to a room with that tag.
- Talk prohibited room tag: If a talk has a prohibited room tag, then it cannot be assigned to a room with that tag.
- Talk mutually-exclusive-talks tag: Talks that share such a tag must not be scheduled in overlapping timeslots.
- Talk prerequisite talks: A talk must be scheduled after all its prerequisite talks.

Soft constraints:

- Theme track conflict: Minimize the number of talks that share a same theme tag during overlapping timeslots.
- Sector conflict: Minimize the number of talks that share a same sector tag during overlapping timeslots.
- Content audience level flow violation: For every content tag, schedule the introductory talks before the advanced talks.
- Audience level diversity: For every timeslot, maximize the number of talks with a different audience level.
- Language diversity: For every timeslot, maximize the number of talks with a different language.
- Generic purpose timeslot and room tags
  - Speaker preferred timeslot tag: If a speaker has a preferred timeslot tag, then all his/her talks should be assigned to a timeslot with that tag.
  - Speaker undesired timeslot tag: If a speaker has a undesired timeslot tag, then all his/her talks should not be assigned to a timeslot with that tag.
  - Talk preferred timeslot tag: If a talk has a preferred timeslot tag, then it should be assigned to a timeslot with that tag.
  - Talk undesired timeslot tag: If a talk has a undesired timeslot tag, then it should not be assigned to a timeslot with that tag.

- Speaker preferred room tag: If a speaker has a preferred room tag, then all his/her talks should be assigned to a room with that tag.
- Speaker undesired room tag: If a speaker has a undesired room tag, then all his/her talks should not be assigned to a room with that tag.
- Talk preferred room tag: If a talk has a preferred room tag, then it should be assigned to a room with that tag.
- Talk undesired room tag: If a talk has a undesired room tag, then it should not be assigned to a room with that tag.
- Same day talks: All talks that share a same theme tag or content tag should be scheduled in the minimum number of days (ideally in the same day).

Figure 3.14. Value proposition

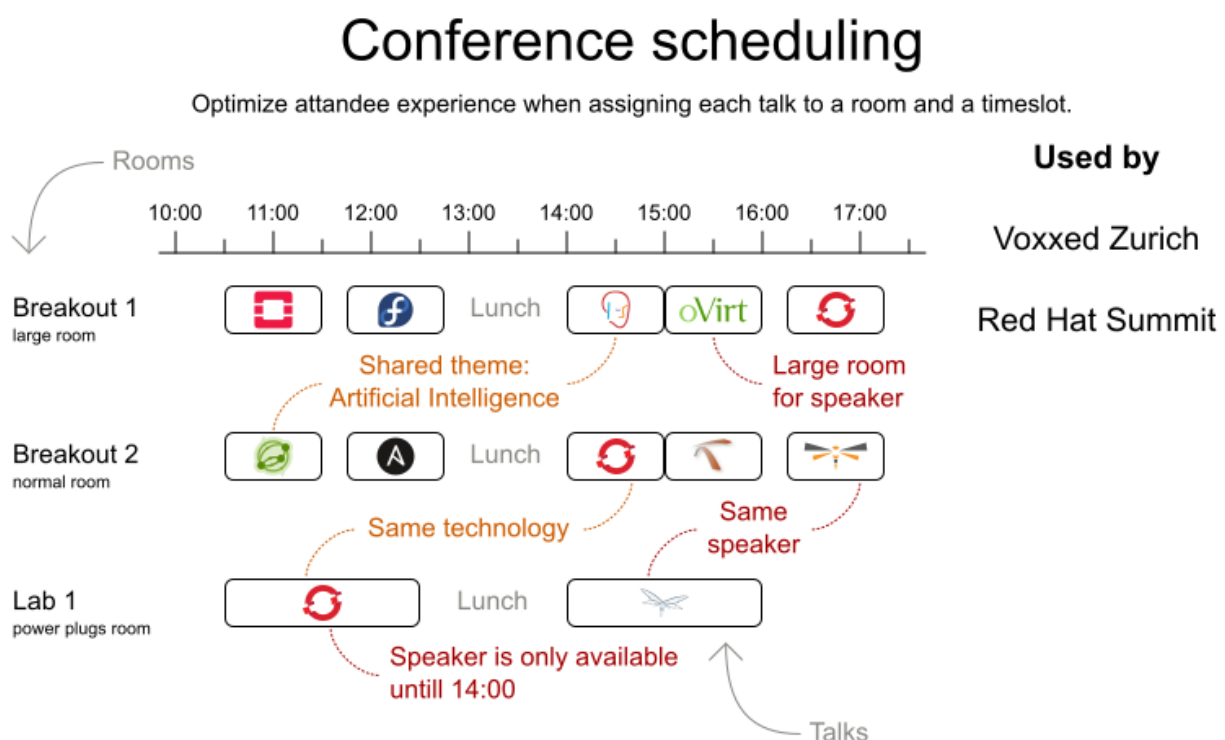

### Problem size

18talks-6timeslots-5rooms	has	18 talks,	6 timeslots and	5 rooms with
a search space of $10^{26}$ .				
36talks-12timeslots-5rooms	has	36 talks,	12 timeslots and	5 rooms with
a search space of $10^{64}$ .				
72talks-12timeslots-10rooms	has	72 talks,	12 timeslots and	10 rooms with
a search space of $10^{149}$ .				
108talks-18timeslots-10rooms	has	108 talks,	18 timeslots and	10 rooms with

a search space of  $10^{243}$ .

216talks-18timeslots-20rooms has 216 talks, 18 timeslots and 20 rooms with a search space of  $10^{552}$ .

### 3.20. ROCK TOUR

Drive the rock bus from show to show, but schedule shows only on available days.

Hard constraints:

- Schedule every required show.
- Schedule as many shows as possible.

Medium constraints:

- Maximize revenue opportunity.
- Minimize driving time.
- Visit sooner than later.

Soft constraints:

- Avoid long driving times.

#### Problem size

47shows has 47 shows with a search space of  $10^{59}$ .

### 3.21. FLIGHT CREW SCHEDULING

Assign flights to pilots and flight attendants.

Hard constraints:

- Required skill: each flight assignment has a required skill. For example, flight AB0001 requires 2 pilots and 3 flight attendants.
- Flight conflict: each employee can only attend one flight at the same time
- Transfer between two flights: between two flights, an employee must be able to transfer from the arrival airport to the departure airport. For example, Ann arrives in Brussels at 10:00 and departs in Amsterdam at 15:00.
- Employee unavailability: the employee must be available on the day of the flight. For example, Ann is on PTO on 1-Feb.

Soft constraints:

- First assignment departing from home
- Last assignment arriving at home
- Load balance flight duration total per employee



## Problem size

175flights-7days-Europe has 2 skills, 50 airports, 150 employees, 175 flights and 875 flight assignments with a search space of  $10^{1904}$ .  
700flights-28days-Europe has 2 skills, 50 airports, 150 employees, 700 flights and 3500 flight assignments with a search space of  $10^{7616}$ .  
875flights-7days-Europe has 2 skills, 50 airports, 750 employees, 875 flights and 4375 flight assignments with a search space of  $10^{12578}$ .  
175flights-7days-US has 2 skills, 48 airports, 150 employees, 175 flights and 875 flight assignments with a search space of  $10^{1904}$ .

## APPENDIX A. VERSIONING INFORMATION

Documentation last updated on Friday, October 12, 2018.