



Red Hat JBoss Fuse 6.2.1

Deploying into Apache Karaf

Deploying application packages into the Apache Karaf container

Red Hat JBoss Fuse 6.2.1 Deploying into Apache Karaf

Deploying application packages into the Apache Karaf container

JBoss A-MQ Docs Team

Content Services

fuse-docs-support@redhat.com

Legal Notice

Copyright © 2015 Red Hat.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution-Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

The guide describes the options for deploying applications into a Red Hat JBoss Fuse container.

Table of Contents

PART I. THE RED HAT JBOSS FUSE CONTAINER	4
CHAPTER 1. RED HAT JBOSS FUSE OVERVIEW	5
1.1. RED HAT JBOSS FUSE CONTAINER ARCHITECTURE	5
1.2. DEPLOYMENT MODELS	6
1.3. DEPENDENCY INJECTION FRAMEWORKS	8
1.4. SYNCHRONOUS COMMUNICATION	9
1.5. ASYNCHRONOUS COMMUNICATION	10
1.6. FUSE FABRIC	11
CHAPTER 2. DEPENDENCY INJECTION FRAMEWORKS	13
2.1. SPRING AND BLUEPRINT FRAMEWORKS	13
2.2. HOT DEPLOYMENT	15
2.3. USING OSGI CONFIGURATION PROPERTIES	17
CHAPTER 3. BUILDING WITH MAVEN	19
3.1. MAVEN DIRECTORY STRUCTURE	19
3.2. PREPARING TO USE MAVEN	21
CHAPTER 4. LOCATING ARTIFACTS WITH MAVEN AND HTTP	26
4.1. LOCATING HTTP ARTIFACTS	26
4.2. LOCATING MAVEN ARTIFACTS AT BUILD TIME	27
4.3. LOCATING MAVEN ARTIFACTS AT RUN TIME	29
PART II. OSGI BUNDLE DEPLOYMENT MODEL	43
CHAPTER 5. INTRODUCTION TO OSGI	44
5.1. RED HAT JBOSS FUSE	44
5.2. OSGI FRAMEWORK	45
5.3. OSGI SERVICES	46
5.4. OSGI BUNDLES	48
CHAPTER 6. BUILDING AN OSGI BUNDLE	50
6.1. GENERATING A BUNDLE PROJECT	50
6.2. MODIFYING AN EXISTING MAVEN PROJECT	51
6.3. PACKAGING A WEB SERVICE IN A BUNDLE	53
6.4. CONFIGURING THE BUNDLE PLUG-IN	55
CHAPTER 7. DEPLOYING AN OSGI BUNDLE	60
7.1. HOT DEPLOYMENT	60
7.2. MANUAL DEPLOYMENT	60
7.3. LIFECYCLE MANAGEMENT	62
7.4. TROUBLESHOOTING DEPENDENCIES	64
CHAPTER 8. DEPLOYING FEATURES	68
8.1. CREATING A FEATURE	68
8.2. DEPLOYING A FEATURE	72
CHAPTER 9. DEPLOYING A PLAIN JAR	75
9.1. BUNDLE TOOL (BND)	75
9.2. CONVERTING A JAR USING BND	76
9.3. CONVERTING A JAR USING THE WRAP SCHEME	79
CHAPTER 10. OSGI BUNDLE TUTORIALS	82
10.1. GENERATING AND RUNNING AN EIP BUNDLE	82

10.2. GENERATING AND RUNNING A WEB SERVICES BUNDLE	84
PART III. WAR DEPLOYMENT MODEL	87
CHAPTER 11. BUILDING A WAR	88
11.1. MODIFYING AN EXISTING MAVEN PROJECT	88
11.2. BOOTSTRAPPING A CXF SERVLET IN A WAR	91
11.3. BOOTSTRAPPING A SPRING CONTEXT IN A WAR	92
CHAPTER 12. DEPLOYING A WAR	94
12.1. CONVERTING THE WAR USING THE WAR SCHEME	94
12.2. CONFIGURING THE WEB CONTAINER	95
PART IV. OSGI SERVICE LAYER	97
CHAPTER 13. OSGI SERVICES	98
13.1. THE BLUEPRINT CONTAINER	98
13.2. PUBLISHING AN OSGI SERVICE	112
13.3. ACCESSING AN OSGI SERVICE	116
13.4. INTEGRATION WITH APACHE CAMEL	120
CHAPTER 14. JMS BROKER	123
14.1. WORKING WITH THE DEFAULT BROKER	123
14.2. JMS ENDPOINTS IN A ROUTER APPLICATION	124
APPENDIX A. URL HANDLERS	128
A.1. FILE URL HANDLER	128
A.2. HTTP URL HANDLER	128
A.3. MVN URL HANDLER	128
A.4. WRAP URL HANDLER	131
A.5. WAR URL HANDLER	132
APPENDIX B. OSGI BEST PRACTICES	135
B.1. OSGI TOOLING	135
B.2. BUILDING OSGI BUNDLES	136
B.3. SAMPLE POM FILE	141
APPENDIX C. PAX-EXAM TESTING FRAMEWORK	143
C.1. INTRODUCTION TO PAX-EXAM	143
C.2. SAMPLE PAX-EXAM TEST CLASS	148
INDEX	151

PART I. THE RED HAT JBOSS FUSE CONTAINER

Abstract

The Red Hat JBoss Fuse container is a flexible container that supports a variety of different deployment models: OSGi bundle deployment and WAR deployment. The container is also integrated with Apache Maven, so that required artifacts can be downloaded and installed dynamically at deploy time.

CHAPTER 1. RED HAT JBOSS FUSE OVERVIEW

Abstract


Red Hat JBoss Fuse is a flexible container that allows you to deploy applications in a range of different package types (WAR or OSGi bundle) and has support for both synchronous and asynchronous communication.

1.1. RED HAT JBOSS FUSE CONTAINER ARCHITECTURE

Overview

Figure 1.1, “Red Hat JBoss Fuse Container Architecture” shows a high-level overview of the Red Hat JBoss Fuse container architecture, showing the variety of deployment models that are supported.

Figure 1.1. Red Hat JBoss Fuse Container Architecture

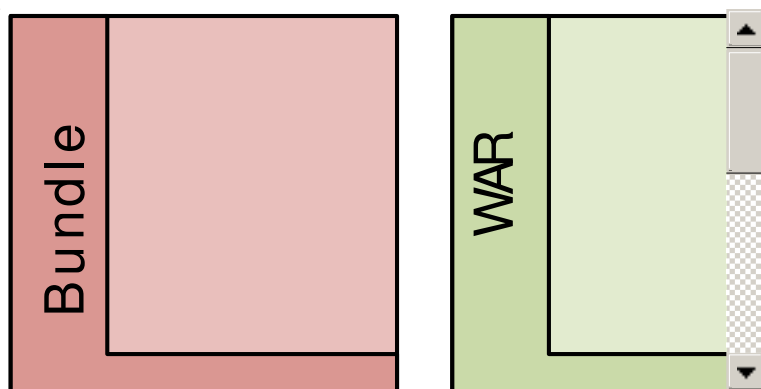

Deployment models

Red Hat JBoss Fuse is a multi-faceted container that supports a variety of deployment models. You can deploy any of the following kinds of deployment unit:

OSGi bundle

An *OSGi bundle* is a JAR file augmented with metadata in the JAR's `META-INF/MANIFEST.MF` file. Because the Red Hat JBoss Fuse container is fundamentally an OSGi container, the OSGi bundle is also the native format for the container. Ultimately, after deployment, all of the other deployment unit types are converted into OSGi bundles.

WAR

A *Web application ARchive* (WAR) is the standard archive format for applications that run inside a Web server. As originally conceived by the Java servlet specification, a WAR packages Web pages, JSP pages, Java classes, servlet code, and so on, as required for a typical Web application. More generally, however, a WAR can be any deployment unit that obeys the basic WAR packaging rules (which, in particular, require the presence of a Web application deployment descriptor, `web.xml`).

Spring framework

The [Spring framework](#) is a popular dependency injection framework, which is fully integrated into the JBoss Fuse container. In other words, Spring enables you to create instances of Java objects and wire

them together by defining a file in XML format. In addition, you can also access a wide variety of utilities and services (such as security, persistence, and transactions) through the Spring framework.

Blueprint framework

The blueprint framework is a dependency injection framework defined by the [OSGi Alliance](#). It is similar to Spring (in fact, it was originally sponsored by SpringSource), but is a more lightweight framework that is optimized for the OSGi environment.

OSGi core framework

At its heart, Red Hat JBoss Fuse is an OSGi container, based on Apache Karaf, whose architecture is defined by the *OSGi Service Platform Core Specification* (available from <http://www.osgi.org/Release4/Download>). OSGi is a flexible and dynamic container, whose particular strengths include: sophisticated management of version dependencies; sharing libraries between applications; and support for dynamically updating libraries at run time (hot fixes).

For more details about the OSGi framework, see [Chapter 5, Introduction to OSGi](#).

Red Hat JBoss Fuse kernel

The JBoss Fuse kernel extends the core framework of OSGi, adding features such as the runtime console, administration, logging, deployment, provisioning, management, and so on. For more details, see [Section 5.1, “Red Hat JBoss Fuse”](#).

1.2. DEPLOYMENT MODELS

09/27/12

Reordered to make OSGi more prominent

Overview

Although Red Hat JBoss Fuse is an OSGi container at heart, it supports a variety of different deployment models. You can think of these as virtual containers, which hide the details of the OSGi framework. In this section we compare the deployment models to give you some idea of the weaknesses and strengths of each model.

[Table 1.1, “Alternative Deployment Packages”](#) shows an overview of the package types associated with each deployment model.


Table 1.1. Alternative Deployment Packages

Package	Metadata	Maven Plug-in	URI Scheme	File Suffix
Bundle	MANIFEST.MF	maven-bundle-plugin	None	.jar
WAR	web.xml	maven-war-plugin	war:	.war

OSGi bundle deployment model

Figure 1.2, “Installing an OSGi Bundle” gives an overview of what happens when you install an OSGi bundle into the Red Hat JBoss Fuse container, where the bundle depends on several other bundles.

Figure 1.2. Installing an OSGi Bundle

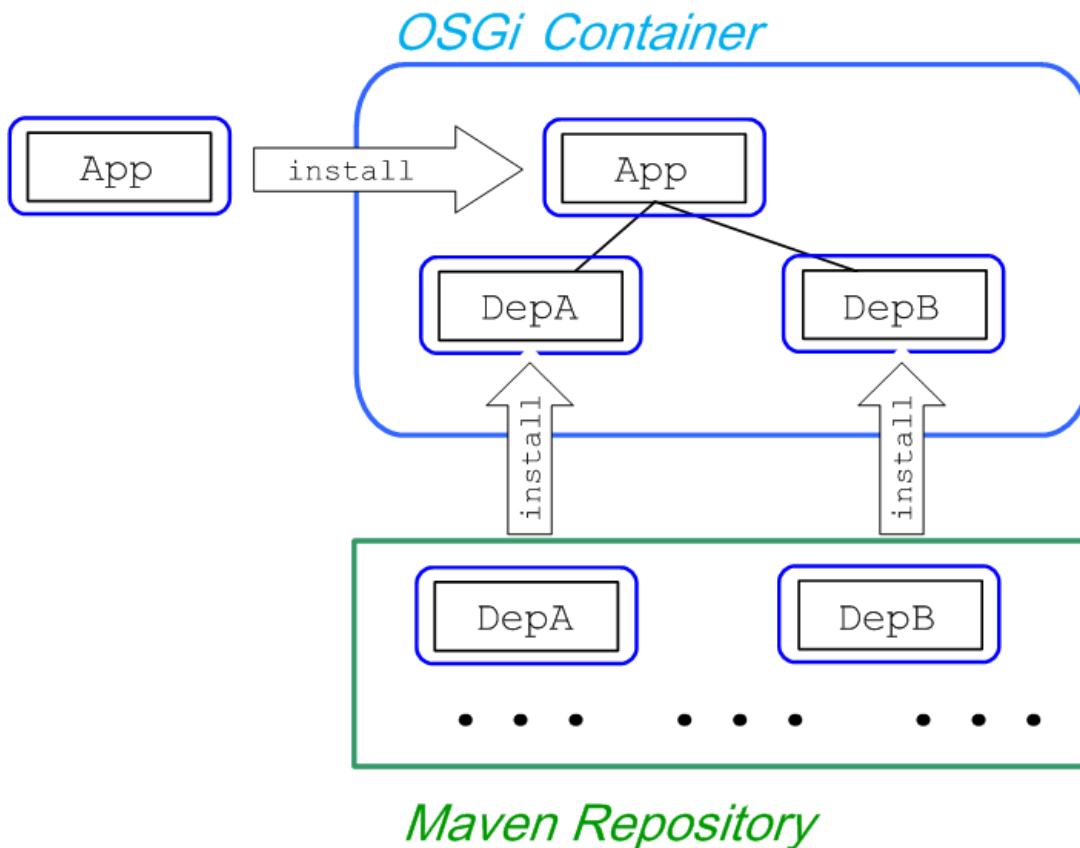


Implicitly, a bundle shares all of its dependencies. This is a flexible approach to deployment, which minimizes resource consumption. But it also introduces a degree of complexity when working with large applications. A bundle does *not* automatically load all of its requisite dependencies, so a bundle might fail to resolve, due to missing dependencies. The recommended way to remedy this is to use *features* to deploy the bundle together with its dependencies (see [Chapter 8, Deploying Features](#)).

WAR deployment model

Figure 1.3, “Installing a WAR” gives an overview of what happens when you install a WAR into the JBoss Fuse container.

Figure 1.3. Installing a WAR

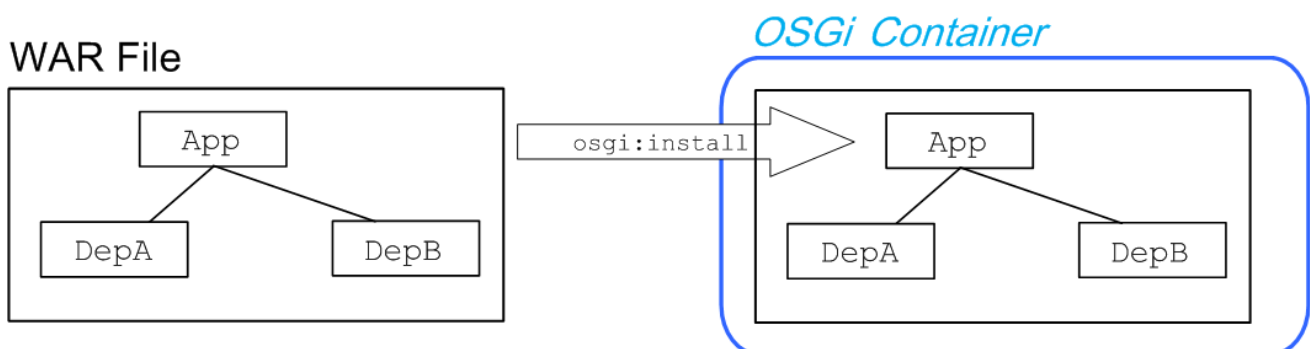

The WAR has a relatively simple deployment model, because the WAR is typically packaged together with all of its dependencies. Hence, the container usually does not have to do any work to resolve the WAR's dependencies. The drawback of this approach, however, is that the WAR is typically large and it

duplicates libraries already available in the container (thus consuming more resources).

1.3. DEPENDENCY INJECTION FRAMEWORKS

09/27/12

Reordered to make blueprint more prominent

Dependency injection

Dependency injection or inversion of control (IOC) is a design paradigm for initializing and configuring applications. Instead of writing Java code that explicitly finds and sets the properties and attributes required by an object, you declare setter methods for all of the properties and objects that this object depends on. The framework takes responsibility for injecting dependencies and properties into the object, using the declared setter methods. This approach reduces dependencies between components and reduces the amount of code that must be devoted to retrieving configuration properties.

There are many popular dependency injection frameworks in current use. In particular, the Spring framework and the blueprint framework are fully integrated with Red Hat JBoss Fuse.

OSGi framework extensions

One of the important characteristics of the OSGi framework is that it is extensible. OSGi provides a framework extension API, which makes it possible to implement OSGi plug-ins that are tightly integrated with the OSGi core. An OSGi extension can be deployed into the OSGi container as an *extension bundle*, which is a special kind of bundle that enjoys privileged access to the OSGi core framework.

Red Hat JBoss Fuse defines extension bundles to integrate the following dependency injection frameworks with OSGi:

- *Blueprint*—the blueprint extensor is based on the blueprint implementation from [Apache Karaf](#).
- *Spring*—the Spring extensor is based on [Spring Dynamic Modules](#) (Spring-DM), which is the OSGi integration component from SpringSource.



NOTE

The Spring-DM module is now deprecated. If you need an injection framework with OSGi integration, use Blueprint instead.

Activating a framework

The framework extension mechanism enables both the Spring extensor and the blueprint extensor to be integrated with the bundle lifecycle. In particular, the extenders receive notifications whenever a bundle is activated (using the command, `osgi: start`) or de-activated (using the command, `osgi: stop`). This gives the extenders a chance to scan the bundle, look for configuration files of the appropriate type and, if necessary, activate the dependency injection framework for that bundle.

For example, when you activate a bundle that is configured using Spring, the blueprint extensor scans the bundle package, looking for any blueprint XML files in the standard location and, if it finds one or more such files, activates the blueprint framework for this bundle.

Blueprint XML file location

The blueprint extensor searches a bundle for blueprint XML files whose location matches the following pattern:

```
OSGI-INF/blueprint/*.xml
```



NOTE

A blueprint XML file can also be placed in a non-standard location, by specifying the location in a bundle header (see [the section called “Custom Blueprint file locations”](#)).

Spring XML file location

The Spring extensor searches a bundle for Spring XML files whose location matches the following pattern:

```
META-INF/spring/*.xml
```



NOTE

A WAR package uses a different mechanism to specify the location of Spring XML files (see [Section 11.3, “Bootstrapping a Spring Context in a WAR”](#)).

1.4. SYNCHRONOUS COMMUNICATION

Overview

Synchronous communication between bundles in the OSGi container is realized by publishing a Java object as an OSGi service. Clients of the OSGi service can then invoke the methods of the published object.

OSGi services

An OSGi service is a plain Java object, which is *published* to make it accessible to other bundles deployed in the OSGi container. Other bundles then *bind* to the Java object and invoke its methods *synchronously*, using the normal Java syntax. OSGi services thus support a model of *synchronous communication* between bundles.

One of the strengths of this model is that the OSGi service is a *perfectly ordinary Java object*. The object is not required to inherit from specific interfaces nor is it required to have any annotations. In other words, your application code is not polluted by the OSGi deployment model.

OSGi registry

To publish an OSGi service, you must register it in the *OSGi registry*. The OSGi specification defines a Java API for registering services, but the simplest way to publish an OSGi service is to exploit the special syntax provided by the blueprint framework. Use the blueprint **service** element to register a Java object in the OSGi registry. For example, to create a **SavingsAccountImpl** object and export it as an OSGi service (exposing it through the **org.fusesource.example.Account** Java interface)

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">
  <bean id="savings" class="org.fusesource.example.SavingsAccountImpl"/>
```

```
<service ref="savings" interface="org.fusesource.example.Account"/>

</blueprint>
```

Another bundle in the container can then bind to the published OSGi service, by defining a blueprint **reference** element that searches the OSGi registry for a service that supports the `org.fusesource.example.Account` interface.


```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <reference id="savingsRef"
            interface="org.fusesource.example.Account"/>

  <bean id="client" class="org.fusesource.example.client.Client">
    <property name="savingsAccount" ref="savingsRef"/>
  </bean>

</blueprint>
```

For more details, see [Section 13.1.2, “Defining a Service Bean”](#).



NOTE

Spring XML also supports the publication and binding of OSGi services.

Dynamic interaction between bundles

Another important feature of OSGi services is that they are tightly integrated with the bundle lifecycle. When a bundle is activated (for example, using the console command, `osgi: start`), its OSGi services are published to the OSGi registry. And when a bundle is de-activated (for example, using the console command, `osgi: stop`), its OSGi services are removed from the OSGi registry. Clients of a service can elect to receive notifications whenever a service is published to or removed from the OSGi registry.

Consequently, the presence or absence of an OSGi service in the registry can serve as a flag that signals to other bundles whether or not a particular bundle is available (active). With appropriate programming, clients can thus be implemented to respond flexibly as other bundles are uninstalled and re-installed in the container. For example, a client could be programmed to suspend certain kinds of processing until a bundle is re-activated, thus facilitating dynamic reconfiguration or updating of that dependent bundle.

1.5. ASYNCHRONOUS COMMUNICATION

JMS broker

You can optionally install a broker instance, typically Apache ActiveMQ, into the Red Hat JBoss Fuse container, to provide support for asynchronous communication between bundles in the container. Apache ActiveMQ is a sophisticated implementation of a JMS broker, which supports asynchronous communication using either queues or topics (publish-subscribe model). Some of the basic features of this JMS broker are as follows:

- *VM protocol*—the Virtual Machine (VM) transport protocol is ideal for communicating within the container. VM is optimized for sending messages within the same JVM instance.
- *Persistent or non-persistent messaging*—you can choose whether the broker should persist messages or not, depending on the requirements of your application.
- *Ease of use*—there is no need to create and configure destinations (that is, queues or topics) before you can use them. After connecting to a broker, you can immediately start sending and receiving messages. If you start sending messages to a queue that does not exist yet, Apache ActiveMQ creates it dynamically.
- *External communication*—you can also configure a TCP port on the broker, opening it up to external JMS clients or other brokers.

For details of how to set up a JMS broker in Red Hat JBoss Fuse, see [Chapter 14, JMS Broker](#).

1.6. FUSE FABRIC

Overview

Fuse Fabric is a technology layer that allows a group of containers to form a cluster that shares a common set of configuration information and a common set of repositories from which to access runtime artifacts. Fabric containers are managed by a Fabric Agent that installs a set of bundles that are specified in the profiles assigned to the container. The agent requests artifacts from the Fabric Ensemble. The ensemble has a list of repositories that it can access. These repositories are managed using a Maven proxy and include a repository that is local to the ensemble.

The added layer imposed on fabric containers does not change the basic deployment models, but it does impact how you specify what needs to be deployed. It also impacts how dependencies are located.

Bundle deployment

In a fabric container, you cannot directly deploy bundles to a container. A container's configuration is managed by a Fabric Agent that updates its contents and configuration based on one or more profiles. So to add a bundle to a container, you must either add the bundle to an existing profile or create a new profile containing the bundle. When the profile is applied to a container the Fuse Agent will install the bundle.

The installation process will download the bundle from a Maven repository and use the appropriate install command to load it into the container. Once the bundle is installed, the dependency resolution process proceeds as it would in a standalone container.

Things to consider

While installing bundles to a fabric container is not radically different from installing bundles in a standalone container, there are a number of things to consider when thinking about creating profiles to deploy your applications:

- Bundles must be accessible through the fabric's Maven proxy

When a Fabric Agent installs a bundle, it must first copy the bundle to the container's host computer. To do so, the agent uses the fabric's Maven Proxy to locate the bundle in one of the accessible Maven repositories and downloads it. This mechanism ensures that all of the containers in the fabric have access to the same set of bundles.

To address this issue, you need to ensure that the fabric's Maven proxy is configured to have access to all of the repositories from which your applications will need to download bundles. For more information see .

- Fabric Agents only load the bundles specified in a profile

A fabric container's contents is completely controlled by the profiles associated with it. The fabric agent managing the container inspects each of the profiles associated with the container, downloads the listed bundles, and features, and installs them. If one of the bundles in a profile depends on a bundle that is not specified in the profile, or one of the other profiles associated with the container, the bundle will not be able to resolve that dependency.

To address this issue you can do one of the following:

- construct your profiles to ensure that it contains all of the required bundles and their dependencies
- deploy the application as a feature that contains all of the required bundles and their dependencies

CHAPTER 2. DEPENDENCY INJECTION FRAMEWORKS

Abstract

Red Hat JBoss Fuse supports two alternative dependency injection frameworks: Spring and OSGi blueprint. These frameworks are fully integrated with the Red Hat JBoss Fuse container, so that Spring XML files and blueprint XML files are automatically activated at the same time the corresponding bundle is activated.

2.1. SPRING AND BLUEPRINT FRAMEWORKS

Overview

The OSGi framework allows third-party frameworks to be piggybacked on top of it. In particular, Red Hat JBoss Fuse enables the Spring framework and the blueprint framework, by default. In the case of the *Spring framework*, OSGi automatically activates any Spring XML files under the **META-INF/spring/** directory in a JAR, and Spring XML files can also be hot-deployed to the **ESBInstallDir/deploy** directory. In the case of the *blueprint framework*, OSGi automatically activates any blueprint XML files under the **OSGI-INF/blueprint/** directory in a JAR, and blueprint XML files can also be hot-deployed to the **ESBInstallDir/deploy** directory.

Prefer Blueprint over Spring-DM

The Blueprint container is now the preferred framework for instantiating, registering, and referencing OSGi services, because this container has now been adopted as an OSGi standard. This ensures greater portability for your OSGi service definitions in the future.

Spring Dynamic Modules (Spring-DM) provided much of the original impetus for the definition of the Blueprint standard, but should now be regarded as obsolescent. Using the Blueprint container does *not* prevent you from using the Spring framework: the latest version of Spring is compatible with Blueprint.

Configuration files

There are two kinds of file that you can use to configure your project:

- *Spring configuration*—in the standard Maven directory layout, Spring XML configuration files are located under **ProjectDir/src/main/resources/META-INF/spring**.
- *Blueprint configuration*—in the standard Maven directory layout, blueprint XML configuration files are located under **ProjectDir/src/main/resources/OSGI-INF/blueprint**.

If you decide to use the blueprint configuration, you can embed `camelContext` elements in the blueprint file, as described in the section called “Blueprint configuration file”.

Prerequisites for blueprint configuration

If you decide to configure your Apache Camel application using blueprint, you must ensure that the `camel-blueprint` feature is installed. If necessary, install it by entering the following console command:

```
JBossFuse:karaf@root> features:install camel-blueprint
```

Spring configuration file

You can deploy a `camelContext` using a Spring configuration file, where the root element is a `Spring beans` element and the `camelContext` element is a child of the `beans` element. In this case, the `camelContext` namespace must be `http://camel.apache.org/schema/spring`.

For example, the following Spring configuration defines a route that generates timer messages every two seconds, sending the messages to the `ExampleRouter` log (which get incorporated into the console log file, *InstallDir/data/log/servicemix.log*):

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      >

    <camelContext xmlns="http://camel.apache.org/schema/spring">
        <route>
            <from uri="timer://myTimer?fixedRate=true&period=2000"/>
            <to uri="log:ExampleRouter"/>
        </route>
    </camelContext>

</beans>
```

It is *not* necessary to specify schema locations in the configuration. But if you are editing the configuration file with an XML editor, you might want to add the schema locations in order to support schema validation and content completion in the editor. For the preceding example, you could specify the schema locations as follows:

```
<beans xmlns="http://www.springframework.org/schema/beans"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:schemaLocation="
        http://www.springframework.org/schema/beans
        http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
        http://camel.apache.org/schema/spring
        http://camel.apache.org/schema/spring/camel-spring.xsd">
    ...
```

Blueprint configuration file

Before deploying routes in a blueprint configuration file, check that the camel-blueprint feature is already installed.

You can deploy a `camelContext` using a blueprint configuration file, where the root element is `blueprint` and the `camelContext` element is a child of the `blueprint` element. In this case, the `camelContext` namespace must be `http://camel.apache.org/schema/blueprint`.

For example, the following blueprint configuration defines a route that generates timer messages every two seconds, sending the messages to the `ExampleRouter` log (which get incorporated into the console log file, *InstallDir/data/log/servicemix.log*):

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
          xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
```

```

>

<camelContext xmlns="http://camel.apache.org/schema/blueprint">
  <route>
    <from uri="timer://myTimer?fixedRate=true&period=2000"/>
    <to uri="log:ExampleRouter"/>
  </route>
</camelContext>

</blueprint>

```



NOTE

Blueprint is a dependency injection framework, defined by the OSGi standard, which is similar to Spring in many respects. For more details about blueprint, see [Section 13.1](#), “The Blueprint Container”.

2.2. HOT DEPLOYMENT

Types of configuration file

You can hot deploy the following types of configuration file:

- Spring XML file, deployable with the suffix, `.xml`.
- Blueprint XML file, deployable with the suffix, `.xml`.

Hot deploy directory


If you have an existing Spring XML or blueprint XML configuration file, you can deploy the configuration file directly by copying it into the following hot deploy directory:

```
InstallDir/deploy
```

After deploying, the configuration file is activated immediately.

Hot undeploying an XML file

To undeploy a Spring XML file or a Blueprint XML file from the hot deploy directory, simply delete the XML file from the *InstallDir/deploy* directory *while the Apache Karaf container is running*



IMPORTANT

The hot undeploy mechanism does *not* work while the container is shut down. If you shut down the Karaf container, delete the XML file from `deploy/`, and then restart the Karaf container, the automatically generated bundle corresponding to the XML file will *not* be undeployed after you restart the container (you can, however, undeploy the bundle manually using the `osgi:uninstall` console command).

Prerequisites

If you want to deploy Apache Camel routes in a blueprint configuration file, the **camel-blueprint** feature must be installed (which it is by default). If the **camel-blueprint** feature has been disabled, however, you can re-install it by entering the following console command:

```
JBossFuse:karaf@root> features:install camel-blueprint
```

Default bundle version

When a Spring XML file or a Blueprint XML file is hot deployed, the XML file is automatically wrapped in an OSGi bundle and deployed as a bundle in the OSGi container. By default, the generated bundle has the version, **0.0.0**.

Customizing the bundle version

If you prefer to customize the bundle version, use the **manifest** element in the XML file. The **manifest** element enables you to *override* any of the headers in the generated bundle's **META-INF/MANIFEST.MF** file. In particular, you can use it to specify the bundle version.

Specifying the bundle version in a Spring XML file

To specify the bundle version in a hot-deployed Spring XML file, define a **manifest** element as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       >

    <manifest xmlns="http://karaf.apache.org/xmlns/deployer/spring/v1.0.0">
        Bundle-Version = 1.2.3.4
    </manifest>

    <camelContext xmlns="http://camel.apache.org/schema/spring">
        <route>
            <from uri="timer://myTimer?fixedRate=true&period=2000"/>
            <to uri="log:ExampleRouter"/>
        </route>
    </camelContext>

</beans>
```

The **manifest** element for Spring XML files belongs to the following schema namespace:

```
http://karaf.apache.org/xmlns/deployer/spring/v1.0.0
```

The contents of the **manifest** element are specified using the syntax of a Java properties file.

Specifying the bundle version in a Blueprint XML file

To specify the bundle version in a hot-deployed Blueprint XML file, define a **manifest** element as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  >

  <manifest
xmlns="http://karaf.apache.org/xmlns/deployer/blueprint/v1.0.0">
    Bundle-Version = 1.2.3.4
  </manifest>

  <camelContext xmlns="http://camel.apache.org/schema/blueprint">
    <route>
      <from uri="timer://myTimer?fixedRate=true&period=2000"/>
      <to uri="log:ExampleRouter"/>
    </route>
  </camelContext>

</blueprint>

```

The `manifest` element for Blueprint XML files belongs to the following schema namespace:

```
http://karaf.apache.org/xmlns/deployer/blueprint/v1.0.0
```

The contents of the `manifest` element are specified using the syntax of a Java properties file.

2.3. USING OSGI CONFIGURATION PROPERTIES

Overview

The OSGi Configuration Admin service defines a mechanism for passing configuration settings to an OSGi bundle. You do not have to use this service for configuration, but it is typically the most convenient way of configuring applications deployed in Red Hat JBoss Fuse.

Persistent ID

In the OSGi Configuration Admin service, a *persistent ID* is a name that identifies a group of related configuration properties. In JBoss Fuse, every persistent ID, *PersistentID*, is implicitly associated with a file named *PersistentID.cfg* in the *ESBInstallDir/etc/* directory. If the corresponding file exists, it can be used to initialize the values of properties belonging to the *PersistentID* property group.

For example, the `etc/org.ops4j.pax.url.mvn.cfg` file is used to set the properties associated with the `org.ops4j.pax.url.mvn` persistent ID (for the PAX Mvn URL handler).

Blueprint example

[Example 2.1, “Using OSGi Configuration Properties in Blueprint”](#) shows how to pass the value of the `prefix` variable to the constructor of the `myTransform` bean in blueprint XML, where the value of `prefix` is set by the OSGi Configuration Admin service.

Example 2.1. Using OSGi Configuration Properties in Blueprint

```

<blueprint
  xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
  xmlns:cm="http://aries.apache.org/blueprint/xmlns/blueprint-cm/v1.1.0"

```

```

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
... >
...
<cm:property-placeholder persistent-id="org.fusesource.example">
  <cm:default-properties>
    <cm:property name="prefix" value="Blueprint-Example"/>
  </cm:default-properties>
</cm:property-placeholder>

  <bean id="myTransform"
class="org.apache.servicemix.examples.camel.MyTransform">
  <property name="prefix" value="${prefix}" />
  </bean>

</blueprint>

```

The syntax, `{{prefix}}`, substitutes the value of the `prefix` variable into the blueprint XML file. The OSGi properties are set up using the following XML elements:

`cm:property-placeholder`

This element gives you access to the properties associated with the specified persistent ID. After defining this element, you can use the syntax, `{{PropName}}`, to substitute variables belonging to the specified persistent ID.

`cm:property-placeholder/cm:default-properties`

You can optionally specify default values for properties by defining `cm:property` elements inside the `cm:default-properties` element. If the corresponding `etc/PersistentID.cfg` file defines property values, however, these will be used instead.

Using multiple property placeholders in Blueprint

It is legal to define multiple property placeholders in a Blueprint XML file (that is, defining multiple `cm:property-placeholder` elements that reference different persistent IDs). One thing that you need to be aware of, however, is that there can be a clash if two properties from different property placeholders have the same name. In this case, the following rules determine which property takes precedence:

1. Explicitly defined property settings (for example, defined in a `etc/PersistentID.cfg` file) take precedence over default property settings (defined in a `cm:default-properties` element).
2. If there is more than one explicit setting for a given property, the setting from the last property placeholder in the Blueprint file takes precedence.
3. Default property settings (defined in a `cm:default-properties` element) have the lowest priority.

CHAPTER 3. BUILDING WITH MAVEN

Abstract

Maven is an open source build system which is available from the [Apache Maven](#) project. This chapter explains some of the basic Maven concepts and describes how to set up Maven to work with Red Hat JBoss Fuse. In principle, you could use any build system to build an OSGi bundle. But Maven is strongly recommended, because it is well supported by Red Hat JBoss Fuse.

3.1. MAVEN DIRECTORY STRUCTURE

Overview

One of the most important principles of the Maven build system is that there are *standard locations* for all of the files in the Maven project. There are several advantages to this principle. One advantage is that Maven projects normally have an identical directory layout, making it easy to find files in a project. Another advantage is that the various tools integrated with Maven need almost *no* initial configuration. For example, the Java compiler knows that it should compile all of the source files under `src/main/java` and put the results into `target/classes`.

Standard directory layout

[Example 3.1, “Standard Maven Directory Layout”](#) shows the elements of the standard Maven directory layout that are relevant to building OSGi bundle projects. In addition, the standard locations for Spring and Blueprint configuration files (which are *not* defined by Maven) are also shown.

Example 3.1. Standard Maven Directory Layout

```
ProjectDir/
  pom.xml
  src/
    main/
      java/
        ...
      resources/
        META-INF/
          spring/
            *.xml
        OSGI-INF/
          blueprint/
            *.xml
    test/
      java/
      resources/
  target/
  ...
```



NOTE

It is possible to override the standard directory layout, but this is *not* a recommended practice in Maven.

pom.xml file

The `pom.xml` file is the Project Object Model (POM) for the current project, which contains a complete description of how to build the current project. A `pom.xml` file can be completely self-contained, but frequently (particular for more complex Maven projects) it can import settings from a *parent POM* file.

After building the project, a copy of the `pom.xml` file is automatically embedded at the following location in the generated JAR file:

```
META-INF/maven/groupId/artifactId/pom.xml
```

src and target directories

The `src/` directory contains all of the code and resource files that you will work on while developing the project.

The `target/` directory contains the result of the build (typically a JAR file), as well as all of the intermediate files generated during the build. For example, after performing a build, the `target/classes/` directory will contain a copy of the resource files and the compiled Java classes.

main and test directories

The `src/main/` directory contains all of the code and resources needed for building the artifact.

The `src/test/` directory contains all of the code and resources for running unit tests against the compiled artifact.

java directory

Each `java/` sub-directory contains Java source code (`*.java` files) with the standard Java directory layout (that is, where the directory pathnames mirror the Java package names, with `/` in place of the `.` character). The `src/main/java/` directory contains the bundle source code and the `src/test/java/` directory contains the unit test source code.

resources directory

If you have any configuration files, data files, or Java properties to include in the bundle, these should be placed under the `src/main/resources/` directory. The files and directories under `src/main/resources/` will be copied into the root of the JAR file that is generated by the Maven build process.

The files under `src/test/resources/` are used only during the testing phase and will *not* be copied into the generated JAR file.

Spring integration

By default, Red Hat JBoss Fuse installs and activates support for [Spring Dynamic Modules \(Spring DM\)](#), which integrates Spring with the OSGi container. This means that it is possible for you to include Spring configuration files, `META-INF/spring/*.xml`, in your bundle. One of the key consequences of having Spring DM enabled in the OSGi container is that the lifecycle of the Spring application context is automatically synchronized with the OSGi bundle lifecycle:

- *Activation*—when a bundle is activated, Spring DM automatically scans the bundle to look for

Spring configuration files in the standard location (any `.xml` files found under the **META-INF/spring/** directory). If any Spring files are found, Spring DM creates an application context for the bundle and creates the beans defined in the Spring configuration files.

- *Stopping*—when a bundle is stopped, Spring DM automatically shuts down the bundle's Spring application context, causing any Spring beans to be deleted.

In practice, this means that you can treat your Spring-enabled bundle as if it is being deployed in a Spring container. Using Spring DM, the features of the OSGi container and a Spring container are effectively merged. In addition, Spring DM provides additional features to support the OSGi container environment—some of these features are discussed in [Chapter 13, OSGi Services](#).

Blueprint container

OSGi R4.2 defines a blueprint container, which is effectively a standardized version of Spring DM. Red Hat JBoss Fuse has built-in support for the blueprint container, which you can enable simply by including blueprint configuration files, **OSGI-INF/blueprint/*.xml**, in your project. For more details about the blueprint container, see [Chapter 13, OSGi Services](#).

3.2. PREPARING TO USE MAVEN


Overview

This section gives a brief overview of how to prepare Maven for building Red Hat JBoss Fuse projects and introduces the concept of Maven coordinates, which are used to locate Maven artifacts.

Prerequisites

In order to build a project using Maven, you must have the following prerequisites:

- *Maven installation*—Maven is a free, open source build tool from Apache. You can download the latest version from the [Maven download page](#).
- *Network connection*—whilst performing a build, Maven dynamically searches external repositories and downloads the required artifacts on the fly. By default, Maven looks for repositories that are accessed over the Internet. You can change this behavior so that Maven will prefer searching repositories that are on a local network.



NOTE

Maven can run in an offline mode. In offline mode Maven will only look for artifacts in its local repository.

Adding the Red Hat JBoss Fuse repository

In order to access artifacts from the Red Hat JBoss Fuse Maven repository, you need to add it to Maven's **settings.xml** file. Maven looks for your **settings.xml** file in the **.m2** directory of the user's home directory. If there is not a user specified **settings.xml** file, Maven will use the system-level **settings.xml** file at **M2_HOME/conf/settings.xml**.

To add the JBoss Fuse repository to Maven's list of repositories, you can either create a new **.m2/settings.xml** file or modify the system-level settings. In the **settings.xml** file, add the **repository** element for the JBoss Fuse repository as shown in bold text in [Example 3.2, “Adding the](#)

Red Hat JBoss Fuse Repositories to Maven”.

Example 3.2. Adding the Red Hat JBoss Fuse Repositories to Maven

```

<settings>
  <profiles>
    <profile>
      <id>my-profile</id>
      <activation>
        <activeByDefault>true</activeByDefault>
      </activation>
      <repositories>
        <repository>
          <id>fusesource</id>

<url>http://repo.fusesource.com/nexus/content/groups/public/</url>
          <snapshots>
            <enabled>false</enabled>
          </snapshots>
          <releases>
            <enabled>true</enabled>
          </releases>
        </repository>
        <repository>
          <id>fusesource.snapshot</id>

<url>http://repo.fusesource.com/nexus/content/groups/public-
snapshots/</url>
          <snapshots>
            <enabled>true</enabled>
          </snapshots>
          <releases>
            <enabled>false</enabled>
          </releases>
        </repository>
        <repository>
          <id>apache-public</id>

<url>https://repository.apache.org/content/groups/public/</url>
          <snapshots>
            <enabled>true</enabled>
          </snapshots>
          <releases>
            <enabled>true</enabled>
          </releases>
        </repository>
        ...
      </repositories>
      <pluginRepositories>
        <pluginRepository>
          <id>fusesource</id>

<url>https://repo.fusesource.com/nexus/content/groups/public/</url>
          <snapshots>
            <enabled>true</enabled>
          </snapshots>
          <releases>

```

```

        <enabled>true</enabled>
      </releases>
    </pluginRepository>
  <pluginRepository>
    <id>fusesource.snapshot</id>

    <url>http://repo.fusesource.com/nexus/content/groups/public-
snapshots</url>

    <snapshots>
      <enabled>true</enabled>
    </snapshots>
    <releases>
      <enabled>>false</enabled>
    </releases>
  </pluginRepository>
  <pluginRepository>
    <id>apache-public</id>

    <url>https://repository.apache.org/content/groups/public</url>
    <snapshots>
      <enabled>true</enabled>
    </snapshots>
    <releases>
      <enabled>true</enabled>
    </releases>
  </pluginRepository>
  ...
</pluginRepositories>
</profile>
</profiles>
...
</settings>

```

The preceding example also shows repository element for the following repositories:

- **fusesource-snapshot** repository—if you want to experiment with building your application using an Red Hat JBoss Fuse snapshot kit, you can include this repository.
- **apache-public** repository—you might not always need this repository, but it is often useful to include it, because JBoss Fuse depends on many of the artifacts from Apache.

Artifacts

The basic building block in the Maven build system is an *artifact*. The output of an artifact, after performing a Maven build, is typically an archive, such as a JAR or a WAR.

Maven coordinates

A key aspect of Maven functionality is the ability to locate artifacts and manage the dependencies between them. Maven defines the location of an artifact using the system of *Maven coordinates*, which uniquely define the location of a particular artifact. A basic coordinate tuple has the form, **{*groupId*, *artifactId*, *version*}**. Sometimes Maven augments the basic set of coordinates with the

additional coordinates, *packaging* and *classifier*. A tuple can be written with the basic coordinates, or with the additional *packaging* coordinate, or with the addition of both the *packaging* and *classifier* coordinates, as follows:

```
groupId:artifactId:version
groupId:artifactId:packaging:version
groupId:artifactId:packaging:classifier:version
```

Each coordinate can be explained as follows:

groupId

Defines a scope for the name of the artifact. You would typically use all or part of a package name as a group ID—for example, `org.fusesource.example`.

artifactId

Defines the artifact name (relative to the group ID).

version

Specifies the artifact's version. A version number can have up to four parts: `n.n.n.n`, where the last part of the version number can contain non-numeric characters (for example, the last part of `1.0-SNAPSHOT` is the alphanumeric substring, `0-SNAPSHOT`).

packaging

Defines the packaged entity that is produced when you build the project. For OSGi projects, the packaging is `bundle`. The default value is `jar`.

classifier

Enables you to distinguish between artifacts that were built from the same POM, but have different content.

The group ID, artifact ID, packaging, and version are defined by the corresponding elements in an artifact's POM file. For example:

```
<project ... >
...
<groupId>org.fusesource.example</groupId>
<artifactId>bundle-demo</artifactId>
<packaging>bundle</packaging>
<version>1.0-SNAPSHOT</version>
...
</project>
```

For example, to define a dependency on the preceding artifact, you could add the following `dependency` element to a POM:

```
<project ... >
...
<dependencies>
  <dependency>
    <groupId>org.fusesource.example</groupId>
    <artifactId>bundle-demo</artifactId>
```

```
<version>1.0-SNAPSHOT</version>
</dependency>
</dependencies>
...
</project>
```



NOTE

It is *not* necessary to specify the **bundle** package type in the preceding dependency, because a bundle is just a particular kind of JAR file and **jar** is the default Maven package type. If you do need to specify the packaging type explicitly in a dependency, however, you can use the **type** element.

CHAPTER 4. LOCATING ARTIFACTS WITH MAVEN AND HTTP

Abstract

In Red Hat JBoss Fuse, Maven is the primary mechanism for locating artifacts and dependencies, both at build time and at run time. Normally, Maven requires Internet connectivity, so that dependencies can be downloaded from remote repositories on demand. But, as explained here, it is also possible to provide dependencies locally, so that the need for Internet connectivity is reduced.

4.1. LOCATING HTTP ARTIFACTS

Overview

You can specify the location of an OSGi bundle (and other kinds of resource) using a HTTP URL—for example, by specifying a HTTP URL as the argument to the `osgi:install` command. This approach is perhaps not as common as using Maven URLs, but it means that you have the option of providing OSGi resources through a Web server.

HTTP URL protocol

The HTTP URL protocol specifies the location of an OSGi bundle (or other resource) using a standard HTTP (or HTTPS) URL. Typically, a HTTP URL has a syntax like the following:

```
http[s] : Host [ : Port ] / [ Path ] [ # AnchorName ] [ ? Query ]
```

In a standalone (non-Fabric) container, a HTTP URL lookup can be triggered by either of the following events:

- When `osgi:install` is invoked on a Maven URL to install an OSGi bundle;
- When `features:install` is invoked to install a Karaf feature (a Karaf feature typically includes one or more Maven URL references).

HTTP URL handler

JBoss Fuse uses Java's built-in HTTP protocol handler to resolve HTTP URLs. Hence, HTTP URL resolution behaves exactly as you would expect in standard Java.

Karaf bundle cache

When you pass a HTTP URL as the argument to the `osgi:install` command (or embedded in a Karaf feature description), JBoss Fuse downloads the referenced OSGi bundle resource, saves it in the Karaf bundle cache (under the `data/cache` directory), and loads the bundle into the Karaf container runtime. The Karaf bundle cache is used to persist all of the bundles currently installed in the Karaf runtime.

**NOTE**

When a Karaf container is stopped and restarted, it loads its installed bundles directly from the Karaf bundle cache, *not* from the local Maven repository (or anywhere else). Hence, if you have updated any artifacts in the local Maven repository in the meantime, those changes are *not* automatically reflected in the state of the Karaf container.

Configuring a HTTP proxy for HTTP URLs

To configure a HTTP proxy (which will be used when resolving HTTP URLs), open the *InstallDir/etc/system.properties* file in a text editor and set the `http.proxyHost` and `http.proxyPort` system properties with the host and port of the proxy—for example:

```
http.proxyHost=192.0.2.0
http.proxyPort=8080
```

You can optionally specify a list of non-proxy hosts (hosts that can be reached without going through the proxy) using the `http.nonProxyHosts` property—for example:

```
http.nonProxyHosts=localhost|*.redhat.com|*.jboss.org
```

**NOTE**


An advantage of using the system properties approach to configuring the proxy is that these settings will be used both by the `mvn` URL protocol handler and by the `http` URL protocol handler (see [the section called “Configuring a HTTP proxy for Maven URLs”](#)).

4.2. LOCATING MAVEN ARTIFACTS AT BUILD TIME

Overview

When building projects, Maven implements a simple caching scheme: artifacts are downloaded from remote repositories on the Internet and then cached in the local repository. [Figure 4.1, “How Maven Locates Artifacts at Build Time”](#) shows an overview of the procedure that Maven follows when locating artifacts at build time.

Figure 4.1. How Maven Locates Artifacts at Build Time

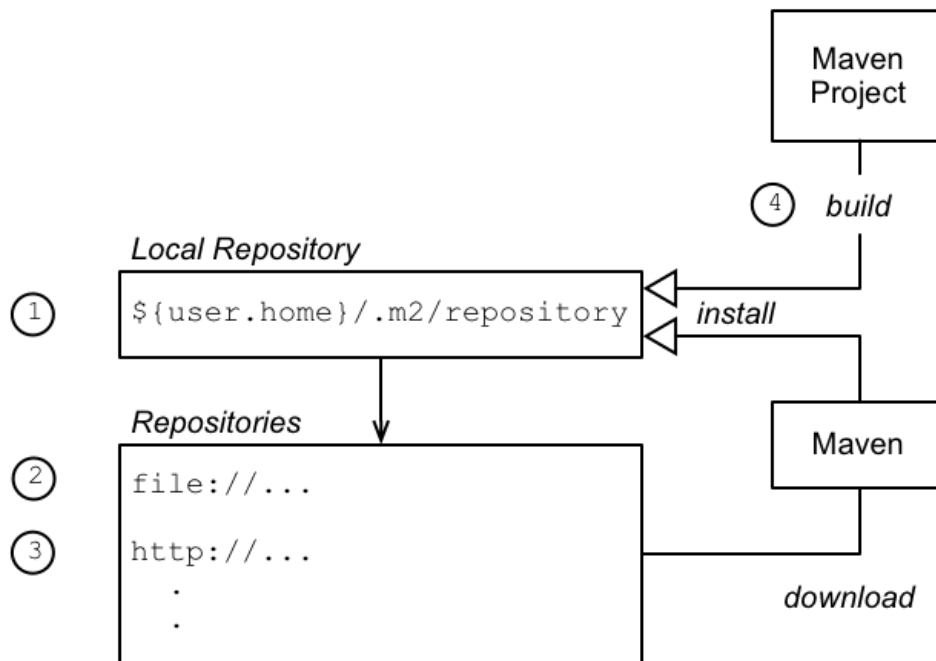

Locating artifacts at build time

While building a project, Maven locates required artifacts (OSGi bundles, Karaf features, required plugins, and so on) as follows:

1. The first place that Maven looks for artifacts is in the *local repository*, `~/.m2/repository/` (which is effectively a cache where Maven stores the artifacts it has already downloaded or found elsewhere).
2. If an artifact is not available in the local repository, Maven attempts to download the artifact from one of the repositories listed in its configuration. This repository list can include both internal and remote repositories.
3. If the artifact is not available from an internal repository, the next repositories to try are the remote repositories (accessible through HTTP or HTTPS).
4. When a Maven project is built locally using the `mvn install` command, the project's Maven artifacts are installed into the local repository.

Adding a remote Maven repository

Remote repositories are configured in the same way as internal repositories, except that they should be listed *after* any internal repositories.

Adding an internal Maven repository

Maven enables you to specify the location of internal repositories either in your `settings.xml` file (which applies to all projects) or in a `pom.xml` (which applies to that project only). Typically, the location of an internal repository is specified using either a `file://` URL or a `http://` URL (assuming you have set up a local Web server to serve up the artifacts) and you should generally ensure that internal repositories are listed *before* remote repositories. Otherwise, there is nothing special about an internal repository: it is just a repository that happens to be located in your internal network.

For an example of how to specify a repository in your `settings.xml` file, see [the section called “Adding the Red Hat JBoss Fuse repository”](#).

Customizing the location of the local repository

Maven resolves the location of the local repository, by checking the following settings:

1. The location specified by the `localRepository` element in the `~/.m2/settings.xml` file (UNIX and Linux) or `C:\Documents and Settings\UserName\.m2\settings.xml` (Windows).
2. Otherwise, the location specified by the `localRepository` element in the `M2_HOME/conf/settings.xml` file.
3. Otherwise, the default location is in the user's home directory, `~/.m2/repository/` (UNIX and Linux) or `C:\Documents and Settings\UserName\.m2\repository` (Windows).

4.3. LOCATING MAVEN ARTIFACTS AT RUN TIME

Abstract

At run time, the process of locating Maven artifacts is implemented by the [Eclipse Aether](#) library, which is bundled with the Karaf container (so that it is *not* necessary for Apache Maven to be installed on the container host). It is possible to customize the Karaf container's Maven configuration by editing the `etc/org.ops4j.pax.url.mvn.cfg` file. For example, you can customize the list of remote Maven repositories and you can configure a HTTP proxy, if required.

4.3.1. Maven URL Handler Architecture

Overview

You can specify the location of an OSGi bundle using a Maven URL—for example, as the argument to the `osgi:install` command. When resolution of a Maven URL is triggered, JBoss Fuse uses a combination of the *Pax URL Aether* component and the *Eclipse Aether* component to implement artifact resolution. The basic strategy is to search the `system/` directory, then search the local Maven repository, and then search the configured remote Maven repositories.

Maven URL protocol

The Maven URL protocol specifies the location of a Maven artifact, which can be retrieved either from local or remote Maven repositories. For example, an artifact with the Maven coordinates, `GroupId:ArtifactId:Version`, can be referenced by the following Maven URL:

```
mvn:GroupId/ArtifactId/Version
```

In a standalone (non-Fabric) container, a Maven URL lookup can be triggered by either of the following events:

- When `osgi:install` is invoked on a Maven URL to install an OSGi bundle;
- When `features:install` is invoked to install a Karaf feature (a Karaf feature typically includes one or more Maven URL references).

Pax URL Aether layer

In Apache Karaf, the framework for resolving Maven URLs is the URL protocol handler mechanism, which is a standard feature of the Java language and JVM. To handle URLs prefixed by the `mvn:` scheme, Karaf registers the [OPS4J Pax URL](#) Aether protocol handler. The Pax URL Aether layer is thus responsible for resolving all `mvn` URLs in the JVM. This layer can be configured through one or both of the following configuration files:


InstallDir/etc/org.ops4j.pax.url.mvn.cfg

Stores the OSGi Config Admin properties used to configure the Pax URL Aether layer. In particular, it is possible to specify the locations of local and remote Maven repositories through the settings in this file. For details of the available settings, see [Section 4.3.5, “Pax URL Aether Reference”](#).

UserHome/.m2/settings.xml

(Optional) You can optionally configure the Pax URL Aether layer to read its configuration from a standard Maven `settings.xml` file (by configuring the relevant settings in `org.ops4j.pax.url.mvn.cfg`).

The main purpose of the Pax URL Aether layer is to facilitate configuration. The Pax URL Aether layer does *not* actually implement resolution of Maven artifacts. That responsibility is delegated to the Eclipse [Aether](#) layer instead.



NOTE

In some old `org.ops4j.pax.url.mvn.cfg` configuration files, you might see the setting `disableAether=false`. This setting is *obsolete*, however, and has no effect on the `pax-url-aether` component. The current implementation of Pax URL Aether (previously called Pax URL Maven) is completely dependent on Eclipse Aether.


Eclipse Aether layer

The Eclipse [Aether](#) layer is fundamental to Maven artifact resolution in Apache Karaf. Ultimately, resolution of Maven artifacts for the Karaf container is *always* performed by the Aether layer. Note that the Aether layer itself is *stateless*: the parameters required to perform resolution of a Maven artifact are passed to the Aether layer with every invocation.

Locating artifacts at run time

[Figure 4.2, “How the Container Locates Artifacts at Run Time”](#) shows the mechanism for handling a Maven URL and resolving a Maven artifact at run time.

Figure 4.2. How the Container Locates Artifacts at Run Time

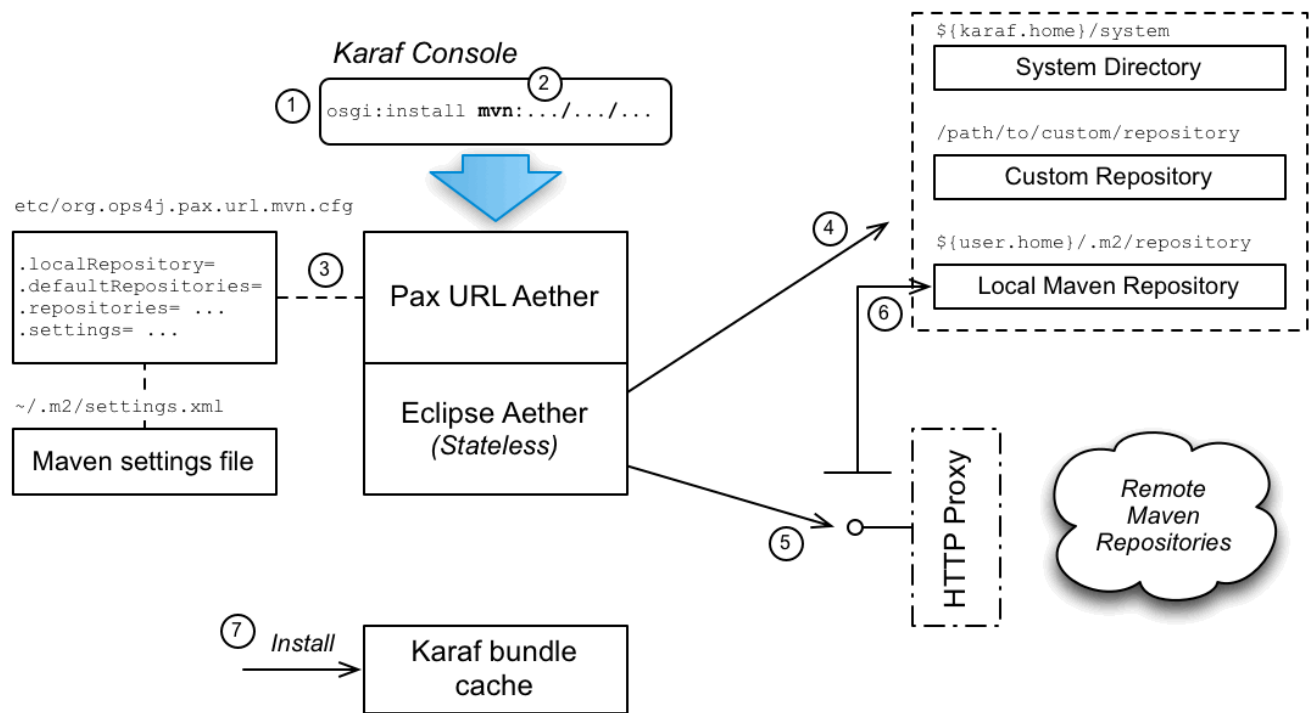

The steps followed to locate the required Maven artifacts are:

1. Resolution of a Maven artifact is triggered when a user invokes the `osgi:install` command on a Maven URL (or if a user invokes the `features:install` command on a feature that references some Maven URLs).
2. To resolve the Maven URL, the JVM calls back on the protocol handler registered against the `mvn` scheme, which happens to be the Pax URL Aether component.
3. The Pax URL Aether component reads its configuration from the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` file (and possibly also from a Maven `settings.xml` file, if so configured). The Pax URL Aether layer parses the requested Maven URL and combines this information with the specified configuration in order to invoke the Eclipse Aether library.
4. When the Aether library is invoked, the first step is to look up any local Maven repositories to try and find the Maven artifact. The following local repositories are configured by default:

InstallDir/system

The JBoss Fuse system directory, which contains all of the Maven artifacts that are bundled with the JBoss Fuse distribution.

UserHome/.m2/repository

The user's own local Maven repository in the user's home directory, *UserHome*.

If you like, you can customize the list of local repositories to add your own custom Maven repository.

If the Maven artifact is found locally, skip straight to step 7.

5. If the Maven artifact cannot be found in one of the local repositories, Aether tries to look up the specified remote repositories (using the list of remote repositories specified in the Pax

URL Aether configuration). Because the remote repositories are typically located on the Internet (accessed through the HTTP protocol), it is necessary to have Internet access for this step to succeed.



NOTE

If your local network requires you to use a HTTP proxy to access the Internet, it is possible to configure Pax URL Aether to use a HTTP proxy. For example, see [the section called “Configuring a HTTP proxy for Maven URLs”](#) for details.

6. If the Maven artifact is found in a remote repository, Aether automatically installs the artifact into the user's local Maven repository, so that another remote lookup will not be required.
7. Finally, assuming that the Maven artifact has been successfully resolved, Karaf installs the artifact in the *Karaf bundle cache*, `InstallDir/data/cache`, and loads the artifact (usually, an OSGi bundle) into the container runtime. At this point, the artifact is effectively installed in the container.

4.3.2. Redeploying Maven Artifacts in a Development Environment

Overview

An important aspect of the Karaf container architecture is that deployed Maven artifacts are stored in the container cache, which is separate from the local Maven repository. Bundles and features get copied from the local Maven repository into the cache at the time they are first deployed. After that, any changes to the artifact in the local Maven repository are ignored.

Immutable artifacts

Usually, it makes sense to ignore changes in the local Maven repository, because Maven requires each specific version of an artifact to be *immutable*: that is, once you make a particular version of a Maven artifact available in a Maven repository, it must *never* change. Hence, it should never be necessary to go back and check the Maven repository for changes to the artifact.

SNAPSHOT artifacts

On the other hand, there is a partial exception to this convention: in a development environment, the same artifacts are constantly being rebuilt and retested, which requires them to be redeployed into the Karaf container. The correct way to deal with this is to attach the suffix `-SNAPSHOT` to the Maven version specifier. Maven treats these artifacts differently: for example, by periodically checking remote Maven repositories for updates and downloading the changed artifacts to the local repository.

Explicitly redeploying

When working with SNAPSHOT artifacts, you will also need to redeploy the changed artifacts to the Karaf container. One approach is explicit redeployment.

For example, say you have already deployed the `org.example/myfoobundle/1.0.0-SNAPSHOT` Maven artifact into the Karaf container and this bundle has the bundle ID, `751`. If you now rebuild this bundle (for example, by executing `mvn install` in the bundle's Maven project), you can redeploy the changed bundle with the following console commands:


```
osgi:uninstall 751
osgi:install mvn:org.example/myfoobundle/1.0.0-SNAPSHOT
```

dev:watch command

Typically, a more convenient approach to redeploying SNAPSHOT artifacts is to enable automatic redeployment, using the `dev:watch` command. For example, given a particular bundle—with bundle ID, **751**—you can enable automatic redeployment by entering the command:

```
dev:watch 751
```

Now, whenever you rebuild and install the Maven artifact into your local Maven repository (for example, by executing `mvn install` in your Maven project), the Karaf container automatically re-installs the changed Maven artifact. For more details, see [section "dev:watch, watch" in "Console Reference"](#).



IMPORTANT

Using the `dev:watch` command is intended for a development environment only. It is *not* recommended for use in a production environment.

4.3.3. Configuring Pax URL Aether Directly

Overview

The default approach to configuring the Pax URL Aether component is to edit the property settings in the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` file directly. This approach is particularly convenient for a production environment, because the Maven configuration is colocated with the rest of the container configuration.



NOTE

In order to use the direct configuration approach, you must at least set the `org.ops4j.pax.url.mvn.repositories` property. If this property is not set, Pax URL Aether falls back to reading configuration from the Maven `settings.xml` file.

Adding a remote Maven repository

To add a remote Maven repository to the Pax URL Aether configuration, open the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` configuration file in a text editor and edit the `org.ops4j.pax.url.mvn.repositories` property setting. The default is as follows:

```
org.ops4j.pax.url.mvn.repositories= \
    http://repo1.maven.org/maven2@id=maven.central.repo, \
    http://repository.jboss.org/nexus/content/repositories/public@id=jboss.public.repo, \
    https://repo.fusesource.com/nexus/content/repositories/releases@id=fusesource.release.repo, \
    https://repo.fusesource.com/nexus/content/groups/ea@id=fusesource.ea.repo,
```

```
\
    http://svn.apache.org/repos/asf/servicemix/m2-repo@id=servicemix.repo,
\

http://repository.springsource.com/maven/bundles/release@id=springsource.r
elease.repo, \

http://repository.springsource.com/maven/bundles/external@id=springsource.
external.repo
```

Where the `org.ops4j.pax.url.mvn.repositories` property is defined as a comma-separated list of Maven repository URLs. The backslash character, `\`, functions as a (UNIX style) line continuation character and must be followed immediately by the newline character. The Pax URL Aether component supports special repository URL options, defined using the `@Option=Value` syntax—see [the section called “Pax URL Aether repository URL syntax”](#).



NOTE

The `@id` option specifies the name of the repository and is *required* by the Aether layer.



NOTE

The presence of the `org.ops4j.pax.url.mvn.repositories` property setting has an important side effect: it signals that the Pax URL Aether component takes its configuration from the `etc/org.ops4j.pax.url.mvn.cfg`, *not* from a `settings.xml` file (even if the `org.ops4j.pax.url.mvn.settings` property has been set).

Adding a default Maven repository

The default repositories are a list of repositories that the container always checks first. To add a default Maven repository to the Pax URL Aether configuration, open the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` configuration file in a text editor and edit the `org.ops4j.pax.url.mvn.defaultRepositories` property setting. The default is as follows:

```
org.ops4j.pax.url.mvn.defaultRepositories=\

file:${runtime.home}/${karaf.default.repository}@snapshots@id=karaf.${kara
f.default.repository},\
    file:${runtime.home}/local-repo@snapshots@id=karaf.local-repo,\

file:${karaf.base}/${karaf.default.repository}@snapshots@id=child.karaf.${
karaf.default.repository}
```

Where the `org.ops4j.pax.url.mvn.defaultRepositories` property is defined as a comma-separated list of Maven repository URLs. The backslash character, `\`, functions as a (UNIX style) line continuation character and must be followed immediately by the newline character. Local repositories should be defined using a URL with the `file:` scheme. The Pax URL Aether component supports special repository URL options, defined using the `@Option=Value` syntax—see [the section called “Pax URL Aether repository URL syntax”](#).

**NOTE**

It is recommended that you leave the container's system repository as the first entry in the list.

Customizing the location of the local Maven repository

The local Maven repository plays a special role, because it is the primary local cache of Maven artifacts: whenever Maven downloads an artifact from a remote repository, it installs the artifact into the local repository. The usual location of the local Maven repository is `.m2/repository/` under the user's home directory. You can optionally customize the location by setting the `org.ops4j.pax.url.mvn.localRepository` property in the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` configuration file. For example:

```
org.ops4j.pax.url.mvn.localRepository=
/home/jbloggs/path/to/local/repository
```

By default, this property is not set.

Configuring a HTTP proxy for Maven URLs

To configure a HTTP proxy (which will be used when connecting to remote Maven repositories), open the `InstallDir/etc/system.properties` file in a text editor and set the `http.proxyHost` and `http.proxyPort` system properties with the host and port of the proxy—for example:

```
http.proxyHost=192.0.2.0
http.proxyPort=8080
```

You can optionally specify a list of non-proxy hosts (hosts that can be reached without going through the proxy) using the `http.nonProxyHosts` property—for example:

```
http.nonProxyHosts=localhost|*.redhat.com|*.jboss.org
```

**NOTE**

An advantage of using the system properties approach to configuring the proxy is that these settings will be used both by the `mvn` URL protocol handler and by the `http` URL protocol handler (see [Section 4.1, “Locating HTTP Artifacts”](#)).

4.3.4. Configuring Pax URL Aether through settings.xml

Overview

You can optionally configure Pax URL Aether using a standard Maven `settings.xml` file. This approach is particularly convenient in a *development environment*, because it makes it possible to store your build time settings and your run time settings all in one place.

Enabling the settings.xml configuration approach

To configure Pax URL Aether to read its configuration from a Maven `settings.xml` file, you must remove or comment out the `org.ops4j.pax.url.mvn.repositories` setting in the `InstallDir/etc/org.ops4j.pax.url.mvn.cfg` file. For example, you can comment out the

default repositories setting by inserting a hash, #, at the start of the line, as follows:

```
#org.ops4j.pax.url.mvn.repositories= \
    http://repo1.maven.org/maven2@id=maven.central.repo, \
    http://repository.jboss.org/nexus/content/repositories/public@id=jboss.public.repo, \
    https://repo.fusesource.com/nexus/content/repositories/releases@id=fusesource.release.repo, \
    https://repo.fusesource.com/nexus/content/groups/ea@id=fusesource.ea.repo, \
    http://svn.apache.org/repos/asf/servicemix/m2-repo@id=servicemix.repo, \
    http://repository.springsource.com/maven/bundles/release@id=springsource.release.repo, \
    http://repository.springsource.com/maven/bundles/external@id=springsource.external.repo
```

When the repositories setting is absent, Pax URL Aether implicitly switches to the `settings.xml` configuration approach.

Location of the settings.xml file

By default, Pax URL Aether looks in the standard locations for the Maven `settings.xml` file (usually `UserHome/.m2/settings.xml`). If you like, you can specify the location explicitly using the `org.ops4j.pax.url.mvn.settings` property. For example:

```
org.ops4j.pax.url.mvn.settings= /home/fuse/settings.xml
```

For full details of the search order for `settings.xml`, see the description of `org.ops4j.pax.url.mvn.settings` in [the section called “Pax URL Aether configuration reference”](#).

Adding a remote Maven repository

To add a new remote Maven repository to your `settings.xml` file, open the `settings.xml` file in a text editor and add a new `repository` XML element. For example, to create an entry for the JBoss Fuse public Maven repository, add a `repository` element as shown:

```
<settings xmlns="http://maven.apache.org/SETTINGS/1.0.0"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/SETTINGS/1.0.0
http://maven.apache.org/xsd/settings-1.0.0.xsd">
    ...
    <profiles>
        <profile>
            <id>my-fuse-profile</id>
            <activation>
                <activeByDefault>true</activeByDefault>
            </activation>
```



```

<repositories>
  <!--
    | Add new remote Maven repositories here
    -->
  <repository>
    <id>jboss-fuse-public-repository</id>

    <url>https://repo.fusesource.com/nexus/content/groups/public/</url>
    <releases>
      <enabled>true</enabled>
    </releases>
    <snapshots>
      <enabled>false</enabled>
    </snapshots>
  </repository>
  ...
</repositories>
</profiles>
...
</settings>

```

The preceding example additionally specifies that release artifacts can be downloaded, but snapshot artifacts cannot be downloaded from the repository.

Customizing the location of the local Maven repository

To customize the location of your local Maven repository, open the `settings.xml` file in a text editor and add (or modify) the `localRepository` XML element. For example, to select the directory, `/home/fuse/.m2/repository`, as your local Maven repository:

```

<settings xmlns="http://maven.apache.org/SETTINGS/1.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/SETTINGS/1.0.0
http://maven.apache.org/xsd/settings-1.0.0.xsd">
  ...
  <!-- localRepository
    | The path to the local repository Maven will use to store artifacts.
    |
    | Default: ~/.m2/repository -->
  <localRepository>/home/fuse/.m2/repository</localRepository>
  ...
</settings>

```

For a detailed explanation of the search order for the local Maven repository, see [the section called “Local Maven repository search order”](#).

Configuring a HTTP proxy for Maven URLs

To configure a HTTP proxy (which will be used when connecting to remote Maven repositories), open the `settings.xml` file in a text editor and add a new `proxy` XML element as a child of the `proxies` XML element. The definition of the proxy follows the standard Maven syntax. For example, to create a proxy for the HTTP (insecure) protocol with host, `192.0.2.0`, and port, `8080`, add a `proxy` element as follows:

```

<settings xmlns="http://maven.apache.org/SETTINGS/1.0.0"

```

```

    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/SETTINGS/1.0.0
http://maven.apache.org/xsd/settings-1.0.0.xsd">
    ...
    <proxies>
      <proxy>
        <id>fuse-proxy-1</id>
        <active>true</active>
        <protocol>http</protocol>
        <host>192.0.2.0</host>
        <port>8080</port>
      </proxy>
    </proxies>
    ...
  </settings>

```

You can also add a proxy for secure HTTPS connections by adding a **proxy** element configured with the **https** protocol.

Reference

For a detailed description of the syntax of the Maven `settings.xml` file, see the Maven [Settings Reference](#). But please note that *not all of the features* documented there are necessarily supported by the Pax URL Aether component.

4.3.5. Pax URL Aether Reference

Overview

This section provides a configuration reference for the Pax URL Aether component, which is used to configure the runtime behaviour of Maven in the Karaf container.



NOTE

The prefix appearing in the property names, `org.ops4j.pax.url.mvn.*`, reflects the old name of this component, which was previously called Pax URL Mvn.

Local Maven repository search order

Pax URL Aether resolves the location of the local repository in the following order:

1. The location specified by the `org.ops4j.pax.url.mvn.localRepository` property in the `org.ops4j.pax.url.mvn.cfg` file.
2. Otherwise, the location specified by the `localRepository` element in the `settings.xml` file specified by the `org.ops4j.pax.url.mvn.settings` property in the `org.ops4j.pax.url.mvn.cfg` file.
3. Otherwise, the location specified by the `localRepository` element in the `.m2/settings.xml` file located under the user's home directory.
4. Otherwise, the location specified by the `localRepository` element in the `M2_HOME/conf/settings.xml` file.

5. Otherwise, the default location is `.m2/repository/` under the user's home directory.

Pax URL Aether Maven URL syntax

The protocol handler registered by Pax URL Aether supports the following Maven URL syntax:

```
mvn:[RepositoryUrl!]GroupId/ArtifactId[/Version[/Type]]
```

Where *RepositoryUrl* has the syntax specified by [the section called “Pax URL Aether repository URL syntax”](#); and *GroupId*, *ArtifactId*, *Version*, *Type* are the standard Maven location coordinates.

Pax URL Aether repository URL syntax

You specify a repository location using a URL with a `file:`, `http:`, or `https:` scheme, optionally appending one or more of the following suffixes:

@snapshots

Allow snapshot versions to be read from the repository.

@noreleases

Do not allow release versions to be read from the repository.

@id=RepoName

(Required) Specifies the repository name. This setting is required by the Aether handler.

@multi

Marks the path as a parent directory of multiple repository directories. At run time the parent directory is scanned for subdirectories and each subdirectory is used as a remote repository.

@update=UpdatePolicy

Specifies the Maven `updatePolicy`, overriding the value of `org.ops4j.pax.url.mvn.globalUpdatePolicy`.

@releasesUpdate=UpdatePolicy

Specifies the Maven `updatePolicy` specifically for release artifacts (overriding the value of `@update`).

@snapshotsUpdate=UpdatePolicy

Specifies the Maven `updatePolicy` specifically for snapshot artifacts (overriding the value of `@update`).

@checksum=ChecksumPolicy

Specifies the Maven `checksumPolicy`, which specifies how to react if a downloaded Maven artifact has a missing or incorrect checksum. The policy value can be: `ignore`, `fail`, or `warn`.

@releasesChecksum=ChecksumPolicy

Specifies the Maven `checksumPolicy` specifically for release artifacts (overriding the value of `@checksum`).

`@snapshotsChecksum=ChecksumPolicy`

Specifies the Maven `checksumPolicy` specifically for snapshot artifacts (overriding the value of `@checksum`).

For example:

```
https://repo.example.org/maven/repository@id=example.repo
```

Pax URL Aether configuration reference

The Pax URL Aether component can be configured by editing the `etc/org.ops4j.pax.url.mvn.cfg` configuration file (uses OSGi Config Admin service). In `pax-url-aether` version 2.4.2, the following configuration properties are supported:

`org.ops4j.pax.url.mvn.certificateCheck`

If `true`, enable the SSL certificate check when connecting to a remote repository through the HTTPS protocol. If `false`, skip the SSL certificate check. Default is `false`.

`org.ops4j.pax.url.mvn.defaultRepositories`

Specifies a list of default (local) Maven repositories that are checked *before* looking up the remote repositories. Specified as a comma-separated list of `file:` repository URLs, where each repository URL has the syntax defined in [the section called “Pax URL Aether repository URL syntax”](#).

`org.ops4j.pax.url.mvn.globalUpdatePolicy`

Specifies the Maven `updatePolicy`, which determines how often Aether attempts to update local Maven artifacts from remote repositories. Can take the following values:

- **always**—always resolve the latest SNAPSHOT from remote Maven repositories.
- **never**—never check for newer remote SNAPSHOTs.
- **daily**—check on the first run of the day (local time).
- **interval:Mins**—check every *Mins* minutes.

Default is **daily**.

`org.ops4j.pax.url.mvn.localRepository`

Specifies the location of the local Maven repository on the file system, overriding the default value (which is usually `UserHome/.m2/repository`).

`org.ops4j.pax.url.mvn.proxies`

Can be used to specify a HTTP proxy, a HTTPS proxy, and non-proxy host lists. The value consists of a semicolon, `;`, separated list of entries. You can include the following entries (where each entry is optional):

- `http:host=Host,port=Port[,nonProxyHosts=NonProxyHosts]`

- `https:host=Host,port=Port[,nonProxyHosts=NonProxyHosts]`

The `nonProxyHosts` setting is optional and, if included, specifies a list of hosts that can be reached without going through the proxy. The list of non-proxy hosts has its entries separated by a pipe, `|`, symbol—for example, `nonProxyHosts=localhost|example.org`.

Here is a sample `org.ops4j.pax.url.mvn.proxies` setting:


```
org.ops4j.pax.url.mvn.proxies=
http:host=gateway,port=8080;https:host=sslgateway,port=8453
```

`org.ops4j.pax.url.mvn.proxySupport`

If `true`, enable HTTP proxy support through property settings. When this setting is enabled, the HTTP proxy can be configured in either of the following ways:

- Through the `org.ops4j.pax.url.mvn.proxies` property (takes precedence), or
- Through the `http.proxyHost`, `http.proxyPort`, and `http.nonProxyHosts` Java system properties, set in the `etc/system.properties` file.

If `false`, the preceding property settings are ignored. Default is `true`.



NOTE

This setting has no effect on proxy support when a Maven `settings.xml` file is selected to configure Pax URL Aether.

`org.ops4j.pax.url.mvn.repositories`

Specifies a list of remote Maven repositories that can be searched for Maven artifacts. Specified as a comma-separated list of `http:` or `https:` repository URLs, where each repository URL has the syntax defined in [the section called “Pax URL Aether repository URL syntax”](#).



IMPORTANT

If the `org.ops4j.pax.url.mvn.repositories` property is *not* set, Pax URL Aether reads its Maven settings from the relevant Maven `settings.xml` file instead (usually, from `UserHome/.m2/settings.xml` by default). In other words, the absence of the `org.ops4j.pax.url.mvn.repositories` property implicitly enables the `settings.xml` configuration approach.

`org.ops4j.pax.url.mvn.security`


Specifies the path to a Maven `settings-security.xml` file. This can be used to enable [server password encryption](#). Default is `${user.home}/.m2/settings-security.xml`.

`org.ops4j.pax.url.mvn.settings`

Specifies a path on the file system to override the default location of the Maven `settings.xml` file. Pax URL Aether resolves the location of the Maven `settings.xml` file in the following order:

1. The location specified by `org.ops4j.pax.url.mvn.settings`.

2. `${user.home}/.m2/settings.xml`
3. `${maven.home}/conf/settings.xml`
4. `M2_HOME/conf/settings.xml`

**NOTE**

All `settings.xml` files are ignored, if the `org.ops4j.pax.url.mvn.repositories` property is set.

`org.ops4j.pax.url.mvn.timeout`

Specifies the timeout to use while downloading artifacts, in units of milliseconds. Default is **5000** (five seconds).

PART II. OSGI BUNDLE DEPLOYMENT MODEL

Abstract

The OSGi bundle is the underlying unit of deployment for the Red Hat JBoss Fuse container. You can either package and deploy your applications directly as bundles or use one of the alternative deployment models (WAR).

CHAPTER 5. INTRODUCTION TO OSGI

Abstract

The OSGi specification supports modular application development by defining a runtime framework that simplifies building, deploying, and managing complex applications.

5.1. RED HAT JBOSS FUSE

Overview


Red Hat JBoss Fuse has the following layered architecture:

- **Technology layer**—includes technologies such as JAX-WS, JAX-RS, JMS, Spring, and JEE
- **the section called “Red Hat JBoss Fuse”** —a wrapper layer around the OSGi container implementation, which provides support for deploying the OSGi container as a runtime server. Runtime features provided by the JBoss Fuse include hot deployment, management, and administration features.
- **OSGi framework** —implements OSGi functionality, including managing dependencies and bundle lifecycles

Red Hat JBoss Fuse

Figure 5.1 shows the architecture of JBoss Fuse.

Figure 5.1. Red Hat JBoss Fuse Architecture

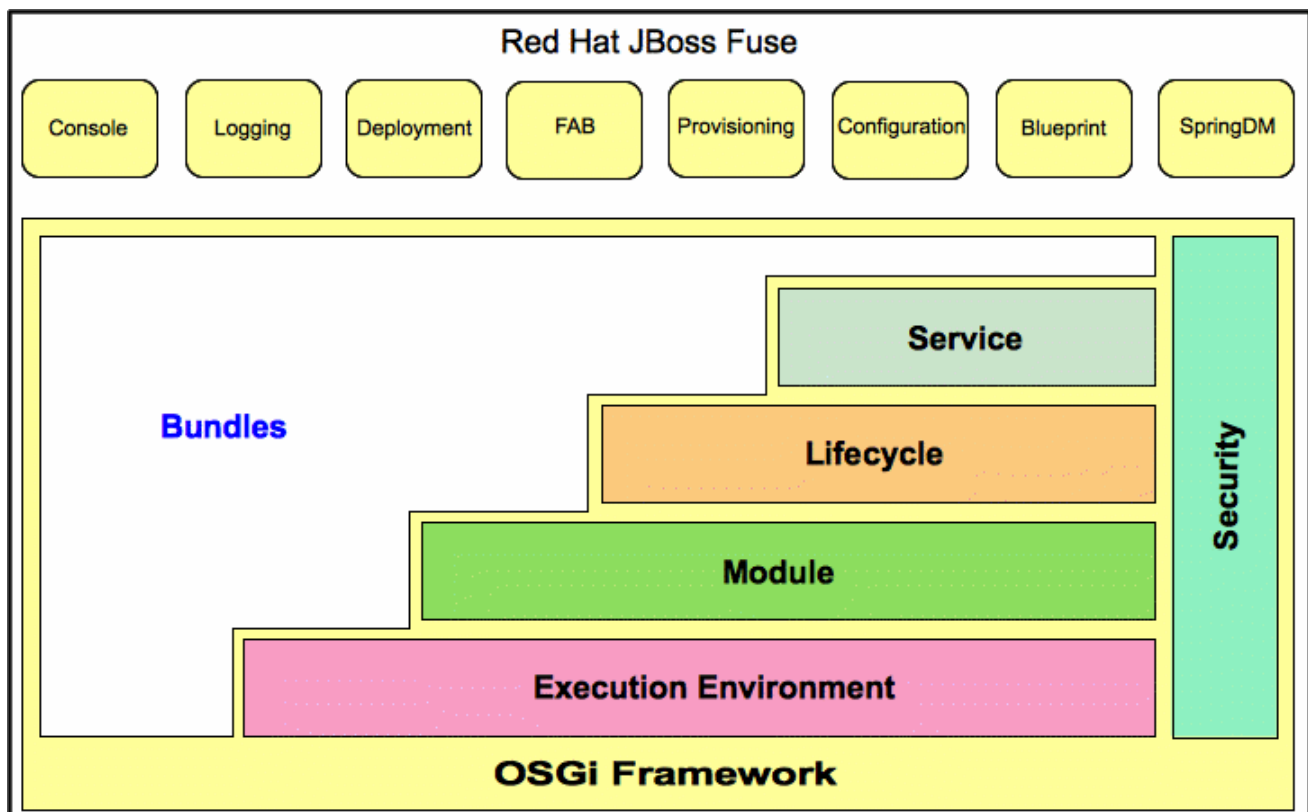

JBoss Fuse is based on [Apache Karaf](#), a powerful, lightweight, OSGi-based runtime container for

deploying and managing bundles to facilitate componentization of applications. JBoss Fuse also provides native OS integration and can be integrated into the operating system as a service so that the lifecycle is bound to the operating system.

As shown in [Figure 5.1](#), JBoss Fuse extends the OSGi layers with:

- **Console**—an extensible [Gogo](#) console manages services, installs and manages applications and libraries, and interacts with the JBoss Fuse runtime. It provides console commands to administer instances of JBoss Fuse. See the ["Console Reference"](#).
- **Logging**—a powerful, unified logging subsystem provides console commands to display, view and change log levels. See ["Configuring and Running JBoss Fuse"](#).
- **Deployment**—supports both manual deployment of OSGi bundles using the `osgi:install` and `osgi:start` commands and hot deployment of applications. When a JAR file, WAR file, or OSGi bundle is copied into the hot deployment folder `InstallDir/ deploy`, it's automatically installed on-the-fly inside the Red Hat JBoss Fuse runtime. When you update or delete these files or bundles, the changes are made automatically (but only while the container is running!). See [Section 7.1, "Hot Deployment"](#).
- **Provisioning**—provides multiple mechanisms for installing applications and libraries. See [Chapter 8, Deploying Features](#).
- **Configuration**—the properties files stored in the `InstallDir/ etc` folder are continuously monitored, and changes to them are automatically propagated to the relevant services at configurable intervals.
- **Spring DM**—simplifies building Spring applications that run in an OSGi framework. When a Spring configuration file is copied to the hot deployment folder, Red Hat JBoss Fuse generates an OSGi bundle on-the-fly and instantiates the Spring application context.
- **Blueprint**—is essentially a standardized version of Spring DM. It is a dependency injection framework that simplifies interaction with the OSGi container—for example, providing standard XML elements to import and export OSGi services. When a Blueprint configuration file is copied to the hot deployment folder, Red Hat JBoss Fuse generates an OSGi bundle on-the-fly and instantiates the Blueprint context.

5.2. OSGI FRAMEWORK

Overview

The [OSGi Alliance](#) is an independent organization responsible for defining the features and capabilities of the [OSGi Service Platform Release 4](#). The OSGi Service Platform is a set of open specifications that simplify building, deploying, and managing complex software applications.

OSGi technology is often referred to as the dynamic module system for Java. OSGi is a framework for Java that uses bundles to modularly deploy Java components and handle dependencies, versioning, classpath control, and class loading. OSGi's lifecycle management allows you to load, start, and stop bundles without shutting down the JVM.

OSGi provides the best runtime platform for Java, a superior class loading architecture, and a registry for services. Bundles can export services, run processes, and have their dependencies managed. Each bundle can have its requirements managed by the OSGi container.

JBoss Fuse uses [Apache Felix](#) as its default OSGi implementation. The framework layers form the container where you install bundles. The framework manages the installation and updating of bundles in a dynamic, scalable manner, and manages the dependencies between bundles and services.

OSGi architecture

As shown in [Figure 5.1, “Red Hat JBoss Fuse Architecture”](#), the OSGi framework contains the following:

- **Bundles** – Logical modules that make up an application. See [Section 5.4, “OSGi Bundles”](#).
- **Service layer** – Provides communication among modules and their contained components. This layer is tightly integrated with the lifecycle layer. See [Section 5.3, “OSGi Services”](#).
- **Lifecycle layer** – Provides access to the underlying OSGi framework. This layer handles the lifecycle of individual bundles so you can manage your application dynamically, including starting and stopping bundles.
- **Module layer** – Provides an API to manage bundle packaging, dependency resolution, and class loading.
- **Execution environment** – A configuration of a JVM. This environment uses profiles that define the environment in which bundles can work.
- **Security layer** – Optional layer based on Java 2 security, with additional constraints and enhancements.

Each layer in the framework depends on the layer beneath it. For example, the lifecycle layer requires the module layer. The module layer can be used without the lifecycle and service layers.

5.3. OSGI SERVICES

Overview

An OSGi service is a Java class or service interface with service properties defined as name/value pairs. The service properties differentiate among service providers that provide services with the same service interface.

An OSGi service is defined semantically by its service interface, and it is implemented as a service object. A service's functionality is defined by the interfaces it implements. Thus, different applications can implement the same service.

Service interfaces allow bundles to interact by binding interfaces, not implementations. A service interface should be specified with as few implementation details as possible.

OSGi service registry

In the OSGi framework, the service layer provides communication between [bundles](#) and their contained components using the publish, find, and bind service model. The service layer contains a service registry where:

- Service providers register services with the framework to be used by other bundles
- Service requesters find services and bind to service providers

Services are owned by, and run within, a bundle. The bundle registers an implementation of a service

with the framework service registry under one or more Java interfaces. Thus, the service's functionality is available to other bundles under the control of the framework, and other bundles can look up and use the service. Lookup is performed using the Java interface and service properties.

Each bundle can register multiple services in the service registry using the fully qualified name of its interface and its properties. Bundles use names and properties with LDAP syntax to query the service registry for services.

A bundle is responsible for runtime service dependency management activities including publication, discovery, and binding. Bundles can also adapt to changes resulting from the dynamic availability (arrival or departure) of the services that are bound to the bundle.

Event notification

Service interfaces are implemented by objects created by a bundle. Bundles can:

- Register services
- Search for services
- Receive notifications when their registration state changes

The OSGi framework provides an event notification mechanism so service requesters can receive notification events when changes in the service registry occur. These changes include the publication or retrieval of a particular service and when services are registered, modified, or unregistered.

Service invocation model

When a bundle wants to use a service, it looks up the service and invokes the Java object as a normal Java call. Therefore, invocations on services are synchronous and occur in the same thread. You can use callbacks for more asynchronous processing. Parameters are passed as Java object references. No marshalling or intermediary canonical formats are required as with XML. OSGi provides solutions for the problem of services being unavailable.

OSGi framework services

In addition to your own services, the OSGi framework provides the following optional services to manage the operation of the framework:

- **Package Admin service**—allows a management agent to define the policy for managing Java package sharing by examining the status of the shared packages. It also allows the management agent to refresh packages and to stop and restart bundles as required. This service enables the management agent to make decisions regarding any shared packages when an exporting bundle is uninstalled or updated.

The service also provides methods to refresh exported packages that were removed or updated since the last refresh, and to explicitly resolve specific bundles. This service can also trace dependencies between bundles at runtime, allowing you to see what bundles might be affected by upgrading.

- **Start Level service**—enables a management agent to control the starting and stopping order of bundles. The service assigns each bundle a start level. The management agent can modify the start level of bundles and set the active start level of the framework, which starts and stops the appropriate bundles. Only bundles that have a start level less than, or equal to, this active start level can be active.

- **URL Handlers service**—dynamically extends the Java runtime with URL schemes and content handlers enabling any component to provide additional URL handlers.
- **Permission Admin service**—enables the OSGi framework management agent to administer the permissions of a specific bundle and to provide defaults for all bundles. A bundle can have a single set of permissions that are used to verify that it is authorized to execute privileged code. You can dynamically manipulate permissions by changing policies on the fly and by adding new policies for newly installed components. Policy files are used to control what bundles can do.
- **Conditional Permission Admin service**—extends the Permission Admin service with permissions that can apply when certain conditions are either true or false at the time the permission is checked. These conditions determine the selection of the bundles to which the permissions apply. Permissions are activated immediately after they are set.

The OSGi framework services are described in detail in separate chapters in the *OSGi Service Platform Release 4* specification available from the [release 4 download page](#) on the OSGi Alliance web site.

OSGi Compendium services

In addition to the OSGi framework services, the OSGi Alliance defines a set of optional, standardized compendium services. The OSGi compendium services provide APIs for tasks such as logging and preferences. These services are described in the *OSGi Service Platform, Service Compendium* available from the [release 4 download page](#) on the OSGi Alliance Web site.

The *Configuration Admin* compendium service is like a central hub that persists configuration information and distributes it to interested parties. The Configuration Admin service specifies the configuration information for deployed bundles and ensures that the bundles receive that data when they are active. The configuration data for a bundle is a list of name-value pairs. See [the section called “Red Hat JBoss Fuse”](#).

5.4. OSGI BUNDLES

Overview

With OSGi, you modularize applications into bundles. Each bundle is a tightly coupled, dynamically loadable collection of classes, JARs, and configuration files that explicitly declare any external dependencies. In OSGi, a bundle is the primary deployment format. Bundles are applications that are packaged in JARs, and can be installed, started, stopped, updated, and removed.

OSGi provides a dynamic, concise, and consistent programming model for developing bundles. Development and deployment are simplified by decoupling the service's specification (Java interface) from its implementation.

The OSGi bundle abstraction allows modules to share Java classes. This is a static form of reuse. The shared classes must be available when the dependent bundle is started.

A bundle is a JAR file with metadata in its OSGi manifest file. A bundle contains class files and, optionally, other resources and native libraries. You can explicitly declare which packages in the bundle are visible externally (exported packages) and which external packages a bundle requires (imported packages).

The module layer handles the packaging and sharing of Java packages between bundles and the hiding of packages from other bundles. The OSGi framework dynamically resolves dependencies among bundles. The framework performs bundle resolution to match imported and exported packages. It can also manage multiple versions of a deployed bundle.

Class Loading in OSGi

OSGi uses a graph model for class loading rather than a tree model (as used by the JVM). Bundles can share and re-use classes in a standardized way, with no runtime class-loading conflicts.

Each bundle has its own internal classpath so that it can serve as an independent unit if required.

The benefits of class loading in OSGi include:

- Sharing classes directly between bundles. There is no requirement to promote JARs to a parent class-loader.
- You can deploy different versions of the same class at the same time, with no conflict.

CHAPTER 6. BUILDING AN OSGI BUNDLE

Abstract

This chapter describes how to build an OSGi bundle using Maven. For building bundles, the Maven bundle plug-in plays a key role, because it enables you to automate the generation of OSGi bundle headers (which would otherwise be a tedious task). Maven archetypes, which generate a complete sample project, can also provide a starting point for your bundle projects.

6.1. GENERATING A BUNDLE PROJECT

Generating bundle projects with Maven archetypes

To help you get started quickly, you can invoke a Maven archetype to generate the initial outline of a Maven project (a Maven archetype is analogous to a project wizard). The following Maven archetypes can generate projects for building OSGi bundles:

- [the section called “Apache CXF karaf-soap-archetype archetype”](#).
- [the section called “Apache Camel archetype”](#).

Apache CXF karaf-soap-archetype archetype

The Apache CXF karaf-soap-archetype archetype creates a project for building a service from Java. To generate a Maven project with the coordinates, *GroupId: ArtifactId: Version*, enter the following command:

```
mvn archetype:generate \  
  -DarchetypeGroupId=io.fabric8.archetypes \  
  -DarchetypeArtifactId=karaf-soap-archetype \  
  -DarchetypeVersion=1.2.0.redhat-621084 \  
  -DgroupId=GroupId \  
  -DartifactId=ArtifactId \  
  -Dversion=Version \  
  -Dfabric8-profile=ProfileName
```



NOTE

The backslash character, \, indicates line continuation on Linux and UNIX operating systems. On Windows platforms, you must omit the backslash character and put all of the arguments on a single line.

Apache Camel archetype

The Apache Camel OSGi archetype creates a project for building a route that can be deployed into the OSGi container. To generate a Maven project with the coordinates, *GroupId: ArtifactId: Version*, enter the following command:

```
mvn archetype:generate \  
  -DarchetypeGroupId=org.apache.camel.archetypes \  
  -DarchetypeArtifactId=camel-archetype-blueprint \  
  -DgroupId=GroupId \  
  -DartifactId=ArtifactId \  
  -Dversion=Version \  
  -Dfabric8-profile=ProfileName
```

```
-DarchetypeVersion=2.15.1.redhat-621084 \
-DgroupId=GroupId \
-DartifactId=ArtifactId \
-Dversion=Version
```

Building the bundle

By default, the preceding archetypes create a project in a new directory, whose name is the same as the specified artifact ID, *ArtifactId*. To build the bundle defined by the new project, open a command prompt, go to the project directory (that is, the directory containing the `pom.xml` file), and enter the following Maven command:

```
mvn install
```

The effect of this command is to compile all of the Java source files, to generate a bundle JAR under the *ArtifactId*/`target` directory, and then to install the generated JAR in the local Maven repository.

6.2. MODIFYING AN EXISTING MAVEN PROJECT

Overview

If you already have a Maven project and you want to modify it so that it generates an OSGi bundle, perform the following steps:

1. the section called “Change the package type to bundle” .
2. the section called “Add the bundle plug-in to your POM” .
3. the section called “Customize the bundle plug-in” .
4. the section called “Customize the JDK compiler version” .

Change the package type to bundle

Configure Maven to generate an OSGi bundle by changing the package type to **bundle** in your project's `pom.xml` file. Change the contents of the `packaging` element to **bundle**, as shown in the following example:

```
<project ... >
...
<packaging>bundle</packaging>
...
</project>
```

The effect of this setting is to select the Maven bundle plug-in, **maven-bundle-plugin**, to perform packaging for this project. This setting on its own, however, has no effect until you explicitly add the bundle plug-in to your POM.

Add the bundle plug-in to your POM

To add the Maven bundle plug-in, copy and paste the following sample **plugin** element into the `project/build/plugins` section of your project's `pom.xml` file:

```
■
```

```

<project ... >
  ...
  <build>
    <defaultGoal>install</defaultGoal>
    <plugins>
      ...
      <plugin>
        <groupId>org.apache.felix</groupId>
        <artifactId>maven-bundle-plugin</artifactId>
        <version>2.3.7</version>
        <extensions>true</extensions>
        <configuration>
          <instructions>
            <Bundle-SymbolicName>${project.groupId}.${project.artifactId}
          </Bundle-SymbolicName>
            <Import-Package>*</Import-Package>
          </instructions>
        </configuration>
      </plugin>
    </plugins>
  </build>
  ...
</project>

```

Where the bundle plug-in is configured by the settings in the `instructions` element.

Customize the bundle plug-in

For some specific recommendations on configuring the bundle plug-in for Apache CXF, see [Section 6.3, “Packaging a Web Service in a Bundle”](#).

For an in-depth discussion of bundle plug-in configuration, in the context of the OSGi framework and versioning policy, see [“Managing OSGi Dependencies”](#).

Customize the JDK compiler version

It is almost always necessary to specify the JDK version in your POM file. If your code uses any modern features of the Java language—such as generics, static imports, and so on—and you have not customized the JDK version in the POM, Maven will fail to compile your source code. It is *not* sufficient to set the `JAVA_HOME` and the `PATH` environment variables to the correct values for your JDK, you must also modify the POM file.

To configure your POM file, so that it accepts the Java language features introduced in JDK 1.7, add the following `maven-compiler-plugin` plug-in settings to your POM (if they are not already present):

```

<project ... >
  ...
  <build>
    <defaultGoal>install</defaultGoal>
    <plugins>
      ...
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>

```



```

        <configuration>
            <source>1.7</source>
            <target>1.7</target>
        </configuration>
    </plugin>
</plugins>
</build>
...
</project>

```

6.3. PACKAGING A WEB SERVICE IN A BUNDLE

Overview

This section explains how to modify an existing Maven project for a Apache CXF application, so that the project generates an OSGi bundle suitable for deployment in the Red Hat JBoss Fuse OSGi container. To convert the Maven project, you need to modify the project's POM file and the project's Spring XML file(s) (located in `META-INF/spring`).

Modifying the POM file to generate a bundle

To configure a Maven POM file to generate a bundle, there are essentially two changes you need to make: change the POM's package type to **bundle**; and add the Maven bundle plug-in to your POM. For details, see [Section 6.1, “Generating a Bundle Project”](#).

Mandatory import packages

In order for your application to use the Apache CXF components, you need to import their packages into the application's bundle. Because of the complex nature of the dependencies in Apache CXF, you cannot rely on the Maven bundle plug-in, or the **bnd** tool, to automatically determine the needed imports. You will need to explicitly declare them.

You need to import the following packages into your bundle:

```

javax.jws
javax.wsdl
javax.xml.bind
javax.xml.bind.annotation
javax.xml.namespace
javax.xml.ws
org.apache.cxf.bus
org.apache.cxf.bus.spring
org.apache.cxf.bus.resource
org.apache.cxf.configuration.spring
org.apache.cxf.resource
org.apache.cxf.jaxws
org.springframework.beans.factory.config

```

Sample Maven bundle plug-in instructions

[Example 6.1, “Configuration of Mandatory Import Packages”](#) shows how to configure the Maven bundle plug-in in your POM to import the mandatory packages. The mandatory import packages appear as a comma-separated list inside the **Import - Package** element. Note the appearance of the wildcard, *****,

as the last element of the list. The wildcard ensures that the Java source files from the current bundle are scanned to discover what additional packages need to be imported.

Example 6.1. Configuration of Mandatory Import Packages

```
<project ... >
  ...
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.felix</groupId>
        <artifactId>maven-bundle-plugin</artifactId>
        <extensions>true</extensions>
        <configuration>
          <instructions>
            ...
            <Import-Package>
              javax.jws,
              javax.wsdl,
              javax.xml.bind,
              javax.xml.bind.annotation,
              javax.xml.namespace,
              javax.xml.ws,
              org.apache.cxf.bus,
              org.apache.cxf.bus.spring,
              org.apache.cxf.bus.resource,
              org.apache.cxf.configuration.spring,
              org.apache.cxf.resource,
              org.apache.cxf.jaxws,
              org.springframework.beans.factory.config,
              *
            </Import-Package>
            ...
          </instructions>
        </configuration>
      </plugin>
    </plugins>
  </build>
  ...
</project>
```

Add a code generation plug-in

A Web services project typically requires code to be generated. Apache CXF provides two Maven plug-ins for the JAX-WS front-end, which enable you to integrate the code generation step into your build. The choice of plug-in depends on whether you develop your service using the Java-first approach or the WSDL-first approach, as follows:

- *Java-first approach*—use the **cxf-java2ws-plugin** plug-in.
- *WSDL-first approach*—use the **cxf-codegen-plugin** plug-in.

OSGi configuration properties

The OSGi Configuration Admin service defines a mechanism for passing configuration settings to an OSGi bundle. You do not have to use this service for configuration, but it is typically the most convenient way of configuring bundle applications. Both Spring DM and Blueprint provide support for OSGi configuration, enabling you to substitute variables in a Spring XML file or a Blueprint file using values obtained from the OSGi Configuration Admin service.

For details of how to use OSGi configuration properties, see [Section 6.4, “Configuring the Bundle Plug-In”](#) and [the section called “Add OSGi configurations to the feature”](#).

6.4. CONFIGURING THE BUNDLE PLUG-IN

Overview

A bundle plug-in requires very little information to function. All of the required properties use default settings to generate a valid OSGi bundle.

While you can create a valid bundle using just the default values, you will probably want to modify some of the values. You can specify most of the properties inside the plug-in's `instructions` element.

Configuration properties

Some of the commonly used configuration properties are:

- [Bundle-SymbolicName](#)
- [Bundle-Name](#)
- [Bundle-Version](#)
- [Export-Package](#)
- [Private-Package](#)
- [Import-Package](#)

Setting a bundle's symbolic name

By default, the bundle plug-in sets the value for the `Bundle-SymbolicName` property to `groupId + "." + artifactId`, with the following exceptions:

- If `groupId` has only one section (no dots), the first package name with classes is returned.

For example, if the group ID is `commons-logging:commons-logging`, the bundle's symbolic name is `org.apache.commons.logging`.

- If `artifactId` is equal to the last section of `groupId`, then `groupId` is used.

For example, if the POM specifies the group ID and artifact ID as `org.apache.maven:maven`, the bundle's symbolic name is `org.apache.maven`.

- If `artifactId` starts with the last section of `groupId`, that portion is removed.

For example, if the POM specifies the group ID and artifact ID as `org.apache.maven:maven-core`, the bundle's symbolic name is `org.apache.maven.core`.

To specify your own value for the bundle's symbolic name, add a **Bundle-SymbolicName** child in the plug-in's **instructions** element, as shown in [Example 6.2](#).

Example 6.2. Setting a bundle's symbolic name

```
<plugin>
  <groupId>org.apache.felix</groupId>
  <artifactId>maven-bundle-plugin</artifactId>
  <configuration>
    <instructions>
      <Bundle-SymbolicName>${project.artifactId}</Bundle-SymbolicName>
      ...
    </instructions>
  </configuration>
</plugin>
```

Setting a bundle's name

By default, a bundle's name is set to `${project.name}`.

To specify your own value for the bundle's name, add a **Bundle-Name** child to the plug-in's **instructions** element, as shown in [Example 6.3](#).

Example 6.3. Setting a bundle's name

```
<plugin>
  <groupId>org.apache.felix</groupId>
  <artifactId>maven-bundle-plugin</artifactId>
  <configuration>
    <instructions>
      <Bundle-Name>JoeFred</Bundle-Name>
      ...
    </instructions>
  </configuration>
</plugin>
```

Setting a bundle's version

By default, a bundle's version is set to `${project.version}`. Any dashes (-) are replaced with dots (.) and the number is padded up to four digits. For example, `4.2-SNAPSHOT` becomes `4.2.0.SNAPSHOT`.

To specify your own value for the bundle's version, add a **Bundle-Version** child to the plug-in's **instructions** element, as shown in [Example 6.4](#).

Example 6.4. Setting a bundle's version

```
<plugin>
  <groupId>org.apache.felix</groupId>
  <artifactId>maven-bundle-plugin</artifactId>
```


```

<configuration>
  <instructions>
    <Bundle-Version>1.0.3.1</Bundle-Version>
    ...
  </instructions>
</configuration>
</plugin>

```

Specifying exported packages

By default, the OSGi manifest's **Export -Package** list is populated by all of the packages in your local Java source code (under `src/main/java`), *except* for the default package, `.`, and any packages containing `.impl` or `.internal`.



IMPORTANT

If you use a **Private-Package** element in your plug-in configuration and you do not specify a list of packages to export, the default behavior includes only the packages listed in the **Private-Package** element in the bundle. No packages are exported.

The default behavior can result in very large packages and in exporting packages that should be kept private. To change the list of exported packages you can add an **Export -Package** child to the plug-in's `instructions` element.

The **Export -Package** element specifies a list of packages that are to be included in the bundle and that are to be exported. The package names can be specified using the `*` wildcard symbol. For example, the entry `com.fuse.demo.*` includes all packages on the project's classpath that start with `com.fuse.demo`.

You can specify packages to be excluded by prefixing the entry with `!`. For example, the entry `!com.fuse.demo.private` excludes the package `com.fuse.demo.private`.

When excluding packages, the order of entries in the list is important. The list is processed in order from the beginning and any subsequent contradicting entries are ignored.


For example, to include all packages starting with `com.fuse.demo` except the package `com.fuse.demo.private`, list the packages using:

```
!com.fuse.demo.private,com.fuse.demo.*
```

However, if you list the packages using `com.fuse.demo.*;!com.fuse.demo.private`, then `com.fuse.demo.private` is included in the bundle because it matches the first pattern.

Specifying private packages

If you want to specify a list of packages to include in a bundle *without* exporting them, you can add a **Private-Package** instruction to the bundle plug-in configuration. By default, if you do not specify a **Private-Package** instruction, all packages in your local Java source are included in the bundle.

**IMPORTANT**

If a package matches an entry in both the **Private-Package** element and the **Export-Package** element, the **Export-Package** element takes precedence. The package is added to the bundle and exported.

The **Private-Package** element works similarly to the **Export-Package** element in that you specify a list of packages to be included in the bundle. The bundle plug-in uses the list to find all classes on the project's classpath that are to be included in the bundle. These packages are packaged in the bundle, but not exported (unless they are also selected by the **Export-Package** instruction).

[Example 6.5](#) shows the configuration for including a private package in a bundle

Example 6.5. Including a private package in a bundle


```
<plugin>
  <groupId>org.apache.felix</groupId>
  <artifactId>maven-bundle-plugin</artifactId>
  <configuration>
    <instructions>
      <Private-Package>org.apache.cxf.wsdlFirst.impl</Private-Package>
      ...
    </instructions>
  </configuration>
</plugin>
```

Specifying imported packages

By default, the bundle plug-in populates the OSGi manifest's **Import-Package** property with a list of all the packages referred to by the contents of the bundle.

While the default behavior is typically sufficient for most projects, you might find instances where you want to import packages that are not automatically added to the list. The default behavior can also result in unwanted packages being imported.

To specify a list of packages to be imported by the bundle, add an **Import-Package** child to the plug-in's **instructions** element. The syntax for the package list is the same as for the **Export-Package** element and the **Private-Package** element.

**IMPORTANT**

When you use the **Import-Package** element, the plug-in does not automatically scan the bundle's contents to determine if there are any required imports. To ensure that the contents of the bundle are scanned, you must place an ***** as the last entry in the package list.

[Example 6.6](#) shows the configuration for specifying the packages imported by a bundle

Example 6.6. Specifying the packages imported by a bundle

```
<plugin>
  <groupId>org.apache.felix</groupId>
```

```
<artifactId>maven-bundle-plugin</artifactId>
<configuration>
  <instructions>
    <Import-Package>javax.jws,
      javax.wsdl,
      org.apache.cxf.bus,
      org.apache.cxf.bus.spring,
      org.apache.cxf.bus.resource,
      org.apache.cxf.configuration.spring,
      org.apache.cxf.resource,
      org.springframework.beans.factory.config,
      *
    </Import-Package>
    ...
  </instructions>
</configuration>
</plugin>
```

More information

For more information on configuring a bundle plug-in, see:

- ["Managing OSGi Dependencies"](#)
- [Apache Felix documentation](#)
- [Peter Kriens' aQute Software Consultancy web site](#)

CHAPTER 7. DEPLOYING AN OSGI BUNDLE

Abstract

Apache Karaf provides two different approaches for deploying a single OSGi bundle: hot deployment or manual deployment. If you need to deploy a collection of related bundles, on the other hand, it is recommended that you deploy them together as a *feature*, rather than singly (see [Chapter 8, Deploying Features](#)).

7.1. HOT DEPLOYMENT

Hot deploy directory

JBoss Fuse monitors JAR files in the *InstallDir/deploy* directory and hot deploys everything in this directory. Each time a JAR file is copied to this directory, it is installed in the runtime and also started. You can subsequently update or delete the JARs, and the changes are handled automatically.

For example, if you have just built the bundle, *ProjectDir/target/foo-1.0-SNAPSHOT.jar*, you can deploy this bundle by copying it to the *InstallDir/deploy* directory as follows (assuming you are working on a UNIX platform):

```
% cp ProjectDir/target/foo-1.0-SNAPSHOT.jar InstallDir/deploy
```

Hot undeploying a bundle

To undeploy a bundle from the hot deploy directory, simply delete the bundle file from the *InstallDir/deploy* directory *while the Apache Karaf container is running*



IMPORTANT

The hot undeploy mechanism does *not* work while the container is shut down. If you shut down the Karaf container, delete the bundle file from **deploy/**, and then restart the Karaf container, the bundle will *not* be undeployed after you restart the container (you can, however, undeploy the bundle manually using the `osgi:uninstall` console command).

7.2. MANUAL DEPLOYMENT

Overview

You can manually deploy and undeploy bundles by issuing commands at the Red Hat JBoss Fuse console.

Installing a bundle

Use the `osgi:install` command to install one or more bundles in the OSGi container. This command has the following syntax:

```
osgi:install [-s] [--start] [--help] UrlList
```


Where *UrlList* is a whitespace-separated list of URLs that specify the location of each bundle to deploy. The following command arguments are supported:

-s

Start the bundle after installing.

--start

Same as **-s**.

--help

Show and explain the command syntax.

For example, to install and start the bundle, *ProjectDir/target/foo-1.0-SNAPSHOT.jar*, enter the following command at the Karaf console prompt:

```
osgi:install -s file:ProjectDir/target/foo-1.0-SNAPSHOT.jar
```



NOTE

On Windows platforms, you must be careful to use the correct syntax for the **file** URL in this command. See [Section A.1, “File URL Handler”](#) for details.

Uninstalling a bundle

To uninstall a bundle, you must first obtain its bundle ID using the **osgi:list** command. You can then uninstall the bundle using the **osgi:uninstall** command (which takes the bundle ID as its argument).

For example, if you have already installed the bundle named **A Camel OSGi Service Unit**, entering **osgi:list** at the console prompt might produce output like the following:

```
...
[ 175] [Active      ] [          ] [Started] [ 60] ServiceMix :: FTP
(2009.02.0.psc-01-00RC1)
[ 181] [Resolved    ] [          ] [ 60] A Camel OSGi
Service Unit (1.0.0.SNAPSHOT)
```

You can now uninstall the bundle with the ID, **181**, by entering the following console command:

```
osgi:uninstall 181
```

URL schemes for locating bundles

When specifying the location URL to the **osgi:install** command, you can use any of the URL schemes supported by Red Hat JBoss Fuse, which includes the following scheme types:

- [Section A.1, “File URL Handler”](#).
- [Section A.2, “HTTP URL Handler”](#).

- [Section A.3, “Mvn URL Handler”](#).


Redeploying bundles automatically using dev:watch

In a development environment—where a developer is constantly changing and rebuilding a bundle—it is typically necessary to re-install the bundle multiple times. Using the `dev:watch` command, you can instruct Karaf to monitor your local Maven repository and re-install a particular bundle automatically, as soon as it changes in your local Maven repository.

For example, given a particular bundle—with bundle ID, **751**—you can enable automatic redeployment by entering the command:

```
dev:watch 751
```

Now, whenever you rebuild and install the Maven artifact into your local Maven repository (for example, by executing `mvn install` in your Maven project), the Karaf container automatically re-installs the changed Maven artifact. For more details, see [section "dev:watch, watch" in "Console Reference"](#).



IMPORTANT


Using the `dev:watch` command is intended for a development environment only. It is *not* recommended for use in a production environment.

7.3. LIFECYCLE MANAGEMENT

Bundle lifecycle states

Applications in an OSGi environment are subject to the lifecycle of its bundles. Bundles have six lifecycle states:

1. **Installed** – All bundles start in the installed state. Bundles in the installed state are waiting for all of their dependencies to be resolved, and once they are resolved, bundles move to the resolved state.
2. **Resolved** – Bundles are moved to the resolved state when the following conditions are met:
 - The runtime environment meets or exceeds the environment specified by the bundle.
 - All of the packages imported by the bundle are exposed by bundles that are either in the resolved state or that can be moved into the resolved state at the same time as the current bundle.
 - All of the required bundles are either in the resolved state or they can be resolved at the same time as the current bundle.



IMPORTANT

All of an application's bundles must be in the resolved state before the application can be started.

If any of the above conditions ceases to be satisfied, the bundle is moved back into the installed state. For example, this can happen when a bundle that contains an imported package is removed from the container.

3. **Starting** – The starting state is a transitory state between the resolved state and the active state. When a bundle is started, the container must create the resources for the bundle. The container also calls the `start()` method of the bundle's bundle activator when one is provided.
4. **Active** – Bundles in the active state are available to do work. What a bundle does in the active state depends on the contents of the bundle. For example, a bundle containing a JAX-WS service provider indicates that the service is available to accept requests.
5. **Stopping** – The stopping state is a transitory state between the active state and the resolved state. When a bundle is stopped, the container must clean up the resources for the bundle. The container also calls the `stop()` method of the bundle's bundle activator when one is provided.
6. **Uninstalled** – When a bundle is uninstalled it is moved from the resolved state to the uninstalled state. A bundle in this state cannot be transitioned back into the resolved state or any other state. It must be explicitly re-installed.

The most important lifecycle states for application developers are the starting state and the stopping state. The endpoints exposed by an application are published during the starting state. The published endpoints are stopped during the stopping state.

Installing and resolving bundles

When you install a bundle using the `osgi:install` command (without the `-s` flag), the kernel installs the specified bundle and attempts to put it into the resolved state. If the resolution of the bundle fails for some reason (for example, if one of its dependencies is unsatisfied), the kernel leaves the bundle in the installed state.

At a later time (for example, after you have installed missing dependencies) you can attempt to move the bundle into the resolved state by invoking the `osgi:resolve` command, as follows:

```
osgi:resolve 181
```

Where the argument (**181**, in this example) is the ID of the bundle you want to resolve.

Starting and stopping bundles

You can start one or more bundles (from either the installed or the resolved state) using the `osgi:start` command. For example, to start the bundles with IDs, 181, 185, and 186, enter the following console command:

```
osgi:start 181 185 186
```

You can stop one or more bundles using the `osgi:stop` command. For example, to stop the bundles with IDs, 181, 185, and 186, enter the following console command:

```
osgi:stop 181 185 186
```

You can restart one or more bundles (that is, moving from the started state to the resolved state, and then back again to the started state) using the `osgi:restart` command. For example, to restart the bundles with IDs, 181, 185, and 186, enter the following console command:

```
osgi:restart 181 185 186
```

Bundle start level

A *start level* is associated with every bundle. The start level is a positive integer value that controls the order in which bundles are activated/started. Bundles with a low start level are started before bundles with a high start level. Hence, bundles with the start level, **1**, are started first and bundles belonging to the kernel tend to have lower start levels, because they provide the prerequisites for running most other bundles.

Typically, the start level of user bundles is 60 or higher.

Specifying a bundle's start level

Use the `osgi:bundle-level` command to set the start level of a particular bundle. For example, to configure the bundle with ID, 181, to have a start level of **70**, enter the following console command:

```
osgi:bundle-level 181 70
```

System start level

The OSGi container itself has a start level associated with it and this *system start level* determines which bundles can be active and which cannot: only those bundles whose start level is *less than or equal* to the system start level can be active.

To discover the current system start level, enter `osgi:start-level` in the console, as follows:

```
JBossFuse:karaf@root> osgi:start-level  
Level 100
```

If you want to change the system start level, provide the new start level as an argument to the `osgi:start-level` command, as follows:

```
osgi:start-level 200
```

7.4. TROUBLESHOOTING DEPENDENCIES

Missing dependencies

The most common issue that can arise when you deploy an OSGi bundle into the Red Hat JBoss Fuse container is that one or more dependencies are missing. This problem shows itself when you try to resolve the bundle in the OSGi container, usually as a side effect of starting the bundle. The bundle fails to resolve (or start) and a `ClassNotFoundException` error is logged (to view the log, use the `log:display` console command or look at the log file in the *InstallDir/data/log* directory).

There are two basic causes of a missing dependency: either a required feature or bundle is not installed in the container; or your bundle's `Import-Package` header is incomplete.

Required features or bundles are not installed

Evidently, all features and bundles required by your bundle must *already* be installed in the OSGi container, before you attempt to resolve your bundle. In particular, because Apache Camel has a modular architecture, where each component is installed as a separate feature, it is easy to forget to install one of the required components.



NOTE

Consider packaging your bundle as a feature. Using a feature, you can package your bundle together with all of its dependencies and thus ensure that they are all installed simultaneously. For details, see [Chapter 8, Deploying Features](#).

Import-Package header is incomplete

If all of the required features and bundles are already installed and you are still getting a **ClassNotFoundException** error, this means that the **Import-Package** header in your bundle's **MANIFEST.MF** file is incomplete. The **maven-bundle-plugin** (see [Section 6.2, “Modifying an Existing Maven Project”](#)) is a great help when it comes to generating your bundle's **Import-Package** header, but you should note the following points:

- Make sure that you include the wildcard, *****, in the **Import-Package** element of the Maven bundle plug-in configuration. The wildcard directs the plug-in to scan your Java source code and automatically generates a list of package dependencies.
- The Maven bundle plug-in is *not* able to figure out dynamic dependencies. For example, if your Java code explicitly calls a class loader to load a class dynamically, the bundle plug-in does not take this into account and the required Java package will not be listed in the generated **Import-Package** header.
- If you define a Spring XML file (for example, in the **META-INF/spring** directory), the Maven bundle plug-in is *not* able to figure out dependencies arising from the Spring XML configuration. Any dependencies arising from Spring XML must be added manually to the bundle plug-in's **Import-Package** element.
- If you define a blueprint XML file (for example, in the **OSGI-INF/blueprint** directory), any dependencies arising from the blueprint XML file are *automatically resolved at run time*. This is an important advantage of blueprint over Spring.

How to track down missing dependencies

To track down missing dependencies, perform the following steps:

1. Perform a quick check to ensure that all of the required bundles and features are actually installed in the OSGi container. You can use **osgi:list** to check which bundles are installed and **features:list** to check which features are installed.
2. Install (but do not start) your bundle, using the **osgi:install** console command. For example:

```
JBossFuse:karaf@root> osgi:install MyBundleURL
```

3. Use the `dev:dynamic-import` console command to enable dynamic imports on the bundle you just installed. For example, if the bundle ID of your bundle is 218, you would enable dynamic imports on this bundle by entering the following command:

```
JBossFuse:karaf@root> dev:dynamic-import 218
```

This setting allows OSGi to resolve dependencies using *any* of the bundles already installed in the container, effectively bypassing the usual dependency resolution mechanism (based on the **Import-Package** header). This is *not* recommended for normal deployment, because it bypasses version checks: you could easily pick up the wrong version of a package, causing your application to malfunction.

4. You should now be able to resolve your bundle. For example, if your bundle ID is 218, enter the following console command:

```
JBossFuse:karaf@root> osgi:resolve 218
```

5. Assuming your bundle is now resolved (check the bundle status using `osgi:list`), you can get a complete list of all the packages wired to your bundle using the `package:imports` command. For example, if your bundle ID is 218, enter the following console command:

```
JBossFuse:karaf@root> package:imports 218
```

You should see a list of dependent packages in the console window (where the package names are highlighted in this example):

```
Spring Beans (67): org.springframework.beans.factory.xml;  
version=3.0.5.RELEASE  
Apache ServiceMix :: Specs :: JAXB API 2.2 (87):  
javax.xml.bind.annotation; version=2.2.1  
Apache ServiceMix :: Specs :: JAXB API 2.2 (87): javax.xml.bind;  
version=2.2.1  
Web Services Metadata 2.0 (104): javax.jws; version=2.0.0  
Apache ServiceMix :: Specs :: JAXWS API 2.2 (105):  
javax.xml.ws.handler; version=2.2.0  
Apache ServiceMix :: Specs :: JAXWS API 2.2 (105): javax.xml.ws;  
version=2.2.0  
Apache CXF Bundle Jar (125): org.apache.cxf.helpers;  
version=2.4.2.fuse-00-08  
Apache CXF Bundle Jar (125): org.apache.cxf.transport.jms.wsd11;  
version=2.4.2.fuse-00-08  
...
```

6. Unpack your bundle JAR file and look at the packages listed under the **Import-Package** header in the **META-INF/MANIFEST.MF** file. Compare this list with the list of packages found in the previous step. Now, compile a list of the packages that are missing from the manifest's **Import-Package** header and add these package names to the **Import-Package** element of the Maven bundle plug-in configuration in your project's POM file.
7. To cancel the dynamic import option, you must uninstall the old bundle from the OSGi container. For example, if your bundle ID is 218, enter the following command:

```
JBossFuse:karaf@root> osgi:uninstall 218
```

8. You can now rebuild your bundle with the updated list of imported packages and test it in the OSGi container.

CHAPTER 8. DEPLOYING FEATURES

Abstract

Because applications and other tools typically consist of multiple OSGi bundles, it is often convenient to aggregate inter-dependent or related bundles into a larger unit of deployment. Red Hat JBoss Fuse therefore provides a scalable unit of deployment, the *feature*, which enables you to deploy multiple bundles (and, optionally, dependencies on other features) in a single step.

8.1. CREATING A FEATURE

Overview

Essentially, a feature is created by adding a new **feature** element to a special kind of XML file, known as a *feature repository*. To create a feature, perform the following steps:

1. the section called “Create a custom feature repository” .
2. the section called “Add a feature to the custom feature repository” .
3. the section called “Add the local repository URL to the features service” .
4. the section called “Add dependent features to the feature” .
5. the section called “Add OSGi configurations to the feature” .

Create a custom feature repository

If you have not already defined a custom feature repository, you can create one as follows. Choose a convenient location for the feature repository on your file system—for example, **C:\Projects\features.xml**—and use your favorite text editor to add the following lines to it:

```
<?xml version="1.0" encoding="UTF-8"?>
<features name="CustomRepository">
</features>
```

Where you must specify a name for the repository, *CustomRepository*, by setting the **name** attribute.



NOTE

In contrast to a Maven repository or an OBR, a feature repository does *not* provide a storage location for bundles. A feature repository merely stores an aggregate of references to bundles. The bundles themselves are stored elsewhere (for example, in the file system or in a Maven repository).

Add a feature to the custom feature repository

To add a feature to the custom feature repository, insert a new **feature** element as a child of the root **features** element. You must give the feature a name and you can list any number of bundles belonging to the feature, by inserting **bundle** child elements. For example, to add a feature named **example-camel-bundle** containing the single bundle, **C:\Projects\camel-bundle\target\camel-bundle-1.0-SNAPSHOT.jar**, add a **feature** element as follows:


```
<?xml version="1.0" encoding="UTF-8"?>
<features name="MyFeaturesRepo">
  <feature name="example-camel-bundle">
    <bundle>file:C:/Projects/camel-bundle/target/camel-bundle-1.0-
    SNAPSHOT.jar</bundle>
  </feature>
</features>
```

The contents of the **bundle** element can be any valid URL, giving the location of a bundle (see [Appendix A, URL Handlers](#)). You can optionally specify a **version** attribute on the feature element, to assign a non-zero version to the feature (you can then specify the version as an optional argument to the **features:install** command).

To check whether the features service successfully parses the new feature entry, enter the following pair of console commands:

```
JBossFuse:karaf@root> features:refreshUrl
JBossFuse:karaf@root> features:list
...
[uninstalled] [0.0.0                ] example-camel-bundle
MyFeaturesRepo
...
```

The **features:list** command typically produces a rather long listing of features, but you should be able to find the entry for your new feature (in this case, **example-camel-bundle**) by scrolling back through the listing. The **features:refreshUrl** command forces the kernel to reread all the feature repositories: if you did not issue this command, the kernel would not be aware of any recent changes that you made to any of the repositories (in particular, the new feature would not appear in the listing).

To avoid scrolling through the long list of features, you can **grep** for the **example-camel-bundle** feature as follows:

```
JBossFuse:karaf@root> features:list | grep example-camel-bundle
[uninstalled] [0.0.0                ] example-camel-bundle
MyFeaturesRepo
```

Where the **grep** command (a standard UNIX pattern matching utility) is built into the shell, so this command also works on Windows platforms.

Add the local repository URL to the features service

In order to make the new feature repository available to Apache Karaf, you must add the feature repository using the **features:addUrl** console command. For example, to make the contents of the repository, **C:\Projects\features.xml**, available to the kernel, you would enter the following console command:

```
features:addUrl file:C:/Projects/features.xml
```

Where the argument to **features:addUrl** can be specified using any of the supported URL formats (see [Appendix A, URL Handlers](#)).

You can check that the repository's URL is registered correctly by entering the **features:listUrl** console command, to get a complete listing of all registered feature repository URLs, as follows:

```
JBossFuse:karaf@root> features:listUrl
mvn:org.apache.servicemix.nmr/apache-servicemix-nmr/1.1.0-fuse-01-00/xml/features
mvn:org.apache.servicemix.camel/features/6.2.1.redhat-084/xml/features
file:C:/Projects/features.xml
mvn:org.apache.ode/ode-jbi-karaf/1.3.3-fuse-01-00/xml/features
mvn:org.apache.felix.karaf/apache-felix-karaf/1.2.0-fuse-01-00/xml/features
mvn:org.apache.servicemix/apache-servicemix/6.2.1.redhat-084/xml/features
```

Add dependent features to the feature

If your feature depends on other features, you can specify these dependencies by adding **feature** elements as children of the original **feature** element. Each child **feature** element contains the name of a feature on which the current feature depends. When you deploy a feature with dependent features, the dependency mechanism checks whether or not the dependent features are installed in the container. If not, the dependency mechanism automatically installs the missing dependencies (and any recursive dependencies).

For example, for the custom Apache Camel feature, **example-camel-bundle**, you can specify explicitly which standard Apache Camel features it depends on. This has the advantage that the application could now be successfully deployed and run, even if the OSGi container does not have the required features pre-deployed. For example, you can define the **example-camel-bundle** feature with Apache Camel dependencies as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<features name="MyFeaturesRepo">
  <feature name="example-camel-bundle">
    <bundle>file:C:/Projects/camel-bundle/target/camel-bundle-1.0-SNAPSHOT.jar</bundle>
    <feature version="6.2.1.redhat-084">camel-core</feature>
    <feature version="6.2.1.redhat-084">camel-spring-osgi</feature>
    <feature version="6.2.1.redhat-084">servicemix-camel</feature>
  </feature>
</features>
```

Specifying the **version** attribute is optional. When present, it enables you to select the specified version of the feature.

Add OSGi configurations to the feature

If your application uses the *OSGi Configuration Admin* service, you can specify configuration settings for this service using the **config** child element of your feature definition. For example, to specify that the **prefix** property has the value, **MyTransform**, add the following **config** child element to your feature's configuration:

```
<?xml version="1.0" encoding="UTF-8"?>
<features name="MyFeaturesRepo">
  <feature name="example-camel-bundle">
    <config name="org.fusesource.fuseesb.example">
      prefix=MyTransform
    </config>
  </feature>
</features>
```

Where the `name` attribute of the `config` element specifies the *persistent ID* of the property settings (where the persistent ID acts effectively as a name scope for the property names). The content of the `config` element is parsed in the same way as a [Java properties file](#).

The settings in the `config` element can optionally be overridden by the settings in the Java properties file located in the *InstallDir/etc* directory, which is named after the persistent ID, as follows:

```
InstallDir/etc/org.fusesource.fuseesb.example.cfg
```

As an example of how the preceding configuration properties can be used in practice, consider the following Blueprint XML file that accesses the OSGi configuration properties:

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
           xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
           xmlns:cm="http://aries.apache.org/blueprint/xmlns/blueprint-
cm/v1.1.0">

    <!-- osgi blueprint property placeholder -->
    <cm:property-placeholder id="placeholder"
                           persistent-
id="org.fusesource.fuseesb.example">
        <cm:default-properties>
            <cm:property name="prefix" value="DefaultValue"/>
        </cm:default-properties>
    </cm:property-placeholder>

    <bean id="myTransform"
class="org.fusesource.fuseesb.example.MyTransform">
        <property name="prefix" value="${prefix}"/>
    </bean>

</blueprint>
```

When this Blueprint XML file is deployed in the `example-camel-bundle` bundle, the property reference, `${prefix}`, is replaced by the value, `MyTransform`, which is specified by the `config` element in the feature repository.

Automatically deploy an OSGi configuration

By adding a `configfile` element to a feature, you can ensure that an OSGi configuration file gets added to the *InstallDir/etc* directory at the same time that the feature is installed. This means that you can conveniently install a feature and its associated configuration at the same time.

For example, given that the `org.fusesource.fuseesb.example.cfg` configuration file is archived in a Maven repository at `mvn:org.fusesource.fuseesb.example/configadmin/1.0/cfg`, you could deploy the configuration file by adding the following element to the feature:

```
<configfile finalname="etc/org.fusesource.fuseesb.example.cfg">
    mvn:org.fusesource.fuseesb.example/configadmin/1.0/cfg
</configfile>
```

8.2. DEPLOYING A FEATURE

Overview

You can deploy a feature in one of the following ways:


- Install at the console, using **features:install**.
- Use hot deployment.
- Modify the boot configuration (first boot only!).

Installing at the console

After you have created a feature (by adding an entry for it in a feature repository and registering the feature repository), it is relatively easy to deploy the feature using the **features:install** console command. For example, to deploy the **example-camel-bundle** feature, enter the following pair of console commands:

```
JBossFuse:karaf@root> features:refreshUrl
JBossFuse:karaf@root> features:install example-camel-bundle
```

It is recommended that you invoke the **features:refreshUrl** command before calling **features:install**, in case any recent changes were made to the features in the feature repository which the kernel has not picked up yet. The **features:install** command takes the feature name as its argument (and, optionally, the feature version as its second argument).



NOTE

Features use a flat namespace. So when naming your features, be careful to avoid name clashes with existing features.

Uninstalling at the console

To uninstall a feature, invoke the **features:uninstall** command as follows:

```
JBossFuse:karaf@root> features:uninstall example-camel-bundle
```



NOTE

After uninstalling, the feature will still be visible when you invoke **features:list**, but its status will now be flagged as **[uninstalled]**.

Hot deployment

You can hot deploy *all* of the features in a feature repository simply by copying the feature repository file into the **installDir/deploy** directory.

As it is unlikely that you would want to hot deploy an entire feature repository at once, it is often more convenient to define a reduced feature repository or *feature descriptor*, which references only those features you want to deploy. The feature descriptor has exactly the same syntax as a feature

repository, but it is written in a different style. The difference is that a feature descriptor consists only of references to existing features from a feature repository.


For example, you could define a feature descriptor to load the `example-camel-bundle` feature as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<features name="CustomDescriptor">
  <repository>RepositoryURL</repository>
  <feature name="hot-example-camel-bundle">
    <feature>example-camel-bundle</feature>
  </feature>
</features>
```

The repository element specifies the location of the custom feature repository, *RepositoryURL* (where you can use any of the URL formats described in [Appendix A, URL Handlers](#)). The feature, `hot-example-camel-bundle`, is just a reference to the existing feature, `example-camel-bundle`.

Hot undeploying a features file

To undeploy a features file from the hot deploy directory, simply delete the features file from the *InstallDir/deploy* directory *while the Apache Karaf container is running*



IMPORTANT

The hot undeploy mechanism does *not* work while the container is shut down. If you shut down the Karaf container, delete the features file from `deploy/`, and then restart the Karaf container, the features will *not* be undeployed after you restart the container (you can, however, undeploy the features manually using the `features:uninstall` console command).

Adding a feature to the boot configuration

If you want to provision copies of Apache Karaf for deployment on multiple hosts, you might be interested in adding a feature to the boot configuration, which determines the collection of features that are installed when Apache Karaf boots up for the very first time.

The configuration file, `/etc/org.apache.felix.karaf.features.cfg`, in your install directory contains the following settings:

```
...
#
# Comma separated list of features repositories to register by default
#
featuresRepositories=mvn:org.apache.felix.karaf/apache-felix-
karaf/1.1.0.3-fuse-SNAPSHOT/xml/features,
mvn:org.apache.servicemix.nmr/apache-servicemix-nmr/1.1.0-fuse-
SNAPSHOT/xml/features,
mvn:org.apache.servicemix/apache-servicemix/4.2.0-fuse-
SNAPSHOT/xml/features,
mvn:org.apache.camel.karaf/apache-camel/2.x-fuse-SNAPSHOT/xml/features,
mvn:org.apache.ode/ode-jbi-karaf/1.3.3-fuse-SNAPSHOT/xml/features
#
```

```
# Comma separated list of features to install at startup
#


# Will put these back in when we decide to include these components
# servicemix-smpp,servicemix-snmp,servicemix-vfs,

featuresBoot=activemq,activemq-broker,camel,jbi-cluster,web,servicemix-
cxfr-bc,servicemix-file,
servicemix-ftp,servicemix-http,servicemix-jms,servicemix-mail,servicemix-
bean,servicemix-camel,
servicemix-cxf-se,servicemix-drools,servicemix-eip,servicemix-
osworkflow,servicemix-quartz,
servicemix-scripting,servicemix-validation,servicemix-saxon,servicemix-
wsn2005,camel-cxf,camel-jms
```

This configuration file has two properties:

- **featuresRepositories**—Comma separated list of feature repositories to load at startup.
- **featuresBoot**—Comma separated list of features to install at startup.

You can modify the configuration to customize the features that are installed as JBoss Fuse starts up. You can also modify this configuration file, if you plan to distribute JBoss Fuse with pre-installed features.



IMPORTANT

This method of adding a feature is only effective the *first time* a particular Apache Karaf instance boots up. Any changes made subsequently to the **featuresRepositories** setting and the **featuresBoot** setting are ignored, even if you restart the container.

You could force the container to revert back to its initial state, however, by deleting the complete contents of the **InstallDir/data/cache** (thereby losing all of the container's custom settings).

CHAPTER 9. DEPLOYING A PLAIN JAR

Abstract

This chapter explains how to deal with plain JAR files (typically libraries) that contain *no deployment metadata whatsoever*. That is, a plain JAR is neither a WAR, nor an OSGi bundle.

If the plain JAR occurs as a dependency of a bundle, you must add bundle headers to the JAR. If the JAR exposes a public API, typically the best solution is to convert the existing JAR into a bundle, enabling the JAR to be shared with other bundles. This chapter describes how to perform the conversion process automatically, using the open source Bnd tool.

9.1. BUNDLE TOOL (BND)

About the bnd tool

The Bnd tool is an open source utility for creating and diagnosing OSGi bundles. It has been developed by Peter Kriens and is freely downloadable from the [aQute](http://www.aqute.biz) Web site (subject to an Apache version 2.0 open source license). The key feature of the Bnd tool is that it automatically generates Manifest headers for the OSGi bundle, thus relieving you of this tedious task. The main tasks that Bnd can perform are:

- Print the manifest and show the package dependencies of a JAR file or bundle file.
- Wrap a vanilla JAR file, converting it into a bundle.
- Build a bundle from the class path, based on specifications in a `.bnd` file.
- Validate manifest entries.

You have the option of invoking Bnd in any of the following ways: from the command line; as an Ant task; or through the Maven bundle plug-in, `maven-bundle-plugin`. In fact, the approach to building bundles described in [Chapter 3, Building with Maven](#) is based on the Maven bundle plug-in and therefore, implicitly, is also based on the Bnd tool.

Downloading and installing bnd

You can download Bnd from the aQute Web site at the following location:

```
http://www.aqute.biz/Bnd/Bnd
```

Download the Bnd JAR file, `bnd-Version.jar`, to a convenient location. There is no installation involved: the JAR file is all that you need to use the Bnd tool. For convenience, however, it is advisable to rename the JAR file to `bnd.jar`, so you won't have to do so much typing when you invoke it from the command line (for example, as in `java -jar bnd.jar Cmd Options`)

References

To learn more about the Bnd tool, consult the following references:

- [Bnd tool documentation](#).

- [Creating OSGi bundles \(SpringSource blog\)](#).

9.2. CONVERTING A JAR USING BND


Overview

This section describes how to convert a vanilla JAR file into an OSGi bundle using the Bnd tool's `wrap` command. You can choose either to perform the conversion with default settings (which works in most cases) or to perform a custom conversion with the help of a Bnd properties file.

Sample JAR file

To demonstrate how to convert a plain JAR into a bundle, we will consider the example of the `commons-logging-Version.jar`, which is available from the [Apache Commons](#) project and can be downloaded from the following location:

```
http://commons.apache.org/downloads/download_logging.cgi
```



NOTE

Actually, this is a rather artificial example, because the Apache Commons logging API is *not* intended to be deployed as an OSGi bundle (which is why it does not have the requisite Manifest headers in the first place). Most of the other JARs from Apache Commons are already provided as bundles.

Bnd print command

The Bnd `print` command is a useful diagnostic tool that displays most of the information about a JAR that is relevant to bundle creation. For example, to print the Manifest headers and package dependencies of the commons logging JAR, you can invoke the Bnd `print` command as follows:

```
java -jar bnd.jar print commons-logging-1.1.1.jar
```

The preceding command produces the following output:

```
[MANIFEST commons-logging-1.1.1.jar]
Archiver-Version      Plexus Archiver
Build-Jdk             1.4.2_16
Built-By              dlgt01
Created-By            Apache Maven
Extension-Name        org.apache.commons.logging
Implementation-Title   Commons Logging
Implementation-Vendor  Apache Software Foundation
Implementation-Vendor-Id org.apache
Implementation-Version 1.1.1
Manifest-Version      1.0
Specification-Title    Commons Logging
Specification-Vendor   Apache Software Foundation
Specification-Version  1.0
X-Compile-Source-JDK  1.2
X-Compile-Target-JDK  1.1

[IMPEXP]
```



```

[USES]
org.apache.commons.logging           org.apache.commons.logging.impl
org.apache.commons.logging.impl      javax.servlet

org.apache.avalon.framework.logger

                                org.apache.commons.logging
                                org.apache.log
                                org.apache.log4j

One error
1 : Unresolved references to [javax.servlet,
org.apache.avalon.framework.logger,
org.apache.log, org.apache.log4j] by class(es) on the Bundle-
Classpath[Jar:comm
ons-logging-1.1.1.jar]:
[org/apache/commons/logging/impl/AvalonLogger.class, org
/apache/commons/logging/impl/ServletContextCleaner.class,
org/apache/commons/log
ging/impl/LogKitLogger.class,
org/apache/commons/logging/impl/Log4JLogger.class]

```

From this output, you can see that the JAR does not define any bundle manifest headers. The output consists of the following sections:

[MANIFEST *JarFileName*]

Lists all of the header settings from the JAR file's **META-INF/Manifest.mf** file.

[IMPEXP]

Lists any Java packages that are imported or exported through the **Import -Package** or **Export -Package** Manifest headers.

[USES]

Shows the JAR's package dependencies. The left column lists all of the packages defined in the JAR, while the right column lists the dependent packages for each of the packages in the left column.

Errors

Lists any errors—for example, any unresolved dependencies.

Bnd wrap command

To convert the plain commons logging JAR into an OSGi bundle, invoke the **Bnd wrap** command as follows:

```
java -jar bnd.jar wrap commons-logging-1.1.1.jar
```

The result of running this command is a bundle file, **commons-logging-1.1.1.bar**, which consists of the original JAR augmented by the Manifest headers required by a bundle.

Checking the new bundle headers

To display the Manifest headers and package dependencies of the newly created bundle JAR, enter the following Bnd print command:

```
java -jar bnd.jar print commons-logging-1.1.1.bar
```

The preceding command should produce output like the following:

```
[MANIFEST commons-logging-1.1.1-bnd.jar]
Archiver-Version           Plexus Archiver
Bnd-LastModified           1263987809524
Build-Jdk                  1.4.2_16
Built-By                   dlgl01
Bundle-ManifestVersion     2
Bundle-Name                commons-logging-1.1.1
Bundle-SymbolicName        commons-logging-1.1.1
Bundle-Version             0
Created-By                 1.5.0_08 (Sun Microsystems Inc.)
Export-Package
org.apache.commons.logging;uses:="org.ap
ache.commons.logging.impl",org.apache.commons.logging.impl;uses:="org.apac
he.ava
lon.framework.logger,org.apache.commons.logging,org.apache.log4j,org.apach
e.log,
javax.servlet"
Extension-Name             org.apache.commons.logging
Implementation-Title       Commons Logging
Implementation-Vendor      Apache Software Foundation
Implementation-Vendor-Id   org.apache
Implementation-Version     1.1.1
Import-Package
javax.servlet;resolution:=optional,org.a
pache.avalon.framework.logger;resolution:=optional,org.apache.commons.logg
ing;re
solution:=optional,org.apache.commons.logging.impl;resolution:=optional,or
g.apac
he.log;resolution:=optional,org.apache.log4j;resolution:=optional
Manifest-Version          1.0
Originally-Created-By     Apache Maven
Specification-Title       Commons Logging
Specification-Vendor      Apache Software Foundation
Specification-Version      1.0
Tool                      Bnd-0.0.384
X-Compile-Source-JDK      1.2
X-Compile-Target-JDK      1.1

[IMPEXP]
Import-Package
    javax.servlet          {resolution:=optional}
    org.apache.avalon.framework.logger {resolution:=optional}
    org.apache.log         {resolution:=optional}
    org.apache.log4j       {resolution:=optional}
Export-Package
    org.apache.commons.logging
    org.apache.commons.logging.impl
```

```
[USES]
org.apache.commons.logging          org.apache.commons.logging.impl
org.apache.commons.logging.impl     javax.servlet

org.apache.avalon.framework.logger

                                org.apache.commons.logging
                                org.apache.log
                                org.apache.log4j
```

Default property file

By default, the `Bnd wrap` command behaves as if it was configured to use the following Bnd property file:

```
Export-Package: *
Import-Package: AllReferencedPackages
```

The result of this configuration is that the new bundle imports all of the packages referenced by the JAR (which is almost always what you need) and all of the packages defined in the JAR are exported. Sometimes you might want to hide some of the packages in the JAR, however, in which case you would need to define a custom property file.

Defining a custom property file

If you want to have more control over the way the `Bnd wrap` command generates a bundle, you can define a Bnd properties file to control the conversion process. For a detailed description of the syntax and capabilities of the Bnd properties file, see the [Bnd tool documentation](#).

For example, in the case of the commons logging JAR, you might decide to hide the `org.apache.commons.logging.impl` package, while exporting the `org.apache.commons.logging` package. You could do this by creating a Bnd properties file called `commons-logging-1.1.1.bnd` and inserting the following lines using a text editor:

```
version=1.1.1
Export-Package: org.apache.commons.logging;version=${version}
Private-Package: org.apache.commons.logging.impl
Bundle-Version: ${version}
```

Notice how a version number is assigned to the exported package by substituting the `version` variable (any properties starting with a lowercase letter are interpreted as variables).

Wrapping with the custom property file

To wrap a JAR file using the custom property file, specify the Bnd properties file using the `-properties` option of the `wrap` command. For example, to wrap the vanilla commons logging JAR using the instructions contained in the `commons-logging-1.1.1.bnd` properties file, enter the following command:

```
java -jar bnd.jar wrap -properties commons-logging-1.1.1.bnd commons-logging-1.1.1.jar
```

9.3. CONVERTING A JAR USING THE WRAP SCHEME

Overview

You also have the option of converting a JAR into a bundle using the **wrap** scheme, which can be prefixed to any existing URL format. The **wrap** scheme is also based on the Bnd utility.

Syntax

The **wrap** scheme has the following basic syntax:

```
wrap:LocationURL
```

The **wrap** scheme can prefix any URL that locates a JAR. The locating part of the URL, *LocationURL*, is used to obtain the (non-bundlized) JAR and the URL handler for the **wrap** scheme then converts the JAR automatically into a bundle.



NOTE

The **wrap** scheme also supports a more elaborate syntax, which enables you to customize the conversion by specifying a Bnd properties file or by specifying individual Bnd properties in the URL. Typically, however, the **wrap** scheme is used just with its default settings.

Default properties

Because the **wrap** scheme is based on the Bnd utility, it uses exactly the same default properties to generate the bundle as Bnd does—see [the section called “Default property file”](#).

Wrap and install

The following example shows how you can use a single console command to download the plain **commons-logging** JAR from a remote Maven repository, convert it into an OSGi bundle on the fly, and then install it and start it in the OSGi container:

```
JBossFuse:karaf@root> osgi:install -s wrap:mvn:commons-logging/commons-logging/1.1.1
```

Feature example

[Example 9.1, “The example-jpa-osgi Feature”](#) shows how the **example-jpa-osgi** feature combines the **mvn** scheme and the **wrap** scheme in order to download the plain HyperSQL JAR file and convert it to an OSGi bundle on the fly.

Example 9.1. The example-jpa-osgi Feature

```
<feature name="examples-jpa-osgi" version="6.2.1.redhat-084">
  <feature version="6.2.1.redhat-084">jpa-hibernate</feature>
  <bundle>wrap:mvn:hsqldb/hsqldb/1.8.0.7</bundle>
  <bundle>mvn:org.apache.servicemix.examples.jpa-osgi/wsd1-first-
  cxfbc-bundle/6.2.1.redhat-084</bundle>
  <bundle>mvn:org.apache.servicemix.examples.jpa-osgi/wsd1-first-
  cxfse-bundle/6.2.1.redhat-084</bundle>
</feature>
```



Reference

The `wrap` scheme is provided by the [Pax project](#), which is the umbrella project for a variety of open source OSGi utilities. For full documentation on the `wrap` scheme, see the [Wrap Protocol](#) reference page.

CHAPTER 10. OSGI BUNDLE TUTORIALS

Abstract

This chapter presents tutorials for Apache Camel and Apache CXF applications. Each tutorial describes how to generate, build, run, and deploy an application as an OSGi bundle.

10.1. GENERATING AND RUNNING AN EIP BUNDLE

Overview

This section explains how to generate, build, and run a complete Apache Camel example as an OSGi bundle, where the starting point code is generated with the help of a Maven archetype.

Prerequisites

In order to generate a project using an Red Hat JBoss Fuse Maven archetype, you must have the following prerequisites:

- *Maven installation*—Maven is a free, open source build tool from Apache. You can download the latest version from <http://maven.apache.org/download.html> (minimum is 3.x).
- *Internet connection*—whilst performing a build, Maven dynamically searches external repositories and downloads the required artifacts on the fly. In order for this to work, your build machine *must* be connected to the Internet.
- *fusesource Maven repository is configured*—in order to locate the archetypes, Maven's `settings.xml` file must be configured with the location of the `fusesource` Maven repository. For details of how to set this up, see [the section called “Adding the Red Hat JBoss Fuse repository”](#).

Generating an EIP bundle

The `karaf-camel-cbr-archetype` archetype creates a router project, which is configured to deploy as a bundle. To generate a Maven project with the coordinates, `org.fusesource.example:camel-bundle`, enter the following command:

```
mvn archetype:generate \
  -DarchetypeGroupId=io.fabric8.archetypes \
  -DarchetypeArtifactId=karaf-camel-cbr-archetype \
  -DarchetypeVersion=1.2.0.redhat-621084 \
  -DgroupId=org.fusesource.example \
  -DartifactId=camel-bundle \
  -Dversion=1.0-SNAPSHOT \
  -Dfabric8-profile=camel-bundle-profile
```



NOTE

The backslash character, `\`, indicates line continuation on Linux and UNIX operating systems. On Windows platforms, you must omit the backslash character and put all of the arguments on a single line.

The result of this command is a directory, ***ProjectDir/camel-bundle***, containing the files for the generated bundle project.

Running the EIP bundle

To install and run the generated ***camel-bundle*** project, perform the following steps:

1. *Build the project*—open a command prompt and change directory to ***ProjectDir/camel-bundle***. Use Maven to build the demonstration by entering the following command:

```
mvn install
```

If this command runs successfully, the ***ProjectDir/camel-bundle/target*** directory should contain the bundle file, ***camel-bundle.jar*** and the bundle will also be installed in the local Maven repository.

2. *Install prerequisite features (optional)*—by default, the ***camel-core*** feature and some related features are pre-installed in the OSGi container. But many of the Apache Camel components are *not* installed by default. To check which features are available and whether or not they are installed, enter the following console command:

```
JBossFuse:karaf@root> features:list
```

Apache Camel features are identifiable by the ***camel-*** prefix. For example, if one of your routes requires the HTTP component, you can make sure that it is installed in the OSGi container by issuing the following console command:

```
JBossFuse:karaf@root> features:install camel-http
```

3. *Install and start the camel-bundle bundle*—at the Red Hat JBoss Fuse console, enter the following command to install the bundle from the local Maven repository (see [Section A.3, “Mvn URL Handler”](#)):

```
JBossFuse:karaf@root> osgi:install -s  
mvn:org.fusesource.example/camel-bundle/1.0-SNAPSHOT
```

4. *Provide the route with file data to process*—after the route has started, you should find the following directory under your JBoss Fuse installation:

```
InstallDir/work/cbr/input
```

To initiate content routing in this example, copy the provided data files from the ***ProjectDir/camel-bundle/src/main/fabric8/data*** directory into the ***InstallDir/work/cbr/input*** directory.

5. *View the output*—after a second or two, the data files disappear from the ***work/cbr/input*** directory, as the route moves the data files into various sub-directories of the ***work/cbr/output*** directory.
6. *Stop the camel-bundle bundle*—to stop the ***camel-bundle*** bundle, you first need to discover the relevant bundle number. To find the bundle number, enter the following console command:

```
JBossFuse:karaf@root> osgi:list
```

■

At the end of the listing, you should see an entry like the following:

```
[ 265] [Active      ] [Created      ] [      ] [ 80] JBoss Fuse
Quickstart: camel-cbr (1.0.0.SNAPSHOT)
```

Where, in this example, the bundle number is 265. To stop this bundle, enter the following console command:

```
JBossFuse:karaf@root> osgi:stop 265
```

10.2. GENERATING AND RUNNING A WEB SERVICES BUNDLE

Overview

This section explains how to generate, build, and run a complete Apache CXF example as a *bundle* in the OSGi container, where the starting point code is generated with the help of a Maven archetype.

Prerequisites

In order to generate a project using a Red Hat JBoss Fuse Maven archetype, you must have the following prerequisites:

- *Maven installation*—Maven is an open source build tool from Apache. You can download the latest version from <http://maven.apache.org/download.html> (minimum is 3.x).
- *Internet connection*—whilst performing a build, Maven dynamically searches external repositories and downloads the required artifacts on the fly. In order for this to work, your build machine *must* be connected to the Internet.
- *fusesource Maven repository is configured*—in order to locate the archetypes, Maven's `settings.xml` file must be configured with the location of the **fusesource** Maven repository. For details of how to set this up, see [the section called “Adding the Red Hat JBoss Fuse repository”](#).

Generating a Web services bundle

The `karaf-soap-archetype` archetype creates a project for building a Java-first JAX-WS application that can be deployed into the OSGi container. To generate a Maven project with the coordinates, `org.fusesource.example:cxf-code-first-bundle`, enter the following command:

```
mvn archetype:generate \
  -DarchetypeGroupId=io.fabric8.archetypes \
  -DarchetypeArtifactId=karaf-soap-archetype \
  -DarchetypeVersion=1.2.0.redhat-621084 \
  -DgroupId=org.fusesource.example \
  -DartifactId=cxf-code-first-bundle \
  -Dversion=1.0-SNAPSHOT \
  -Dfabric8-profile=cxf-code-first-bundle-profile
```




NOTE

The backslash character, \, indicates line continuation on Linux and UNIX operating systems. On Windows platforms, you must omit the backslash character and put all of the arguments on a single line.

The result of this command is a directory, *ProjectDir/cxf-code-first-bundle*, containing the files for the generated bundle project.

Modifying the bundle instructions

Typically, you will need to modify the instructions for the Maven bundle plug-in in the POM file. In particular, the default **Import - Package** element generated by the **servicemix-cxf-code-first-osgi-bundle** archetype is not configured to scan the project's Java source files. In most cases, however, you would want the Maven bundle plug-in to perform this automatic scanning in order to ensure that the bundle imports all of the packages needed by your code.

To enable the **Import - Package** scanning feature, simply add the wildcard, *, as the last item in the comma-separated list inside the **Import - Package** element, as shown in the following example:

Example 10.1. Import-Package Instruction with Wildcard

```
<project ... >
  ...
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.felix</groupId>
        <artifactId>maven-bundle-plugin</artifactId>
        <version>${version.maven-bundle-plugin}</version>
        <extensions>true</extensions>
        <configuration>
          <instructions>
            <Import-Package>javax.jws;version="[0,3)",
              javax.wsdl,
              javax.xml.namespace,
              org.apache.cxf.helpers,
              org.osgi.service.blueprint,
              io.fabric8.cxf.endpoint,
              org.apache.cxf.transport.http,
              *
            </Import-Package>
            <Import-Service>org.apache.aries.blueprint.NamespaceHandler;
              osgi.service.blueprint.namespace=http://cxf.apache.org/transport/http/c
              onfiguration</Import-Service>
            <Export-Package>org.fusesource.example</Export-Package>
          </instructions>
        </configuration>
      </plugin>
    </plugins>
  </build>
  ...
</project>
```

Running the Web services bundle

To install and run the generated **cxf-code-first-bundle** project, perform the following steps:

1. *Build the project*—open a command prompt and change directory to **ProjectDir/cxf-code-first-bundle**. Use Maven to build the demonstration by entering the following command:

```
mvn install
```

If this command runs successfully, the **ProjectDir/cxf-code-first-bundle/target** directory should contain the bundle file, **cxf-code-first-bundle.jar**.

2. *Install and start the cxf-code-first-bundle bundle*—at the Red Hat JBoss Fuse console, enter the following command to install the bundle from your local Maven repository:

```
JBossFuse:karaf@root> osgi:install -s  
mvn:org.fusesource.example/cxf-code-first-bundle/1.0-SNAPSHOT
```

3. *Test the Web service*—to test the Web service deployed in the previous step, you can use a web browser to query the service's WSDL. Open your favourite web browser and navigate to the following URL:

```
http://localhost:8181/cxf/HelloWorld?wsdl
```

When the web service receives the query, **?wsdl**, it returns a WSDL description of the running service.

4. *Stop the cxf-code-first-bundle bundle*—to stop the **cxf-code-first-bundle** bundle, you first need to discover the relevant bundle number. To find the bundle number, enter the following console command:

```
JBossFuse:karaf@root> osgi:list
```

At the end of the listing, you should see an entry like the following:

```
[ 266] [Active      ] [Created      ] [          ] [ 80] JBoss Fuse  
Quickstart: soap (1.0.0.SNAPSHOT)
```

Where, in this example, the bundle number is 266. To stop this bundle, enter the following console command:

```
JBossFuse:karaf@root> osgi:stop 266
```

PART III. WAR DEPLOYMENT MODEL

Abstract

The Web application ARchive (WAR) is a tried and tested model for packaging and deploying applications. This approach is simple and reliable, though not as flexible as the OSGi bundle model.

CHAPTER 11. BUILDING A WAR

Abstract

This chapter describes how to build and package a WAR using Maven.

11.1. MODIFYING AN EXISTING MAVEN PROJECT

Overview

If you already have a Maven project and you want to modify it so that it generates a WAR, perform the following steps:

1. [the section called “Change the package type to WAR”](#).
2. [the section called “Customize the JDK compiler version”](#).
3. [the section called “Store resources under webapp/WEB-INF”](#).
4. [the section called “Customize the Maven WAR plug-in”](#).

Change the package type to WAR

Configure Maven to generate a WAR by changing the package type to `war` in your project's `pom.xml` file. Change the contents of the `packaging` element to `war`, as shown in the following example:

```
<project ... >
...
  <packaging>war</packaging>
...
</project>
```

The effect of this setting is to select the Maven WAR plug-in, `maven-war-plugin`, to perform packaging for this project.

Customize the JDK compiler version

It is almost always necessary to specify the JDK version in your POM file. If your code uses any modern features of the Java language—such as generics, static imports, and so on—and you have not customized the JDK version in the POM, Maven will fail to compile your source code. It is *not* sufficient to set the `JAVA_HOME` and the `PATH` environment variables to the correct values for your JDK, you must also modify the POM file.

To configure your POM file, so that it accepts the Java language features introduced in JDK 1.7, add the following `maven-compiler-plugin` plug-in settings to your POM (if they are not already present):

```
<project ... >
...
  <build>
    <defaultGoal>install</defaultGoal>
    <plugins>
```

```

...
<plugin>
  <groupId>org.apache.maven.plugins</groupId>
  <artifactId>maven-compiler-plugin</artifactId>
  <configuration>
    <source>1.7</source>
    <target>1.7</target>
  </configuration>
</plugin>
</plugins>
</build>
...
</project>

```

Store resources under webapp/WEB-INF

Resource files for the Web application are stored under the `/WEB-INF` directory in the standard WAR directory layout. In order to ensure that these resources are copied into the root of the generated WAR package, store the `WEB-INF` directory under *ProjectDir/src/main/webapp* in the Maven directory tree, as follows:

```

ProjectDir/
  pom.xml
  src/
    main/
      webapp/
        WEB-INF/
          classes/
          lib/
web.xml

```

In particular, note that the `web.xml` file is stored at *ProjectDir/src/main/webapp/WEB-INF/web.xml*.

Customize the Maven WAR plug-in

It is possible to customize the Maven WAR plug-in by adding an entry to the `plugins` section of the `pom.xml` file. Most of the configuration options are concerned with adding additional resources to the WAR package. For example, to include all of the resources under the `src/main/resources` directory (specified relative to the location of `pom.xml`) in the WAR package, you could add the following WAR plug-in configuration to your POM:

```

<project ...>
  ...
  <build>
    ...
    <plugins>
      <plugin>
        <artifactId>maven-war-plugin</artifactId>
        <version>2.1.1</version>
        <configuration>
          <!-- Optionally specify where the web.xml file comes from -->
          <webXml>src/main/webapp/WEB-INF/web.xml</webXml>
          <!-- Optionally specify extra resources to include -->

```

```

        <webResources>
          <resource>
            <directory>src/main/resources</directory>
            <targetPath>WEB-INF</targetPath>
            <includes>
              <include>*/*</include>
            </includes>
          </resource>
        </webResources>
      </configuration>
    </plugin>
    ...
  </plugins>
</build>
</project>

```

The preceding plug-in configuration customizes the following settings:

webXml

Specifies where to find the `web.xml` file in the current Maven project, relative to the location of `pom.xml`. The default is `src/main/webapp/WEB-INF/web.xml`.

webResources

Specifies additional resource files that are to be included in the generated WAR package. It can contain the following sub-elements:

- **webResources/resource**—each resource element specifies a set of resource files to include in the WAR.
- **webResources/resource/directory**—specifies the base directory from which to copy resource files, where this directory is specified relative to the location of `pom.xml`.
- **webResources/resource/targetPath**—specifies where to put the resource files in the generated WAR package.
- **webResources/resource/includes**—uses an Ant-style wildcard pattern to specify explicitly which resources should be *included* in the WAR.
- **webResources/resource/excludes**—uses an Ant-style wildcard pattern to specify explicitly which resources should be *excluded* from the WAR (exclusions have priority over inclusions).

For complete details of how to configure the Maven WAR plug-in, see <http://maven.apache.org/plugins/maven-war-plugin/index.html>.



NOTE

Do not use version 2.1 of the `maven-war-plugin` plug-in, which has a bug that causes two copies of the `web.xml` file to be inserted into the generated `.war` file.

Building the WAR

To build the WAR defined by the Maven project, open a command prompt, go to the project directory (that is, the directory containing the `pom.xml` file), and enter the following Maven command:

```
mvn install
```

The effect of this command is to compile all of the Java source files, to generate a WAR under the *ProjectDir*/target directory, and then to install the generated WAR in the local Maven repository.

11.2. BOOTSTRAPPING A CXF SERVLET IN A WAR

Overview

A simple way to bootstrap Apache CXF in a WAR is to configure `web.xml` to use the standard CXF servlet, `org.apache.cxf.transport.servlet.CXFServlet`.

Example

For example, the following `web.xml` file shows how to configure the CXF servlet, where all Web service addresses accessed through this servlet would be prefixed by `/services/` (as specified by the value of `servlet-mapping/url-pattern`):

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE web-app PUBLIC
  "-//Sun Microsystems, Inc.//DTD Web Application 2.3//EN"
  "http://java.sun.com/dtd/web-app_2_3.dtd">

<web-app>
  <display-name>cxf</display-name>
  <description>cxf</description>

  <servlet>
    <servlet-name>cxf</servlet-name>
    <display-name>cxf</display-name>
    <description>Apache CXF Endpoint</description>
    <servlet-class>org.apache.cxf.transport.servlet.CXFServlet</servlet-
class>
    <load-on-startup>1</load-on-startup>
  </servlet>

  <servlet-mapping>
    <servlet-name>cxf</servlet-name>
    <url-pattern>/services/*</url-pattern>
  </servlet-mapping>

  <session-config>
    <session-timeout>60</session-timeout>
  </session-config>

</web-app>
```

cxf-servlet.xml file

In addition to configuring the `web.xml` file, it is also necessary to configure your Web services by defining a `cxf-servlet.xml` file, which must be copied into the root of the generated WAR.

Alternatively, if you do not want to put `cxf-servlet.xml` in the default location, you can customize its name and location, by setting the `contextConfigLocation` context parameter in the `web.xml` file. For example, to specify that Apache CXF configuration is located in `WEB-INF/cxf-servlet.xml`, set the following context parameter in `web.xml`:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE web-app PUBLIC
    "-//Sun Microsystems, Inc.//DTD Web Application 2.3//EN"
    "http://java.sun.com/dtd/web-app_2_3.dtd">

<web-app>
    ...
    <context-param>
        <param-name>contextConfigLocation</param-name>
        <param-value>WEB-INF/cxf-servlet.xml</param-value>
    </context-param>
    ...
</web-app>
```

Reference

For full details of how to configure the CXF servlet, see .

11.3. BOOTSTRAPPING A SPRING CONTEXT IN A WAR

Overview

You can bootstrap a Spring context in a WAR using Spring's [ContextLoaderListener](#) class.

Bootstrapping a Spring context in a WAR

For example, the following `web.xml` file shows how to boot up a Spring application context that is initialized by the XML file, `/WEB-INF/applicationContext.xml` (which is the location of the context file in the generated WAR package):

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<web-app version="2.4" xmlns="http://java.sun.com/xml/ns/j2ee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
http://java.sun.com/xml/ns/j2ee/web-app_2_4.xsd">

    <display-name>Camel Routes</display-name>

    <!-- location of spring xml files -->
    <context-param>
        <param-name>contextConfigLocation</param-name>
        <param-value>/WEB-INF/applicationContext.xml</param-value>
    </context-param>

    <!-- the listener that kick-starts Spring -->
```



```
<listener>
  <listener-
class>org.springframework.web.context.ContextLoaderListener</listener-
class>
  </listener>

</web-app>
```

Maven dependency

In order to access the `ContextLoaderListener` class from the Spring framework, you *must* add the following dependency to your project's `pom.xml` file:

```
<dependency>
  <groupId>org.springframework</groupId>
  <artifactId>spring-web</artifactId>
  <version>${spring-version}</version>
</dependency>
```

Where the `spring-version` property specifies the version of the Spring framework you are using.

CHAPTER 12. DEPLOYING A WAR

Abstract

This chapter explains how to deploy a Web archive (WAR) file as a bundle in the OSGi container. Conversion to a bundle is performed automatically by the PAX War URL, which is based on the open source Bnd tool. The presence of a `web.xml` file in the bundle signals to the container that the bundle should be deployed as a Web application.

12.1. CONVERTING THE WAR USING THE WAR SCHEME

Overview

To convert a WAR file into a bundle suitable for deployment in the OSGi container, add the `war:` prefix to the WAR URL. The [PAX War URL handler](#) acts as a wrapper, which adds the requisite manifest headers to the WAR file.

Syntax

The `war` scheme has the following basic syntax:

```
war:LocationURL[?Options]
```

The location URL, *LocationURL*, can be any of the location URLs described in [Appendix A, URL Handlers](#) (for example, an `mvn:` or a `file:` URL). Options can be appended to the URL in the following format:

```
?Option=Value&Option=Value&...
```

Or if the `war` URL appears in an XML file:

```
?Option=Value&Option=Value&...
```

Prerequisite

The Apache Karaf `war` feature is required to convert and deploy WARs using the `war:` scheme. It can be installed from the container's command console using `features:install war`.

Deploying a WAR file

If the WAR file is stored in a Maven repository, you can deploy it into the OSGi container using the `osgi:install` command, taking a `war:mvn:` URL as its argument. For example, to deploy the `wicket-example` WAR file from a Maven repository, where the application should be accessible from the `wicket` Web application context, enter the following console command:

```
JBossFuse:karaf@root> install war:mvn:org.apache.wicket/wicket-examples/1.4.7/war?Web-ContextPath=wicket
```

Alternatively, if the WAR file is stored on the filesystem, you can deploy it into the OSGi container by specifying a `war:file:` URL. For example, to deploy the WAR file, `wicket-example-1.4.6.war`, enter the following console command:

```
JBossFuse:karaf@root> install war:file:///wicket-examples-1.4.7.war?Web-ContextPath=wicket
```

Accessing the Web application

The WAR file is automatically installed into a Web container, which listens on the TCP port 8181 by default, and the Web container uses the Web application context specified by the **Web-ContextPath** option. For example, the **wicket-example** WAR deployed in the preceding examples, would be accessible from the following URL:

```
http://localhost:8181/wicket
```

Default conversion parameters

The PAX War URL handler converts a WAR file to a special kind of OSGi bundle, which includes additional Manifest headers to support WAR deployment (for example, the **Web-ContextPath** Manifest header). By default, the deployed WAR is configured as an isolated bundle (neither importing nor exporting any packages). This mimics the deployment model of a WAR inside a J2EE container, where the WAR is completely self-contained, including all of the JAR files it needs.

For details of the default conversion parameters, see [Table A.2, “Default Instructions for Wrapping a WAR File”](#).

Customizing the conversion parameters

The PAX War URL handler is layered over Bnd. If you want to customize the bundle headers in the Manifest file, you can either add a Bnd instruction as a URL option or you can specify a Bnd instructions file for the War URL handler to use—for details, see [Section A.5, “War URL Handler”](#).

In particular, you might sometimes find it necessary to customize the entry for the **Bundle-ClassPath**, because the default value of **Bundle-ClassPath** does *not* include all of the resources in the WAR file (see [Table A.2, “Default Instructions for Wrapping a WAR File”](#)).

References

Support for running WARs in the OSGi container is provided by the [PAX WAR Extender](#), which monitors each bundle as it starts and, if the bundle contains a **web.xml** file, automatically deploys the WAR in a Web container. The [War Protocol page](#) has the original reference documentation for the War URL handler.

12.2. CONFIGURING THE WEB CONTAINER

Overview

Red Hat JBoss Fuse automatically deploys WAR files into a Web container, which is implemented by the [PAX Web library](#). You can configure the Web container through the OSGi Configuration Admin service.

Configuration file

The Web container uses the following configuration file:

```
■
```

```
EsbInstallDir/etc/org.ops4j.pax.web.cfg
```

You must create this file, if it does not already exist in the *EsbInstallDir/etc/* directory.

Customizing the HTTP port

By default, the Web container listens on the TCP port, 8181. You can change this value by editing the *etc/org.ops4j.pax.web.cfg* file and setting the value of the `org.osgi.service.http.port` property, as follows:

```
# Configure the Web container
org.osgi.service.http.port=8181
```

Enabling SSL/TLS security

The Web container is also used for deploying the Fuse Management Console. The instructions for securing the Web container with SSL/TLS are identical to the instructions for securing the Fuse Management Console with SSL/TLS. See [chapter "Securing the Jetty HTTP Server" in "Security Guide"](#) for details.



WARNING

If you are planning to enable SSL/TLS security, you must ensure that you explicitly disable the SSLv3 protocol, in order to safeguard against the [Poodle vulnerability \(CVE-2014-3566\)](#). For more details, see [Disabling SSLv3 in JBoss Fuse 6.x and JBoss A-MQ 6.x](#).

Reference

The properties that you can set in the Web container's configuration file are defined by the PAX Web library. You can set the following kinds of property:

- [Basic](#)
- [SSL](#)
- [JSP](#)

PART IV. OSGI SERVICE LAYER

Abstract

In Red Hat JBoss Fuse, the natural way to communicate between deployed bundles is to use *OSGi services*. An OSGi service exposes Java methods that can be invoked by other bundles in the container.

CHAPTER 13. OSGI SERVICES

Abstract

The OSGi core framework defines the *OSGi Service Layer*, which provides a simple mechanism for bundles to interact by registering Java objects as services in the *OSGi service registry*. One of the strengths of the OSGi service model is that *any* Java object can be offered as a service: there are no particular constraints, inheritance rules, or annotations that must be applied to the service class. This chapter describes how to deploy an OSGi service using the OSGi *blueprint container*.

13.1. THE BLUEPRINT CONTAINER

Abstract

The *blueprint container* is a dependency injection framework that simplifies interaction with the OSGi container. In particular, the blueprint container supports a configuration-based approach to using the OSGi service registry—for example, providing standard XML elements to import and export OSGi services.

13.1.1. Blueprint Configuration

Location of blueprint files in a JAR file

Relative to the root of the bundle JAR file, the standard location for blueprint configuration files is the following directory:

```
OSGI-INF/blueprint
```

Any files with the suffix, `.xml`, under this directory are interpreted as blueprint configuration files; in other words, any files that match the pattern, `OSGI-INF/blueprint/*.xml`.

Location of blueprint files in a Maven project

In the context of a Maven project, *ProjectDir*, the standard location for blueprint configuration files is the following directory:

```
ProjectDir/src/main/resources/OSGI-INF/blueprint
```

Blueprint namespace and root element


Blueprint configuration elements are associated with the following XML namespace:

```
http://www.osgi.org/xmlns/blueprint/v1.0.0
```

The root element for blueprint configuration is **blueprint**, so a blueprint XML configuration file normally has the following outline form:

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">
```

```
...
</blueprint>
```



NOTE

In the **blueprint** root element, there is no need to specify the location of the blueprint schema using an **xsi:schemaLocation** attribute, because the schema location is already known to the blueprint framework.

Blueprint Manifest configuration

There are a few aspects of blueprint configuration that are controlled by headers in the JAR's manifest file, **META-INF/MANIFEST.MF**, as follows:

- the section called “Custom Blueprint file locations”.
- the section called “Mandatory dependencies”.

Custom Blueprint file locations

If you need to place your blueprint configuration files in a non-standard location (that is, somewhere other than **OSGI-INF/blueprint/*.xml**), you can specify a comma-separated list of alternative locations in the **Bundle-Blueprint** header in the manifest file—for example:

```
Bundle-Blueprint: lib/account.xml, security.bp, cnf/*.xml
```

Mandatory dependencies

Dependencies on an OSGi service are mandatory by default (although this can be changed by setting the **availability** attribute to **optional** on a **reference** element or a **reference-list** element). Declaring a dependency to be mandatory means that the bundle cannot function properly without that dependency and the dependency must be available at all times.

Normally, while a blueprint container is initializing, it passes through a *grace period*, during which time it attempts to resolve all mandatory dependencies. If the mandatory dependencies cannot be resolved in this time (the default timeout is 5 minutes), container initialization is aborted and the bundle is not started. The following settings can be appended to the **Bundle-SymbolicName** manifest header to configure the grace period:

blueprint.graceperiod

If **true** (the default), the grace period is enabled and the blueprint container waits for mandatory dependencies to be resolved during initialization; if **false**, the grace period is skipped and the container does not check whether the mandatory dependencies are resolved.

blueprint.timeout

Specifies the grace period timeout in milliseconds. The default is 300000 (5 minutes).

For example, to enable a grace period of 10 seconds, you could define the following **Bundle-SymbolicName** header in the manifest file:

```
Bundle-SymbolicName: org.fusesource.example.osgi-client;
  blueprint.graceperiod:=true;
  blueprint.timeout:= 10000
```

The value of the **Bundle-SymbolicName** header is a semi-colon separated list, where the first item is the actual bundle symbolic name, the second item, **blueprint.graceperiod:=true**, enables the grace period and the third item, **blueprint.timeout:= 10000**, specifies a 10 second timeout.

13.1.2. Defining a Service Bean

Overview

Similarly to the Spring container, the blueprint container enables you to instantiate Java classes using a **bean** element. You can create all of your main application objects this way. In particular, you can use the **bean** element to create a Java object that represents an OSGi service instance.

Blueprint bean element

The blueprint **bean** element is defined in the blueprint schema namespace, <http://www.osgi.org/xmlns/blueprint/v1.0.0>. The blueprint `{http://www.osgi.org/xmlns/blueprint/v1.0.0}bean` element should not be confused with the Spring `{http://www.springframework.org/schema/beans}bean` element, which has a similar syntax but is defined in a different namespace.



NOTE

The Spring DM specification version 2.0 or later, allows you to mix both kinds of **bean** element under the **beans** root element, (as long as you define each **bean** elements using the appropriate namespace prefix).

Sample beans

The blueprint **bean** element enables you to create objects using a similar syntax to the conventional Spring **bean** element. One significant difference, however, is that blueprint constructor arguments are specified using the **argument** child element, in contrast to Spring's **constructor-arg** child element. The following example shows how to create a few different types of bean using blueprint's **bean** element:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <bean id="label" class="java.lang.String">
    <argument value="LABEL_VALUE"/>
  </bean>

  <bean id="myList" class="java.util.ArrayList">
    <argument type="int" value="10"/>
  </bean>

  <bean id="account" class="org.fusesource.example.Account">
    <property name="accountName" value="john.doe"/>
    <property name="balance" value="10000"/>
  </bean>
</blueprint>
```



```

    </bean>

</blueprint>

```

Where the **Account** class referenced by the last bean example could be defined as follows:

```

// Java
package org.fusesource.example;

public class Account
{
    private String accountName;
    private int balance;

    public Account () { }

    public void setAccountName(String name) {
        this.accountName = name;
    }

    public void setBalance(int bal) {
        this.balance = bal;
    }
    ...
}

```

Differences between Blueprint and Spring

Although the syntax of the blueprint **bean** element and the Spring **bean** element are similar, there are a few differences, as you can see from [Table 13.1, “Comparison of Spring bean with Blueprint bean”](#). In this table, the XML tags (identifiers enclosed in angle brackets) refer to child elements of **bean** and the plain identifiers refer to attributes.

Table 13.1. Comparison of Spring bean with Blueprint bean

Spring DM Attributes/Tags	Blueprint Attributes/Tags
id	id
name/<alias>	<i>N/A</i>
class	class
scope	scope= ("singleton" "prototype")
lazy-init= ("true" "false")	activation= ("eager" "lazy")
depends-on	depends-on
init-method	init-method

Spring DM Attributes/Tags	Blueprint Attributes/Tags
<code>destroy-method</code>	<code>destroy-method</code>
<code>factory-method</code>	<code>factory-bean</code>
<code>factory-bean</code>	<code>factory-ref</code>
<code><constructor-arg></code>	<code><argument></code>
<code><property></code>	<code><property></code>

Where the default value of the blueprint `scope` attribute is `singleton` and the default value of the blueprint `activation` attribute is `eager`.

References

For more details on defining blueprint beans, consult the following references:

- [Spring Dynamic Modules Reference Guide v2.0](#) (see the blueprint chapters).
- Section 121 *Blueprint Container Specification*, from the [OSGi Compendium Services R4.2](#) specification.

13.1.3. Exporting a Service

Overview

This section describes how to export a Java object to the OSGi service registry, thus making it accessible as a service to other bundles in the OSGi container.

Exporting with a single interface

To export a service to the OSGi service registry under a single interface name, define a `service` element that references the relevant service bean, using the `ref` attribute, and specifies the published interface, using the `interface` attribute.

For example, you could export an instance of the `SavingsAccountImpl` class under the `org.fusesource.example.Account` interface name using the blueprint configuration code shown in [Example 13.1, “Sample Service Export with a Single Interface”](#).

Example 13.1. Sample Service Export with a Single Interface

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">
  <bean id="savings" class="org.fusesource.example.SavingsAccountImpl"/>
  <service ref="savings" interface="org.fusesource.example.Account"/>
</blueprint>
```

Where the **ref** attribute specifies the ID of the corresponding bean instance and the **interface** attribute specifies the name of the public Java interface under which the service is registered in the OSGi service registry. The classes and interfaces used in this example are shown in [Example 13.2, “Sample Account Classes and Interfaces”](#)

Example 13.2. Sample Account Classes and Interfaces

```
// Java
package org.fusesource.example

public interface Account { ... }

public interface SavingsAccount { ... }

public interface CheckingAccount { ... }

public class SavingsAccountImpl implements SavingsAccount
{
    ...
}

public class CheckingAccountImpl implements CheckingAccount
{
    ...
}
```

Exporting with multiple interfaces

To export a service to the OSGi service registry under multiple interface names, define a **service** element that references the relevant service bean, using the **ref** attribute, and specifies the published interfaces, using the **interfaces** child element.

For example, you could export an instance of the **SavingsAccountImpl** class under the list of public Java interfaces, **org.fusesource.example.Account** and **org.fusesource.example.SavingsAccount**, using the following blueprint configuration code:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">
  <bean id="savings" class="org.fusesource.example.SavingsAccountImpl"/>
  <service ref="savings">
    <interfaces>
      <value>org.fusesource.example.Account</value>
      <value>org.fusesource.example.SavingsAccount</value>
    </interfaces>
  </service>
  ...
</blueprint>
```



NOTE

The **interface** attribute and the **interfaces** element cannot be used simultaneously in the same **service** element. You must use either one or the other.

Exporting with auto-export

If you want to export a service to the OSGi service registry under *all* of its implemented public Java interfaces, there is an easy way of accomplishing this using the **auto-export** attribute.

For example, to export an instance of the **SavingsAccountImpl** class under all of its implemented public interfaces, use the following blueprint configuration code:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">
  <bean id="savings" class="org.fusesource.example.SavingsAccountImpl"/>
  <service ref="savings" auto-export="interfaces"/>
  ...
</blueprint>
```

Where the **interfaces** value of the **auto-export** attribute indicates that blueprint should register all of the public interfaces implemented by **SavingsAccountImpl**. The **auto-export** attribute can have the following valid values:

disabled

Disables auto-export. This is the default.

interfaces

Registers the service under all of its implemented public Java interfaces.

class-hierarchy

Registers the service under its own type (class) and under all super-types (super-classes), except for the **Object** class.

all-classes

Like the **class-hierarchy** option, but including all of the implemented public Java interfaces as well.

Setting service properties


The OSGi service registry also allows you to associate *service properties* with a registered service. Clients of the service can then use the service properties to search for or filter services. To associate service properties with an exported service, add a **service-properties** child element that contains one or more **beans:entry** elements (one **beans:entry** element for each service property).

For example, to associate the **bank.name** string property with a savings account service, you could use the following blueprint configuration:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
  xmlns:beans="http://www.springframework.org/schema/beans"
  ...>
  ...
  <service ref="savings" auto-export="interfaces">
    <service-properties>
      <beans:entry key="bank.name" value="HighStreetBank"/>
    </service-properties>
  </service>
  ...
</blueprint>
```

```
</blueprint>
```

Where the `bank.name` string property has the value, `HighStreetBank`. It is possible to define service properties of type other than string: that is, primitive types, arrays, and collections are also supported. For details of how to define these types, see [Controlling the Set of Advertised Properties](#) in the *Spring Reference Guide*.



NOTE

Strictly speaking, the `entry` element ought to belong to the blueprint namespace. The use of the `beans:entry` element in Spring's implementation of blueprint is non-standard.

Default service properties

There are two service properties that might be set automatically when you export a service using the `service` element, as follows:

- `osgi.service.blueprint.compname`—is always set to the `id` of the service's `bean` element, unless the bean is inlined (that is, the bean is defined as a child element of the `service` element). Inlined beans are always anonymous.
- `service.ranking`—is automatically set, if the ranking attribute is non-zero.

Specifying a ranking attribute

If a bundle looks up a service in the service registry and finds more than one matching service, you can use ranking to determine which of the services is returned. The rule is that, whenever a lookup matches multiple services, the service with the highest rank is returned. The service rank can be any non-negative integer, with `0` being the default. You can specify the service ranking by setting the `ranking` attribute on the `service` element—for example:

```
<service ref="savings" interface="org.fusesource.example.Account"
  ranking="10"/>
```

Specifying a registration listener

If you want to keep track of service registration and unregistration events, you can define a *registration listener* callback bean that receives registration and unregistration event notifications. To define a registration listener, add a `registration-listener` child element to a `service` element.

For example, the following blueprint configuration defines a listener bean, `listenerBean`, which is referenced by a `registration-listener` element, so that the listener bean receives callbacks whenever an `Account` service is registered or unregistered:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0" ...>
  ...
  <bean id="listenerBean" class="org.fusesource.example.Listener"/>

  <service ref="savings" auto-export="interfaces">
    <registration-listener
      ref="listenerBean"
      registration-method="register"
```

```

        unregistration-method="unregister"/>
    </service>
    ...
</blueprint>

```

Where the **registration-listener** element's **ref** attribute references the **id** of the listener bean, the **registration-method** attribute specifies the name of the listener method that receives the registration callback, and **unregistration-method** attribute specifies the name of the listener method that receives the unregistration callback.

The following Java code shows a sample definition of the **Listener** class that receives notifications of registration and unregistration events:

```

// Java
package org.fusesource.example;

public class Listener
{
    public void register(Account service, java.util.Map serviceProperties)
    {
        ...
    }

    public void unregister(Account service, java.util.Map
serviceProperties) {
        ...
    }
}

```

The method names, **register** and **unregister**, are specified by the **registration-method** and **unregistration-method** attributes respectively. The signatures of these methods must conform to the following syntax:

- *First method argument*—any type **T** that is assignable from the service object's type. In other words, any supertype class of the service class or any interface implemented by the service class. This argument contains the service instance, unless the service bean declares the **scope** to be **prototype**, in which case this argument is **null** (when the scope is **prototype**, no service instance is available at registration time).
- *Second method argument*—must be of either **java.util.Map** type or **java.util.Dictionary** type. This map contains the service properties associated with this service registration.

13.1.4. Importing a Service

Overview

This section describes how to obtain and use references to OSGi services that have been exported to the OSGi service registry. Essentially, you can use either the **reference** element or the **reference-list** element to import an OSGi service. The key difference between these elements is *not* (as you might at first be tempted to think) that **reference** returns a single service reference, while **reference-list** returns a list of service references. Rather, the real difference is that the **reference** element is suitable for accessing *stateless* services, while the **reference-list** element is suitable for accessing *stateful* services.

Managing service references


The following models for obtaining OSGi services references are supported:

- the section called “Reference manager”.
- the section called “Reference list manager”.

Reference manager

A *reference manager* instance is created by the blueprint `reference` element. This element returns a single service reference and is the preferred approach for accessing *stateless* services. [Figure 13.1, “Reference to Stateless Service”](#) shows an overview of the model for accessing a stateless service using the reference manager.

Figure 13.1. Reference to Stateless Service

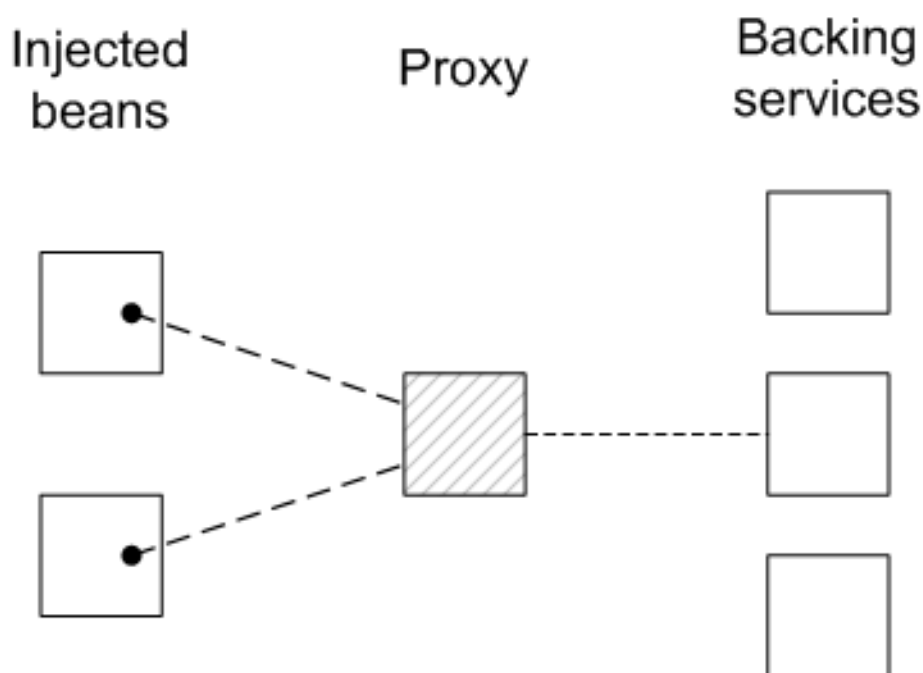

Beans in the client blueprint container get injected with a proxy object (the *provided object*), which is backed by a service object (the *backing service*) from the OSGi service registry. This model explicitly takes advantage of the fact that stateless services are interchangeable, in the following ways:


- If multiple services instances are found that match the criteria in the `reference` element, the reference manager can arbitrarily choose one of them as the backing instance (because they are interchangeable).
- If the backing service disappears, the reference manager can immediately switch to using one of the other available services of the same type. Hence, there is no guarantee, from one method invocation to the next, that the proxy remains connected to the same backing service.

The contract between the client and the backing service is thus *stateless*, and the client must *not* assume that it is always talking to the same service instance. If no matching service instances are available, the proxy will wait for a certain length of time before throwing the `ServiceUnavailable` exception. The length of the timeout is configurable by setting the `timeout` attribute on the `reference` element.

Reference list manager

A *reference list manager* instance is created by the blueprint `reference-list` element. This element returns a list of service references and is the preferred approach for accessing *stateful* services. [Figure 13.2, “List of References to Stateful Services”](#) shows an overview of the model for accessing a stateful service using the reference list manager.

Figure 13.2. List of References to Stateful Services

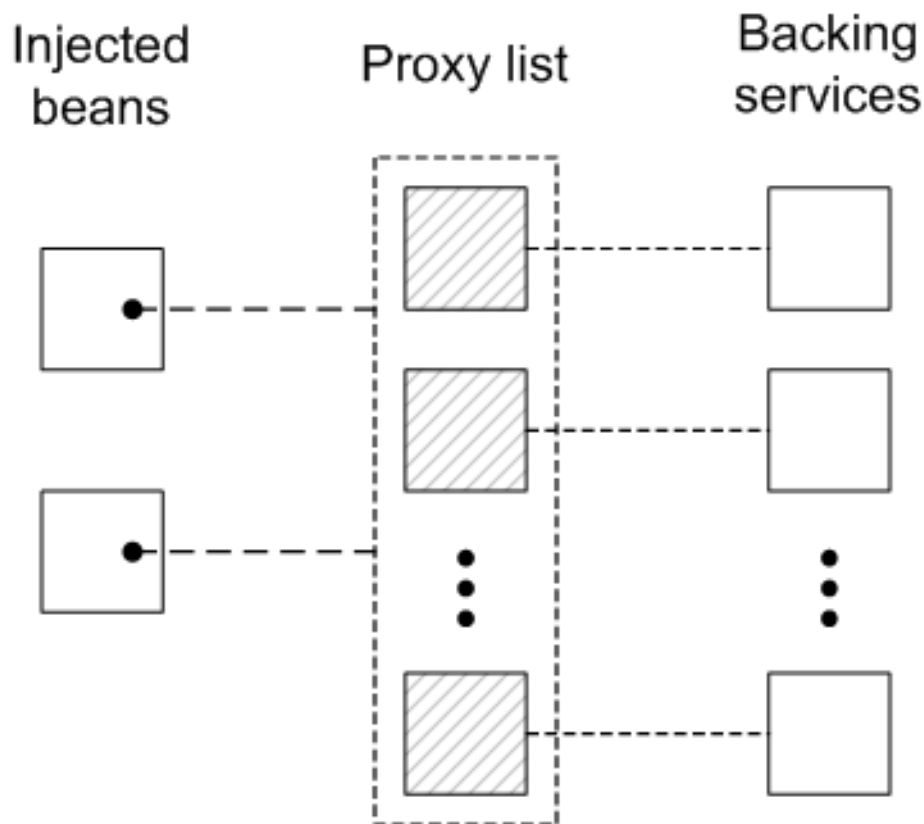

Beans in the client blueprint container get injected with a `java.util.List` object (the *provided object*), which contains a list of proxy objects. Each proxy is backed by a unique service instance in the OSGi service registry. Unlike the stateless model, backing services are *not* considered to be interchangeable here. In fact, the lifecycle of each proxy in the list is tightly linked to the lifecycle of the corresponding backing service: when a service gets registered in the OSGi registry, a corresponding proxy is synchronously created and added to the proxy list; and when a service gets unregistered from the OSGi registry, the corresponding proxy is synchronously removed from the proxy list.

The contract between a proxy and its backing service is thus *stateful*, and the client may assume when it invokes methods on a particular proxy, that it is always communicating with the *same* backing service. It could happen, however, that the backing service becomes unavailable, in which case the proxy becomes stale. Any attempt to invoke a method on a stale proxy will generate the `ServiceUnavailable` exception.

Matching by interface (stateless)

The simplest way to obtain a *stateless* service reference is by specifying the interface to match, using the `interface` attribute on the `reference` element. The service is deemed to match, if the `interface` attribute value is a super-type of the service or if the attribute value is a Java interface implemented by the service (the `interface` attribute can specify either a Java class or a Java interface).

For example, to reference a stateless `SavingsAccount` service (see [Example 13.1, “Sample Service Export with a Single Interface”](#)), define a `reference` element as follows:


```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <reference id="savingsRef"
            interface="org.fusesource.example.SavingsAccount"/>

  <bean id="client" class="org.fusesource.example.client.Client">
    <property name="savingsAccount" ref="savingsRef"/>
  </bean>

</blueprint>
```

Where the **reference** element creates a reference manager bean with the ID, **savingsRef**. To use the referenced service, inject the **savingsRef** bean into one of your client classes, as shown.

The bean property injected into the client class can be any type that is assignable from **SavingsAccount**. For example, you could define the **Client** class as follows:

```
package org.fusesource.example.client;

import org.fusesource.example.SavingsAccount;

public class Client {
    SavingsAccount savingsAccount;

    // Bean properties
    public SavingsAccount getSavingsAccount() {
        return savingsAccount;
    }

    public void setSavingsAccount(SavingsAccount savingsAccount) {
        this.savingsAccount = savingsAccount;
    }
    ...
}
```

Matching by interface (stateful)

The simplest way to obtain a *stateful* service reference is by specifying the interface to match, using the **interface** attribute on the **reference-list** element. The reference list manager then obtains a list of all the services, whose **interface** attribute value is either a super-type of the service or a Java interface implemented by the service (the **interface** attribute can specify either a Java class or a Java interface).

For example, to reference a stateful **SavingsAccount** service (see [Example 13.1, “Sample Service Export with a Single Interface”](#)), define a **reference-list** element as follows:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <reference-list id="savingsListRef"
                interface="org.fusesource.example.SavingsAccount"/>

  <bean id="client" class="org.fusesource.example.client.Client">
    <property name="savingsAccountList" ref="savingsListRef"/>
  </bean>

</blueprint>
```

```

    </bean>

</blueprint>

```

Where the **reference-list** element creates a reference list manager bean with the ID, **savingsListRef**. To use the referenced service list, inject the **savingsListRef** bean reference into one of your client classes, as shown.

By default, the **savingsAccountList** bean property is a list of service objects (for example, **java.util.List<SavingsAccount>**). You could define the client class as follows:

```

package org.fusesource.example.client;

import org.fusesource.example.SavingsAccount;

public class Client {
    java.util.List<SavingsAccount> accountList;

    // Bean properties
    public java.util.List<SavingsAccount> getSavingsAccountList() {
        return accountList;
    }

    public void setSavingsAccountList(
        java.util.List<SavingsAccount> accountList
    ) {
        this.accountList = accountList;
    }
    ...
}

```

Matching by interface and component name

To match both the interface and the component name (bean ID) of a *stateless* service, specify both the **interface** attribute and the **component-name** attribute on the **reference** element, as follows:

```

<reference id="savingsRef"
    interface="org.fusesource.example.SavingsAccount"
    component-name="savings"/>

```

To match both the interface and the component name (bean ID) of a *stateful* service, specify both the **interface** attribute and the **component-name** attribute on the **reference-list** element, as follows:

```

<reference-list id="savingsRef"
    interface="org.fusesource.example.SavingsAccount"
    component-name="savings"/>

```

Matching service properties with a filter

You can select services by matching service properties against a filter. The filter is specified using the **filter** attribute on the **reference** element or on the **reference-list** element. The value of the **filter** attribute must be an *LDAP filter expression*. For example, to define a filter that matches when

the `bank.name` service property equals `HighStreetBank`, you could use the following LDAP filter expression:

```
(bank.name=HighStreetBank)
```

To match two service property values, you can use `&` conjunction, which combines expressions with a logical **and**. For example, to require that the `foo` property is equal to `FooValue` and the `bar` property is equal to `BarValue`, you could use the following LDAP filter expression:

```
(&(foo=FooValue)(bar=BarValue))
```

For the complete syntax of LDAP filter expressions, see section 3.2.7 of the *OSGi Core Specification*.

Filters can also be combined with the `interface` and `component-name` settings, in which case all of the specified conditions are required to match.

For example, to match a *stateless* service of `SavingsAccount` type, with a `bank.name` service property equal to `HighStreetBank`, you could define a **reference** element as follows:

```
<reference id="savingsRef"
  interface="org.fusesource.example.SavingsAccount"
  filter="(bank.name=HighStreetBank)"/>
```

To match a *stateful* service of `SavingsAccount` type, with a `bank.name` service property equal to `HighStreetBank`, you could define a **reference-list** element as follows:

```
<reference-list id="savingsRef"
  interface="org.fusesource.example.SavingsAccount"
  filter="(bank.name=HighStreetBank)"/>
```

Specifying whether mandatory or optional

By default, a reference to an OSGi service is assumed to be mandatory (see [the section called “Mandatory dependencies”](#)). It is possible, however, to customize the dependency behavior of a **reference** element or a **reference-list** element by setting the `availability` attribute on the element. There are two possible values of the `availability` attribute: **mandatory** (the default), means that the dependency *must* be resolved during a normal blueprint container initialization; and **optional**, means that the dependency need *not* be resolved during initialization.

The following example of a **reference** element shows how to declare explicitly that the reference is a mandatory dependency:

```
<reference id="savingsRef"
  interface="org.fusesource.example.SavingsAccount"
  availability="mandatory"/>
```

Specifying a reference listener

To cope with the dynamic nature of the OSGi environment—for example, if you have declared some of your service references to have **optional** availability—it is often useful to track when a backing service gets bound to the registry and when it gets unbound from the registry. To receive notifications

of service binding and unbinding events, you can define a **reference-listener** element as the child of either the **reference** element or the **reference-list** element.

For example, the following blueprint configuration shows how to define a reference listener as a child of the reference manager with the ID, **savingsRef**:

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <reference id="savingsRef"
            interface="org.fusesource.example.SavingsAccount"
            >
    <reference-listener bind-method="onBind" unbind-method="onUnbind">
      <bean class="org.fusesource.example.client.Listener"/>
    </reference-listener>
  </reference>

  <bean id="client" class="org.fusesource.example.client.Client">
    <property name="savingsAcc" ref="savingsRef"/>
  </bean>

</blueprint>
```

The preceding configuration registers an instance of **org.fusesource.example.client.Listener** type as a callback that listens for **bind** and **unbind** events. Events are generated whenever the **savingsRef** reference manager's backing service binds or unbinds.

The following example shows a sample implementation of the **Listener** class:

```
package org.fusesource.example.client;

import org.osgi.framework.ServiceReference;

public class Listener {

    public void onBind(ServiceReference ref) {
        System.out.println("Bound service: " + ref);
    }

    public void onUnbind(ServiceReference ref) {
        System.out.println("Unbound service: " + ref);
    }

}
```

The method names, **onBind** and **onUnbind**, are specified by the **bind-method** and **unbind-method** attributes respectively. Both of these callback methods take an **org.osgi.framework.ServiceReference** argument.

13.2. PUBLISHING AN OSGI SERVICE

Overview

This section explains how to generate, build, and deploy a simple OSGi service in the OSGi container. The service is a simple *Hello World* Java class and the OSGi configuration is defined using a blueprint configuration file.

Prerequisites

In order to generate a project using the Maven Quickstart archetype, you must have the following prerequisites:


- *Maven installation*—Maven is a free, open source build tool from Apache. You can download the latest version from <http://maven.apache.org/download.html> (minimum is 2.0.9).
- *Internet connection*—whilst performing a build, Maven dynamically searches external repositories and downloads the required artifacts on the fly. In order for this to work, your build machine *must* be connected to the Internet.

Generating a Maven project

The `maven-archetype-quickstart` archetype creates a generic Maven project, which you can then customize for whatever purpose you like. To generate a Maven project with the coordinates, `org.fusesource.example:osgi-service`, enter the following command:

```
mvn archetype:create
-DarchetypeArtifactId=maven-archetype-quickstart
-DgroupId=org.fusesource.example
-DartifactId=osgi-service
```

The result of this command is a directory, *ProjectDir/osgi-service*, containing the files for the generated project.



NOTE

Be careful not to choose a group ID for your artifact that clashes with the group ID of an existing product! This could lead to clashes between your project's packages and the packages from the existing product (because the group ID is typically used as the root of a project's Java package names).

Customizing the POM file

You must customize the POM file in order to generate an OSGi bundle, as follows:

1. Follow the POM customization steps described in [Section 6.1, “Generating a Bundle Project”](#).
2. In the configuration of the Maven bundle plug-in, modify the bundle instructions to export the `org.fusesource.example.service` package, as follows:

```
<project ... >
...
<build>
...
<plugins>
...
<plugin>
  <groupId>org.apache.felix</groupId>
```

```

        <artifactId>maven-bundle-plugin</artifactId>
        <extensions>>true</extensions>
        <configuration>
            <instructions>
                <Bundle-SymbolicName>${pom.groupId}.${pom.artifactId}
            </Bundle-SymbolicName>
            <Export-Package>org.fusesource.example.service</Export-Package>
        </instructions>
        </configuration>
    </plugin>
</plugins>
</build>
...
</project>

```

Writing the service interface

Create the *ProjectDir/osgi-service/src/main/java/org/fusesource/example/service* sub-directory. In this directory, use your favorite text editor to create the file, `HelloWorldSvc.java`, and add the code from [Example 13.3, “The HelloWorldSvc Interface”](#) to it.

Example 13.3. The HelloWorldSvc Interface

```

// Java
package org.fusesource.example.service;

public interface HelloWorldSvc
{
    public void sayHello();
}

```

Writing the service class

Create the *ProjectDir/osgi-service/src/main/java/org/fusesource/example/service/impl* sub-directory. In this directory, use your favorite text editor to create the file, `HelloWorldSvcImpl.java`, and add the code from [Example 13.4, “The HelloWorldSvcImpl Class”](#) to it.

Example 13.4. The HelloWorldSvcImpl Class

```

package org.fusesource.example.service.impl;

import org.fusesource.example.service.HelloWorldSvc;

public class HelloWorldSvcImpl implements HelloWorldSvc {

    public void sayHello()
    {
        System.out.println( "Hello World!" );
    }
}

```

```
}
}
```

Writing the blueprint file

The blueprint configuration file is an XML file stored under the **OSGI-INF/blueprint** directory on the class path. To add a blueprint file to your project, first create the following sub-directories:

```
ProjectDir/osgi-service/src/main/resources
ProjectDir/osgi-service/src/main/resources/OSGI-INF
ProjectDir/osgi-service/src/main/resources/OSGI-INF/blueprint
```

Where the **src/main/resources** is the standard Maven location for all JAR resources. Resource files under this directory will automatically be packaged in the root scope of the generated bundle JAR.

[Example 13.5, “Blueprint File for Exporting a Service”](#) shows a sample blueprint file that creates a **HelloWorldSvc** bean, using the **bean** element, and then exports the bean as an OSGi service, using the **service** element.

Under the **ProjectDir/osgi-service/src/main/resources/OSGI-INF/blueprint** directory, use your favorite text editor to create the file, **config.xml**, and add the XML code from [Example 13.5, “Blueprint File for Exporting a Service”](#).

Example 13.5. Blueprint File for Exporting a Service

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <bean id="hello"
class="org.fusesource.example.service.impl.HelloWorldSvcImpl"/>

  <service ref="hello"
interface="org.fusesource.example.service.HelloWorldSvc"/>

</blueprint>
```

Running the service bundle

To install and run the **osgi-service** project, perform the following steps:

1. *Build the project*—open a command prompt and change directory to **ProjectDir/osgi-service**. Use Maven to build the demonstration by entering the following command:

```
mvn install
```

If this command runs successfully, the **ProjectDir/osgi-service/target** directory should contain the bundle file, **osgi-service-1.0-SNAPSHOT.jar**.

2. *Install and start the osgi-service bundle*—at the Red Hat JBoss Fuse console, enter the following

command:

```
JBossFuse:karaf@root> osgi:install -s file:ProjectDir/osgi-
service/target/osgi-service-1.0-SNAPSHOT.jar
```

Where *ProjectDir* is the directory containing your Maven projects and the `-s` flag directs the container to start the bundle right away. For example, if your project directory is `C:\Projects` on a Windows machine, you would enter the following command:

```
JBossFuse:karaf@root> osgi:install -s file:C:/Projects/osgi-
service/target/osgi-service-1.0-SNAPSHOT.jar
```



NOTE

On Windows machines, be careful how you format the **file** URL—for details of the syntax understood by the **file** URL handler, see [Section A.1, “File URL Handler”](#).

3. Check that the service has been created—to check that the bundle has started successfully, enter the following Red Hat JBoss Fuse console command:

```
JBossFuse:karaf@root> osgi:list
```

Somewhere in this listing, you should see a line for the **osgi-service** bundle, for example:

```
[ 236] [Active      ] [Created      ] [      ] [ 60] osgi-service
(1.0.0.SNAPSHOT)
```

To check that the service is registered in the OSGi service registry, enter a console command like the following:

```
JBossFuse:karaf@root> osgi:ls 236
```

Where the argument to the preceding command is the **osgi-service** bundle ID. You should see some output like the following at the console:

```
osgi-service (236) provides:
-----
osgi.service.blueprint.compname = hello
objectClass = org.fusesource.example.service.HelloWorldSvc
service.id = 272
----
osgi.blueprint.container.version = 1.0.0.SNAPSHOT
osgi.blueprint.container.symbolicname = org.fusesource.example.osgi-
service
objectClass =
org.osgi.service.blueprint.container.BlueprintContainer
service.id = 273
```

13.3. ACCESSING AN OSGI SERVICE

Overview

This section explains how to generate, build, and deploy a simple OSGi client in the OSGi container. The client finds the simple Hello World service in the OSGi registry and invokes the `sayHello()` method on it.

Prerequisites

In order to generate a project using the Maven Quickstart archetype, you must have the following prerequisites:


- *Maven installation*—Maven is a free, open source build tool from Apache. You can download the latest version from <http://maven.apache.org/download.html> (minimum is 2.0.9).
- *Internet connection*—whilst performing a build, Maven dynamically searches external repositories and downloads the required artifacts on the fly. In order for this to work, your build machine *must* be connected to the Internet.

Generating a Maven project

The `maven-archetype-quickstart` archetype creates a generic Maven project, which you can then customize for whatever purpose you like. To generate a Maven project with the coordinates, `org.fusesource.example:osgi-client`, enter the following command:

```
mvn archetype:create
-DarchetypeArtifactId=maven-archetype-quickstart
-DgroupId=org.fusesource.example
-DartifactId=osgi-client
```

The result of this command is a directory, *ProjectDir/osgi-client*, containing the files for the generated project.



NOTE

Be careful not to choose a group ID for your artifact that clashes with the group ID of an existing product! This could lead to clashes between your project's packages and the packages from the existing product (because the group ID is typically used as the root of a project's Java package names).

Customizing the POM file

You must customize the POM file in order to generate an OSGi bundle, as follows:

1. Follow the POM customization steps described in [Section 6.1, “Generating a Bundle Project”](#).
2. Because the client uses the `HelloWorldSvc` Java interface, which is defined in the `osgi-service` bundle, it is necessary to add a Maven dependency on the `osgi-service` bundle. Assuming that the Maven coordinates of the `osgi-service` bundle are `org.fusesource.example:osgi-service:1.0-SNAPSHOT`, you should add the following dependency to the client's POM file:

```
<project ... >
...
<dependencies>
```

```

    ...
    <dependency>
      <groupId>org.fusesource.example</groupId>
      <artifactId>osgi-service</artifactId>
      <version>1.0-SNAPSHOT</version>
    </dependency>
  </dependencies>
  ...
</project>

```

Writing the Blueprint file

To add a blueprint file to your client project, first create the following sub-directories:

```

ProjectDir/osgi-client/src/main/resources
ProjectDir/osgi-client/src/main/resources/OSGI-INF
ProjectDir/osgi-client/src/main/resources/OSGI-INF/blueprint

```

Under the *ProjectDir/osgi-client/src/main/resources/OSGI-INF/blueprint* directory, use your favorite text editor to create the file, `config.xml`, and add the XML code from [Example 13.6](#), “Blueprint File for Importing a Service”.

Example 13.6. Blueprint File for Importing a Service

```

<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <reference id="helloWorld"
    interface="org.fusesource.example.service.HelloWorldSvc"/>

  <bean id="client"
    class="org.fusesource.example.client.Client"
    init-method="init">
    <property name="helloWorldSvc" ref="helloWorld"/>
  </bean>

</blueprint>

```

Where the `reference` element creates a reference manager that finds a service of `HelloWorldSvc` type in the OSGi registry. The `bean` element creates an instance of the `Client` class and injects the service reference as the bean property, `helloWorldSvc`. In addition, the `init-method` attribute specifies that the `Client.init()` method is called during the bean initialization phase (that is, *after* the service reference has been injected into the client bean).

Writing the client class

Under the *ProjectDir/osgi-client/src/main/java/org/fusesource/example/client* directory, use your favorite text editor to create the file, `Client.java`, and add the Java code from [Example 13.7](#), “The Client Class”.

Example 13.7. The Client Class

```
// Java
package org.fusesource.example.client;

import org.fusesource.example.service>HelloWorldSvc;

public class Client {
    HelloWorldSvc helloWorldSvc;

    // Bean properties
    public HelloWorldSvc getHelloWorldSvc() {
        return helloWorldSvc;
    }

    public void setHelloWorldSvc(HelloWorldSvc helloWorldSvc) {
        this.helloWorldSvc = helloWorldSvc;
    }

    public void init() {
        System.out.println("OSGi client started.");
        if (helloWorldSvc != null) {
            System.out.println("Calling sayHello()");
            helloWorldSvc.sayHello(); // Invoke the OSGi service!
        }
    }
}
```

The `Client` class defines a getter and a setter method for the `helloWorldSvc` bean property, which enables it to receive the reference to the Hello World service by injection. The `init()` method is called during the bean initialization phase, after property injection, which means that it is normally possible to invoke the Hello World service within the scope of this method.

Running the client bundle

To install and run the `osgi-client` project, perform the following steps:

1. *Build the project*—open a command prompt and change directory to ***ProjectDir/osgi-client***. Use Maven to build the demonstration by entering the following command:

```
mvn install
```

If this command runs successfully, the ***ProjectDir/osgi-client/target*** directory should contain the bundle file, ***osgi-client-1.0-SNAPSHOT.jar***.

2. *Install and start the osgi-service bundle*—at the Red Hat JBoss Fuse console, enter the following command:

```
JBossFuse:karaf@root> osgi:install -s file:ProjectDir/osgi-
client/target/osgi-client-1.0-SNAPSHOT.jar
```

Where *ProjectDir* is the directory containing your Maven projects and the `-s` flag directs the container to start the bundle right away. For example, if your project directory is ***C:\Projects*** on a Windows machine, you would enter the following command:

```
JBossFuse:karaf@root> osgi:install -s file:C:/Projects/osgi-
client/target/osgi-client-1.0-SNAPSHOT.jar
```



NOTE

On Windows machines, be careful how you format the **file** URL—for details of the syntax understood by the **file** URL handler, see [Section A.1, “File URL Handler”](#).

3. *Client output*—if the client bundle is started successfully, you should immediately see output like the following in the console:

```
Bundle ID: 239
OSGi client started.
Calling sayHello()
Hello World!
```

13.4. INTEGRATION WITH APACHE CAMEL

Overview

Apache Camel provides a simple way to invoke OSGi services using the Bean language. This feature is automatically available whenever a Apache Camel application is deployed into an OSGi container and requires no special configuration.

Registry chaining

When a Apache Camel route is deployed into the OSGi container, the `CamelContext` automatically sets up a registry chain for resolving bean instances: the registry chain consists of the OSGi registry, followed by the blueprint (or Spring) registry. Now, if you try to reference a particular bean class or bean instance, the registry resolves the bean as follows:

1. Look up the bean in the OSGi registry first. If a class name is specified, try to match this with the interface or class of an OSGi service.
2. If no match is found in the OSGi registry, fall back on the blueprint registry (or the Spring registry, if you are using the Spring container).

Sample OSGi service interface

Consider the OSGi service defined by the following Java interface, which defines the single method, `getGreeting()`:

```
// Java
package org.fusesource.example.hello.boston;

public interface HelloBoston {
    public String getGreeting();
}
```

Sample service export

When defining the bundle that implements the **HelloBoston** OSGi service, you could use the following blueprint configuration to export the service:

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">

  <bean id="hello"
class="org.fusesource.example.hello.boston>HelloBostonImpl"/>

  <service ref="hello"
interface="org.fusesource.example.hello.boston>HelloBoston"/>

</blueprint>
```

Where it is assumed that the **HelloBoston** interface is implemented by the **HelloBostonImpl** class (not shown).

Invoking the OSGi service from Java DSL

After you have deployed the bundle containing the **HelloBoston** OSGi service, you can invoke the service from a Apache Camel application using the Java DSL. In the Java DSL, you invoke the OSGi service through the Bean language, as follows:

```
from("timer:foo?period=5000")
  .bean(org.fusesource.example.hello.boston>HelloBoston.class,
"getGreeting")
  .log("The message contains: ${body}")
```

In the **bean** command, the first argument is the OSGi interface or class, which must match the interface exported from the OSGi service bundle. The second argument is the name of the bean method you want to invoke. For full details of the **bean** command syntax, see [section "Bean Integration" in "Apache Camel Development Guide"](#).



NOTE

When you use this approach, the OSGi service is implicitly imported. It is *not* necessary to import the OSGi service explicitly in this case.

Invoking the OSGi service from XML DSL

In the XML DSL, you can also use the Bean language to invoke the **HelloBoston** OSGi service, but the syntax is slightly different. In the XML DSL, you invoke the OSGi service through the Bean language, using the **method** element, as follows:

```
<beans ...>
  <camelContext xmlns="http://camel.apache.org/schema/spring">
    <route>
      <from uri="timer:foo?period=5000"/>
      <setBody>
        <method ref="org.fusesource.example.hello.boston>HelloBoston"
method="getGreeting"/>
      </setBody>
      <log message="The message contains: ${body}"/>
    </route>
  </camelContext>
</beans>
```

```
        </route>
    </camelContext>
</beans>
```

**NOTE**

When you use this approach, the OSGi service is implicitly imported. It is *not* necessary to import the OSGi service explicitly in this case.

CHAPTER 14. JMS BROKER

Abstract

Red Hat JBoss Fuse supports the deployment of JMS brokers. By default, it deploys an Apache ActiveMQ JMS broker. It includes all of the required bundles to deploy additional Apache ActiveMQ instances by deploying a new broker configuration.

14.1. WORKING WITH THE DEFAULT BROKER

Abstract

Red Hat JBoss Fuse starts up with a message broker by default. You can use this broker as it is for your application, or you can update its configuration to suite the needs of your application.

Overview

When you deploy a Red Hat JBoss Fuse instance, whether as a standalone container or as a part of a fabric, the default behavior is for a Apache ActiveMQ instance to be started in the container. The default broker creates an Openwire port that listens on port **61616**. The broker remains installed in the container and activates whenever you restart the container.

Broker configuration

The default broker's configuration is controlled by two files:

- **etc/broker.xml**—a standard Apache ActiveMQ configuration file that serves as a template for the default broker's configuration. It contains property place holders, specified using the syntax `${propName}`, that allow you to set the values of the actual property using the OSGi Admin service.
- **etc/io.fabric8.mq.fabric.server-default.cfg**—the OSGi configuration file that specifies the values for the properties in the broker's template configuration file.

For details on how to edit the default broker's configuration see the JBoss A-MQ documentation.

Broker data

The default broker's data is stored in **data/activemq**. You can change this location using the **config** command to change the broker's `data` property as shown in [Example 14.1, “Configuring the Default Broker's Data Directory”](#).

Example 14.1. Configuring the Default Broker's Data Directory

```
JBossFuse:karaf@root> config:edit io.fabric8.mq.fabric.server.3e3d0055-
1c5f-40e3-987e-024c1fac1c3f
JBossFuse:karaf@root> config:propset data dataStore
JBossFuse:karaf@root> config:exit
```

Disabling the default broker

If you decide that you don't want to use the default broker, you can disable it by removing its OSGi configuration file:

1. From the JBoss Fuse command console, delete the configuration PID using the `config:delete` command as shown in [Example 14.2, “Deleting the Default Broker Configuration”](#).

Example 14.2. Deleting the Default Broker Configuration

```
JBossFuse:karaf@root> config:delete
io.fabric8.mq.fabric.server.xxx
```

xxx is the system generated ID for the broker. You can find this value using the `config:list` command.

2. From the system terminal, delete the actual configuration file `etc/io.fabric8.mq.fabric.server-default.cfg`.

It is important to do both steps. [Step 1](#) removes the broker from the running container and its cached deployment information. [Step 2](#) removes the broker's configuration from the file system and ensures that it will not be automatically reloaded if the container is restarted.

14.2. JMS ENDPOINTS IN A ROUTER APPLICATION

Overview

The following example shows how you can integrate a JMS broker into a router application. The example generates messages using a timer; sends the messages through the `camel.timer` queue in the JMS broker; and then writes the messages to a specific directory in the file system.

Prerequisites

In order to run the sample router application, you need to have the `activemq-camel` feature installed in the OSGi container. The `activemq-camel` component is needed for defining Apache ActiveMQ-based JMS endpoints in Apache Camel. This feature is *not* installed by default, so you must install it using the following console command:

```
JBossFuse:karaf@root> features:install activemq-camel
```

You also need the `activemq` feature, but this feature is normally available, because Red Hat JBoss Fuse installs it by default.

TIP

Most of the Apache Camel components are *not* installed by default. Whenever you are about to define an endpoint in a Apache Camel route, remember to check whether the corresponding component feature is installed. Apache Camel component features generally have the same name as the corresponding Apache Camel component artifact ID, `camel-ComponentName`.

Router configuration

[Example 14.3, “Sample Route with JMS Endpoints”](#) gives an example of a Apache Camel route defined using the Spring XML DSL. Messages generated by the timer endpoint are propagated through the JMS broker and then written out to the file system.

Example 14.3. Sample Route with JMS Endpoints

```
<?xml version="1.0"?>
<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:camel="http://camel.apache.org/schema/spring">

  <bean id="activemq"
class="org.apache.activemq.camel.component.ActiveMQComponent">
    <property name="brokerURL" value="tcp://localhost:61616"/>
  </bean>

  <camelContext xmlns="http://camel.apache.org/schema/spring">
    <route>
      <from uri="timer://MyTimer?fixedRate=true&period=4000"/>
      <setBody><constant>Hello World!</constant></setBody>
      <to uri="activemq:camel.timer"/>
    </route>
    <route>
      <from uri="activemq:camel.timer"/>
      <to uri="file:C:/temp/sandpit/timer"/>
    </route>
  </camelContext>

</beans>
```


Camel activemq component

In general, it is necessary to create a custom instance of the Apache Camel `activemq` component, because you need to specify the connection details for connecting to the broker. The preceding example uses Spring syntax to instantiate the `activemq` bean which connects to the broker URL, `tcp://localhost:61616`. The broker URL must correspond to one of the transport connectors defined in the broker configuration file, `deploy/test-broker.xml`.

Sample routes

[Example 14.3, “Sample Route with JMS Endpoints”](#) defines two routes, as follows:

1. The first route uses a `timer` endpoint to generate messages at four-second intervals. The `setBody` element places a dummy string in the body of the message (which would otherwise be `null`). The messages are then sent to the `camel.timer` queue on the broker (the `activemq:camel.timer` endpoint).

**NOTE**

The `activemq` scheme in `activemq:camel.timer` is resolved by looking up `activemq` in the bean registry, which resolves to the locally instantiated bean with ID, `activemq`.

2. The second route pulls messages off the `camel.timer` queue and then writes the messages to the specified directory, `C:\temp\sandpit\timer`, in the file system.

Steps to run the example

To run the sample router application, perform the following steps:

1. Using your favorite text editor, copy and paste the router configuration from [Example 14.3, “Sample Route with JMS Endpoints”](#) into a file called `camel-timer.xml`.

Edit the file endpoint in the second route, in order to change the target directory to a suitable location on your file system:

```
<route>
  <from uri="activemq:camel.timer"/>
  <to uri="file:YourDirectoryHere!"/>
</route>
```

2. Start up a local instance of the Red Hat JBoss Fuse runtime by entering the following at a command prompt:

```
servicemix
```

3. Make sure the requisite features are installed in the OSGi container. To install the `activemq-camel` feature, enter the following command at the console:

```
JBossFuse:karaf@root> features:install activemq-camel
```

To ensure that the `activemq-broker` feature is *not* installed, enter the following command at the console:

```
JBossFuse:karaf@root> features:uninstall activemq-broker
```

4. Use one of the following alternatives to obtain a broker instance for this demonstration:

- *Use the default broker*—assuming you have not disabled the default broker, you can use it for this demonstration, because it is listening on the correct port, 61616.
- *Create a new broker instance using the console*—if you prefer not to use the default broker, you can disable it (as described in [Section 14.1, “Working with the Default Broker”](#)) and then create a new JMS broker instance by entering the following command at the console:

```
JBossFuse:karaf@root> activemq:create-broker --name test
```

After executing this command, you should see the broker configuration file, `test-broker.xml`, in the `InstallDir/deploy` directory.

5. Hot deploy the router configuration you created in step 1. Copy the `camel-timer.xml` file into the *InstallDir/deploy* directory.
6. Within a few seconds, you should start to see files appearing in the target directory (which is `C:\temp\sandpit\timer`, by default). The file component automatically generates a unique filename for each message that it writes.

It is also possible to monitor activity in the JMS broker by connecting to the Red Hat JBoss Fuse runtime's JMX port. To monitor the broker using JMX, perform the following steps:

- a. To monitor the JBoss Fuse runtime, start a JConsole instance (a standard Java utility) by entering the following command:

```
jconsole
```

- b. Initially, a **JConsole: Connect to Agent** dialog prompts you to connect to a JMX port. From the **Local** tab, select the `org.apache.felix.karaf.main.Bootstrap` entry and click **Connect**.
 - c. In the main JConsole window, click on the **MBeans** tab and then drill down to `org.apache.activemq|test|Queue` in the MBean tree (assuming that `test` is the name of your broker).
 - d. Under the **Queue** folder, you should see the `camel.timer` queue. Click on the `camel.timer` queue to view statistics on the message throughput of this queue.
7. To shut down the router application, delete the `camel-timer.xml` file from the *InstallDir/deploy* directory *while the Karaf container is running*

APPENDIX A. URL HANDLERS

Abstract

There are many contexts in Red Hat JBoss Fuse where you need to provide a URL to specify the location of a resource (for example, as the argument to a console command). In general, when specifying a URL, you can use any of the schemes supported by JBoss Fuse's built-in URL handlers. This appendix describes the syntax for all of the available URL handlers.

A.1. FILE URL HANDLER

Syntax

A file URL has the syntax, `file:PathName`, where *PathName* is the relative or absolute pathname of a file that is available on the Classpath. The provided *PathName* is parsed by Java's built-in file *URL handler*. Hence, the *PathName* syntax is subject to the usual conventions of a Java pathname: in particular, on Windows, each backslash must either be escaped by another backslash or replaced by a forward slash.

Examples

For example, consider the pathname, `C:\Projects\camel-bundle\target\foo-1.0-SNAPSHOT.jar`, on Windows. The following example shows the *correct* alternatives for the file URL on Windows:

```
file:C:/Projects/camel-bundle/target/foo-1.0-SNAPSHOT.jar
file:C:\\Projects\\camel-bundle\\target\\foo-1.0-SNAPSHOT.jar
```

The following example shows some *incorrect* alternatives for the file URL on Windows:

```
file:C:\Projects\camel-bundle\target\foo-1.0-SNAPSHOT.jar // WRONG!
file://C:/Projects/camel-bundle/target/foo-1.0-SNAPSHOT.jar // WRONG!
file://C:\\Projects\\camel-bundle\\target\\foo-1.0-SNAPSHOT.jar // WRONG!
```

A.2. HTTP URL HANDLER

Syntax

A HTTP URL has the standard syntax, `http:Host[:Port]/[Path][#AnchorName][?Query]`. You can also specify a secure HTTP URL using the `https` scheme. The provided HTTP URL is parsed by Java's built-in HTTP URL handler, so the HTTP URL behaves in the normal way for a Java application.

A.3. MVN URL HANDLER

Overview

If you use Maven to build your bundles or if you know that a particular bundle is available from a Maven repository, you can use the Mvn handler scheme to locate the bundle.



NOTE

To ensure that the Mvn URL handler can find local and remote Maven artifacts, you might find it necessary to customize the Mvn URL handler configuration. For details, see [the section called “Configuring the Mvn URL handler”](#).

Syntax

An Mvn URL has the following syntax:

```
mvn:[repositoryUrl!]groupId/artifactId[/[version]/[packaging]  
[/[classifier]]]
```

Where *repositoryUrl* optionally specifies the URL of a Maven repository. The *groupId*, *artifactId*, *version*, *packaging*, and *classifier* are the standard Maven coordinates for locating Maven artifacts (see [the section called “Maven coordinates”](#)).

Omitting coordinates

When specifying an Mvn URL, only the *groupId* and the *artifactId* coordinates are required. The following examples reference a Maven bundle with the *groupId*, *org.fusesource.example*, and with the *artifactId*, *bundle-demo*:

```
mvn:org.fusesource.example/bundle-demo  
mvn:org.fusesource.example/bundle-demo/1.1
```

When the *version* is omitted, as in the first example, it defaults to **LATEST**, which resolves to the latest version based on the available Maven metadata.

In order to specify a *classifier* value without specifying a *packaging* or a *version* value, it is permissible to leave gaps in the Mvn URL. Likewise, if you want to specify a *packaging* value without a *version* value. For example:

```
mvn:groupId/artifactId///classifier  
mvn:groupId/artifactId/version//classifier  
mvn:groupId/artifactId//packaging/classifier  
mvn:groupId/artifactId//packaging
```

Specifying a version range

When specifying the *version* value in an Mvn URL, you can specify a version range (using standard Maven version range syntax) in place of a simple version number. You use square brackets—[and]—to denote inclusive ranges and parentheses—(and)—to denote exclusive ranges. For example, the range, **[1.0.4, 2.0)**, matches any version, *v*, that satisfies **1.0.4 ≤ v < 2.0**. You can use this version range in an Mvn URL as follows:

```
mvn:org.fusesource.example/bundle-demo/[1.0.4, 2.0)
```

Configuring the Mvn URL handler

Before using Mvn URLs for the first time, you might need to customize the Mvn URL handler settings, as follows:

1. the section called “Check the Mvn URL settings” .
2. the section called “Edit the configuration file” .
3. the section called “Customize the location of the local repository” .

Check the Mvn URL settings

The Mvn URL handler resolves a reference to a local Maven repository and maintains a list of remote Maven repositories. When resolving an Mvn URL, the handler searches first the local repository and then the remote repositories in order to locate the specified Maven artifact. If there is a problem with resolving an Mvn URL, the first thing you should do is to check the handler settings to see which local repository and remote repositories it is using to resolve URLs.

To check the Mvn URL settings, enter the following commands at the console:

```
JBossFuse:karaf@root> config:edit org.ops4j.pax.url.mvn
JBossFuse:karaf@root> config:proplist
```

The **config:edit** command switches the focus of the **config** utility to the properties belonging to the **org.ops4j.pax.url.mvn** persistent ID. The **config:proplist** command outputs all of the property settings for the current persistent ID. With the focus on **org.ops4j.pax.url.mvn**, you should see a listing similar to the following:

```
org.ops4j.pax.url.mvn.localRepository = file:E:/Data/.m2/repository
service.pid = org.ops4j.pax.url.mvn
org.ops4j.pax.url.mvn.defaultRepositories =
file:E:/Programs/FUSE/apache-serv
icemix-4.2.0-fuse-SNAPSHOT/system@snapshots
felix.fileinstall.filename = org.ops4j.pax.url.mvn.cfg
org.ops4j.pax.url.mvn.repositories = http://repo1.maven.org/maven2,
http://re
po.fusesource.com/maven2, http://repo.fusesource.com/maven2-
snapshot@snapshots@n
oreleases, http://repository.apache.org/content/groups/snapshots-
group@snapshots
@noreleases, http://repository.ops4j.org/maven2,
http://svn.apache.org/repos/asf
/servicemix/m2-repo,
http://repository.springsource.com/maven/bundles/release, h
ttp://repository.springsource.com/maven/bundles/external
```

Where the **localRepository** setting shows the local repository location currently used by the handler and the **repositories** setting shows the remote repository list currently used by the handler.

Edit the configuration file

To customize the property settings for the Mvn URL handler, edit the following configuration file:

```
InstallDir/etc/org.ops4j.pax.url.mvn.cfg
```

The settings in this file enable you to specify explicitly the location of the local Maven repository, remove Maven repositories, Maven proxy server settings, and more. Please see the comments in the configuration file for more details about these settings.

Customize the location of the local repository

In particular, if your local Maven repository is in a non-default location, you might find it necessary to configure it explicitly in order to access Maven artifacts that you build locally. In your `org.ops4j.pax.url.mvn.cfg` configuration file, uncomment the `org.ops4j.pax.url.mvn.localRepository` property and set it to the location of your local Maven repository. For example:

```
# Path to the local maven repository which is used to avoid downloading
# artifacts when they already exist locally.
# The value of this property will be extracted from the settings.xml file
# above, or defaulted to:
#     System.getProperty( "user.home" ) + "/.m2/repository"
#
org.ops4j.pax.url.mvn.localRepository=file:E:/Data/.m2/repository
```

Reference

For more details about the `mvn` URL syntax, see the original Pax URL [Mvn Protocol](#) documentation.

A.4. WRAP URL HANDLER

Overview

If you need to reference a JAR file that is not already packaged as a bundle, you can use the Wrap URL handler to convert it dynamically. The implementation of the Wrap URL handler is based on Peter Krien's open source Bnd utility.

Syntax

A Wrap URL has the following syntax:

```
wrap:locationURL[,instructionsURL][$instructions]
```

The *locationURL* can be any URL that locates a JAR (where the referenced JAR is *not* formatted as a bundle). The optional *instructionsURL* references a Bnd properties file that specifies how the bundle conversion is performed. The optional *instructions* is an ampersand, &, delimited list of Bnd properties that specify how the bundle conversion is performed.

Default instructions

In most cases, the default Bnd instructions are adequate for wrapping an API JAR file. By default, Wrap adds manifest headers to the JAR's `META-INF/Manifest.mf` file as shown in [Table A.1, “Default Instructions for Wrapping a JAR”](#).

Table A.1. Default Instructions for Wrapping a JAR

Manifest Header	Default Value
Import - Package	*;resolution:=optional
Export - Package	All packages from the wrapped JAR.
Bundle - SymbolicName	The name of the JAR file, where any characters not in the set [a-zA-Z0-9_-] are replaced by underscore, _.

Examples

The following Wrap URL locates version 1.1 of the **commons-logging** JAR in a Maven repository and converts it to an OSGi bundle using the default Bnd properties:

```
wrap:mvn:commons-logging/commons-logging/1.1
```

The following Wrap URL uses the Bnd properties from the file, **E:\Data\Examples\commons-logging-1.1.bnd**:

```
wrap:mvn:commons-logging/commons-logging/1.1, file:E:/Data/Examples/commons-logging-1.1.bnd
```

The following Wrap URL specifies the **Bundle-SymbolicName** property and the **Bundle-Version** property explicitly:

```
wrap:mvn:commons-logging/commons-logging/1.1$Bundle-SymbolicName=apache-comm-log&Bundle-Version=1.1
```

If the preceding URL is used as a command-line argument, it might be necessary to escape the dollar sign, **\\$**, to prevent it from being processed by the command line, as follows:

```
wrap:mvn:commons-logging/commons-logging/1.1\$Bundle-SymbolicName=apache-comm-log&Bundle-Version=1.1
```

Reference

For more details about the **wrap** URL handler, see the following references:

- The [Bnd tool documentation](#), for more details about Bnd properties and Bnd instruction files.
- The original Pax URL [Wrap Protocol](#) documentation.

A.5. WAR URL HANDLER

Overview

If you need to deploy a WAR file in an OSGi container, you can automatically add the requisite manifest headers to the WAR file by prefixing the WAR URL with **war :**, as described here.

Syntax

A War URL is specified using either of the following syntaxes:

```
war:warURL
warref:instructionsURL
```

The first syntax, using the `war` scheme, specifies a WAR file that is converted into a bundle using the default instructions. The `warURL` can be any URL that locates a WAR file.

The second syntax, using the `warref` scheme, specifies a Bnd properties file, `instructionsURL`, that contains the conversion instructions (including some instructions that are specific to this handler). In this syntax, the location of the referenced WAR file does *not* appear explicitly in the URL. The WAR file is specified instead by the (mandatory) **WAR-URL** property in the properties file.

WAR-specific properties/instructions

Some of the properties in the `.bnd` instructions file are specific to the War URL handler, as follows:

WAR-URL

(Mandatory) Specifies the location of the War file that is to be converted into a bundle.

Web-ContextPath

Specifies the piece of the URL path that is used to access this Web application, after it has been deployed inside the Web container.



NOTE

Earlier versions of PAX Web used the property, **Webapp-Context**, which is now *deprecated*.

Default instructions

By default, the War URL handler adds manifest headers to the WAR's `META-INF/Manifest.mf` file as shown in [Table A.2, “Default Instructions for Wrapping a WAR File”](#).

Table A.2. Default Instructions for Wrapping a WAR File

Manifest Header	Default Value
Import -Package	<code>javax.* , org.xml.* , org.w3c.*</code>
Export -Package	No packages are exported.
Bundle-SymbolicName	The name of the WAR file, where any characters not in the set <code>[a-zA-Z0-9_- \.]</code> are replaced by period, <code>.</code>
Web-ContextPath	No default value. But the <i>WAR extender</i> will use the value of Bundle-SymbolicName by default.

Manifest Header	Default Value
Bundle-ClassPath	<p>In addition to any class path entries specified explicitly, the following entries are added automatically:</p> <ul style="list-style-type: none"> • . • WEB-INF/classes • All of the JARs from the WEB-INF/lib directory.

Examples

The following War URL locates version 1.4.7 of the **wicket-examples** WAR in a Maven repository and converts it to an OSGi bundle using the default instructions:

```
war:mvn:org.apache.wicket/wicket-examples/1.4.7/war
```

The following Wrap URL specifies the **Web-ContextPath** explicitly:

```
war:mvn:org.apache.wicket/wicket-examples/1.4.7/war?Web-ContextPath=wicket
```

The following War URL converts the WAR file referenced by the **WAR-URL** property in the **wicket-examples-1.4.7.bnd** file and then converts the WAR into an OSGi bundle using the other instructions in the **.bnd** file:

```
warref:file:E:/Data/Examples/wicket-examples-1.4.7.bnd
```

Reference

For more details about the war URL syntax, see the original Pax URL [War Protocol](#) documentation.

APPENDIX B. OSGI BEST PRACTICES

Abstract

The combination of Maven and the OSGi framework provides a sophisticated framework for building and deploying enterprise applications. In order to use this framework effectively, however, it is necessary to adopt certain conventions and best practices. The practices described in this appendix are intended to optimize the manageability and scalability of your OSGi applications.

B.1. OSGI TOOLING

Overview

The following best practices are recommended for OSGi related tools and utilities:

- [the section called “Use the Maven bundle plug-in to generate the Manifest”](#) .
- [the section called “Avoid using the OSGi API directly”](#) .
- [the section called “Prefer Blueprint over Spring-DM”](#) .
- [the section called “Use Apache Karaf features to group bundles together”](#) .
- [the section called “Use the OSGi Configuration Admin service”](#) .
- [the section called “Use PAX-Exam for testing”](#) .

Use the Maven bundle plug-in to generate the Manifest

Even for a moderately sized bundle project, it is usually impractical to create and maintain a bundle Manifest by hand. The [Maven bundle plug-in](#) is the most effective tool for automating the generation of bundle Manifests in a Maven project. See [Section B.2, “Building OSGi Bundles”](#).

Avoid using the OSGi API directly

Avoid using the OSGi Java API directly. Prefer a higher level technology, for example: Blueprint (from the [OSGi Compendium Specification](#)), [Spring-DM](#), [Declarative Services \(DS\)](#), [iPojo](#), and so on.

Prefer Blueprint over Spring-DM

The Blueprint container is now the preferred framework for instantiating, registering, and referencing OSGi services, because this container has now been adopted as an OSGi standard. This ensures greater portability for your OSGi service definitions in the future.

Spring Dynamic Modules (Spring-DM) provided much of the original impetus for the definition of the Blueprint standard, but should now be regarded as obsolescent. Using the Blueprint container does *not* prevent you from using the Spring framework: the latest version of Spring is compatible with Blueprint.

Use Apache Karaf features to group bundles together

When an application is composed of a large number of bundles, it becomes essential to group bundles together in order to deploy them efficiently. Apache Karaf *features* is a mechanism that is designed just

for this purpose. It is easy to use and supported by a variety of different tools. See [Chapter 8, Deploying Features](#) for details.

Use the OSGi Configuration Admin service

The OSGi Configuration Admin service is the preferred mechanism for providing configuration properties to your application. This configuration mechanism enjoys better tooling support than other approaches. For example, in Red Hat JBoss Fuse the OSGi Configuration Admin service is supported in the following ways:

- Properties integrated with Spring XML files.
- Properties automatically read from configuration files, *etc/persistendId.cfg*
- Properties can be set in feature repositories.

Use PAX-Exam for testing

In order for testing to be really effective, you should run at least some of your tests in an OSGi container. This requires you to start an OSGi container, configure its environment, install prerequisite bundles, and install the actual test. Performing these steps manually for every test would make testing prohibitively difficult and time-consuming. Pax-Exam solves this problem by providing a testing framework that is capable of automatically initializing an OSGi container before running tests in the container.

See [Appendix C, Pax-Exam Testing Framework](#) for more details.

B.2. BUILDING OSGI BUNDLES

Overview

The following best practices are recommended when building OSGi bundles using Maven:

- [the section called “Use package prefix as the bundle symbolic name”](#) .
- [the section called “Artifact ID should be derived from the bundle symbolic name”](#) .
- [the section called “Always export packages with a version”](#) .
- [the section called “Use naming convention for private packages”](#) .
- [the section called “Import packages with version ranges”](#) .
- [the section called “Avoid importing packages that you export”](#) .
- [the section called “Use optional imports with caution”](#) .
- [the section called “Avoid using the Require-Bundle header”](#) .

Use package prefix as the bundle symbolic name

Use your application's package prefix as the bundle symbolic name. For example, if all of your Java source code is located in sub-packages of `org.fusesource.fooProject`, use `org.fusesource.fooProject` as the bundle symbolic name.

Artifact ID should be derived from the bundle symbolic name

It makes sense to identify a Maven artifact with an OSGi bundle. To show this relationship as clearly as possible, you should use base the artifact ID on the bundle symbolic name. Two conventions are commonly used:

- *The artifact ID is identical to the bundle symbolic name*—this enables you to define the bundle symbolic name in terms of the artifact ID, using the following Maven bundle instruction:

```
<Bundle-SymbolicName>${project.artifactId}</Bundle-SymbolicName>
```

- *The bundle symbolic name is composed of the group ID and the artifact ID, joined by a dot*—this enables you to define the bundle symbolic name in terms of the group ID and the artifact ID, using the following Maven bundle instruction:

```
<Bundle-SymbolicName>${project.groupId}.${project.artifactId}
</Bundle-SymbolicName>
```



NOTE

Properties of the form `project.*` can be used to reference the value of any element in the current POM. To construct the name of a POM property, take the XPath name of any POM element (for example, `project/artifactId`) and replace occurrences of `/` with the `.` character. Hence, `${project.artifactId}` references the `artifactId` element from the current POM.

Always export packages with a version

One of the key advantages of the OSGi framework is its ability to manage bundle versions and the possibility of deploying multiple versions of a bundle in the same container. In order to take advantage of this capability, however, it is essential that you associate a version with any packages that you export.

For example, you can configure the `maven-bundle-plugin` plug-in to export packages with the current artifact version (given by the `project.version` property) as follows:

```
<Export-Package>
  ${project.artifactId}*;version=${project.version}
</Export-Package>
```

Notice how this example exploits the convention that packages use the artifact ID, `project.artifactId`, as their package prefix. The combination of package prefix and wildcard, `${project.artifactId}*`, enables you to reference all of the source code in your bundle.

Use naming convention for private packages

If you define any private packages in your bundle (packages that you do not want to export), it is recommended that you identify these packages using a strict naming convention. For example, if your bundle includes implementation classes that you do not want to export, you should place these classes in packages prefixed by `${project.artifactId}.impl` or `${project.artifactId}.internal`.

**NOTE**

If you do not specify any **Export -Package** instruction, the default behavior of the Maven bundle plug-in is to exclude any packages that contain a path segment equal to **impl** or **internal**.

To ensure that the private packages are *not* exported, you can add an entry of the form **!PackagePattern** to the Maven bundle plug-in's export instructions. The effect of this entry is to exclude any matching packages. For example, to exclude any packages prefixed by **\${project.artifactId}.impl**, you could add the following instruction to the Maven bundle plug-in configuration:

```
<Export-Package>
  !${project.artifactId}.impl.*,
  ${project.artifactId}*;version=${project.version}
</Export-Package>
```

**NOTE**

The order of entries in the **Export -Package** element is significant. The first match in the list determines whether a package is included or excluded. Hence, in order for exclusions to be effective, they should appear at the *start* of the list.

Import packages with version ranges

In order to benefit from OSGi version management capabilities, it is important to restrict the range of acceptable versions for imported packages. You can use either of the following approaches:

- *Manual version ranges*—you can manually specify the version range for an imported package using the **version** qualifier, as shown in the following example:

```
<Import-Package>
  org.springframework.*;version="[2.5,4)",
  org.apache.commons.logging.*;version="[1.1,2)",
  *
</Import-Package>
```

Version ranges are specified using the standard OSGi version range syntax, where square brackets—that is, **[** and **]**—denote inclusive ranges and parentheses—that is, **(** and **)**—denote exclusive ranges. Hence the range, **[2.5,4)**, means that the version, **v**, is restricted to the range, **2.5 <= v < 4**. Note the special case of a range written as a simple number—for example, **version="2.5"**, which is equivalent to the range, **[2.5, *infinity*)**.

- *Automatic version ranges*—if packages are imported from a Maven dependency and if the dependency is packaged as an OSGi bundle, the Maven bundle plug-in automatically adds the version range to the import instructions.

The default behavior is as follows. If your POM depends on a bundle that is identified as version 1.2.4.8, the generated manifest will import version 1.2 of the bundle's exported packages (that is, the imported version number is truncated to the first two parts, major and minor).

It is also possible to customize how imported version ranges are generated from the bundle dependency. When setting the **version** property, you can use the **`\${@}** macro (which returns the original export version) and the **`\${version}** macro (which modifies a version number) to

generate a version range. For example, consider the following `version` settings:

```
*;version="${@}"
```

If a particular package has export version `1.2.4.8`, the generated import version resolves to `1.2.4.8`.

```
*;version="${version};==;${@}"
```

If a particular package has export version `1.2.4.8`, the generated import version resolves to `1.2`.

```
*;version="[${version};==;${@}],${version};+;${@}]"
```

If a particular package has export version `1.2.4.8`, the generated import version range resolves to `[1.2, 1.3)`.

```
*;version="[${version};==;${@}],${version};+;${@}]"
```

If a particular package has export version `1.2.4.8`, the generated import version range resolves to `[1.2, 2)`.

The middle part of the version macro—for example, `==` or `+=`—formats the returned version number. The equals sign, `=`, returns the corresponding version part unchanged; the plus sign, `+`, returns the corresponding version part plus one; and the minus sign, `-`, returns the corresponding version part minus one. For more details, consult the Bnd documentation for the [version macro](#) and the [-versionpolicy option](#).



NOTE

In practice, you are likely to find that the majority of imported packages can be automatically versioned by Maven. It is, typically, only occasionally necessary to specify a version manually.

Avoid importing packages that you export

Normally, it is not good practice to import the packages that you export (though there are exceptions to this rule). Here are some guidelines to follow:

- If the bundle is a pure library (providing interfaces and classes, but *not* instantiating any classes or OSGi services), do not import the packages that you export.
- If the bundle is a pure API (providing interfaces and abstract classes, but no implementation classes), do not import the packages that you export.
- If the bundle is a pure implementation (implementing and registering an OSGi service, but not providing any API), you do not need to export any packages at all.



NOTE

The registered OSGi service must be accessible through an API interface or class, but it is presumed that this API is provided in a *separate* API bundle. The implementation bundle therefore needs to import the corresponding API packages.

- A special case arises, if an implementation and its corresponding API are combined into the same bundle. In this case, the API packages must be listed amongst the export packages *and* amongst the import packages. This configuration is interpreted in a special way by the OSGi framework: it actually means that the API packages will either be exported *or* imported at run time (but not both).

The reason for this special configuration is that, in a complex OSGi application, it is possible that an API package might be provided by more than one bundle. But you do not want multiple copies of an API to be exported into OSGi, because that can lead to technical problems like class cast exceptions. When a package is listed both in the exports and in the imports, the OSGi resolver proceeds as follows:

1. First of all, the resolver checks whether the package has already been exported from another bundle. If so, the resolver imports the package, but *does not export it*.
2. Otherwise, the resolver uses the local API package and exports this package, but it *does not import the package*.

Assuming you want to avoid importing the packages that you export, there are two alternative approaches you can take, as follows:

- (*Recommended*) The most effective way of suppressing the import of exported packages is to append the `-noimport:=true` setting to package patterns in the **Export-Package** instruction. For example:

```
<Export-Package>
  ${project.artifactId}*;version=${project.version};-noimport:=true
</Export-Package>
```

The marked packages are now *not* imported, irrespective of what is contained in the **Import-Package** instruction.

- An alternative way of avoiding the import is to add one or more package exclusions to the Maven bundle plug-in's **Import-Package** element (this was the only possibility in earlier versions of the Maven bundle plug-in). For example, the following **Import-Package** element instructs the Maven bundle plug-in to exclude all packages prefixed by the artifact ID, `${project.artifactId}`:

```
<Import-Package>
  !${project.artifactId}*,
  org.springframework.*;version="[2.5,4)",
  org.apache.commons.logging.*;version="[1.1,2)",
  *
</Import-Package>
```

Use optional imports with caution

When an imported package is specified with *optional* resolution, this allows the bundle to be resolved *without* resolving the optional package. This affects the resolution order of the bundles which, in turn, can affect the runtime behavior. You should therefore be careful with optional imports, in case they have some unintended side effects.

A package is optional when it appears in the **Import-Package** manifest header with the `resolution:=optional` setting appended to it. For example, the following example shows an **Import-Package** instruction for the Maven bundle plug-in that specifies an optional import:


```

<Import-Package>
  org.springframework.*;version="[2.5,4)",
  org.apache.commons.logging.*;version="[1.1,2)";resolution:="optional",
  *
</Import-Package>

```

Avoid using the Require-Bundle header

Avoid using the **Require-Bundle** header, if possible. The trouble with using the **Require-Bundle** header is that it *forces* the OSGi resolver to use packages from the specified bundle. Importing at the granularity of packages, on the other hand, allows the resolver to be more flexible, because there are fewer constraints: if a package is already available and resolved from another bundle, the resolver could use that package instead.

B.3. SAMPLE POM FILE

POM file

[Example B.1, “Sample POM File Illustrating Best Practices”](#) shows a sample POM that illustrates the best practices for building an OSGi bundle using Maven.

Example B.1. Sample POM File Illustrating Best Practices

```

<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/maven-v4_0_0.xsd">

  <modelVersion>4.0.0</modelVersion>

  <groupId>org.fusesource</groupId>
  <artifactId>org.fusesource.fooProject</artifactId>
  <packaging>bundle</packaging>
  <version>1.0-SNAPSHOT</version>
  <name>A fooProject OSGi Bundle</name>
  <url>http://www.myorganization.org</url>

  <dependencies>...</dependencies>

  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.felix</groupId>
        <artifactId>maven-bundle-plugin</artifactId>
        <configuration>
          <instructions>
            <Bundle-SymbolicName>${project.artifactId}</Bundle-
SymbolicName>
            <Export-Package>
              !${project.artifactId}.impl.*,
              ${project.artifactId}*;version=${project.version};-
noimport:=true
            </Export-Package>

```

```
        <Import-Package>
            org.springframework.*;version="[2.5,4)",
            org.apache.commons.logging.*;version="[1.1,2)",
            *
        </Import-Package>
    </instructions>
</configuration>
</plugin>
</plugins>
</build>

</project>
```

APPENDIX C. PAX-EXAM TESTING FRAMEWORK

Abstract

When it is time to start testing your application bundles in the OSGi container, it is recommended that you perform the testing using the Pax-Exam testing framework.

C.1. INTRODUCTION TO PAX-EXAM

Overview

Pax-Exam is an automated testing framework for running tests in an OSGi container. Consider the manual steps that would be needed to run tests in an OSGi container:

1. Set up the environment and initial options for the OSGi container.
2. Start the OSGi container.
3. Install the prerequisite bundles into the OSGi container (provisioning).
4. Install and run the test classes.

Using Pax-Exam you can simplify this testing procedure by automating it. Initialization options and provisioning options are performed by a configuration method in the test class. The Pax-Exam framework takes care of starting the OSGi container before running the test class bundle.

This section gives a brief introduction to the Pax-Exam testing framework and explains how to write a basic example using Apache Karaf.

JUnit 4 framework

JUnit 4 is the latest version of the [JUnit](#) Java testing suite. It defines a test by applying *Java annotations*, rather than using inherited classes and naming conventions as earlier versions did.

The simplest JUnit tests require two steps:

1. Specify which methods are the test methods by annotating them with the `@Test` annotation (you also need to include an import of `org.junit.Test` in the file).
2. At any point in the test method, define an assertion by calling one of the methods `assertTrue()`, `assertNotNull()`, or `assertEquals()` with a boolean argument (you also need to include a static import of `org.junit.Assert.*` in the file). The test succeeds, if the specified assertions all evaluate to `true`.

Integration with Pax-Exam

To integrate JUnit 4 with Pax-Exam, perform the following steps:

1. Import the requisite Pax Exam, JUnit, and other classes; for example:

```
import static org.ops4j.pax.exam.CoreOptions.*;
import static org.junit.Assert.*;
```

```
import javax.inject.Inject;

import org.junit.Test;
import org.junit.runner.RunWith;
import org.ops4j.pax.exam.Configuration;
import org.ops4j.pax.exam.Option;
import org.ops4j.pax.exam.junit.PaxExam;
import org.ops4j.pax.exam.regression.pde.HelloService;
import org.ops4j.pax.exam.spi.reactors.ExamReactorStrategy;
import org.ops4j.pax.exam.spi.reactors.PerMethod;
...
```

2. Customize JUnit to run the test in the PaxExam class—Adding a **@RunWith(PaxExam.class)** annotation to the test class hooks Pax Exam into JUnit, enabling it to set up a test container with an OSGi framework, provision your bundles according to specified configuration options, and build a probe bundle from the test classes and resources in your current project:

```
...
import org.junit.runner.RunWith;
import org.ops4j.pax.exam.junit.PaxExam;
...

@RunWith(PaxExam.class)
public class MyTest {
    ...
}
```

3. Add a PaxExam configuration method to the test class or classes—to run a test in an OSGi framework, you need to initialize the OSGi container properly and install any prerequisite bundles. These essential steps are performed by returning the appropriate options from the PaxExam configuration method. This method is identified by the **@Configuration** annotation this way:

```
import org.ops4j.pax.exam.junit.Configuration;
...
@Configuration
public static Option[] configuration() throws Exception {
    ...
}
```

The **@Configuration** annotation returns an array of configuration options that define the set of bundles to be provisioned the OSGi framework in the test container. It also provides access to a large number of configuration options—both provisioning and properties options:

4. Use the PaxExam fluent API to configure the OSGi framework—the PaxExam configuration method supports a fairly large number of provisioning and property options. To define these options efficiently, PaxExam provides a fluent API, which is provided in the **org.ops4j.pax.exam.CoreOptions** class.

- Provisioning options

These options are used to provision bundles to the OSGi framework under test. Two options provision a single bundle and one option can provision a group of related bundles.

- **bundle()**

Using `bundle()`, you can provision a bundle from any kind of URL supported by Pax URL. This includes the standard `http:` and `file:` protocols and some specialized protocols for grouping bundles, scanning directories, and other useful things.

- `mavenBundle()`

Using `mavenBundle()`, you can specify a bundle by its Maven coordinates. The bundle will be provisioned to the test container from a local or remote maven repository using the standard Maven lookup and caching procedures.

- `junitBundle()`

Using `junitBundle()`, you can provision JUnit and its dependencies as OSGi bundles to the test container.

- Property options

Property options are used to set system properties, OSGi framework properties, and VM properties for a forked Java Virtual Machine, as applicable. Some useful options are:

- `composite`

Groups multiple options into a single option. This is useful for building your own option methods.

```
public static Option baseBundles() {
    return combine(
        mavenBundle("com.example.foo", "common", "1.0.0"),
        mavenBundle("com.example.foo", "util", "1.0.0"));
}
```

- `systemProperty`

Sets a system property in the framework VM. For native containers, this amounts to invoking `System.setProperty()` in the running VM, which may or may not produce the same effect as a `-Dkey=value` argument for some properties defined in the JRE API.

```
systemProperty("org.osgi.service.http.port").value("8080"),
systemProperty("org.osgi.service.http.secure").value("8443")
```

-



NOTE

For details, see [Pax Exam Configuration Options](#).

Integration with Apache Karaf

Theoretically, Pax-Exam provides all of the features that are needed to run an OSGi framework embedded in Apache Karaf. In practice, however, there are a lot of Java system properties and configuration options that need to be set in order to initialize Apache Karaf. It would be a nuisance, if all of these properties and options needed to be specified explicitly in the Pax-Exam configuration method.

In order to simplify running Pax-Exam in Apache Karaf, helper classes are provided, which automatically take care of initializing the OSGi framework for you. The following classes are provided:

`org.apache.karaf.testing.AbstractIntegrationTest`

Provides some helper methods, particularly the `getOsgiService()` methods which make it easy to find an OSGi service, by specifying the Java type of the service or by specifying service properties.

`org.apache.karaf.testing.Helper`

Provides the `Helper.getDefaultOptions()` method, which configures all of the settings needed to start up Apache Karaf in a default configuration.

Maven dependencies

[Example C.1, “Pax-Exam and Related Maven Dependencies”](#) shows the Maven dependencies you need in order to run the Pax-Exam testing framework. You must specify dependencies on JUnit 4, Pax-Exam, and Apache Karaf tooling.

Example C.1. Pax-Exam and Related Maven Dependencies

```
<project ...>
  ...
  <properties>
    <junit-version>4.11</junit-version>
    <pax-exam-version>3.5.0</pax-exam-version>
    <felix.karaf.version>2.4.0</felix.karaf.version>
```

```

...
</properties>

<dependencies>
  <!-- Pax-Exam dependencies -->
  <dependency>
    <groupId>org.ops4j.pax.exam</groupId>
    <artifactId>pax-exam-container-karaf</artifactId>
    <version>${pax.exam.version}</version>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>org.ops4j.pax.exam</groupId>
    <artifactId>pax-exam-junit4</artifactId>
    <version>${pax.exam.version}</version>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>org.ops4j.pax.exam</groupId>
    <artifactId>pax-exam</artifactId>
    <version>${pax.exam.version}</version>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>org.ops4j.pax.url</groupId>
    <artifactId>pax-url-aether</artifactId>
    <version>1.6.0</version>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>javax.inject</groupId>
    <artifactId>javax.inject</artifactId>
    <version>1</version>
    <scope>test</scope>
  </dependency>

  <!-- JUnit dependencies -->
  <dependency>
    <groupId>junit</groupId>
    <artifactId>junit</artifactId>
    <version>${felix.karaf.version}</version>
    <scope>test</scope>
  </dependency>

  <!-- Apache Karaf integration -->
  <dependency>
    <groupId>org.ops4j.pax.exam.karaf</groupId>
    <artifactId>org.ops4j.pax.exam.karaf.testing</artifactId>
    <version>${felix.karaf.version}</version>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>org.ops4j.pax.exam.karaf</groupId>

<artifactId>org.ops4j.pax.exam.karaf.options.KarafDistributionOption.features</artifactId>

```

```

        <version>${felix.karaf.version}</version>
        <scope>test</scope>
    </dependency>
</dependencies>
...

<build>
    <plugins>

        <plugin>
            <groupId>org.apache.servicemix.tooling</groupId>
            <artifactId>depends-maven-plugin</artifactId>
            <version>1.2</version>
            <executions>
                <execution>
                    <id>generate-depends-fil</id>
                    <goals>
                        <goal>generate-depends-file</goal>
                    </goals>
                </execution>
            </executions>
        </plugin>
    </plugins>
</build>
...
</project>

```

This example uses custom properties to specify the versions of the various Maven artifacts.

References

To learn more about using the Pax-Exam testing framework, consult the following references:

- [JUnit 4 testing framework](#) on the [JUnit](#) Web site.
- The [Pax-Exam reference guide](#) on the [Pax-Exam](#) Web site.
- Source code for the sample [FeatureTest](#) class.

C.2. SAMPLE PAX-EXAM TEST CLASS

Sample test class

Example C.2, “CalculatorITestClass” shows an example of how to write a test class for Apache Karaf in the Pax-Exam testing framework. The CalculatorITest class configures the Apache Karaf environment, installs the obr and wrapper features, and then runs a test against the two features (where the obr and wrapper features implement particular sets of commands in the command console).

Example C.2. CalculatorITestClass

```
// Java
/*
 * Licensed to the Apache Software Foundation (ASF)
 * ...
 */
package org.ops4j.pax.exam.sample.karaf;

import static org.ops4j.pax.exam.CoreOptions.maven;
import static org.ops4j.pax.exam.CoreOptions.mavenBundle;
import static
org.ops4j.pax.exam.karaf.options.KarafDistributionOption.configureConsol
e;
import static
org.ops4j.pax.exam.karaf.options.KarafDistributionOption.features;
import static
org.ops4j.pax.exam.karaf.options.KarafDistributionOption.karafDistributi
onConfiguration;
import static
org.ops4j.pax.exam.karaf.options.KarafDistributionOption.keepRuntimeFold
er;

import java.io.File;

import javax.inject.Inject;

import org.junit.Assert;
import org.junit.Test;
import org.junit.runner.RunWith;
import org.ops4j.pax.exam.Configuration;
import org.ops4j.pax.exam.ConfigurationManager;
import org.ops4j.pax.exam.Option;
import org.ops4j.pax.exam.junit.PaxExam;
import org.ops4j.pax.exam.options.MavenArtifactUrlReference;
import org.ops4j.pax.exam.options.MavenUrlReference;
import org.ops4j.pax.exam.sample8.ds.Calculator;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

1 @RunWith(PaxExam.class)
public class CalculatorITest {
    private static Logger LOG =
```

```
LoggerFactory.getLogger(CalculatorITest.class);
```

```

2  @Inject
   protected Calculator calculator;

3  @Configuration
   public Option[] config() {
       MavenArtifactUrlReference karafUrl = maven()
           .groupId("org.apache.karaf")
           .artifactId("apache-karaf")
           .version(karafVersion())
           .type("zip");
       MavenUrlReference karafStandardRepo = maven()
           .groupId("org.apache.karaf.features")
           .artifactId("standard")
           .version(karafVersion())
           .classifier("features")
           .type("xml");
       return new Option[] {
           // KarafDistributionOption.debugConfiguration("5005",
true),
           karafDistributionConfiguration()
               .frameworkUrl(karafUrl)
               .unpackDirectory(new File("target", "exam"))
               .useDeployFolder(false),
           keepRuntimeFolder(),
           configureConsole().ignoreLocalConsole(),
           features(karafStandardRepo, "scr"),
           mavenBundle()
               .groupId("org.ops4j.pax.exam.samples")
               .artifactId("pax-exam-sample8-ds")
               .versionAsInProject().start(),
       };
   }

   public static String karafVersion() {
       ConfigurationManager cm = new ConfigurationManager();
       String karafVersion = cm.getProperty("pax.exam.karaf.version",
"3.0.0");
       return karafVersion;
   }

4  @Test
   public void testAdd() {
       int result = calculator.add(1, 2);
       LOG.info("Result of add was {}", result);
       Assert.assertEquals(3, result);
   }
}

```

1

The `@RunWith` annotation instructs JUnit4 to run the following test

with the PaxExam class. This is the key step for integrating JUnit4 with the Pax-Exam testing framework.

2

The `@Inject` annotation is a javax annotation that identifies the following method as a service to be injected and executed in the testing framework.

3

The `@Configuration` annotation is specific to Pax-Exam and marks the following method as a configuration method for setting Pax-Exam testing options. The configuration method must be declared as public static and must have a return value of type, `org.ops4j.pax.exam.Option[]`.

4

The `@Test` annotation is a standard JUnit4 annotation that identifies the following method as a test method to be executed in the testing framework.

INDEX

B

broker.xml, [Broker configuration](#)

Bundle-Name, [Setting a bundle's name](#)

Bundle-SymbolicName, [Setting a bundle's symbolic name](#)

Bundle-Version, [Setting a bundle's version](#)

bundles, [OSGi Bundles](#)

exporting packages, [Specifying exported packages](#)

importing packages, [Specifying imported packages](#)

lifecycle states, [Bundle lifecycle states](#)

name, [Setting a bundle's name](#)

private packages, [Specifying private packages](#)

symbolic name, [Setting a bundle's symbolic name](#)

version, [Setting a bundle's version](#)

C

class loading, [Class Loading in OSGi](#)

Conditional Permission Admin service, [OSGi framework services](#)

Configuration Admin service, [OSGi Compendium services](#)

console, [Red Hat JBoss Fuse](#)

D

default broker

configuration, [Broker configuration](#)

data directory, [Broker data](#)

disabling, [Disabling the default broker](#)

default repositories, [Adding a default Maven repository](#)

E

execution environment, [OSGi architecture](#)

Export-Package, [Specifying exported packages](#)

I

Import-Package, [Specifying imported packages](#)

io.fabric8.mq.fabric.server-default.cfg, [Broker configuration](#)

J

JBoss Fuse, [Red Hat JBoss Fuse](#)

console, [Red Hat JBoss Fuse](#)

L

lifecycle layer, [OSGi architecture](#)

lifecycle states, [Bundle lifecycle states](#)

M

Maven

local repository, [Customizing the location of the local Maven repository](#)

remote repositories, [Adding a remote Maven repository](#)

module layer, [OSGi architecture](#)

O

[org.ops4j.pax.url.mvn.localRepository.localRepository](#), [Customizing the location of the local Maven repository](#)

[org.ops4j.pax.url.mvn.localRepository.settings](#), [Customizing the location of the local Maven repository](#)

[org.ops4j.pax.url.mvn.repositories](#), [Adding a remote Maven repository](#), [Adding a default Maven repository](#)

[OSGi Compendium services](#), [OSGi Compendium services](#)

[Configuration Admin service](#), [OSGi Compendium services](#)

[OSGi framework](#), [OSGi Framework](#)

[bundles](#), [OSGi architecture](#)

[execution environment](#), [OSGi architecture](#)

[lifecycle layer](#), [OSGi architecture](#)

[module layer](#), [OSGi architecture](#)

[security layer](#), [OSGi architecture](#)

[service layer](#), [OSGi architecture](#)

[OSGi framework services](#), [OSGi framework services](#)

[Conditional Permission Admin service](#), [OSGi framework services](#)

[Package Admin service](#), [OSGi framework services](#)

[Permission Admin service](#), [OSGi framework services](#)

[Start Level service](#), [OSGi framework services](#)

[URL Handlers service](#), [OSGi framework services](#)

[OSGi service registry](#), [OSGi service registry](#)

[OSGi services](#), [OSGi Services](#)

[service invocation model](#), [Service invocation model](#)

[service registry](#), [OSGi service registry](#)

P

[Package Admin service](#), [OSGi framework services](#)

[Permission Admin service](#), [OSGi framework services](#)

[Private-Package](#), [Specifying private packages](#)

R

[remote repositories](#), [Adding a remote Maven repository](#)

repositories

default, [Adding a default Maven repository](#)

remote, [Adding a remote Maven repository](#)

S

security layer, [OSGi architecture](#)

service layer, [OSGi architecture](#)

Start Level service, [OSGi framework services](#)

U

URL Handlers service, [OSGi framework services](#)