



Red Hat OpenShift Application Runtimes 1

Eclipse Vert.x Runtime Guide

For Use with Red Hat OpenShift Application Runtimes

Red Hat OpenShift Application Runtimes 1 Eclipse Vert.x Runtime Guide

For Use with Red Hat OpenShift Application Runtimes

Legal Notice

Copyright © 2018 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

This guide provides details on using the Eclipse Vert.x runtime with Red Hat OpenShift Application Runtimes.

Table of Contents

PREFACE	6
CHAPTER 1. WHAT IS ECLIPSE VERT.X	7
1.1. KEY ECLIPSE VERT.X CONCEPTS	7
1.2. CONFIGURING YOUR APPLICATION TO USE ECLIPSE VERT.X	8
1.3. CONFIGURING YOUR ECLIPSE VERT.X APPLICATION TO USE AGROAL	9
CHAPTER 2. MISSIONS AND CLOUD-NATIVE DEVELOPMENT ON OPENSIFT	11
Missions	11
Boosters	11
CHAPTER 3. AVAILABLE MISSIONS AND BOOSTERS FOR ECLIPSE VERT.X	12
3.1. REST API LEVEL 0 MISSION - ECLIPSE VERT.X BOOSTER	12
3.1.1. Viewing the booster source code and README	12
3.1.2. REST API Level 0 design tradeoffs	12
3.1.3. Deploying the REST API Level 0 booster to OpenShift Online	13
3.1.3.1. Deploying the booster using developers.redhat.com/launch	13
3.1.3.2. Authenticating the oc CLI client	13
3.1.3.3. Deploying the REST API Level 0 booster using the oc CLI client	14
3.1.4. Deploying the REST API Level 0 booster to Single-node OpenShift Cluster	15
3.1.4.1. Getting the Fabric8 Launcher tool URL and credentials	15
3.1.4.2. Deploying the booster using the Fabric8 Launcher tool	16
3.1.4.3. Authenticating the oc CLI client	16
3.1.4.4. Deploying the REST API Level 0 booster using the oc CLI client	17
3.1.5. Deploying the REST API Level 0 booster to OpenShift Container Platform	18
3.1.6. Interacting with the unmodified REST API Level 0 booster for Eclipse Vert.x	18
3.1.7. Running the REST API Level 0 booster integration tests	19
3.1.8. REST resources	19
3.2. EXTERNALIZED CONFIGURATION MISSION - ECLIPSE VERT.X BOOSTER	20
3.2.1. The externalized configuration design pattern	20
3.2.2. Externalized Configuration design tradeoffs	20
3.2.3. Viewing the booster source code and README	21
3.2.4. Deploying the Externalized Configuration booster to OpenShift Online	21
3.2.4.1. Deploying the booster using developers.redhat.com/launch	21
3.2.4.2. Authenticating the oc CLI client	22
3.2.4.3. Deploying the Externalized Configuration booster using the oc CLI client	22
3.2.5. Deploying the Externalized Configuration booster to Single-node OpenShift Cluster	24
3.2.5.1. Getting the Fabric8 Launcher tool URL and credentials	24
3.2.5.2. Deploying the booster using the Fabric8 Launcher tool	24
3.2.5.3. Authenticating the oc CLI client	25
3.2.5.4. Deploying the Externalized Configuration booster using the oc CLI client	25
3.2.6. Deploying the Externalized Configuration booster to OpenShift Container Platform	27
3.2.7. Interacting with the unmodified Externalized Configuration booster for Eclipse Vert.x	27
3.2.8. Running the Externalized Configuration booster integration tests	28
3.2.9. Externalized Configuration resources	29
3.3. RELATIONAL DATABASE BACKEND MISSION - ECLIPSE VERT.X BOOSTER	29
3.3.1. Relational Database Backend design tradeoffs	30
3.3.2. Viewing the booster source code and README	30
3.3.3. Deploying the Relational Database Backend booster to OpenShift Online	31
3.3.3.1. Deploying the booster using developers.redhat.com/launch	31
3.3.3.2. Authenticating the oc CLI client	31
3.3.3.3. Deploying the Relational Database Backend booster using the oc CLI client	32

3.3.4. Deploying the Relational Database Backend booster to Single-node OpenShift Cluster	33
3.3.4.1. Getting the Fabric8 Launcher tool URL and credentials	33
3.3.4.2. Deploying the booster using the Fabric8 Launcher tool	34
3.3.4.3. Authenticating the oc CLI client	34
3.3.4.4. Deploying the Relational Database Backend booster using the oc CLI client	35
3.3.5. Deploying the Relational Database Backend booster to OpenShift Container Platform	36
3.3.6. Interacting with the Relational Database Backend API	36
Troubleshooting	38
3.3.7. Running the Relational Database Backend booster integration tests	38
3.3.8. Relational database resources	39
3.4. HEALTH CHECK MISSION - ECLIPSE VERT.X BOOSTER	39
3.4.1. Health check concepts	40
3.4.2. Viewing the booster source code and README	40
3.4.3. Deploying the Health Check booster to OpenShift Online	41
3.4.3.1. Deploying the booster using developers.redhat.com/launch	41
3.4.3.2. Authenticating the oc CLI client	41
3.4.3.3. Deploying the Health Check booster using the oc CLI client	42
3.4.4. Deploying the Health Check booster to Single-node OpenShift Cluster	43
3.4.4.1. Getting the Fabric8 Launcher tool URL and credentials	43
3.4.4.2. Deploying the booster using the Fabric8 Launcher tool	44
3.4.4.3. Authenticating the oc CLI client	44
3.4.4.4. Deploying the Health Check booster using the oc CLI client	44
3.4.5. Deploying the Health Check booster to OpenShift Container Platform	46
3.4.6. Interacting with the unmodified Health Check booster	46
3.4.7. Running the Health Check booster integration tests	48
3.4.8. Health check resources	48
3.5. CIRCUIT BREAKER MISSION - ECLIPSE VERT.X BOOSTER	49
3.5.1. The circuit breaker design pattern	49
Circuit breaker implementation	49
3.5.2. Circuit Breaker design tradeoffs	50
3.5.3. Viewing the booster source code and README	50
3.5.4. Deploying the Circuit Breaker booster to OpenShift Online	50
3.5.4.1. Deploying the booster using developers.redhat.com/launch	51
3.5.4.2. Authenticating the oc CLI client	51
3.5.4.3. Deploying the Circuit Breaker booster using the oc CLI client	51
3.5.5. Deploying the Circuit Breaker booster to Single-node OpenShift Cluster	53
3.5.5.1. Getting the Fabric8 Launcher tool URL and credentials	53
3.5.5.2. Deploying the booster using the Fabric8 Launcher tool	53
3.5.5.3. Authenticating the oc CLI client	54
3.5.5.4. Deploying the Circuit Breaker booster using the oc CLI client	54
3.5.6. Deploying the Circuit Breaker booster to OpenShift Container Platform	56
3.5.7. Interacting with the unmodified Eclipse Vert.x Circuit Breaker booster	56
3.5.8. Running the Circuit Breaker booster integration tests	58
3.5.9. Using Hystrix Dashboard to monitor the circuit breaker	59
3.5.10. Circuit breaker resources	60
3.6. SECURED MISSION - ECLIPSE VERT.X BOOSTER	60
3.6.1. The Secured project structure	60
3.6.2. Viewing the booster source code and README	61
3.6.3. Red Hat SSO deployment configuration	61
3.6.4. Red Hat SSO realm model	62
3.6.4.1. Red Hat SSO users	62
3.6.4.2. The application clients	64
3.6.5. Eclipse Vert.x SSO adapter configuration	64

3.6.6. Deploying the Secured booster to Single-node OpenShift Cluster	65
3.6.6.1. Getting the Fabric8 Launcher tool URL and credentials	65
3.6.6.2. Creating the Secured booster using Fabric8 Launcher	66
3.6.6.3. Authenticating the oc CLI client	66
3.6.6.4. Deploying the Secured booster using the oc CLI client	66
3.6.7. Deploying the Secured booster to OpenShift Container Platform	67
3.6.7.1. Authenticating the oc CLI client	67
3.6.7.2. Deploying the Secured booster using the oc CLI client	68
3.6.8. Authenticating to the Secured booster API endpoint	69
3.6.8.1. Getting the Secured booster API endpoint	69
3.6.8.2. Authenticating HTTP requests using the command line	70
3.6.8.3. Authenticating HTTP requests using the web interface	72
3.6.9. Running the Eclipse Vert.x Secured booster integration tests	75
3.6.10. Secured SSO resources	76
3.7. CACHE MISSION - ECLIPSE VERT.X BOOSTER	76
3.7.1. How caching works and when you need it	76
3.7.2. Viewing the booster source code and README	77
3.7.3. Deploying the Cache booster to OpenShift Online	78
3.7.3.1. Deploying the booster using developers.redhat.com/launch	78
3.7.3.2. Authenticating the oc CLI client	78
3.7.3.3. Deploying the Cache booster using the oc CLI client	79
3.7.4. Deploying the Cache booster to Single-node OpenShift Cluster	80
3.7.4.1. Getting the Fabric8 Launcher tool URL and credentials	80
3.7.4.2. Deploying the booster using the Fabric8 Launcher tool	81
3.7.4.3. Authenticating the oc CLI client	81
3.7.4.4. Deploying the Cache booster using the oc CLI client	82
3.7.5. Deploying the Cache booster to OpenShift Container Platform	83
3.7.6. Interacting with the unmodified Cache booster	83
3.7.7. Running the Cache booster integration tests	84
3.7.8. Caching resources	84
CHAPTER 4. DEVELOPING AN APPLICATION FOR THE ECLIPSE VERT.X RUNTIME	85
4.1. CREATING A BASIC ECLIPSE VERT.X APPLICATION	85
4.1.1. Creating an application	85
4.1.2. Deploying an application to OpenShift	88
4.2. DEPLOYING AN EXISTING ECLIPSE VERT.X APPLICATION TO OPENSIFT	90
CHAPTER 5. DEBUGGING	91
5.1. REMOTE DEBUGGING	91
5.1.1. Starting your application locally in debugging mode	91
5.1.2. Starting your application on OpenShift in debugging mode	91
5.1.3. Attaching a remote debugger to the application	92
5.2. DEBUG LOGGING	93
5.2.1. Configuring logging for your Eclipse Vert.x application using java.util.logging	93
5.2.2. Adding log output to your Eclipse Vert.x application.	94
5.2.3. Specifying a custom logging framework for your application	94
5.2.4. Configuring Netty logging for your Eclipse Vert.x application.	95
5.2.5. Accessing debug logs on OpenShift	95
CHAPTER 6. MONITORING	97
6.1. ACCESSING JVM METRICS FOR YOUR APPLICATION ON OPENSIFT	97
6.1.1. Accessing JVM metrics using Jolokia on OpenShift	97
APPENDIX A. THE SOURCE-TO-IMAGE (S2I) BUILD PROCESS	99

APPENDIX B. UPDATING THE DEPLOYMENT CONFIGURATION OF A BOOSTER	100
APPENDIX C. CONFIGURING A JENKINS FREESTYLE PROJECT TO DEPLOY YOUR APPLICATION WITH THE FABRIC8 MAVEN PLUGIN	102
Next steps	103
APPENDIX D. ADDITIONAL ECLIPSE VERT.X RESOURCES	104
APPENDIX E. APPLICATION DEVELOPMENT RESOURCES	105
APPENDIX F. PROFICIENCY LEVELS	106
Foundational	106
Advanced	106
Expert	106
APPENDIX G. GLOSSARY	107
G.1. PRODUCT AND PROJECT NAMES	107
G.2. TERMS SPECIFIC TO FABRIC8 LAUNCHER	107

PREFACE

This guide covers concepts as well as practical details needed by developers to use the Eclipse Vert.x runtime.

CHAPTER 1. WHAT IS ECLIPSE VERT.X

Eclipse Vert.x is a toolkit for writing reactive, non-blocking, asynchronous applications that run on the JVM (Java Virtual Machine). Eclipse Vert.x provides a non-prescriptive and flexible way to write efficient, multi-language (polyglot) applications. Eclipse Vert.x is also designed to be truly cloud-native by efficiently allowing many processes to switch between one or very few threads. This allows Eclipse Vert.x applications and services to more effectively use their CPU quotas in cloud environments and avoids the unnecessary overhead caused when creating new threads. Check out [Additional Resources](#) for further reading on Eclipse Vert.x.

Using the Eclipse Vert.x runtime in OpenShift makes it simpler and easier to build reactive systems with Eclipse Vert.x. The Eclipse Vert.x runtime enables you to run Eclipse Vert.x applications and services in OpenShift while providing all the advantages and conveniences of the OpenShift platform such as rolling updates, service discovery, and canary deployments. OpenShift also makes it easier for your applications to implement common microservice patterns such as externalized configuration, health check, circuit breaker, and failover.

1.1. KEY ECLIPSE VERT.X CONCEPTS

Cloud- and Container-Native Applications

Cloud-native applications are one of the key technological concepts behind microservices. They are designed to form distributed systems consisting of decoupled components that often run inside containers, on top of clusters containing a large number of nodes. These applications are intended to be resistant to failure of individual components, and to be updated without requiring service downtime. Systems based on cloud-native applications rely on automated deployment, scaling, and administrative and maintenance tasks. Management and administration tasks are often carried out at cluster level using off-the-shelf management and orchestration tools, rather than on the level of individual machines.

Reactive Systems

A reactive system, as defined in the [reactive manifesto](#), is a distributed systems with the following characteristics:

Elastic

The system remains responsive under varying workload, with individual components scaled and load-balanced as necessary to accommodate the differences in workload. Elastic application deliver the same quality of service regardless of the number of requests they receive at the same time.

Resilient

The system remains responsive when any of its individual components fails. Components are isolated from each other, with each individual component able to quickly recover after failure occurs. Failure of a single component should never prevent other components from functioning properly for a longer time. This prevents cascading failure, where the failure of an isolated component causes other components to become blocked and gradually fail.

Responsive

Responsive systems are designed to always respond to requests in a reasonable amount of time to ensure a consistent quality of service. To maintain responsiveness, the communication channel between the applications must never be blocked.

Message-Driven

The individual components of an application use asynchronous message-passing to communicate with each other. The components first detect each other using service discovery. If an event takes place (such as a mouse click or a search query) on a service, the service sends out a message over a common channel (the event bus). The messages is in turn caught and handled by the respective component.

Reactive Systems can be understood as “distributed systems done right”. They are designed with asynchrony as their key property in mind.

Reactive Programming

While the concept of reactive systems describes the architecture of a distributed system, reactive programming refers to practices that make applications reactive at the code level. Reactive programming is a development model to write asynchronous and event-driven applications. In reactive applications, the code reacts to events or messages.

There are several implementations of reactive programming, from the simplest ones using callbacks, to more complex ones, such as the Reactive Extensions (Rx), and coroutines. The Reactive Extensions (Rx) is the most well-known form of reactive programming in Java, thanks to the frequently-used *RxJava* library.

For further reading on reactive systems, reactive programming, and reactive extensions, see the [Additional Resources](#) section.

1.2. CONFIGURING YOUR APPLICATION TO USE ECLIPSE VERT.X

To configure your application to use Eclipse Vert.x:

Prerequisites

- A Maven-based application

Procedure

1. Reference the Eclipse Vert.x BOM (Bill of Materials) artifact in the `<dependencyManagement>` section of the `pom.xml` file of your application. Specify the `<type>pom</type>` and `<scope>import</scope>`:

```
<project>
  ...
  <dependencyManagement>
    <dependencies>
      <dependency>
        <groupId>io.vertx</groupId>
        <artifactId>vertx-dependencies</artifactId>
        <version>${vertx.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
    </dependencies>
  </dependencyManagement>
  ...
</project>
```

Include the following properties in your `pom.xml` file to track the version of Eclipse Vert.x and the Vert.x Maven Plugin you are using:

```
<project>
  ...
  <properties>
    <vertx.version>3.5.4.redhat-00002</vertx.version>
```

```

    <vertx-maven-plugin.version>1.0.17</vertx-maven-plugin.version>
  </properties>
  ...
</project>

```

2. Reference **vertx-maven-plugin** as the plugin used to package your application:

```

<project>
  ...
  <build>
    <plugins>
      ...
      <plugin>
        <groupId>io.reactiverse</groupId>
        <artifactId>vertx-maven-plugin</artifactId>
        <version>${vertx-maven-plugin.version}</version>
        <executions>
          <execution>
            <id>vmp</id>
            <goals>
              <goal>initialize</goal>
              <goal>package</goal>
            </goals>
          </execution>
        </executions>
        <configuration>
          <redeploy>true</redeploy>
        </configuration>
      </plugin>
      ...
    </plugins>
  </build>
  ...
</project>

```

Additional resources

- For more information about packaging your Eclipse Vert.x application, see the [Vert.x Maven Plugin](#) documentation.

1.3. CONFIGURING YOUR ECLIPSE VERT.X APPLICATION TO USE AGROAL

Starting with Eclipse Vert.x release **3.5.1.redhat-003**, Agroal replaced C3PO as the default JDBC connection pool. C3PO and Agroal use different property names and upgrading to a newer release of Eclipse Vert.x might break the JDBC connection pool configuration of your Eclipse Vert.x applications. Update the property names in the configuration of your JDBC connection pool to avoid this issue.



NOTE

To continue using C3PO as the JDBC connection pool for your application, set the value of the **provider_class** property in your JDBC connection pool configuration to **io.vertx.ext.jdbc.spi.impl.C3PODataSourceProvider**.

Procedure

1. Update the following property names within your JDBC connection pool configuration to match the connection pool you use:

C3P0 property name	Agroal property name
url	jdbcUrl
driver_class	driverClassName
user	principal
password	credential
castUUID	castUUID

Additional information

- Example JDBC connection pool configuration using C3P0:

```
JsonObject config = new JsonObject()
    .put("url", JDBC_URL)
    // set C3P0 as the JDBC connection pool:
    .put("provider_class",
        "io.vertx.ext.jdbc.spi.impl.C3P0DataSourceProvider")
    .put("driver_class", "org.postgresql.Driver")
    .put("user", JDBC_USER)
    .put("password", JDBC_PASSWORD)
    .put("castUUID", true);
```

- Example JDBC connection pool configuration using Agroal:

```
JsonObject config = new JsonObject()
    .put("jdbcUrl", JDBC_URL)
    .put("driverClassName", "org.postgresql.Driver")
    .put("principal", JDBC_USER)
    .put("credential", JDBC_PASSWORD)
    .put("castUUID", true);
```

CHAPTER 2. MISSIONS AND CLOUD-NATIVE DEVELOPMENT ON OPENSIFT

When developing applications on OpenShift, you can use missions and boosters to kickstart your development.

Missions

Missions are working applications that showcase different fundamental pieces of building cloud native applications and services.

A mission implements a [Microservice pattern](#) such as:

- Creating REST APIs
- Interoperating with a database
- Implementing the Health Check pattern

You can use missions for a variety of purposes:

- A proof of technology demonstration
- A teaching tool, or a sandbox for understanding how to develop applications for your project
- They can also be updated or extended for your own use case

Boosters

A booster is the implementation of a mission in a specific runtime. Boosters are preconfigured, functioning applications that demonstrate core principles of modern application development and run in an environment similar to production.

Each mission is implemented in one or more runtimes. Both the specific implementation and the actual project that contains your code are called a booster.

For example, the REST API Level 0 mission is implemented for these runtimes:

- [Node.js booster](#)
- [Spring Boot booster](#)
- [Eclipse Vert.x booster](#)
- [Thorntail booster](#)

CHAPTER 3. AVAILABLE MISSIONS AND BOOSTERS FOR ECLIPSE VERT.X

The following boosters are available for Eclipse Vert.x.

3.1. REST API LEVEL 0 MISSION - ECLIPSE VERT.X BOOSTER

Mission proficiency level: [Foundational](#).

What the REST API Level 0 Mission Does

The REST API Level 0 mission shows how to map business operations to a remote procedure call endpoint over HTTP using a REST framework. This corresponds to [Level 0 in the Richardson Maturity Model](#). Creating an HTTP endpoint using REST and its underlying principles to define your API lets you quickly prototype and design the API flexibly.

This booster introduces the mechanics of interacting with a remote service using the HTTP protocol. It allows you to:

- Execute an HTTP **GET** request on the **api/greeting** endpoint.
- Receive a response in JSON format with a payload consisting of the **Hello, World!** String.
- Execute an HTTP **GET** request on the **api/greeting** endpoint while passing in a String argument. This uses the **name** request parameter in the query string.
- Receive a response in JSON format with a payload of **Hello, \$name!** with **\$name** replaced by the value of the **name** parameter passed into the request.

3.1.1. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.1.2. REST API Level 0 design tradeoffs

Table 3.1. Design Tradeoffs

Pros	Cons
<ul style="list-style-type: none"> • The booster enables fast prototyping. • The API Design is flexible. • HTTP endpoints allow clients to be language-neutral. 	<ul style="list-style-type: none"> • As an application or service matures, the REST API Level 0 approach might not scale well. It might not support a clean API design or use cases with database interactions. <ul style="list-style-type: none"> ◦ Any operations involving shared, mutable state must be integrated with an appropriate backing datastore. ◦ All requests handled by this API design are scoped only to the container servicing the request. Subsequent requests might not be served by the same container.

3.1.3. Deploying the REST API Level 0 booster to OpenShift Online

Use one of the following options to execute the REST API Level 0 booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the oc CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the **oc** commands for you.

3.1.3.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.1.3.2. Authenticating the oc CLI client

To work with boosters on [OpenShift Online](#) using the **oc** command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](#) web interface.

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the [OpenShift Online](#) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your [OpenShift Online](#) account.

```
$ oc login OPENSHIFT_URL --token=MYTOKEN
```

3.1.3.3. Deploying the REST API Level 0 booster using the oc CLI client

Prerequisites

- The booster application created using [developers.redhat.com/launch](#). For more information, see [Section 3.1.3.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.1.3.2, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new project in OpenShift.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.
4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			

MY_APP_NAME-1-aaaaa	1/1	Running	0
58s			
MY_APP_NAME-s2i-1-build	0/1	Completed	0
2m			

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once it is fully deployed and started. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

- Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
MY_APP_NAME	MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME	8080

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.1.4. Deploying the REST API Level 0 booster to Single-node OpenShift Cluster

Use one of the following options to execute the REST API Level 0 booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the **oc** commands for you.

3.1.4.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

- Navigate to the console where you started Single-node OpenShift Cluster.
- Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
   OpenShift server started.
   The server is accessible via web console at:
       https://192.168.42.152:8443

   You are logged in as:
       User:      developer
       Password: developer

   To login as administrator:
       oc login -u system:admin
```

3.1.4.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.1.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.1.4.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.1.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login ...** command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.1.4.4. Deploying the REST API Level 0 booster using theoc CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.1.4.2, “Deploying the booster using the Fabric8 Launcher tool”](#).
- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.1.4.3, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new project in OpenShift.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.
4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
58s			
MY_APP_NAME-s2i-1-build	0/1	Completed	0
2m			

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once it is fully deployed and started. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
NAME                                HOST/PORT
PATH      SERVICES      PORT      TERMINATION
MY_APP_NAME MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME 8080
```

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.1.5. Deploying the REST API Level 0 booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or the [Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.1.3, “Deploying the REST API Level 0 booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.1.6. Interacting with the unmodified REST API Level 0 booster for Eclipse Vert.x

The booster provides a default HTTP endpoint that accepts GET requests.

Prerequisites

- Your application running
- The **curl** binary or a web browser

Procedure

1. Use **curl** to execute a **GET** request against the booster. You can also use a browser to do this.

```
$ curl http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/greeting
{
  "content" : "Hello, World!"
}
```

2. Use **curl** to execute a **GET** request with the **name** URL parameter against the booster. You can also use a browser to do this.

```
$ curl http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/greeting?name=Sarah
{
```

```

    "content" : "Hello, Sarah!"
  }

```



NOTE

From a browser, you can also use a form provided by the booster to perform these same interactions. The form is located at the root of the project **`http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME`**.

3.1.7. Running the REST API Level 0 booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.



WARNING

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```

3.1.8. REST resources

More background and related information on REST can be found here:

- [Architectural Styles and the Design of Network-based Software Architectures - Representational State Transfer \(REST\)](#)
- [Richardson Maturity Model](#)
- [JSR 311: JAX-RS: The JavaTM API for RESTful Web Services](#)

- [Some Rest with Eclipse Vert.x](#)
- [REST API Level 0 Mission - Spring Boot Booster](#)
- [REST API Level 0 Mission - Thorntail Booster](#)
- [REST API Level 0 Mission - Node.js Booster](#)

3.2. EXTERNALIZED CONFIGURATION MISSION - ECLIPSE VERT.X BOOSTER

Mission proficiency level: [Foundational](#).

The Externalized Configuration mission provides a basic example of using a ConfigMap to externalize configuration. *ConfigMap* is an object used by OpenShift to inject configuration data as simple key and value pairs into one or more Linux containers while keeping the containers independent of OpenShift.

This mission shows you how to:

- Set up and configure a **ConfigMap**.
- Use the configuration provided by the **ConfigMap** within an application.
- Deploy changes to the **ConfigMap** configuration of running applications.

3.2.1. The externalized configuration design pattern

Whenever possible, externalize the application configuration and separate it from the application code. This allows the application configuration to change as it moves through different environments, but leaves the code unchanged. Externalizing the configuration also keeps sensitive or internal information out of your code base and version control. Many languages and application servers provide environment variables to support externalizing an application's configuration.

Microservices architectures and multi-language (polyglot) environments add a layer of complexity to managing an application's configuration. Applications consist of independent, distributed services, and each can have its own configuration. Keeping all configuration data synchronized and accessible creates a maintenance challenge.

ConfigMaps enable the application configuration to be externalized and used in individual Linux containers and pods on OpenShift. You can create a ConfigMap object in a variety of ways, including using a YAML file, and inject it into the Linux container. ConfigMaps also allow you to group and scale sets of configuration data. This lets you configure a large number of environments beyond the basic *Development*, *Stage*, and *Production*. You can find more information about ConfigMaps in the [OpenShift documentation](#).

3.2.2. Externalized Configuration design tradeoffs

Table 3.2. Design Tradeoffs

Pros	Cons
<ul style="list-style-type: none"> • Configuration is separate from deployments • Can be updated independently • Can be shared across services 	<ul style="list-style-type: none"> • Adding configuration to environment requires additional step • Has to be maintained separately • Requires coordination beyond the scope of a service

3.2.3. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.2.4. Deploying the Externalized Configuration booster to OpenShift Online

Use one of the following options to execute the Externalized Configuration booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the **oc** commands for you.

3.2.4.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.2.4.2. Authenticating the oc CLI client

To work with boosters on [OpenShift Online](#) using the **oc** command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](#) web interface.

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the [OpenShift Online](#) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your [OpenShift Online](#) account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.2.4.3. Deploying the Externalized Configuration booster using the oc CLI client

Prerequisites

- The booster application created using developers.redhat.com/launch. For more information, see [Section 3.2.4.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.2.4.2, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Assign view access rights to the service account before deploying your booster, so that the booster can access the OpenShift API in order to read the contents of the ConfigMap.

```
$ oc policy add-role-to-user view -n $(oc project -q) -z default
```

4. Navigate to the root directory of your booster.
5. Deploy your ConfigMap configuration to OpenShift using **app-config.yml**.

```
$ oc create configmap app-config --from-file=app-config.yml
```

6. Verify your ConfigMap configuration has been deployed.

```
$ oc get configmap app-config -o yaml

apiVersion: v1
data:
  app-config.yml: |-
    message : "Hello, %s from a ConfigMap !"
    level : INFO
...
```

7. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

8. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS
RESTARTS AGE		
MY_APP_NAME-1-aaaaa 1/1	Running	0
58s		
MY_APP_NAME-s2i-1-build 0/1	Completed	0
2m		

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once its fully deployed and started. You should also wait for your pod to be *ready* before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-1-aaaaa** is *ready* when the **READY** column is **1/1**. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

9. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME MY_APP_NAME-MY_PROJECT_NAME.OPENSHIFT_HOSTNAME	
MY_APP_NAME 8080	

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use `http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME` as the base URL to access the application.

3.2.5. Deploying the Externalized Configuration booster to Single-node OpenShift Cluster

Use one of the following options to execute the Externalized Configuration booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the `oc` CLI client](#)

Although each method uses the same `oc` commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the `oc` commands for you.

3.2.5.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

1. Navigate to the console where you started Single-node OpenShift Cluster.
2. Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
OpenShift server started.
The server is accessible via web console at:
  https://192.168.42.152:8443

You are logged in as:
  User:      developer
  Password: developer

To login as administrator:
  oc login -u system:admin
```

3.2.5.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.2.5.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.2.5.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.2.5.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.2.5.4. Deploying the Externalized Configuration booster using the oc CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.2.5.2, “Deploying the booster using the Fabric8 Launcher tool”](#).
- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.2.5.3, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Assign view access rights to the service account before deploying your booster, so that the booster can access the OpenShift API in order to read the contents of the ConfigMap.

```
$ oc policy add-role-to-user view -n $(oc project -q) -z default
```

4. Navigate to the root directory of your booster.

5. Deploy your ConfigMap configuration to OpenShift using **app-config.yml**.

```
$ oc create configmap app-config --from-file=app-config.yml
```

6. Verify your ConfigMap configuration has been deployed.

```
$ oc get configmap app-config -o yaml

apiVersion: v1
data:
  app-config.yml: |-
    message : "Hello, %s from a ConfigMap !"
    level : INFO
...
```

7. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

8. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS
RESTARTS AGE		
MY_APP_NAME-1-aaaaa 1/1	Running	0
58s		
MY_APP_NAME-s2i-1-build 0/1	Completed	0
2m		

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once its fully deployed and started. You should also wait for your pod to be *ready* before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-1-aaaaa** is *ready* when the **READY** column is

1/1. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

9. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
NAME                                HOST/PORT
PATH      SERVICES          PORT      TERMINATION
MY_APP_NAME MY_APP_NAME-MY_PROJECT_NAME.OPENSHIFT_HOSTNAME
MY_APP_NAME 8080
```

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-**

MY_PROJECT_NAME.OPENSHIFT_HOSTNAME as the base URL to access the application.

3.2.6. Deploying the Externalized Configuration booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or [the Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.2.4, “Deploying the Externalized Configuration booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.2.7. Interacting with the unmodified Externalized Configuration booster for Eclipse Vert.x

The booster provides a default HTTP endpoint that accepts GET requests.

Prerequisites

- Your application running
- The **curl** binary or a web browser

Procedure

1. Use **curl** to execute a **GET** request against the booster. You can also use a browser to do this.

```
$ curl http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSHIFT_HOSTNAME/api/greeting
{"content":"Hello, World from a ConfigMap !"}

```

2. Update the deployed ConfigMap configuration.

```
$ oc edit configmap app-config
```

Change the value for the **message** key to **Bonjour, %s from a ConfigMap !** and save the file.

3. Update of the ConfigMap should be read by the application within an acceptable time (a few seconds) without requiring a restart of the application.
4. Execute a **GET** request using **curl** against the booster with the updated ConfigMap configuration to see your updated greeting. You can also do this from your browser using the web form provided by the application.

```
$ curl http://MY_APP_NAME-  
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/greeting  
{ "content": "Bonjour, World from a ConfigMap !" }
```

3.2.8. Running the Externalized Configuration booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.



WARNING

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project
- View access permission assigned to the service account of your booster application. This allows your application to read the configuration from the ConfigMap:

```
$ oc policy add-role-to-user view -n $(oc project -q) -z default
```

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```


3.2.9. Externalized Configuration resources

More background and related information on Externalized Configuration and ConfigMap can be found here:

- [OpenShift ConfigMap Documentation](#)
- [Blog Post about ConfigMap in OpenShift](#)
- [Externalized Configuration with Eclipse Vert.x](#)
- [Externalized Configuration - Spring Boot Booster](#)
- [Externalized Configuration - Thorntail Booster](#)
- [Externalized Configuration - Node.js Booster](#)

3.3. RELATIONAL DATABASE BACKEND MISSION - ECLIPSE VERT.X BOOSTER

Limitation: Run this booster on a Single-node OpenShift Cluster. You can also use a manual workflow to deploy this booster to OpenShift Online Pro and OpenShift Container Platform. This booster is not currently available on OpenShift Online Starter.

Mission proficiency level: **Foundational**.

What the Relational Database Backend Booster Does

The Relational Database Backend booster expands on the REST API Level 0 booster to provide a basic example of performing *create*, *read*, *update* and *delete* (*CRUD*) operations on a PostgreSQL database using a simple HTTP API. *CRUD* operations are the four basic functions of persistent storage, widely used when developing an HTTP API dealing with a database.

The booster also demonstrates the ability of the HTTP application to locate and connect to a database in OpenShift. Each runtime shows how to implement the connectivity solution best suited in the given case. The runtime can choose between options such as using *JDBC*, *JPA*, or accessing *ORM* APIs directly.

The booster application exposes an HTTP API, which provides endpoints that allow you to manipulate data by performing *CRUD* operations over HTTP. The *CRUD* operations are mapped to HTTP **Verbs**. The API uses JSON formatting to receive requests and return responses to the user. The user can also use an UI provided by the booster to use the application. Specifically, this booster provides an application that allows you to:

- Navigate to the application web interface in your browser. This exposes a simple website allowing you to perform *CRUD* operations on the data in the **my_data** database.
- Execute an HTTP **GET** request on the **api/fruits** endpoint.
- Receive a response formatted as a JSON array containing the list of all fruits in the database.
- Execute an HTTP **GET** request on the **api/fruits/*** endpoint while passing in a valid item ID as an argument.
- Receive a response in JSON format containing the name of the fruit with the given ID. If no item matches the specified ID, the call results in an HTTP error 404.

- Execute an HTTP **POST** request on the **api/fruits** endpoint passing in a valid **name** value to create a new entry in the database.
- Execute an HTTP **PUT** request on the **api/fruits/*** endpoint passing in a valid ID and a name as an argument. This updates the name of the item with the given ID to match the name specified in your request.
- Execute an HTTP **DELETE** request on the **api/fruits/*** endpoint, passing in a valid ID as an argument. This removes the item with the specified ID from the database and returns an HTTP code **204** (No Content) as a response. If you pass in an invalid ID, the call results in an HTTP error **404**.

This booster also contains a set of automated [integration tests](#) that can be used to verify that the application is fully integrated with the database.

This booster does not showcase a fully matured RESTful model (level 3), but it does use compatible HTTP verbs and status, following the recommended HTTP API practices.

3.3.1. Relational Database Backend design tradeoffs

Table 3.3. Design Tradeoffs

Pros	Cons
<ul style="list-style-type: none"> • Each runtime determines how to implement the database interactions. One can use a low-level connectivity API such as JDBC, some other can use JPA, and yet another can access ORM APIs directly. Each runtime decides what would be the best way. • Each runtime determines how the schema is created. 	<ul style="list-style-type: none"> • The PostgreSQL database example provided with this mission is not backed up with persistent storage. Changes to the database are lost if you stop or redeploy the database pod. To use an external database with your mission's pod in order to preserve changes, see the Integrating External Services chapter of the OpenShift Documentation. It is also possible to set up persistent storage with database containers on OpenShift. (For more details about using persistent storage with OpenShift and containers, see the Persistent Storage, Managing Volumes and Persistent Volumes chapters of the OpenShift Documentation).

3.3.2. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.

2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.3.3. Deploying the Relational Database Backend booster to OpenShift Online

Use one of the following options to execute the Relational Database Backend booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the **oc** commands for you.

3.3.3.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.3.3.2. Authenticating the oc CLI client

To work with boosters on [OpenShift Online](#) using the **oc** command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](#) web interface.

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the [OpenShift Online](#) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login ...** command with the hidden token, and click the button next to it to copy its content to your clipboard.

5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your [OpenShift Online](#) account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.3.3.3. Deploying the Relational Database Backend booster using the **oc** CLI client

Prerequisites

- The booster application created using [developers.redhat.com/launch](#). For more information, see [Section 3.3.3.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.3.3.2, “Authenticating the **oc** CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Deploy the PostgreSQL database to OpenShift. Ensure that you use the following values for user name, password, and database name when creating your database application. The booster application is pre-configured to use these values. Using different values prevents your booster application from integrating with the database.

```
$ oc new-app -e POSTGRES_USER=luke -ePOSTGRES_PASSWORD=secret -
ePOSTGRES_DATABASE=my_data openshift/postgresql-92-centos7 --
name=my-database
```

5. Check the status of your database and ensure the pod is running.

```
$ oc get pods -w
my-database-1-aaaaa 1/1 Running 0 45s
my-database-1-deploy 0/1 Completed 0 53s
```

The **my-database-1-aaaaa** pod should have a status of **Running** and should be indicated as ready once it is fully deployed and started. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Use maven to start the deployment to OpenShift.

■

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

7. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
MY_APP_NAME-s2i-1-build	0/1	Completed	0

Your **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** and should be indicated as ready once it is fully deployed and started.

8. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME	
MY_APP_NAME 8080	

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-**

MY_PROJECT_NAME.OPENSIFT_HOSTNAME as the base URL to access the application.

3.3.4. Deploying the Relational Database Backend booster to Single-node OpenShift Cluster

Use one of the following options to execute the Relational Database Backend booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the oc CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the **oc** commands for you.

3.3.4.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

1. Navigate to the console where you started Single-node OpenShift Cluster.
2. Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
   OpenShift server started.
   The server is accessible via web console at:
     https://192.168.42.152:8443

   You are logged in as:
     User:      developer
     Password: developer

   To login as administrator:
     oc login -u system:admin
```

3.3.4.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.3.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.3.4.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.3.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.

- Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
- Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.3.4.4. Deploying the Relational Database Backend booster using theoc CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.3.4.2, “Deploying the booster using the Fabric8 Launcher tool”](#).
- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.3.4.3, “Authenticating the oc CLI client”](#).

Procedure

- Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

- Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

- Navigate to the root directory of your booster.
- Deploy the PostgreSQL database to OpenShift. Ensure that you use the following values for user name, password, and database name when creating your database application. The booster application is pre-configured to use these values. Using different values prevents your booster application from integrating with the database.

```
$ oc new-app -e POSTGRES_USER=luke -ePOSTGRES_PASSWORD=secret -
ePOSTGRES_DATABASE=my_data openshift/postgresql-92-centos7 --
name=my-database
```

- Check the status of your database and ensure the pod is running.

```
$ oc get pods -w
my-database-1-aaaaa 1/1      Running    0          45s
my-database-1-deploy 0/1      Completed 0          53s
```

The **my-database-1-aaaaa** pod should have a status of **Running** and should be indicated as

ready once it is fully deployed and started. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Use maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

7. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
MY_APP_NAME-s2i-1-build	0/1	Completed	0

Your **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** and should be indicated as ready once it is fully deployed and started.

8. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH	SERVICES
MY_APP_NAME	MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME	8080

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.3.5. Deploying the Relational Database Backend booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or the [Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.3.3, “Deploying the Relational Database Backend booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.3.6. Interacting with the Relational Database Backend API

When you have finished creating your application booster, you can interact with it the following way:

Prerequisites

- Your application running
- The **curl** binary or a web browser

Procedure

1. Obtain the URL of your application by executing the following command:

```
$ oc get route MY_APP_NAME
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME	MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME	8080

2. To access the web interface of the database application, navigate to the *application URL* in your browser:

```
http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
```

Alternatively, you can make requests directly on the **api/fruits/*** endpoint using **curl**:

List all entries in the database:

```
$ curl http://MY_APP_NAME-  
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/fruits
```

```
[ {  
  "id" : 1,  
  "name" : "Cherry",  
}, {  
  "id" : 2,  
  "name" : "Apple",  
}, {  
  "id" : 3,  
  "name" : "Banana",  
} ]
```

Retrieve an entry with a specific ID

```
$ curl http://MY_APP_NAME-  
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/fruits/3
```

```
{  
  "id" : 3,  
  "name" : "Banana",  
}
```

Create a new entry:

Create a new entry:

```
$ curl -H "Content-Type: application/json" -X POST -d
'{"name":"pear"}' http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/fruits
```

```
{
  "id" : 4,
  "name" : "pear",
}
```

Update an Entry

```
$ curl -H "Content-Type: application/json" -X PUT -d
'{"name":"pineapple"}' http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/fruits/1
```

```
{
  "id" : 1,
  "name" : "pineapple",
}
```

Delete an Entry:

```
$ curl -X DELETE http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/fruits/1
```

Troubleshooting

- If you receive an HTTP Error code **503** as a response after executing these commands, it means that the application is not ready yet.

3.3.7. Running the Relational Database Backend booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.

**WARNING**

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```

3.3.8. Relational database resources

More background and related information on running relational databases in OpenShift, CRUD, HTTP API and REST can be found here:

- [HTTP Verbs](#)
- [Architectural Styles and the Design of Network-based Software Architectures - Representational State Transfer \(REST\)](#)
- [The never ending REST API design debate](#)
- [REST APIs must be Hypertext driven](#)
- [Richardson Maturity Model](#)
- [JSR 311: JAX-RS: The Java™ API for RESTful Web Services](#)
- [Some Rest with Eclipse Vert.x](#)
- [Using the Eclipse Vert.x asynchronous SQL client](#)
- [Relational Database Backend Mission - Spring Boot Booster](#)
- [Relational Database Backend Mission - Thorntail Booster](#)
- [Relational Database Backend Mission - Node.js Booster](#)

3.4. HEALTH CHECK MISSION - ECLIPSE VERT.X BOOSTER

Mission proficiency level: **Foundational**.

When you deploy an application, its important to know if it is available and if it can start handling incoming requests. Implementing the *health check* pattern allows you to monitor the health of an application, which includes if an application is available and whether it is able to service requests.



NOTE

If you are not familiar with the health check terminology, see the [Section 3.4.1, “Health check concepts”](#) section first.

The purpose of this use case is to demonstrate the health check pattern through the use of probing. Probing is used to report the liveness and readiness of an application. In this use case, you configure an

application which exposes an HTTP **health** endpoint to issue HTTP requests. If the container is alive, according to the liveness probe on the **health** HTTP endpoint, the management platform receives **200** as return code and no further action is required. If the **health** HTTP endpoint does not return a response, for example if the thread is blocked, then the application is not considered alive according to the liveness probe. In that case, the platform kills the pod corresponding to that application and recreates a new pod to restart the application.

This use case also allows you to demonstrate and use a readiness probe. In cases where the application is running but is unable to handle requests, such as when the application returns an HTTP **503** response code during restart, this application is not considered ready according to the readiness probe. If the application is not considered ready by the readiness probe, requests are not routed to that application until it is considered ready according to the readiness probe.

3.4.1. Health check concepts

In order to understand the health check pattern, you need to first understand the following concepts:

Liveness

Liveness defines whether an application is running or not. Sometimes a running application moves into an unresponsive or stopped state and needs to be restarted. Checking for liveness helps determine whether or not an application needs to be restarted.

Readiness

Readiness defines whether a running application can service requests. Sometimes a running application moves into an error or broken state where it can no longer service requests. Checking readiness helps determine whether or not requests should continue to be routed to that application.

Fail-over

Fail-over enables failures in servicing requests to be handled gracefully. If an application fails to service a request, that request and future requests can then *fail-over* or be routed to another application, which is usually a redundant copy of that same application.

Resilience and Stability

Resilience and Stability enable failures in servicing requests to be handled gracefully. If an application fails to service a request due to connection loss, in a resilient system that request can be retried after the connection is re-established.

Probe

A probe is a Kubernetes action that periodically performs diagnostics on a running container.

3.4.2. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.4.3. Deploying the Health Check booster to OpenShift Online

Use one of the following options to execute the Health Check booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the `oc` CLI client](#)

Although each method uses the same `oc` commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the `oc` commands for you.

3.4.3.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.4.3.2. Authenticating the `oc` CLI client

To work with boosters on [OpenShift Online](#) using the `oc` command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](#) web interface.

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the [OpenShift Online](#) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the `oc login ...` command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your `oc` CLI client with your [OpenShift Online](#) account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.4.3.3. Deploying the Health Check booster using the oc CLI client

Prerequisites

- The booster application created using developers.redhat.com/launch. For more information, see [Section 3.4.3.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.4.3.2, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
58s			
MY_APP_NAME-s2i-1-build	0/1	Completed	0
2m			

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once its fully deployed and started. You should also wait for your pod to be ready before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-1-aaaaa** is ready when the **READY** column is **1/1**. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
NAME                                HOST/PORT
PATH      SERVICES      PORT      TERMINATION
MY_APP_NAME MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME 8080
```

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.4.4. Deploying the Health Check booster to Single-node OpenShift Cluster

Use one of the following options to execute the Health Check booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the **oc** commands for you.

3.4.4.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

1. Navigate to the console where you started Single-node OpenShift Cluster.
2. Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
OpenShift server started.
The server is accessible via web console at:
    https://192.168.42.152:8443

You are logged in as:
    User:      developer
    Password: developer
```

```
To login as administrator:  
oc login -u system:admin
```

3.4.4.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.4.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.4.4.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.4.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.4.4.4. Deploying the Health Check booster using the oc CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.4.4.2, “Deploying the booster using the Fabric8 Launcher tool”](#).

- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.4.4.3, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
58s			
MY_APP_NAME-s2i-1-build	0/1	Completed	0
2m			

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once its fully deployed and started. You should also wait for your pod to be ready before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-1-aaaaa** is ready when the **READY** column is **1/1**. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT		
PATH	SERVICES	PORT	TERMINATION
MY_APP_NAME	MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME		
MY_APP_NAME	8080		

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.4.5. Deploying the Health Check booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or [the Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.4.3, “Deploying the Health Check booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.4.6. Interacting with the unmodified Health Check booster

Once you have the booster deployed, you will have a service called **MY_APP_NAME** running that exposes the following REST endpoints:

/api/greeting

Returns a JSON containing greeting of **name** parameter (or World as default value).

/api/stop

Forces the service to become unresponsive as means to simulate a failure.

The following steps demonstrate how to verify the service availability and simulate a failure. This failure of an available service causes the OpenShift self-healing capabilities to be trigger on the service.

Alternatively, you can use the web interface to perform these steps.

1. Use **curl** to execute a **GET** request against the **MY_APP_NAME** service. You can also use a browser to do this.

```
$ curl http://MY_APP_NAME-  
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/greeting
```

```
{"content":"Hello, World!"}
```

2. Invoke the **/api/stop** endpoint and verify the availability of the **/api/greeting** endpoint shortly after that.

Invoking the **/api/stop** endpoint simulates an internal service failure and triggers the OpenShift self-healing capabilities. When invoking **/api/greeting** after simulating the failure, the service should return a HTTP status **503**.

```
$ curl http://MY_APP_NAME-  
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/stop
```

```
Stopping HTTP server, Bye bye world !
```

(followed by)

```
$ curl http://MY_APP_NAME-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME/api/greeting
```

```
Not online
```

3. Use **oc get pods -w** to continuously watch the self-healing capabilities in action.

While invoking the service failure, you can watch the self-healing capabilities in action on OpenShift console, or with the **oc** client tools. You should see the number of pods in the **READY** state move to zero (**0/1**) and after a short period (less than one minute) move back up to one (**1/1**). In addition to that, the **RESTARTS** count increases every time you invoke the service failure.

```
$ oc get pods -w
NAME                                READY    STATUS    RESTARTS   AGE
MY_APP_NAME-1-26iy7                0/1      Running   5           18m
MY_APP_NAME-1-26iy7                1/1      Running   5           19m
```

4. Optional: Use the web interface to invoke the service.

Alternatively to the interaction using the terminal window, you can use the web interface provided by the service to invoke the different methods and watch the service move through the life cycle phases.

```
http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
```

5. Optional: Use the web console to view the log output generated by the application at each stage of the self-healing process.

1. Navigate to your project.
2. On the sidebar, click on *Monitoring*.
3. In the upper right-hand corner of the screen, click on *Events* to display the log messages.
4. Optional: Click *View Details* to display a detailed view of the Event log.

The health check application generates the following messages:

Message	Status
<i>Unhealthy</i>	Readiness probe failed. This message is expected and indicates that the simulated failure of the /api/greeting endpoint has been detected and the self-healing process starts.
<i>Killing</i>	The unavailable Docker container running the service is being killed before being re-created.
<i>Pulling</i>	Downloading the latest version of docker image to re-create the container.

Message	Status
<i>Pulled</i>	Docker image downloaded successfully.
<i>Created</i>	Docker container has been successfully created
<i>Started</i>	Docker container is ready to handle requests

3.4.7. Running the Health Check booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.



WARNING

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```

3.4.8. Health check resources

More background and related information on health checking can be found here:

- [Overview of Application Health in OpenShift](#)
- [Health Checking in Kubernetes](#)
- [Kubernetes Liveness and Readiness Probes](#)

- [Kubernetes Probes](#)
- [Health Check - Spring Boot Booster](#)
- [Health Check - Thorntail Booster](#)
- [Health Check - Node.js Booster](#)

3.5. CIRCUIT BREAKER MISSION - ECLIPSE VERT.X BOOSTER

Limitation: Run this booster on a Single-node OpenShift Cluster. You can also use a manual workflow to deploy this booster to OpenShift Online Pro and OpenShift Container Platform. This booster is not currently available on OpenShift Online Starter.

Mission proficiency level: **Foundational**.

The *Circuit Breaker* mission demonstrates a generic pattern for reporting the failure of a service and then limiting access to the failed service until it becomes available to handle requests. This helps prevent cascading failure in other services that depend on the failed services for functionality.

This mission shows you how to implement a Circuit Breaker and Fallback pattern in your services.

3.5.1. The circuit breaker design pattern

The Circuit Breaker is a pattern intended to:

- Reduce the impact of network failure and high latency on service architectures where services synchronously invoke other services.
If one of the services:
 - becomes unavailable due to network failure, or
 - incurs unusually high latency values due to overwhelming traffic,
 other services attempting to call its endpoint may end up exhausting critical resources in an attempt to reach it, rendering themselves unusable.
- Prevent the condition also known as cascading failure, which can render the entire microservice architecture unusable.
- Act as a proxy between a protected function and a remote function, which monitors for failures.
- Trip once the failures reach a certain threshold, and all further calls to the circuit breaker return an error or a predefined fallback response, without the protected call being made at all.

The Circuit Breaker usually also contain an error reporting mechanism that notifies you when the Circuit Breaker trips.

Circuit breaker implementation

- With the Circuit Breaker pattern implemented, a service client invokes a remote service endpoint via a proxy at regular intervals.
- If the calls to the remote service endpoint fail repeatedly and consistently, the Circuit Breaker trips, making all calls to the service fail immediately over a set timeout period and returns a predefined fallback response.

- When the timeout period expires, a limited number of test calls are allowed to pass through to the remote service to determine whether it has healed, or remains unavailable.
 - If the test calls fail, the Circuit Breaker keeps the service unavailable and keeps returning the fallback responses to incoming calls.
 - If the test calls succeed, the Circuit Breaker closes, fully enabling traffic to reach the remote service again.

3.5.2. Circuit Breaker design tradeoffs

Table 3.4. Design Tradeoffs

Pros	Cons
<ul style="list-style-type: none"> • Enables a service to handle the failure of other services it invokes. 	<ul style="list-style-type: none"> • Optimizing the timeout values can be challenging <ul style="list-style-type: none"> ◦ Larger-than-necessary timeout values may generate excessive latency. ◦ Smaller-than-necessary timeout values may introduce false positives.

3.5.3. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.5.4. Deploying the Circuit Breaker booster to OpenShift Online

Use one of the following options to execute the Circuit Breaker booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the `oc` CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the **oc** commands for you.

3.5.4.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](https://openshift.com).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.5.4.2. Authenticating the **oc** CLI client

To work with boosters on [OpenShift Online](https://openshift.com) using the **oc** command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](https://openshift.com) web interface.

Prerequisites

- An account at [OpenShift Online](https://openshift.com).

Procedure

1. Navigate to the [OpenShift Online](https://openshift.com) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your [OpenShift Online](https://openshift.com) account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.5.4.3. Deploying the Circuit Breaker booster using the **oc** CLI client

Prerequisites

- The booster application created using developers.redhat.com/launch. For more information, see [Section 3.5.4.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.5.4.2, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-greeting-1-aaaaa	1/1	Running	0
17s			
MY_APP_NAME-greeting-1-deploy	0/1	Completed	0
22s			
MY_APP_NAME-name-1-aaaaa	1/1	Running	0
14s			
MY_APP_NAME-name-1-deploy	0/1	Completed	0
28s			

Both the **MY_APP_NAME-greeting-1-aaaaa** and **MY_APP_NAME-name-1-aaaaa** pods should have a status of **Running** once they are fully deployed and started. You should also wait for your pods to be ready before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-greeting-1-aaaaa** is ready when the **READY** column is **1/1**. Your specific pod names will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME-greeting MY_APP_NAME-greeting-	
MY_PROJECT_NAME.OPENSIFT_HOSTNAME MY_APP_NAME-greeting	
8080 None	

MY_APP_NAME - name	MY_APP_NAME - name -	
MY_PROJECT_NAME . OPENSIFT_HOSTNAME		MY_APP_NAME - name
8080	None	

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-greeting-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

3.5.5. Deploying the Circuit Breaker booster to Single-node OpenShift Cluster

Use one of the following options to execute the Circuit Breaker booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the **oc** commands for you.

3.5.5.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

1. Navigate to the console where you started Single-node OpenShift Cluster.
2. Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
OpenShift server started.
The server is accessible via web console at:
    https://192.168.42.152:8443

You are logged in as:
    User:      developer
    Password: developer

To login as administrator:
    oc login -u system:admin
```

3.5.5.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.5.5.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.5.5.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.5.5.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.5.5.4. Deploying the Circuit Breaker booster using the oc CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.5.5.2, “Deploying the booster using the Fabric8 Launcher tool”](#).
- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.5.5.3, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-greeting-1-aaaaa	1/1	Running	0
17s			
MY_APP_NAME-greeting-1-deploy	0/1	Completed	0
22s			
MY_APP_NAME-name-1-aaaaa	1/1	Running	0
14s			
MY_APP_NAME-name-1-deploy	0/1	Completed	0
28s			

Both the **MY_APP_NAME-greeting-1-aaaaa** and **MY_APP_NAME-name-1-aaaaa** pods should have a status of **Running** once they are fully deployed and started. You should also wait for your pods to be ready before proceeding, which is shown in the **READY** column. For example, **MY_APP_NAME-greeting-1-aaaaa** is ready when the **READY** column is **1/1**. Your specific pod names will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME-greeting MY_APP_NAME-greeting-	
MY_PROJECT_NAME.OPENSIFT_HOSTNAME MY_APP_NAME-greeting	
8080 None	

MY_APP_NAME - name	MY_APP_NAME - name -	
MY_PROJECT_NAME.OPENSHIFT_HOSTNAME		MY_APP_NAME - name
8080	None	

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-greeting-MY_PROJECT_NAME.OPENSHIFT_HOSTNAME** as the base URL to access the application.

3.5.6. Deploying the Circuit Breaker booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or the [Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.5.4, “Deploying the Circuit Breaker booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.5.7. Interacting with the unmodified Eclipse Vert.x Circuit Breaker booster

Once you have the Eclipse Vert.x booster deployed, you have the following services running:

MY_APP_NAME - name

Exposes the following endpoints:

- the **/api/name** endpoint, which returns a name when this service is working, and an error when this service is set up to demonstrate failure.
- the **/api/state** endpoint, which controls the behavior of the **/api/name** endpoint and determines whether the service works correctly or demonstrates failure.

MY_APP_NAME - greeting

Exposes the following endpoints:

- the **/api/greeting** endpoint that you can call to get a personalized greeting response. When you call the **/api/greeting** endpoint, it issues a call against the **/api/name** endpoint of the **MY_APP_NAME - name** service as part of processing your request. The call made against the **/api/name** endpoint is protected by the Circuit Breaker.

If the remote endpoint is available, the **name** service responds with an HTTP code **200 (OK)** and you receive the following greeting from the **/api/greeting** endpoint:

```
{"content": "Hello, World!"}
```

If the remote endpoint is unavailable, the **name** service responds with an HTTP code **500 (Internal server error)** and you receive a predefined fallback response from the **/api/greeting** endpoint:

```
{"content":"Hello, Fallback!"}
```

- the **/api/cb-state** endpoint, which returns the state of the Circuit Breaker. The state can be:
 - *open*: the circuit breaker is preventing requests from reaching the failed service,
 - *closed*: the circuit breaker is allowing requests to reach the service.
 - *half-open*: the circuit breaker is allowing a request to reach the service. If the request succeeds, the state of the service is reset to closed. If the request fails, the timer is restarted.

The following steps demonstrate how to verify the availability of the service, simulate a failure and receive a fallback response.

1. Use **curl** to execute a **GET** request against the **MY_APP_NAME-greeting** service. You can also use the **Invoke** button in the web interface to do this.

```
$ curl http://MY_APP_NAME-greeting-
MY_PROJECT_NAME.LOCAL_OPENSIFT_HOSTNAME/api/greeting
{"content":"Hello, World!"}
```

2. To simulate the failure of the **MY_APP_NAME-name** service you can:
 - use the **Toggle** button in the web interface.
 - scale the number of replicas of the pod running the **MY_APP_NAME-name** service down to 0.
 - execute an HTTP **PUT** request against the **/api/state** endpoint of the **MY_APP_NAME-name** service to set its state to **fail**.

```
$ curl -X PUT -H "Content-Type: application/json" -d '{"state":
"fail"}' http://MY_APP_NAME-name-
MY_PROJECT_NAME.LOCAL_OPENSIFT_HOSTNAME/api/state
```

3. Invoke the **/api/greeting** endpoint. When several requests on the **/api/name** endpoint fail:
 - a. the Circuit Breaker opens,
 - b. the state indicator in the web interface changes from **CLOSED** to **OPEN**,
 - c. the Circuit Breaker issues a fallback response when you invoke the **/api/greeting** endpoint:

```
$ curl http://MY_APP_NAME-greeting-
MY_PROJECT_NAME.LOCAL_OPENSIFT_HOSTNAME/api/greeting
{"content":"Hello, Fallback!"}
```

4. Restore the name **MY_APP_NAME-name** service to availability. To do this you can:
 - use the **Toggle** button in the web interface.

- scale the number of replicas of the pod running the **MY_APP_NAME-name** service back up to 1.
- execute an HTTP **PUT** request against the **/api/state** endpoint of the **MY_APP_NAME-name** service to set its state back to **ok**.

```
$ curl -X PUT -H "Content-Type: application/json" -d '{"state":
"ok"}' http://MY_APP_NAME-name-
MY_PROJECT_NAME.LOCAL_OPENSHIFT_HOSTNAME/api/state
```

5. Invoke the **/api/greeting** endpoint again. When several requests on the **/api/name** endpoint succeed:
 - a. the Circuit Breaker closes,
 - b. the state indicator in the web interface changes from **OPEN** to **CLOSED**,
 - c. the Circuit Breaker issues a returns the **Hello World!** greeting when you invoke the **/api/greeting** endpoint:

```
$ curl http://MY_APP_NAME-greeting-
MY_PROJECT_NAME.LOCAL_OPENSHIFT_HOSTNAME/api/greeting
{"content": "Hello, World!"}
```

3.5.8. Running the Circuit Breaker booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.



WARNING

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```

3.5.9. Using Hystrix Dashboard to monitor the circuit breaker

Hystrix Dashboard lets you easily monitor the health of your services in real time by aggregating Hystrix metrics data from an event stream and displaying them on one screen.

Prerequisites

- The application deployed

Procedure

1. Log in to your Single-node OpenShift Cluster cluster.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

2. To access the Web console, use your browser to navigate to your Single-node OpenShift Cluster URL.
3. Navigate to the project that contains your Circuit Breaker application.

```
$ oc project MY_PROJECT_NAME
```

4. Import the [YAML template](#) for the Hystrix Dashboard application. You can do this by clicking *Add to Project*, then selecting the *Import YAML / JSON* tab, and copying the contents of the YAML file into the text box. Alternatively, you can execute the following command:

```
$ oc create -f https://raw.githubusercontent.com/snowdrop/openshift-templates/master/hystrix-dashboard/hystrix-dashboard.yml
```

5. Click the *Create* button to create the Hystrix Dashboard application based on the template. Alternatively, you can execute the following command.

```
$ oc new-app --template=hystrix-dashboard
```

6. Wait for the pod containing Hystrix Dashboard to deploy.
7. Obtain the route of your Hystrix Dashboard application.

```
$ oc get route hystrix-dashboard
NAME                                HOST/PORT
PATH            SERVICES            PORT      TERMINATION  WILDCARD
hystrix-dashboard  hystrix-dashboard-
MY_PROJECT_NAME.LOCAL_OPENSIFT_HOSTNAME  hystrix-
dashboard  <all>                                None
```

8. To access the Dashboard, open the Dashboard application route URL in your browser. Alternatively, you can navigate to the *Overview* screen in the Web console and click the route URL in the header above the pod containing your Hystrix Dashboard application.

9. To use the Dashboard to monitor the **MY_APP_NAME-greeting** service, replace the default event stream address with the following address and click the *Monitor Stream* button.

```
http://MY_APP_NAME-greeting/hystrix.stream
```

Additional resources

- The Hystrix Dashboard [wiki page](#)

3.5.10. Circuit breaker resources

Follow the links below for more background information on the design principles behind the Circuit Breaker pattern

- [microservices.io: Microservice Patterns: Circuit Breaker](#)
- [Martin Fowler: CircuitBreaker](#)
- [Circuit Breaker Mission - Spring Boot Booster](#)
- [Circuit Breaker Mission - Thorntail Booster](#)
- [Circuit Breaker Mission - Node.js Booster](#)

3.6. SECURED MISSION - ECLIPSE VERT.X BOOSTER

Limitation: Run this booster on a Single-node OpenShift Cluster. You can also use a manual workflow to deploy this booster to OpenShift Online Pro and OpenShift Container Platform. This booster is not currently available on OpenShift Online Starter.

Mission proficiency level: **Advanced**.

The Secured booster secures a REST endpoint using [Red Hat SSO](#). (This booster expands on the REST API Level 0 booster).

Red Hat SSO:

- Implements the [Open ID Connect](#) protocol which is an extension of the OAuth 2.0 specification.
- Issues access tokens to provide clients with various access rights to secured resources.

Securing an application with SSO enables you to add security to your applications while centralizing the security configuration.



IMPORTANT

This mission comes with Red Hat SSO pre-configured for demonstration purposes, it does not explain its principles, usage, or configuration. Before using this mission, ensure that you are familiar with the basic concepts related to [Red Hat SSO](#).

3.6.1. The Secured project structure

The SSO booster project contains:

- the sources for the Greeting service, which is the one which we are going to secure

- a template file (**service.sso.yaml**) to deploy the SSO server
- the Keycloak adapter configuration to secure the service

3.6.2. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch
- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.6.3. Red Hat SSO deployment configuration

The **service.sso.yaml** file in this booster contains all OpenShift configuration items to deploy a pre-configured Red Hat SSO server. The SSO server configuration has been simplified for the sake of this exercise and does provide an out-of-the-box configuration, with pre-configured users and security settings. The **service.sso.yaml** file also contains very long lines, and some text editors, such as [gedit](#), may have issues reading this file.



WARNING

It is not recommended to use this SSO configuration in production. Specifically, the simplifications made to the booster security configuration impact the ability to use it in a production environment.

Table 3.5. SSO Booster Simplifications

Change	Reason	Recommendation
--------	--------	----------------

Change	Reason	Recommendation
The default configuration includes both public and private keys in the yaml configuration files .	We did this because the end user can deploy Red Hat SSO module and have it in a usable state without needing to know the internals or how to configure Red Hat SSO.	In production, do not store private keys under source control. They should be added by the server administrator.
The configured clients accept any callback url .	To avoid having a custom configuration for each runtime, we avoid the callback verification that is required by the OAuth2 specification.	An application-specific callback URL should be provided with a valid domain name.
Clients do not require SSL/TLS and the secured applications are not exposed over HTTPS .	The boosters are simplified by not requiring certificates generated for each runtime.	In production a secure application should use HTTPS rather than plain HTTP.
The token timeout has been increased to 10 minutes from the default of 1 minute .	Provides a better user experience when working with the command line examples	From a security perspective, the window an attacker would have to guess the access token is extended. It is recommended to keep this window short as it makes it much harder for a potential attacker to guess the current token.

3.6.4. Red Hat SSO realm model

The **master** realm is used to secure this booster. There are two pre-configured application client definitions that provide a model for command line clients and the secured REST endpoint.

There are also two pre-configured users in the Red Hat SSO **master** realm that can be used to validate various authentication and authorization outcomes: **admin** and **alice**.

3.6.4.1. Red Hat SSO users

The realm model for the secured boosters includes two users:

admin

The **admin** user has a password of **admin** and is the realm administrator. This user has full access to the Red Hat SSO administration console, but none of the role mappings that are required to access the secured endpoints. You can use this user to illustrate the behavior of an authenticated, but unauthorized user.

alice

The **alice** user has a password of **password** and is the canonical application user. This user will demonstrate successful authenticated and authorized access to the secured endpoints. An example representation of the role mappings is provided in this decoded JWT bearer token:

```

{
  "jti": "0073cfaa-7ed6-4326-ac07-c108d34b4f82",
  "exp": 1510162193,
  "nbf": 0,
  "iat": 1510161593,
  "iss": "https://secure-sso-
sso.LOCAL_OPENSIFT_HOSTNAME/auth/realms/master", ❶
  "aud": "demoapp",
  "sub": "c0175ccb-0892-4b31-829f-dda873815fe8",
  "typ": "Bearer",
  "azp": "demoapp",
  "nonce": "90ff5d1a-ba44-45ae-a413-50b08bf4a242",
  "auth_time": 1510161591,
  "session_state": "98efb95a-b355-43d1-996b-0abcb1304352",
  "acr": "1",
  "client_session": "5962112c-2b19-461e-8aac-84ab512d2a01",
  "allowed-origins": [
    "*"
  ],
  "realm_access": {
    "roles": [ ❷
      "booster-admin"
    ]
  },
  "resource_access": { ❸
    "secured-booster-endpoint": {
      "roles": [
        "booster-admin" ❹
      ]
    },
    "account": {
      "roles": [
        "manage-account",
        "view-profile"
      ]
    }
  },
  "name": "Alice InChains",
  "preferred_username": "alice", ❺
  "given_name": "Alice",
  "family_name": "InChains",
  "email": "alice@keycloak.org"
}

```

- ❶ The **iss** field corresponds to the Red Hat SSO realm instance URL that issues the token. This must be configured in the secured endpoint deployments in order for the token to be verified.
- ❷ The **roles** object provides the roles that have been granted to the user at the global realm level. In this case **alice** has been granted the **booster-admin** role. We will see that the secured endpoint will look to the realm level for authorized roles.
- ❸ The **resource_access** object contains resource specific role grants. Under this object you will find an object for each of the secured endpoints.

❹

The `resource_access.secured-booster-endpoint.roles` object contains the roles granted to **alice** for the **secured-booster-endpoint** resource.

- 5 The `preferred_username` field provides the username that was used to generate the access token.

3.6.4.2. The application clients

The OAuth 2.0 specification allows you to define a role for application clients that access secured resources on behalf of resource owners. The **master** realm has the following application clients defined:

demoapp

This is a **confidential** type client with a client secret that is used to obtain an access token that contains grants for the **alice** user which enable **alice** to access the Thorntail, Eclipse Vert.x, Node.js and Spring Boot based REST booster deployments.

secured-booster-endpoint

The **secured-booster-endpoint** is a bearer-only type of client that requires a **booster-admin** role for accessing the associated resources, specifically the Greeting service.

3.6.5. Eclipse Vert.x SSO adapter configuration

The SSO adapter is the *client side*, or client to the SSO server, component that enforces security on the web resources. In this specific case, it is the greeting service.

Enacting security

```
router.route("/greeting")
    .handler(JWTAUTH_HANDLER.create(
        JWTAuth.create(vertx,
            new JWTAuthOptions()
                .addPubSecKey(new PubSecKeyOptions()
                    .setAlgorithm("RS256")
                    .setPublicKey(System.getenv("REALM_PUBLIC_KEY")))
                .setPermissionsClaimKey("realm_access/roles"))));
```

- 1 Locate the HTTP route to secure.
- 2 Instantiate a new JWT security handler.
- 3 The authorization enforcer is created.
- 4 The configuration to the enforcer.
- 5 Public key encryption algorithm.
- 6 PEM format of the realm public key. You can obtain this from the administration console.
- 7 Where the authorization enforcer should lookup permissions.

The enforcer here is configured using PEM format of the realm public key and specifying the algorithm. And since the enforcer is configured to consume keycloak JWTs, we also need to provide a location for the permission claims in the token.

Below is a JSON file reconstructed from the deployment environment variables, which is used when interacting with the application through web interface.

```
JsonObject keycloakJson = new JsonObject()
    .put("realm", System.getenv("REALM")) ❶
    .put("auth-server-url", System.getenv("SSO_AUTH_SERVER_URL")) ❷
    .put("ssl-required", "external")
    .put("resource", System.getenv("CLIENT_ID")) ❸
    .put("credentials", new JsonObject()
        .put("secret", System.getenv("SECRET")));
```

- ❶ The security realm to be used.
- ❸ The actual keycloak *client* configuration.
- ❷ The address of the Red Hat SSO server (Interpolation at build time)

3.6.6. Deploying the Secured booster to Single-node OpenShift Cluster

3.6.6.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

- Navigate to the console where you started Single-node OpenShift Cluster.
- Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
OpenShift server started.
The server is accessible via web console at:
    https://192.168.42.152:8443

You are logged in as:
    User:      developer
    Password: developer
```

```
To login as administrator:  
oc login -u system:admin
```

3.6.6.2. Creating the Secured booster using Fabric8 Launcher

Prerequisites

- The URL and user credentials of your running Fabric8 Launcher instance. For more information, see [Section 3.6.6.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

- Navigate to the Fabric8 Launcher URL in a browser and log in.
- Follow the on-screen instructions to create your booster in Eclipse Vert.x. When asked about which deployment type, select *I will build and run locally*.
- Follow on-screen instructions.
When done, click the **Download as ZIP file** button and store the file on your hard drive.

3.6.6.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.6.6.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login ...** command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.6.6.4. Deploying the Secured booster using the oc CLI client

Prerequisites

- The booster application created using the Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.6.6.2, “Creating the Secured booster using Fabric8 Launcher”](#).
- Your Fabric8 Launcher URL.
- The **oc** client authenticated. For more information, see [Section 3.6.6.3, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Deploy the Red Hat SSO server using the **service.sso.yaml** file from your booster ZIP file:

```
$ oc create -f service.sso.yaml
```

5. Use Maven to start the deployment to Single-node OpenShift Cluster.

```
$ mvn clean fabric8:deploy -Dopenshift -DskipTests \
    -DSSO_AUTH_SERVER_URL=$(oc get route secure-sso -o
    jsonpath='{ "https://" }{.spec.host}{ "/auth\n" }')
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on Single-node OpenShift Cluster and to start the pod.

This process generates the uberjar file as well as the OpenShift resources and deploys them to the current project on your Single-node OpenShift Cluster server.

3.6.7. Deploying the Secured booster to OpenShift Container Platform

In addition to the Single-node OpenShift Cluster, you can create and deploy the booster on OpenShift Container Platform with only minor differences. The most important difference is that you need to create the booster application on Single-node OpenShift Cluster before you can deploy it with OpenShift Container Platform.

Prerequisites

- The booster created using [Single-node OpenShift Cluster](#).

3.6.7.1. Authenticating the oc CLI client

To work with boosters on OpenShift Container Platform using the **oc** command-line client, you need to authenticate the client using the token provided by the OpenShift Container Platform web interface.

Prerequisites

- An account at OpenShift Container Platform.

Procedure

1. Navigate to the OpenShift Container Platform URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your OpenShift Container Platform account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.6.7.2. Deploying the Secured booster using the **oc** CLI client

Prerequisites

- The booster application created using the Fabric8 Launcher tool on a Single-node OpenShift Cluster.
- The **oc** client authenticated. For more information, see [Section 3.6.7.1, “Authenticating the **oc** CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new OpenShift project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Deploy the Red Hat SSO server using the **service.sso.yaml** file from your booster ZIP file:

```
$ oc create -f service.sso.yaml
```


5. Use Maven to start the deployment to OpenShift Container Platform.

```
$ mvn clean fabric8:deploy -Popenshift -DskipTests \
  -DSSO_AUTH_SERVER_URL=$(oc get route secure-ssso -o
  jsonpath='{ "https://" }{.spec.host}{ "/auth\n" }')
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift Container Platform and to start the pod.

This process generates the uberjar file as well as the OpenShift resources and deploys them to the current project on your OpenShift Container Platform server.

3.6.8. Authenticating to the Secured booster API endpoint

The Secured booster provides a default HTTP endpoint that accepts **GET** requests if the caller is authenticated and authorized. The client first authenticates against the Red Hat SSO server and then performs a **GET** request against the Secured booster using the access token returned by the authentication step.

3.6.8.1. Getting the Secured booster API endpoint

When using a client to interact with the booster, you must specify the Secured booster endpoint, which is the *PROJECT_ID* service.

Prerequisites

- The Secured booster deployed and running.
- The **oc** client authenticated.

Procedure

1. In a terminal application, execute the **oc get routes** command.
A sample output is shown in the following table:

Example 3.1. List of Secured endpoints

Name	Host/Port	Path	Services	Port	Termination
secure-ssso	secure-ssso- myproject.LOCAL OPEN SHIFT_HOSTNAME		secure-ssso	<all>	passthrough
PROJECT_ID	PROJECT_ID- myproject.LOCAL OPEN SHIFT_HOSTNAME		PROJECT_ID	<all>	

The attributes, such as **username**, **password**, and **client_secret** are usually kept secret, but the above command uses the default provided credentials with this booster for demonstration purpose.

NOTE

The **-sk** option tells curl to ignore failures resulting from self-signed certificates. Do not use this option in a production environment. On macOS, you must have **curl** version **7.56.1** or greater installed. It must also be built with OpenSSL.

1. Invoke the Secured service. Attach the access (bearer) token to the HTTP headers:

Example 3.2. A sample GET Request Headers with an Access (Bearer) Token

<**SERVICE_HOST**> is the URL of the secured booster endpoint. For more information, see [Section 3.6.8.1, “Getting the Secured booster API endpoint”](#).

- a. In a web browser, navigate to the [JWT Debugger](#) website.
- b. Select **RS256** from the *Algorithm* drop down menu.

**NOTE**

Make sure the web form has been updated after you made the selection, so it displays the correct RSASHA256(...) information in the Signature section. If it has not, try switching to HS256 and then back to RS256.

- c. Paste the following content in the topmost text box into the *VERIFY SIGNATURE* section:

```
-----BEGIN PUBLIC KEY-----
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAoETnPmN55xBJjRzN/cs30
OzJ9o1kteLVNRjzdTxFOyRtS2ovDfzdhh09XzUcTMbIsCOAZtSt8K+6yvBXyp0SYv
I75EUdypmkcK1KoptqY5KEBQ1KwhWuP7IWQ0fshUwD6jI1QWdfGxfM/h34FvEn/0t
J71xN2P8TI2YanwuDZgosdobx/PAvlgREBGuk4BgmexT0kAdnFxIUQcCkiEZ2C41u
CrxiS4CEe50X91aK9HKZV4ZJX6vnqMHmdDnsMdO+Uftx0BYZio+a1jP4W3d7J5fGe
i0aXjQCOpivKnP2yU2DPdWmDMYVb67l8DRA+jh00JFKZ5H2fNgE3II59vdsRwIDAQ
AB
-----END PUBLIC KEY-----
```

**NOTE**

This is the master realm public key from the Red Hat SSO server deployment of the Secured booster.

- d. Paste the **token** output from the client output into the *Encoded* box.
The *Signature Verified* sign is displayed on the debugger page.

3.6.8.3. Authenticating HTTP requests using the web interface

In addition to the HTTP API, the secured endpoint also contains a web interface to interact with.

The following procedure is an exercise for you to see how security is enforced, how you authenticate, and how you work with the authentication token.

Prerequisites

- The secured endpoint URL. For more information, see [Section 3.6.8.1, “Getting the Secured booster API endpoint”](#).

Procedure

1. In a web browser, navigate to the endpoint URL.
2. Perform an unauthenticated request:
 - a. Click the *Invoke* button.

Figure 3.1. Unauthenticated Secured Booster Web Interface**Using the greeting service**

The greeting service is a protected endpoint. You will need to login first.

Login Logout

Greeting service (as *Unauthenticated*):

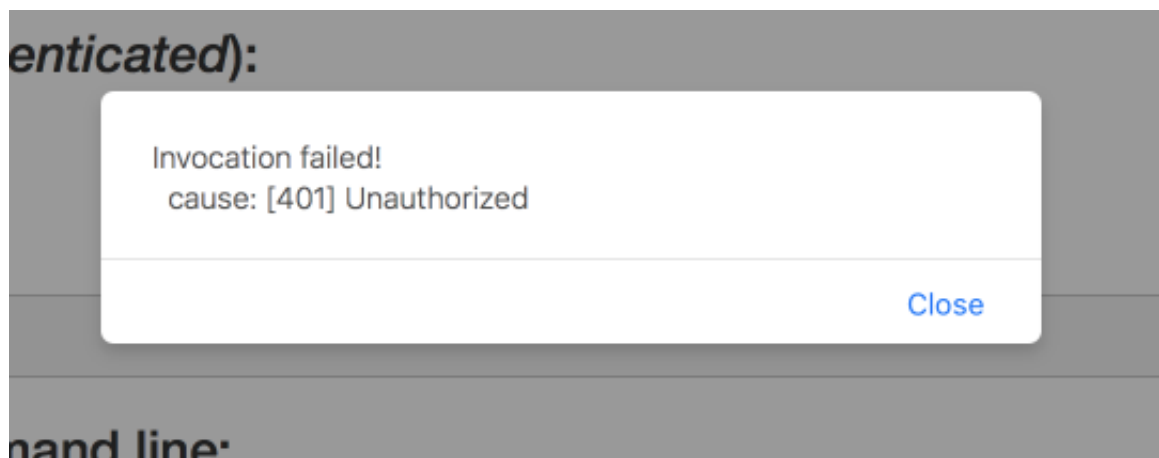
Name

Result:

Invoke the service to see the result.

Curl command for the command line:

The services responds with an **HTTP 401 Unauthorized** status code.

Figure 3.2. Unauthenticated Error Message

3. Perform an authenticated request as a user:
 - a. Click the *Login* button to authenticate against Red Hat SSO. You will be redirected to the SSO server.
 - b. Log in as [the Alice user](#). You will be redirected back to the web interface.

**NOTE**

You can see the access (bearer) token in the command line output at the bottom of the page.

Figure 3.3. Authenticated Secured Booster Web Interface (as Alice)**Using the greeting service**

The greeting service is a protected endpoint. You will need to login first.

Login Logout

Greeting service (as alice):

Name

Result:

Invoke the service to see the result.

Curl command for the command line:

```
curl -H "Authorization: Bearer eyJhbGciOiJSUzI1NiIsInR5cCIgOiAiSldUliwia2kiIABICjRek1nbXhZMUhrQnpXTnR0SnkwMm5jNTNlMGNIWDQxV1hNSTU1MFo4MGVBIn0.eyJqdGkiOiJY2JjZWZhOS0zYzdlLTRk
```

- c. Click *Invoke* again to access the Greeting service.
Confirm that there is no exception and the JSON response payload is displayed. This means the service accepted your access (bearer) token and you are authorized access to the Greeting service.

Figure 3.4. The Result of an Authenticated Greeting Request (as Alice)**Using the greeting service**

The greeting service is a protected endpoint. You will need to login first.

Login Logout

Greeting service (as alice):

Name

Result:

```
{"id":1,"content":"Hello, World!"}
```

Curl command for the command line:

```
curl -H "Authorization: Bearer eyJhbGciOiJSUzI1NiIsInR5cCIgOiAiSldUliwia2kiIABICjRek1nbXhZMUhrQnpXTnR0SnkwMm5jNTNlMGNIWDQxV1hNSTU1MFo4MGVBIn0.eyJqdGkiOiJY2JjZWZhOS0zYzdlLTRk
```

- d. Log out.
4. Perform an authenticated request as an administrator:
 - a. Click the *Invoke* button.
Confirm that this sends an unauthenticated request to the Greeting service.
 - b. Click the *Login* button and log in as [the admin user](#).

Figure 3.5. Authenticated Secured Booster Web Interface (as admin)**Using the greeting service**

The greeting service is a protected endpoint. You will need to login first.

Login Logout

Greeting service (as admin):

Name

Result:

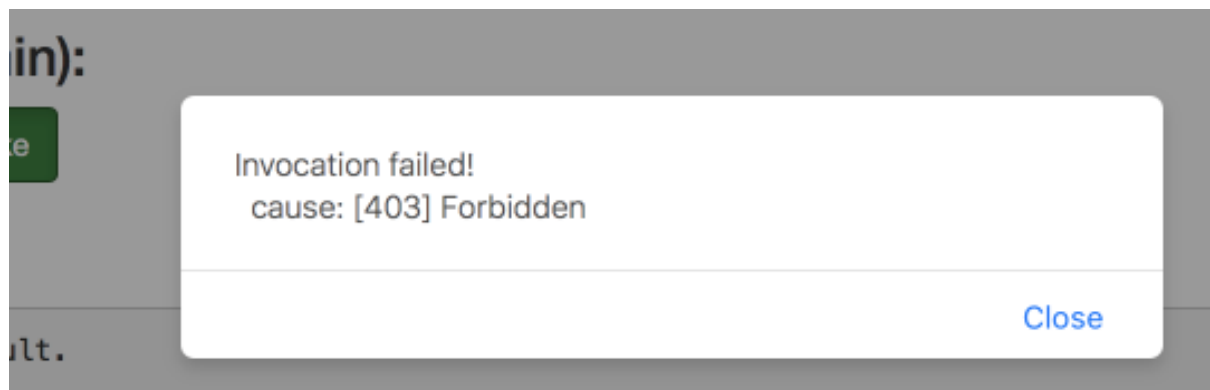
Invoke the service to see the result.

Curl command for the command line:

```
curl -H "Authorization: Bearer
eyJhbGciOiJIUzU1NiIsInR5cCI6IkpXZWQxV1hNTU1Mfo4MGVBIn0.eyJqdGkiOiJZWm4N2UzYy03NjQ0LTQ"
```

- Click the *Invoke* button.

The service responds with an **HTTP 403 Forbidden** status code because the *admin* user is not authorized to access the Greeting service.

Figure 3.6. Unauthorized Error Message**3.6.9. Running the Eclipse Vert.x Secured booster integration tests****Prerequisites**

- The **oc** client authenticated.

Procedure**WARNING**

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

By default, the SSO server is deployed (and destroyed) as part of testing. The steps for executing integration tests are as follows:

1. In a terminal application, navigate to the directory with your project.
2. Execute the integration tests:

```
mvn clean verify -Popenshift,openshift-it
```

If you deployed an SSO server beforehand, e.g. by executing `oc create -f service.sso.yaml`, set the system property `skip.sso.init` to `true` when running the tests:

```
mvn clean verify -Popenshift,openshift-it -Dskip.sso.init=true
```

When executed like this, the tests will use the existing SSO server. The tests will not deploy their own SSO server, nor will they destroy the existing one.

3.6.10. Secured SSO resources

Follow the links below for additional information on the principles behind the OAuth2 specification and on securing your applications using Red Hat SSO and Keycloak:

- [Aaron Parecki: OAuth2 Simplified](#)
- [Red Hat SSO 7.1 Documentation](#)
- [Keycloak 3.2 Documentation](#)
- [Secured Mission - Spring Boot Booster](#)
- [Secured Mission - Thorntail Booster](#)
- [Secured Mission - Node.js Booster](#)

3.7. CACHE MISSION - ECLIPSE VERT.X BOOSTER

Limitation: Run this booster on a Single-node OpenShift Cluster. You can also use a manual workflow to deploy this booster to OpenShift Online Pro and OpenShift Container Platform. This booster is not currently available on OpenShift Online Starter.

Mission proficiency level: **Advanced**.

The Cache mission demonstrates how to use a cache to increase the response time of applications.

This mission shows you how to:

- Deploy a cache to OpenShift.
- Use a cache within an application.

3.7.1. How caching works and when you need it

Caches allows you to store information and access it for a given period of time. You can access information in a cache faster or more reliably than repeatedly calling the original service. A disadvantage of using a cache is that the cached information is not up to date. However, that problem can be reduced

by setting an *expiration* or TTL (time to live) on each value stored in the cache.

Example 3.3. Caching example

Assume you have two applications: *service1* and *service2*:

- *Service1* depends on a value from *service2*.
 - If the value from *service2* infrequently changes, *service1* could cache the value from *service2* for a period of time.
 - Using cached values can also reduce the number of times *service2* is called.
- If it takes *service1* 500 ms to retrieve the value directly from *service2*, but 100 ms to retrieve the cached value, *service1* would save 400 ms by using the cached value for each cached call.
- If *service1* would make uncached calls to *service2* 5 times per second, over 10 seconds, that would be 50 calls.
- If *service1* started using a cached value with a TTL of 1 second instead, that would be reduced to 10 calls over 10 seconds.

How the Cache mission works

1. The *cache*, *cute name*, and *greeting* services are deployed and exposed.
2. User accesses the web frontend of the *greeting* service.
3. User invokes the *greeting* HTTP API using a button on the web frontend.
4. The *greeting* service depends on a value from the *cute name* service.
 - The *greeting* service first checks if that value is stored in the *cache* service. If it is, then the cached value is returned.
 - If the value is not cached, the *greeting* service calls the *cute name* service, returns the value, and stores the value in the *cache* service with a TTL of 5 seconds.
5. The web front end displays the response from the *greeting* service as well as the total time of the operation.
6. User invokes the service multiple times to see the difference between cached and uncached operations.
 - Cached operations are significantly faster than uncached operations.
 - User can force the cache to be cleared before the TTL expires.

3.7.2. Viewing the booster source code and README

Prerequisites

One of the following:

- Access to developers.redhat.com/launch

- Fabric8 Launcher installed on a Single-node OpenShift Cluster

Procedure

1. Use the Fabric8 Launcher tool to generate your own version of the booster.
2. View the generated GitHub repository or download and extract the ZIP file that contains the booster source code.

Additional resources

- [Using developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Using the Fabric8 Launcher tool on a Single-node OpenShift Cluster](#)

3.7.3. Deploying the Cache booster to OpenShift Online

Use one of the following options to execute the Cache booster on OpenShift Online.

- [Use developers.redhat.com/launch](https://developers.redhat.com/launch)
- [Use the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using developers.redhat.com/launch provides an automated booster deployment workflow that executes the **oc** commands for you.

3.7.3.1. Deploying the booster using developers.redhat.com/launch

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the developers.redhat.com/launch URL in a browser and log in.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.7.3.2. Authenticating the oc CLI client

To work with boosters on [OpenShift Online](#) using the **oc** command-line client, you need to authenticate the client using the token provided by the [OpenShift Online](#) web interface.

Prerequisites

- An account at [OpenShift Online](#).

Procedure

1. Navigate to the [OpenShift Online](#) URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.

3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login** ... command with the hidden token, and click the button next to it to copy its content to your clipboard.
5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your [OpenShift Online](#) account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.7.3.3. Deploying the Cache booster using the oc CLI client

Prerequisites

- The booster application created using [developers.redhat.com/launch](#). For more information, see [Section 3.7.3.1, “Deploying the booster using developers.redhat.com/launch”](#).
- The **oc** client authenticated. For more information, see [Section 3.7.3.2, “Authenticating the oc CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Deploy the cache service.

```
$ oc apply -f service.cache.yml
```

5. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

6. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
cache-server-123456789-aaaaa		1/1	Running
8m			0
MY_APP_NAME-cutename-1-bbbbbb	1/1	Running	0
4m			

```

MY_APP_NAME-cutename-s2i-1-build    0/1      Completed    0
7m
MY_APP_NAME-greeting-1-cccccc       1/1      Running      0
3m
MY_APP_NAME-greeting-s2i-1-build    0/1      Completed    0
3m

```

Your 3 pods should have a status of **Running** once they are fully deployed and started.

- Once your booster is deployed and started, determine its route.

Example Route Information

```

$ oc get routes
NAME                                HOST/PORT
PATH      SERVICES          PORT      TERMINATION
MY_APP_NAME-cutename    MY_APP_NAME-cutename-
MY_PROJECT_NAME.OPENS
HIFT_HOSTNAME            MY_APP_NAME-cutename
8080                      None
MY_APP_NAME-greeting    MY_APP_NAME-greeting-
MY_PROJECT_NAME.OPENS
HIFT_HOSTNAME            MY_APP_NAME-greeting
8080                      None

```

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **`http://MY_APP_NAME-greeting-MY_PROJECT_NAME.OPENS`** as the base URL to access the greeting service.

3.7.4. Deploying the Cache booster to Single-node OpenShift Cluster

Use one of the following options to execute the Cache booster locally on Single-node OpenShift Cluster:

- [Using Fabric8 Launcher](#)
- [Using the **oc** CLI client](#)

Although each method uses the same **oc** commands to deploy your application, using Fabric8 Launcher provides an automated booster deployment workflow that executes the **oc** commands for you.

3.7.4.1. Getting the Fabric8 Launcher tool URL and credentials

You need the Fabric8 Launcher tool URL and user credentials to create and deploy boosters on Single-node OpenShift Cluster. This information is provided when the Single-node OpenShift Cluster is started.

Prerequisites

- The Fabric8 Launcher tool installed, configured, and running. For more information, see the [Install and Configure the Fabric8 Launcher Tool](#) guide.

Procedure

- Navigate to the console where you started Single-node OpenShift Cluster.
- Check the console output for the URL and user credentials you can use to access the running Fabric8 Launcher:

Example Console Output from a Single-node OpenShift Cluster Startup

```
...
-- Removing temporary directory ... OK
-- Server Information ...
OpenShift server started.
The server is accessible via web console at:
  https://192.168.42.152:8443

You are logged in as:
  User:      developer
  Password:  developer

To login as administrator:
  oc login -u system:admin
```

3.7.4.2. Deploying the booster using the Fabric8 Launcher tool

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.7.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Fabric8 Launcher URL in a browser.
2. Follow on-screen instructions to create and launch your booster in Eclipse Vert.x.

3.7.4.3. Authenticating the oc CLI client

To work with boosters on Single-node OpenShift Cluster using the **oc** command-line client, you need to authenticate the client using the token provided by the Single-node OpenShift Cluster web interface.

Prerequisites

- The URL of your running Fabric8 Launcher instance and the user credentials of your Single-node OpenShift Cluster. For more information, see [Section 3.7.4.1, “Getting the Fabric8 Launcher tool URL and credentials”](#).

Procedure

1. Navigate to the Single-node OpenShift Cluster URL in a browser.
2. Click on the question mark icon in the top right-hand corner of the Web console, next to your user name.
3. Select *Command Line Tools* in the drop-down menu.
4. Find the text box that contains the **oc login ...** command with the hidden token, and click the button next to it to copy its content to your clipboard.

5. Paste the command into a terminal application. The command uses your authentication token to authenticate your **oc** CLI client with your Single-node OpenShift Cluster account.

```
$ oc login OPENSIFT_URL --token=MYTOKEN
```

3.7.4.4. Deploying the Cache booster using the **oc** CLI client

Prerequisites

- The booster application created using Fabric8 Launcher tool on a Single-node OpenShift Cluster. For more information, see [Section 3.7.4.2, “Deploying the booster using the Fabric8 Launcher tool”](#).
- Your Fabric8 Launcher tool URL.
- The **oc** client authenticated. For more information, see [Section 3.7.4.3, “Authenticating the **oc** CLI client”](#).

Procedure

1. Clone your project from GitHub.

```
$ git clone git@github.com:USERNAME/MY_PROJECT_NAME.git
```

Alternatively, if you downloaded a ZIP file of your project, extract it.

```
$ unzip MY_PROJECT_NAME.zip
```

2. Create a new project.

```
$ oc new-project MY_PROJECT_NAME
```

3. Navigate to the root directory of your booster.

4. Deploy the cache service.

```
$ oc apply -f service.cache.yml
```

5. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

6. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
cache-server-123456789-aaaaa	1/1	Running	0
8m			
MY_APP_NAME-cutename-1-bbbbb	1/1	Running	0
4m			
MY_APP_NAME-cutename-s2i-1-build	0/1	Completed	0
7m			

```

MY_APP_NAME-greeting-1-cccc 1/1 Running 0
3m
MY_APP_NAME-greeting-s2i-1-build 0/1 Completed 0
3m

```

Your 3 pods should have a status of **Running** once they are fully deployed and started.

- Once your booster is deployed and started, determine its route.

Example Route Information

```

$ oc get routes
NAME                                HOST/PORT
PATH      SERVICES      PORT      TERMINATION
MY_APP_NAME-cutename MY_APP_NAME-cutename-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME MY_APP_NAME-cutename
8080      None
MY_APP_NAME-greeting MY_APP_NAME-greeting-
MY_PROJECT_NAME.OPENSIFT_HOSTNAME MY_APP_NAME-greeting
8080      None

```

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **`http://MY_APP_NAME-greeting-MY_PROJECT_NAME.OPENSIFT_HOSTNAME`** as the base URL to access the greeting service.

3.7.5. Deploying the Cache booster to OpenShift Container Platform

The process of creating and deploying boosters to OpenShift Container Platform is similar to OpenShift Online:

Prerequisites

- The booster created using developers.redhat.com/launch or [the Fabric8 Launcher tool](#).

Procedure

- Follow the instructions in [Section 3.7.3, “Deploying the Cache booster to OpenShift Online”](#), only use the URL and user credentials from the OpenShift Container Platform Web Console.

3.7.6. Interacting with the unmodified Cache booster

Prerequisites

- Your application deployed

Procedure

- Navigate to the **greeting** service using your browser.
- Click *Invoke the service* once.
Notice the **duration** value is above **2000**. Also notice the cache state has changed from **No cached value** to **A value is cached**.

3. Wait 5 seconds and notice cache state has changed back to **No cached value**.
The TTL for the cached value is set to 5 seconds. When the TTL expires, the value is no longer cached.
4. Click *Invoke the service* once more to cache the value.
5. Click *Invoke the service* a few more times over the course of a few seconds while cache state is **A value is cached**.
Notice a significantly lower **duration** value since it is using a cached value. If you click *Clear the cache*, the cache is emptied.

3.7.7. Running the Cache booster integration tests

This booster includes a self-contained set of integration tests. When run inside an OpenShift project, the tests:

- Deploy a test instance of the application to the project.
- Execute the individual tests on that instance.
- Remove all instances of the application from the project when the testing is done.



WARNING

Executing integration tests removes all existing instances of the booster application from the target OpenShift project. To avoid accidentally removing your booster application, ensure that you create and select a separate OpenShift project to execute the tests.

Prerequisites

- The **oc** client authenticated
- An empty OpenShift project

Procedure

Execute the following command to run the integration tests:

```
$ mvn clean verify -Popenshift,openshift-it
```

3.7.8. Caching resources

More background and related information on caching can be found here:

- [Cache Mission - Spring Boot Booster](#)
- [Cache Mission - Thorntail Booster](#)
- [Cache Mission - Node.js Booster](#)

CHAPTER 4. DEVELOPING AN APPLICATION FOR THE ECLIPSE VERT.X RUNTIME

4.1. CREATING A BASIC ECLIPSE VERT.X APPLICATION

In addition to [using a booster](#), you can create new Eclipse Vert.x applications from scratch and deploy them to OpenShift.

4.1.1. Creating an application

Create a simple **Greeting** application to run on OpenShift using Eclipse Vert.x. The following procedure shows you how to:

- Write some simple application code that makes use of functionalities provided by Eclipse Vert.x.
- Declare dependencies and configure the application build using a **pom.xml** file.
- Start your application on localhost and verify that it works.

Prerequisites

- Maven installed.
- JDK 8 or later installed.

Procedure

1. Create the application directory and navigate to it.

```
$ mkdir myApp
$ cd myApp
```

2. Create a **pom.xml** file.

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/xsd/maven-4.0.0.xsd">
  <modelVersion>4.0.0</modelVersion>

  <groupId>com.example</groupId>
  <artifactId>my-app</artifactId>
  <version>1.0.0-SNAPSHOT</version>
  <packaging>jar</packaging>

  <name>My Application</name>
  <description>Example application using RHOAR Vert.x</description>

  <properties>
    <vertx.version>3.5.4.redhat-00002</vertx.version>
    <vertx-maven-plugin.version>1.0.17</vertx-maven-plugin.version>
    <vertx.verticle>com.example.MyApp</vertx.verticle>
```

```

    <fabric8.generator.from>registry.access.redhat.com/redhat-
openjdk-18/openjdk18-openshift:1.2</fabric8.generator.from>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
    <project.build.sourceEncoding>UTF-
8</project.build.sourceEncoding>
    <project.reporting.outputEncoding>UTF-
8</project.reporting.outputEncoding>
  </properties>

  <!-- Import dependencies from the RHOAR Vert.x BOM file. -->
  <dependencyManagement>
    <dependencies>
      <dependency>
        <groupId>io.vertx</groupId>
        <artifactId>vertx-dependencies</artifactId>
        <version>${vertx.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
    </dependencies>
  </dependencyManagement>

  <!-- Specify the RHOAR Vert.x artifacts that your application
depends on. -->
  <dependencies>
    <dependency>
      <groupId>io.vertx</groupId>
      <artifactId>vertx-core</artifactId>
    </dependency>
    <dependency>
      <groupId>io.vertx</groupId>
      <artifactId>vertx-web</artifactId>
    </dependency>
  </dependencies>

  <!-- Specify the repositories containing RHOAR artifacts. -->
  <repositories>
    <repository>
      <id>redhat-ga</id>
      <name>Red Hat GA Repository</name>
      <url>https://maven.repository.redhat.com/ga/</url>
    </repository>
  </repositories>

  <!-- Specify the repositories containing the plugins used to
execute the build of your application. -->
  <pluginRepositories>
    <pluginRepository>
      <id>redhat-ga</id>
      <name>Red Hat GA Repository</name>
      <url>https://maven.repository.redhat.com/ga/</url>
    </pluginRepository>
  </pluginRepositories>

  <!-- Configure your application to be packaged using the Vert.x

```

```

Maven Plugin. -->
<build>
  <plugins>
    <plugin>
      <groupId>io.reactiverse</groupId>
      <artifactId>vertx-maven-plugin</artifactId>
      <version>${vertx-maven-plugin.version}</version>
      <executions>
        <execution>
          <id>vmp</id>
          <goals>
            <goal>initialize</goal>
            <goal>package</goal>
          </goals>
        </execution>
      </executions>
    </plugin>
  </plugins>
</build>

<!-- Configure your application to be deployed to OpenShift using
the Fabric8 Maven Plugin. -->
<profiles>
  <profile>
    <id>openshift</id>
    <build>
      <plugins>
        <plugin>
          <groupId>io.fabric8</groupId>
          <artifactId>fabric8-maven-plugin</artifactId>
          <version>3.5.40</version>
          <executions>
            <execution>
              <goals>
                <goal>resource</goal>
                <goal>build</goal>
              </goals>
            </execution>
          </executions>
        </plugin>
      </plugins>
    </build>
  </profile>
</profiles>
</project>

```

3. Create a new class in **src/main/java/com/example/**.

As a recommended practice, ensure that the location of your class within the directory structure of your project reflects the value that you set for **groupId** in your **pom.xml** file. For example, for **<groupId>my.awesome.project</groupId>**, the location of the class should be **src/main/java/my/awesome/project/**.

```

package com.example;

import io.vertx.core.AbstractVerticle;

```

```
import io.vertx.core.Future;

public class MyApp extends AbstractVerticle {

    @Override
    public void start(Future<Void> fut) {
        vertx
            .createHttpServer()
            .requestHandler(r ->
                r.response().end("Greetings!"))
            .listen(8080, result -> {
                if (result.succeeded()) {
                    fut.complete();
                } else {
                    fut.fail(result.cause());
                }
            });
    }
}
```

4. Start your application. Execute the following command in the directory containing you application.

```
$ mvn vertx:run
```

5. Using **curl** or your browser, verify your application is running at <http://localhost:8080>.

```
$ curl http://localhost:8080
Greetings!
```

Additional information

- As a recommended practice, you can configure liveness and readiness probes to enable health monitoring for your application when running on OpenShift. To learn how application health monitoring on OpenShift works, try the [Health Check booster](#).

4.1.2. Deploying an application to OpenShift

This procedure shows you how to:

- Build your application and deploy it to OpenShift using the Fabric8 Maven Plugin.
- Use the command line to interact with your application running on OpenShift.

Prerequisites

- The **oc** CLI client installed.
- Maven installed.
- A Maven-based application.

Procedure

1. Log in to your OpenShift instance with the **oc** client.

```
$ oc login ...
```

2. Create a new project.

```
$ oc new-project MY_PROJECT_NAME
```

3. In a terminal application, navigate to the directory containing your application:

```
$ cd myApp
```

4. Use Maven to start the deployment to OpenShift.

```
$ mvn clean fabric8:deploy -Popenshift
```

This command uses the Fabric8 Maven Plugin to launch the [S2I process](#) on OpenShift and to start the pod.

5. Check the status of your booster and ensure your pod is running.

```
$ oc get pods -w
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-1-aaaaa	1/1	Running	0
58s			
MY_APP_NAME-s2i-1-build	0/1	Completed	0
2m			

The **MY_APP_NAME-1-aaaaa** pod should have a status of **Running** once it is fully deployed and started. Your specific pod name will vary. The number in the middle will increase with each new build. The letters at the end are generated when the pod is created.

6. Once your booster is deployed and started, determine its route.

Example Route Information

```
$ oc get routes
```

NAME	HOST/PORT
PATH SERVICES PORT TERMINATION	
MY_APP_NAME	MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
MY_APP_NAME	8080

The route information of a pod gives you the base URL which you use to access it. In the example above, you would use **http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME** as the base URL to access the application.

7. Using **curl** or your browser, verify your application is running in OpenShift.

```
$ curl http://MY_APP_NAME-MY_PROJECT_NAME.OPENSIFT_HOSTNAME
Greetings!
```

4.2. DEPLOYING AN EXISTING ECLIPSE VERT.X APPLICATION TO OPENSIFT

You can easily deploy your existing application to OpenShift using the Fabric8 Maven plugin.

Prerequisites

- A Eclipse Vert.x–based application

Procedure

1. Add the following profile to the **pom.xml** file in the root directory of your application:

```
<profiles>
  <profile>
    <id>openshift</id>
    <build>
      <plugins>
        <plugin>
          <groupId>io.fabric8</groupId>
          <artifactId>fabric8-maven-plugin</artifactId>
          <version>3.5.40</version>
          <executions>
            <execution>
              <goals>
                <goal>resource</goal>
                <goal>build</goal>
              </goals>
            </execution>
          </executions>
        </plugin>
      </plugins>
    </build>
  </profile>
</profiles>
```

In this profile, the Fabric8 Maven plugin is invoked for building and deploying the application to OpenShift.

2. Deploy the application to OpenShift according to instructions in [Section 4.1.2, “Deploying an application to OpenShift”](#).

CHAPTER 5. DEBUGGING

This section contains information about debugging your Eclipse Vert.x-based application both in local and remote deployments.

5.1. REMOTE DEBUGGING

To remotely debug an application, you must first configure it to start in a debugging mode, and then attach a debugger to it.

5.1.1. Starting your application locally in debugging mode

One of the ways of debugging a Maven-based project is manually launching the application while specifying a debugging port, and subsequently connecting a remote debugger to that port. This method is applicable at least to the following deployments of the application:

- When launching the application manually using the `mvn vertx:debug` goal. This starts the application with debugging enabled.

Prerequisites

- A Maven-based application

Procedure

1. In a console, navigate to the directory with your application.
2. Launch your application and specify the debug port using the `-Ddebug.port` argument:

```
$ mvn vertx:debug -Ddebug.port=$PORT_NUMBER
```

Here, `$PORT_NUMBER` is an unused port number of your choice. Remember this number for the remote debugger configuration.

Use the `-Ddebug.suspend=true` argument to make the application wait until a debugger is attached to start.

5.1.2. Starting your application on OpenShift in debugging mode

To debug your Eclipse Vert.x-based application on OpenShift remotely, you must set the `JAVA_DEBUG` environment variable inside the container to `true` and configure port forwarding so that you can connect to your application from a remote debugger.

Prerequisites

- Your application running on OpenShift.
- The `oc` binary installed on your machine.
- The ability to execute the `oc port-forward` command in your target OpenShift environment.

Procedure

1. Using the **oc** command, list the available deployment configurations:

```
$ oc get dc
```

2. Set the **JAVA_DEBUG** environment variable in the deployment configuration of your application to **true**, which configures the JVM to open the port number **5005** for debugging. For example:

```
$ oc set env dc/MY_APP_NAME JAVA_DEBUG=true
```

3. Redeploy the application if it is not set to redeploy automatically on configuration change. For example:

```
$ oc rollout latest dc/MY_APP_NAME
```

4. Configure port forwarding from your local machine to the application pod:

- a. List the currently running pods and find one containing your application:

```
$ oc get pod
```

NAME	READY	STATUS	RESTARTS
AGE			
MY_APP_NAME-3-1xrsp	0/1	Running	0
...			6s

- b. Configure port forwarding:

```
$ oc port-forward MY_APP_NAME-3-1xrsp $LOCAL_PORT_NUMBER:5005
```

Here, **\$LOCAL_PORT_NUMBER** is an unused port number of your choice on your local machine. Remember this number for the remote debugger configuration.

5. When you are done debugging, unset the **JAVA_DEBUG** environment variable in your application pod. For example:

```
$ oc set env dc/MY_APP_NAME JAVA_DEBUG-
```

Additional resources

You can also set the **JAVA_DEBUG_PORT** environment variable if you want to change the debug port from the default, which is **5005**.

5.1.3. Attaching a remote debugger to the application

When your application is configured for debugging, attach a remote debugger of your choice to it. In this guide, [Red Hat JBoss Developer Studio](#) is covered, but the procedure is similar when using other programs.

Prerequisites

- The application running either locally or on OpenShift, and configured for debugging.
- The port number that your application is listening on for debugging.

- Red Hat JBoss Developer Studio installed on your machine. You can download it from the [Red Hat JBoss Developer Studio download page](#).

Procedure

1. Start Red Hat JBoss Developer Studio.
2. Create a new debug configuration for your application:
 - a. Click **Run** → **Debug Configurations**.
 - b. In the list of configurations, double-click **Remote Java application**. This creates a new remote debugging configuration.
 - c. Enter a suitable name for the configuration in the **Name** field.
 - d. Enter the path to the directory with your application into the **Project** field. You can use the **Browse...** button for convenience.
 - e. Set the **Connection Type** field to *Standard (Socket Attach)* if it is not already.
 - f. Set the **Port** field to the port number that your application is listening on for debugging.
 - g. Click **Apply**.
3. Start debugging by clicking the **Debug** button in the Debug Configurations window.
To quickly launch your debug configuration after the first time, click **Run** → **Debug History** and select the configuration from the list.

Additional resources

- [Debug an OpenShift Java Application with JBoss Developer Studio](#) on Red Hat Knowledgebase.
- A [Debugging Java Applications On OpenShift and Kubernetes](#) article on OpenShift Blog.

5.2. DEBUG LOGGING

Eclipse Vert.x provides a built-in logging API. The default logging implementation for Eclipse Vert.x uses the `java.util.logging` library that is [provided with the Java JDK](#). Alternatively, Eclipse Vert.x allows you to use a different logging framework, for example, [Log4J](#) (Eclipse Vert.x supports Log4J v1 and v2) or [SLF4J](#).

5.2.1. Configuring logging for your Eclipse Vert.x application using `java.util.logging`

To configure debug logging for your Eclipse Vert.x application using `java.util.logging`:

- Set the `java.util.logging.config.file` system property in the `application.properties` file. The value of this variable must correspond to the name of your [java.util.logging configuration file](#). This ensures that `LogManager` initializes `java.util.logging` at application startup.
- Alternatively, add a `java.util.logging` configuration file with the `vertx-default-jul-logging.properties` name to the classpath of your Maven project. Eclipse Vert.x will use that file to configure `java.util.logging` on application startup.

Eclipse Vert.x allows you to specify a custom logging backend using the **LogDelegateFactory** that provides pre-built implementations for the **Log4J**, **Log4J2** and **SLF4J** libraries. Unlike **java.util.logging**, which is [included with Java](#) by default, the other backends require that you specify their respective libraries as dependencies for your application.

5.2.2. Adding log output to your Eclipse Vert.x application.

1. To add logging to your application, create a **io.vertx.core.logging.Logger**:

```
Logger logger = LoggerFactory.getLogger(className);

logger.info("something happened");
logger.error("oops!", exception);
logger.debug("debug message");
logger.warn("warning");
```

CAUTION

Logging backends use different formats to represent replaceable tokens in parameterized messages. If you rely on parameterized logging methods, you will not be able to switch logging backends without changing your code.

5.2.3. Specifying a custom logging framework for your application

If you do not want Eclipse Vert.x to use **java.util.logging**, configure **io.vertx.core.logging.Logger** to use a different logging framework, for example, **Log4J** or **SLF4J**:

1. Set the value of the **vertx.logger-delegate-factory-class-name** system property to the name of the class that implements the **LogDelegateFactory** interface. Eclipse Vert.x provides the pre-built implementations for the following libraries with their corresponding pre-defined classnames listed below:

Library	Class name
Log4J v1	io.vertx.core.logging.Log4jLogDelegateFactory
Log4J v2	io.vertx.core.logging.Log4j2LogDelegateFactory
SLF4J	io.vertx.core.logging.SLF4JLogDelegateFactory

When implementing logging using a custom library, ensure that the relevant **Log4J** or **SLF4J** jars are included among the dependencies for your application.

CAUTION

The *Log4J v1* delegate provided with Eclipse Vert.x does not support parameterized messages. The delegates for *Log4J v2* and *SLF4J* both use the **{}** syntax. The **java.util.logging** delegate relies on **java.text.MessageFormat** that uses the **{n}** syntax.

5.2.4. Configuring Netty logging for your Eclipse Vert.x application.

[Netty](#) is a library used by VertX to manage asynchronous network communication in applications.

Netty:

- Allows quick and easy development of network applications, such as protocol servers and clients.
- Simplifies and streamlines network programming, such as TCP and UDP socket server development.
- Provides a unified API for managing blocking and non-blocking connections.

Netty does not rely on an external logging configuration using system properties. Instead, it implements a logging configuration based on logging libraries visible to Netty classes in your project. Netty tries to use the libraries in the following order:

1. **SLF4J**
2. **Log4J**
3. **java.util.logging** as a fallback option

You can set **io.netty.util.internal.logging.InternalLoggerFactory** directly to a particular logger by adding the following code at the beginning of the **main** method of your application:

```
// Force logging to Log4j
InternalLoggerFactory.setDefaultFactory(Log4JLoggerFactory.INSTANCE);
```

5.2.5. Accessing debug logs on OpenShift

Start your application and interact with it to see the debugging statements in OpenShift.

Prerequisites

- A Maven-based application with debug logging enabled.
- The **oc** CLI client installed and authenticated.

Procedure

1. Deploy your application to OpenShift:

```
$ mvn clean fabric8:deploy -Popenshift
```

2. View the logs:

1. Get the name of the pod with your application:

```
$ oc get pods
```

2. Start watching the log output:

```
$ oc logs -f pod/MY_APP_NAME-2-aaaaa
```

Keep the terminal window displaying the log output open so that you can watch the log output.

3. Interact with your application:

For example, if you had debug logging in the [REST API Level 0 booster](#) to log the **message** variable in the **/api/greeting** method:

1. Get the route of your application:

```
$ oc get routes
```

2. Make an HTTP request on the **/api/greeting** endpoint of your application:

```
$ curl $APPLICATION_ROUTE/api/greeting?name=Sarah
```

4. Return to the window with your pod logs and inspect debug logging messages in the logs.

```
...  
Feb 11, 2017 10:23:42 AM io.openshift.MY_APP_NAME  
INFO: Greeting: Hello, Sarah  
...
```

5. To disable debug logging, update your logging configuration file, for example **src/main/resources/vertx-default-jul-logging.properties**, remove the logging configuration for your class and redeploy your application.

CHAPTER 6. MONITORING

This section contains information about monitoring your Eclipse Vert.x-based application running on OpenShift.

6.1. ACCESSING JVM METRICS FOR YOUR APPLICATION ON OPENSIFT

6.1.1. Accessing JVM metrics using Jolokia on OpenShift

[Jolokia](#) is a built-in lightweight solution for accessing JMX (Java Management Extension) metrics over HTTP on OpenShift. Jolokia allows you to access CPU, storage, and memory usage data collected by JMX over an HTTP bridge. Jolokia uses a REST interface and JSON-formatted message payloads. It is suitable for monitoring cloud applications thanks to its comparably high speed and low resource requirements.

For Java-based applications, the OpenShift Web console provides the integrated [hawt.io console](#) that collects and displays all relevant metrics output by the JVM running your application.

Prerequisites

- the **oc** client authenticated
- a Java-based application container running in a project on OpenShift
- latest [JDK 1.8.0 image](#)

Procedure

1. List the deployment configurations of the pods inside your project and select the one that corresponds to your application.

```
oc get dc
```

NAME	REVISION	DESIRED	CURRENT	TRIGGERED BY
MY_APP_NAME	2	1	1	config,image(my-app:6)
...				

2. Open the YAML deployment template of the pod running your application for editing.

```
oc edit dc/MY_APP_NAME
```

3. Add the following entry to the **ports** section of the template and save your changes:

```
...
spec:
  ...
  ports:
  - containerPort: 8778
    name: jolokia
    protocol: TCP
  ...
...
```

-
- 4. Redeploy the pod running your application.

```
oc rollout latest dc/MY_APP_NAME
```

The pod is redeployed with the updated deployment configuration and exposes the port **8778**.

- 5. Log into the OpenShift Web console.
- 6. In the sidebar, navigate to *Applications > Pods*, and click on the name of the pod running your application.
- 7. In the pod details screen, click *Open Java Console* to access the hawt.io console.

Additional resources

- [hawt.io documentation](#)

APPENDIX A. THE SOURCE-TO-IMAGE (S2I) BUILD PROCESS

[Source-to-Image](#) (S2I) is a build tool for generating reproducible Docker-formatted container images from online SCM repositories with application sources. With S2I builds, you can easily deliver the latest version of your application into production with shorter build times, decreased resource and network usage, improved security, and a number of other advantages. OpenShift supports multiple [build strategies and input sources](#).

For more information, see the [Source-to-Image \(S2I\) Build](#) chapter of the OpenShift Container Platform documentation.


You must provide three elements to the S2I process to assemble the final container image:

- The application sources hosted in an online SCM repository, such as GitHub.
- The S2I Builder image, which serves as the foundation for the assembled image and provides the ecosystem in which your application is running.
- Optionally, you can also provide environment variables and parameters that are used by [S2I scripts](#).

The process injects your application source and dependencies into the Builder image according to instructions specified in the S2I script, and generates a Docker-formatted container image that runs the assembled application. For more information, check the [S2I build requirements](#), [build options](#) and [how builds work](#) sections of the OpenShift Container Platform documentation.

APPENDIX B. UPDATING THE DEPLOYMENT CONFIGURATION OF A BOOSTER

The deployment configuration for a booster contains information related to deploying and running the booster in OpenShift, such as route information or readiness probe location. The deployment configuration of a booster is stored in a set of YAML files. For boosters that use the Fabric8 Maven Plugin, the YAML files are located in the `src/main/fabric8/` directory. For boosters using Nodeshift, the YAML files are located in the `.nodeshift` directory.



IMPORTANT

The deployment configuration files used by the Fabric8 Maven Plugin and Nodeshift do not have to be full OpenShift resource definitions. Both Fabric8 Maven Plugin and Nodeshift can take the deployment configuration files and add some missing information to create a full OpenShift resource definition. The resource definitions generated by the Fabric8 Maven Plugin are available in the `target/classes/META-INF/fabric8/` directory. The resource definitions generated by Nodeshift are available in the `tmp/nodeshift/resource/` directory.

Prerequisites

- An existing booster project.
- The `oc` CLI client installed.

Procedure

1. Edit an existing YAML file or create an additional YAML file with your configuration update.
 - For example, if your booster already has a YAML file with a `readinessProbe` configured, you could change the `path` value to a different available path to check for readiness:

```
spec:
  template:
    spec:
      containers:
        readinessProbe:
          httpGet:
            path: /path/to/probe
            port: 8080
            scheme: HTTP
    ...
```

- If a `readinessProbe` is not configured in an existing YAML file, you can also create a new YAML file in the same directory with the `readinessProbe` configuration.
2. Deploy the updated version of your booster using Maven or npm.
 3. Verify that your configuration updates show in the deployed version of your booster.

```
$ oc export all --as-template='my-template'

apiVersion: v1
kind: Template
```



```
metadata:
  creationTimestamp: null
  name: my-template
objects:
- apiVersion: v1
  kind: DeploymentConfig
  ...
  spec:
    ...
    template:
      ...
      spec:
        containers:
          ...
          livenessProbe:
            failureThreshold: 3
            httpGet:
              path: /path/to/different/probe
              port: 8080
              scheme: HTTP
            initialDelaySeconds: 60
            periodSeconds: 30
            successThreshold: 1
            timeoutSeconds: 1
          ...
```

Additional resources

If you updated the configuration of your application directly using the web-based console or the **oc** CLI client, export and add these changes to your YAML file. Use the **oc export all** command to show the configuration of your deployed application.

APPENDIX C. CONFIGURING A JENKINS FREESTYLE PROJECT TO DEPLOY YOUR APPLICATION WITH THE FABRIC8 MAVEN PLUGIN

Similar to using Maven and the Fabric8 Maven Plugin from your local host to deploy an application, you can configure Jenkins to use Maven and the Fabric8 Maven Plugin to deploy an application.

Prerequisites

- Access to an OpenShift cluster.
- [The Jenkins container image](#) running on same OpenShift cluster.
- A JDK and Maven installed and configured on your Jenkins server.
- An application configured to use Maven, the Fabric8 Maven Plugin, and the Red Hat base image in the `pom.xml`.

Example `pom.xml`

```
<properties>
...
  <fabric8.generator.from>registry.access.redhat.com/redhat-openjdk-18/openjdk18-openshift</fabric8.generator.from>
</properties>
```

- The source of the application available in GitHub.

Procedure

1. Create a new OpenShift project for your application:
 - a. Open the OpenShift Web console and log in.
 - b. Click *Create Project* to create a new OpenShift project.
 - c. Enter the project information and click *Create*.
2. Ensure Jenkins has access to that project.

For example, if you configured a service account for Jenkins, ensure that account has **edit** access to the project of your application.
3. Create a new [freestyle Jenkins project](#) on your Jenkins server:
 - a. Click *New Item*.
 - b. Enter a name, choose *Freestyle project*, and click *OK*.
 - c. Under *Source Code Management*, choose *Git* and add the GitHub url of your application.
 - d. Under *Build*, choose *Add build step* and select **Invoke top-level Maven targets**.
 - e. Add the following to *Goals*:

```
clean fabric8:deploy -Popenshift -Dfabric8.namespace=MY_PROJECT
```

Substitute **MY_PROJECT** with the name of the OpenShift project for your application.

- f. Click *Save*.
4. Click *Build Now* from the main page of the Jenkins project to verify your application builds and deploys to the OpenShift project for your application.
You can also verify that your application is deployed by opening the route in the OpenShift project of the application.

Next steps

- Consider adding [GITSCM polling](#) or using [the Poll SCM build trigger](#). These options enable builds to run every time a new commit is pushed to the GitHub repository.
- Consider adding a build step that executes tests before deploying.

APPENDIX D. ADDITIONAL ECLIPSE VERT.X RESOURCES

- [The Reactive Manifesto](#)
- [Eclipse Vert.x project](#)
- [Eclipse Vert.x for Reactive Programming in Red Hat OpenShift Application Runtimes](#)
- [Building Reactive Microservices in Java](#)
- [Eclipse Vert.x Cheat Sheet for Developers](#)
- [Eclipse Vert.x - From zero to \(micro\)-hero](#)
- [Red Hat Summit 2017 Talk - Reactive Programming with Eclipse Vert.x](#)
- [Red Hat Summit 2017 Breakout Session - Reactive Systems with Eclipse Vert.x and Red Hat OpenShift](#)
- [Live Coding Reactive Systems with Eclipse Vert.x and OpenShift](#)

APPENDIX E. APPLICATION DEVELOPMENT RESOURCES

For additional information on application development with OpenShift see:

- [OpenShift Interactive Learning Portal](#)
- [Red Hat OpenShift Application Runtimes Overview](#)

APPENDIX F. PROFICIENCY LEVELS

Each available mission teaches concepts that require certain minimum knowledge. This requirement varies by mission. The minimum requirements and concepts are organized in several levels of proficiency. In addition to the levels described here, you might need additional information specific to each mission.

Foundational

The missions rated at Foundational proficiency generally require no prior knowledge of the subject matter; they provide general awareness and demonstration of key elements, concepts, and terminology. There are no special requirements except those directly mentioned in the description of the mission.

Advanced

When using Advanced missions, the assumption is that you are familiar with the common concepts and terminology of the subject area of the mission in addition to Kubernetes and OpenShift. You must also be able to perform basic tasks on your own, for example configure services and applications, or administer networks. If a service is needed by the mission, but configuring it is not in the scope of the mission, the assumption is that you have the knowledge to properly configure it, and only the resulting state of the service is described in the documentation.

Expert

Expert missions require the highest level of knowledge of the subject matter. You are expected to perform many tasks based on feature-based documentation and manuals, and the documentation is aimed at most complex scenarios.

APPENDIX G. GLOSSARY

G.1. PRODUCT AND PROJECT NAMES

developers.redhat.com/launch

developers.redhat.com/launch is a standalone getting started experience offered by Red Hat for jumpstarting cloud-native application development on OpenShift. It provides a hassle-free way of creating functional example applications, called missions, as well as an easy way to build and deploy those missions to OpenShift.

Fabric8 Launcher

The Fabric8 Launcher is the upstream project on which developers.redhat.com/launch is based.

Single-node OpenShift Cluster

An OpenShift cluster running on your machine using Minishift.

G.2. TERMS SPECIFIC TO FABRIC8 LAUNCHER

Booster

A language-specific implementation of a particular [mission](#) on a particular [runtime](#). Boosters are listed in a [booster catalog](#).

For example, a booster is a web service with a REST API implemented using the Thorntail runtime.

Booster Catalog

A Git repository that contains information about boosters.

Mission

An application specification, for example *a web service with a REST API*.

Missions generally do not specify which language or platform they should run on; the description only contains the intended functionality.

Runtime

A platform that executes [boosters](#). For example, Thorntail or Eclipse Vert.x.