



# **Red Hat OpenShift Container Storage 3.10**

## **Deployment Guide**

Deploying Red Hat OpenShift Container Storage 3.10.



# Red Hat Openshift Container Storage3.10 Deployment Guide

---

Deploying Red Hat Openshift Container Storage 3.10.

Bhavana Mohan

Customer Content Services Red Hat

[bmohanra@redhat.com](mailto:bmohanra@redhat.com)

## Legal Notice

Copyright © 2018 Red Hat, Inc.

This document is licensed by Red Hat under the [Creative Commons Attribution-ShareAlike 3.0 Unported License](#). If you distribute this document, or a modified version of it, you must provide attribution to Red Hat, Inc. and provide a link to the original. If the document is modified, all Red Hat trademarks must be removed.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

## Abstract

This guide describes the prerequisites and provides step-by-step instructions to deploy Red Hat OpenShift Container Storage.

## Table of Contents

<b>PART I. PLANNING</b>	<b>4</b>
<b>CHAPTER 1. IDENTIFY YOUR WORKLOADS</b>	<b>5</b>
<b>CHAPTER 2. IDENTIFY YOUR USE CASE</b>	<b>6</b>
2.1. CONVERGED MODE	6
2.2. INDEPENDENT MODE	7
<b>CHAPTER 3. VERIFY PREREQUISITES</b>	<b>9</b>
3.1. CONVERGED MODE	9
3.2. INDEPENDENT MODE	12
<b>PART II. DEPLOY</b>	<b>16</b>
<b>CHAPTER 4. DEPLOYING CONTAINERIZED STORAGE IN CONVERGED MODE</b>	<b>17</b>
4.1. SPECIFY ADVANCED INSTALLER VARIABLES	18
4.2. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE	19
4.3. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE WITH REGISTRY	21
4.4. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE WITH LOGGING AND METRICS	22
4.5. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE FOR APPLICATIONS WITH REGISTRY, LOGGING, AND METRICS	24
4.6. VERIFY YOUR DEPLOYMENT	27
4.7. CREATING AN ARBITER VOLUME (OPTIONAL)	30
<b>CHAPTER 5. DEPLOY CONTAINERIZED STORAGE IN INDEPENDENT MODE</b>	<b>33</b>
5.1. SETTING UP A RHGS CLUSTER	33
5.2. SPECIFY ADVANCED INSTALLER VARIABLES	37
5.3. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE	39
5.4. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE FOR APPLICATIONS WITH REGISTRY, LOGGING, AND METRICS	40
5.5. VERIFY YOUR DEPLOYMENT	42
5.6. CREATING AN ARBITER VOLUME (OPTIONAL)	46
<b>PART III. UPGRADE</b>	<b>48</b>
<b>CHAPTER 6. UPGRADING YOUR RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE</b>	<b>49</b>
6.1. PREREQUISITES	49
6.2. RESTORING ORIGINAL LABEL VALUES FOR /DEV/LOG	49
6.3. UPGRADING CNS-DEPLOY AND HEKETI SERVER	51
6.4. UPGRADING THE RED HAT GLUSTER STORAGE PODS	54
6.5. UPGRADING THE CLIENT ON RED HAT OPENSIFT CONTAINER PLATFORM NODES	61
<b>CHAPTER 7. UPGRADING YOUR RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE</b>	<b>63</b>
7.1. PREREQUISITES	63
7.2. UPGRADING YOUR INDEPENDENT MODE SETUP	63
7.3. UPGRADING THE CLIENT ON RED HAT OPENSIFT CONTAINER PLATFORM NODES	71
<b>PART IV. UNINSTALLING</b>	<b>72</b>
<b>CHAPTER 8. UNINSTALL RED HAT OPENSIFT CONTAINER STORAGE</b>	<b>73</b>
<b>PART V. WORKLOADS</b>	<b>74</b>

<b>CHAPTER 9. MANAGING ARBITRATED REPLICATED VOLUMES</b>	<b>75</b>
9.1. MANAGING ARBITER BRICK SIZE	75
9.2. MANAGING ARBITER BRICK PLACEMENT	75
9.3. CREATING PERSISTENT VOLUMES	77
<b>CHAPTER 10. SETTING UP CUSTOM VOLUME OPTIONS</b>	<b>79</b>
<b>PART VI. APPENDIX</b>	<b>80</b>
<b>APPENDIX A. OPTIONAL DEPLOYMENT METHOD (WITH CNS-DEPLOY)</b>	<b>81</b>
A.1. SETTING UP CONVERGED MODE	81
A.2. SETTING UP INDEPENDENT MODE	83
A.3. SETTING UP THE ENVIRONMENT	87
<b>APPENDIX B. SETTINGS THAT ARE DESTROYED WHEN USING UNINSTALL PLAYBOOK</b>	<b>111</b>
<b>APPENDIX C. REVISION HISTORY</b>	<b>115</b>



# PART I. PLANNING



## CHAPTER 1. IDENTIFY YOUR WORKLOADS

This chapter provides a list of workloads that are supported with Red Hat Openshift Container Storage.

Persistent volumes backed by block storage is the recommended method for the following workloads:

- Jenkins
- ElasticSearch
- Prometheus

If using file storage for transactional workloads, turn off the performance translators as described in [Chapter 10, \*Setting up Custom Volume Options\*](#).

## CHAPTER 2. IDENTIFY YOUR USE CASE

This chapter provides a brief introduction of the two use cases available in Containerized Red Hat Gluster Storage.



### NOTE

Red Hat Openshift Container Storage does not support a simultaneous deployment of converged and independent mode with ansible workflow. Therefore, you must deploy either converged mode or independent mode: you cannot mix both modes during deployment.

### 2.1. CONVERGED MODE



### NOTE

Converged mode was earlier called as Container-Native Storage.


This deployment delivers a hyper-converged solution, where the storage containers that host Red Hat Gluster Storage co-reside with the compute containers and serve out storage from the hosts that have local or direct attached storage to the compute containers. This solution integrates Red Hat Gluster Storage deployment and management with OpenShift services. As a result, persistent storage is delivered within an OpenShift pod that provides both compute and file storage.

Converged Mode for OpenShift Container Platform is built around three key technologies:

- OpenShift provides the platform as a service (PaaS) infrastructure based on Kubernetes container management. Basic OpenShift architecture is built around multiple master systems where each system contains a set of nodes.
- Red Hat Gluster Storage provides the containerized distributed storage based on Red Hat Gluster Storage 3.4 container. Each Red Hat Gluster Storage volume is composed of a collection of bricks, where each brick is the combination of a node and an export directory.
- Heketi provides the Red Hat Gluster Storage volume life-cycle management. It creates the Red Hat Gluster Storage volumes dynamically and supports multiple Red Hat Gluster Storage clusters.

The following list provides the administrators a solution workflow. The administrators can:

- Create multiple persistent volumes (PV) and register these volumes with OpenShift.
- Developers then submit a persistent volume claim (PVC).
- A PV is identified and selected from a pool of available PVs and bound to the PVC.
- The OpenShift pod then uses the PV for persistent storage.

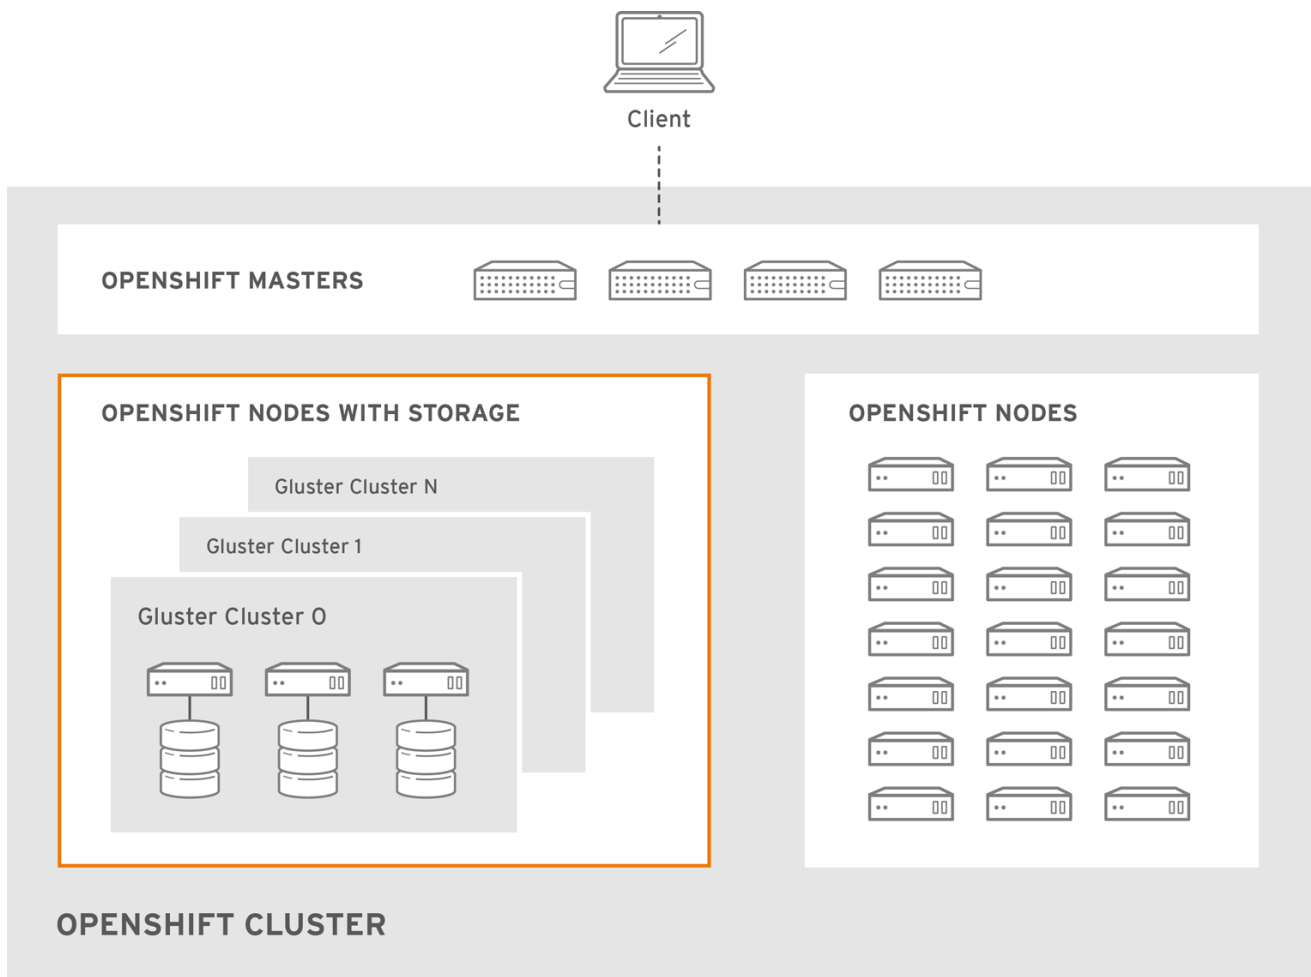

GLUSTER\_409447\_0616


**Figure 2.1. Architecture - Converged Mode for OpenShift Container Platform**



#### NOTE

Red Hat OpenShift Container Storage does not support a simultaneous deployment of converged and independent mode with ansible workflow. Therefore, you must deploy either converged mode or independent mode: you cannot mix both modes during deployment.

## 2.2. INDEPENDENT MODE



#### NOTE

Independent mode was earlier called Container-Ready Storage.

Independent mode is deployed as a stand-alone Red Hat Gluster Storage cluster that provides persistent storage to containers, unlike converged mode, which is deployed on top of an OpenShift Cluster.

Independent mode provides the same storage functionality to OpenShift Container Platform as converged Mode. Independent mode provides dynamic provisioned storage, statically provisioned storage, RWO support, and RWX support. Further, it provides full support for OpenShift Container Platform infrastructure services like logging, metrics, and registry services. Being stand-alone of

OpenShift Container Platform, independent mode does have an advantage regarding providing additional Red Hat Gluster Storage data services functionality to what is supported by OpenShift, such as, Snapshot, Geo Replication, and Nagios Monitoring.

For users of persistent storage, the deployment modes are completely transparent. Administrators will see variation in how they set the system up, manage, and scale. In independent mode, storage is managed like Red Hat Gluster Storage.

Following are some of the key drivers of choosing independent mode of deployment:

- OpenShift Container Platform administrators might not want to manage storage. Independent mode separates storage management from container management.
- Leverage legacy storage (SAN, Arrays, Old filers): Customers often have storage arrays from traditional storage vendors that have either limited or no support for OpenShift. Independent mode allows users to leverage existing legacy storage for OpenShift Containers.
- Cost effective: In environments where costs related to new infrastructure is a challenge, they can repurpose their existing storage arrays to back OpenShift under independent mode. Independent mode is perfect for such situations where one can run Red Hat Gluster Storage inside a VM and serve out LUNs or disks from these storage arrays to OpenShift offering all the features that the OpenShift storage subsystem has to offer including dynamic provisioning. This is a very useful solution in those environments with potential infrastructure additions.

Independent mode may have Heketi, and other provisioners (components of independent mode) deployed on top of OpenShift Cluster nodes. With Red Hat OpenShift Container Storage 3.10, Red Hat recommends Heketi be deployed on OpenShift Cluster. Heketi is a service endpoint for automated Red Hat Gluster Storage volume provisioning, where requests for allocation of Red Hat Gluster Storage volumes to back OpenShift PVs land from kubernetes. Heketi manages allocation and de-allocation of Red Hat Gluster Storage volumes dynamically.



#### **NOTE**

Red Hat OpenShift Container Storage does not support a simultaneous deployment of converged and independent mode with ansible workflow. Therefore, you must deploy either converged mode or independent mode: you cannot mix both modes during deployment.

## CHAPTER 3. VERIFY PREREQUISITES

This chapter provides the prerequisites that have to be verified before for the two different use cases available in Containerized Red Hat Gluster Storage before deployment.

### 3.1. CONVERGED MODE

#### 3.1.1. Supported Versions

The following table lists the supported versions of OpenShift Container Platform with Red Hat Gluster Storage Server and Red Hat Openshift Container Storage.

**Table 3.1. Supported Versions**

OpenShift Container Platform	Red Hat Gluster Storage	Red Hat Openshift Container Storage
3.9, 3.10	3.4	3.10
3.7, 3.9, 3.10	3.3.1	3.9

#### 3.1.2. Environment Requirements

The requirements for Red Hat Enterprise Linux Atomic Host, Red Hat OpenShift Container Platform, Red Hat Enterprise Linux, and Red Hat Gluster Storage are described in this section. A Red Hat Gluster Storage Container Native with OpenShift Container Platform environment consists of Red Hat OpenShift Container Platform installed on either Red Hat Enterprise Linux Atomic Host or Red Hat Enterprise Linux.

##### 3.1.2.1. Installing Red Hat Openshift Container Storage with OpenShift Container Platform on Red Hat Enterprise Linux 7

This section describes the procedures to install Red Hat Gluster Storage Container Native with OpenShift Container Platform on Red Hat Enterprise Linux 7 based OpenShift Container Platform 3.10.

###### 3.1.2.1.1. Setting up the Openshift Master as the Client

You can use the OpenShift Master as a client to execute the **oc** commands across the cluster when installing OpenShift. Generally, this is setup as a non-scheduled node in the cluster. This is the default configuration when using the OpenShift installer. You can also choose to install their client on their local machine to access the cluster remotely. For more information, see <https://access.redhat.com/documentation/en/openshift-container-platform/3.10/single/cli-reference/#installing-the-cli>.

###### Install heketi-client package

Execute the following commands to install **heketi-client** package.

```
# subscription-manager repos --enable=rh-gluster-3-client-for-rhel-7-
server-rpms

# yum install heketi-client
```

After installing the `heketi-client` package, disable the gluster repo by executing the following command:

```
# subscription-manager repos --disable=rh-gluster-3-client-for-rhel-7-server-rpms
```

### 3.1.3. Red Hat OpenShift Container Platform and Red Hat OpenShift Container Storage Requirements

The following list provides the Red Hat OpenShift Container Platform Red Hat OpenShift Container Storage requirements:

- All OpenShift nodes on Red Hat Enterprise Linux systems must have `glusterfs-client` RPMs (`glusterfs`, `glusterfs-client-xlators`, `glusterfs-libs`, `glusterfs-fuse`) installed. You can verify if the RPMs are installed by running the following command:

```
# yum list glusterfs glusterfs-client-xlators glusterfs-libs glusterfs-fuse
```

For more information on installing native client packages, see [https://access.qa.redhat.com/documentation/en-us/red\\_hat\\_gluster\\_storage/3.4/html-single/administration\\_guide/#Installing\\_Native\\_Client](https://access.qa.redhat.com/documentation/en-us/red_hat_gluster_storage/3.4/html-single/administration_guide/#Installing_Native_Client)

### 3.1.4. Red Hat Gluster Storage Requirements

The following list provides the details regarding the Red Hat Gluster Storage requirements:

- Installation of Heketi packages must have valid subscriptions to Red Hat Gluster Storage Server repositories.
- Red Hat Gluster Storage installations must adhere to the requirements outlined in the [Red Hat Gluster Storage Installation Guide](#).
- The versions of Red Hat Enterprise OpenShift and Red Hat Gluster Storage integrated must be compatible, according to the information in [Section 3.1.1, “Supported Versions”](#) section.
- A fully qualified domain name must be set for Red Hat Gluster Storage server node. Ensure that the correct DNS records exist, and that the fully qualified domain name is resolvable via both forward and reverse DNS lookup.
- To access GlusterFS volumes, the `mount.glusterfs` command must be available on all schedulable nodes. For RPM-based systems, the `glusterfs-fuse` package must be installed:

```
# yum install glusterfs-fuse
```


This package comes installed on every RHEL system. However, it is recommended to update to the latest available version from Red Hat Gluster Storage. To do this, the following RPM repository must be enabled:

```
# subscription-manager repos --enable=rh-gluster-3-client-for-rhel-7-server-rpms
```

If `glusterfs-fuse` is already installed on the nodes, ensure that the latest version is installed:

```
# yum update glusterfs-fuse
```

■



## IMPORTANT

### Restrictions for using Snapshot

- After a snapshot is created, it must be accessed through the user-serviceable snapshots feature only. This can be used to copy the old versions of files into the required location.

Reverting the volume to a snapshot state is not supported and should never be done as it might damage the consistency of the data.

- On a volume with snapshots, volume changing operations, such as volume expansion, must not be performed.

### 3.1.5. Deployment and Scaling Guidelines

To prevent potential deployment or scaling issues, review the following guidelines before deploying converged mode or independent mode with OpenShift Container Platform.

Ensure that the Trusted Storage Pool is appropriately sized and you have room for dynamic scaling on demand. This action ensures that you do not scale beyond the following maximum limits:

- **Sizing guidelines on converged mode or independent mode:**

- **Persistent volumes backed by the file interface:** For typical operations, size for 300-500 persistent volumes backed by files per three-node converged mode or independent mode cluster. The maximum limit of supported persistent volumes backed by the file interface is 1000 persistent volumes per three-node cluster in a converged mode or independent mode deployment. Considering that micro-services can dynamically scale as per demand, it is recommended that the initial sizing keep sufficient headroom for the scaling. If additional scaling is needed, add a new three-node converged mode or independent mode cluster to support additional persistent volumes

Creation of more than 1,000 persistent volumes per trusted storage pool is not supported for file-based storage.

- **Persistent volumes backed by block-based storage:** Size for a maximum of 300 persistent volumes per three-node converged mode or independent mode cluster. Be aware that converged mode and independent mode supports only OpenShift Container Platform logging and metrics on block-backed persistent volumes.
- **Persistent volumes backed by file and block:** Size for 300-500 persistent volumes (backed by files) and 100-200 persistent volumes (backed by block). Do not exceed these maximum limits of file or block-backed persistent volumes or the combination of a maximum 1000 persistent volumes per three-node converged mode or independent mode cluster.
- 3-way distributed-replicated volumes and arbitrated volumes are the only supported volume types.
- Minimum Red Hat OpenShift Container Storage cluster size (4): It is recommended to have a minimum of 4 nodes in the Red Hat OpenShift Container Storage cluster to adequately meet high-availability requirements. Although 3 nodes are required to create a persistent volume claim, the failure of one node in a 3 node cluster prevents the persistent volume claim from being created. The fourth node provides high-availability and allows the persistent volume claim to be created even if a node fails.

- Each physical or virtual node that hosts a converged mode or independent mode peer requires the following:
  - a minimum of 8 GB RAM and 30 MB per persistent volume.
  - the same disk type.
  - the heketidb utilises 2 GB distributed replica volume.
- **Deployment guidelines on converged mode or independent mode:**
  - In converged mode, you can install the Red Hat Openshift Container Storage nodes, Heketi, and all provisioner pods on OpenShift Container Platform Infrastructure nodes or OpenShift Container Platform Application nodes.
  - In independent mode, you can install Heketi and all provisioners pods on OpenShift Container Platform Infrastructure nodes or on OpenShift Container Platform Application nodes
- Red Hat Gluster Storage Container Native with OpenShift Container Platform supports up to 14 snapshots per volume by default (snap-max-hard-limit =14 in Heketi Template).

## 3.2. INDEPENDENT MODE

### 3.2.1. Supported Versions

The following table lists the supported versions of OpenShift Container Platform with Red Hat Gluster Storage Server and Red Hat Openshift Container Storage.

**Table 3.2. Supported Versions**

OpenShift Container Platform	Red Hat Gluster Storage	Red Hat Openshift Container Storage
3.9, 3.10	3.4	3.10
3.7, 3.9, 3.10	3.3.1	3.9

### 3.2.2. Environment Requirements

The requirements for Red Hat Enterprise Linux Atomic Host, Red Hat OpenShift Container Platform, Red Hat Enterprise Linux, and Red Hat Gluster Storage are described in this section. A Red Hat Gluster Storage Container Native with OpenShift Container Platform environment consists of Red Hat OpenShift Container Platform installed on either Red Hat Enterprise Linux Atomic Host or Red Hat Enterprise Linux.

#### 3.2.2.1. Installing Red Hat Openshift Container Storage with OpenShift Container Platform on Red Hat Enterprise Linux 7

This section describes the procedures to install Red Hat Gluster Storage Container Native with OpenShift Container Platform on Red Hat Enterprise Linux 7 based OpenShift Container Platform 3.10.

##### 3.2.2.1.1. Setting up the Openshift Master as the Client



You can use the OpenShift Master as a client to execute the **oc** commands across the cluster when installing OpenShift. Generally, this is setup as a non-scheduled node in the cluster. This is the default configuration when using the OpenShift installer. You can also choose to install their client on their local machine to access the cluster remotely. For more information, see <https://access.redhat.com/documentation/en/openshift-container-platform/3.10/single/cli-reference/#installing-the-cli>.

### Install heketi-client package

Execute the following commands to install **heketi-client** package.

```
# subscription-manager repos --enable=rh-gluster-3-client-for-rhel-7-server-rpms
```

```
# yum install heketi-client
```

After installing the heketi-client package, disable the gluster repo by executing the following command:

```
# subscription-manager repos --disable=rh-gluster-3-client-for-rhel-7-server-rpms
```

### 3.2.3. Red Hat OpenShift Container Platform and Red Hat Openshift Container Storage Requirements

The following list provides the Red Hat OpenShift Container Platform requirements:

- All OpenShift nodes on Red Hat Enterprise Linux systems must have glusterfs-client RPMs (glusterfs, glusterfs-client-xlators, glusterfs-libs, glusterfs-fuse) installed. You can verify if the RPMs are installed by running the following command:

```
# yum list glusterfs glusterfs-client-xlators glusterfs-libs glusterfs-fuse
```

For more information on installing native client packages, see [https://access.qa.redhat.com/documentation/en-us/red\\_hat\\_gluster\\_storage/3.4/html-single/administration\\_guide/#Installing\\_Native\\_Client](https://access.qa.redhat.com/documentation/en-us/red_hat_gluster_storage/3.4/html-single/administration_guide/#Installing_Native_Client)

### 3.2.4. Red Hat Gluster Storage Requirements

The following list provides the details regarding the Red Hat Gluster Storage requirements:

- Installation of Heketi packages must have valid subscriptions to Red Hat Gluster Storage Server repositories.
- Red Hat Gluster Storage installations must adhere to the requirements outlined in the [Red Hat Gluster Storage Installation Guide](#).
- The versions of Red Hat Enterprise OpenShift and Red Hat Gluster Storage integrated must be compatible, according to the information in [Section 3.1.1, “Supported Versions”](#) section.
- A fully qualified domain name must be set for Red Hat Gluster Storage server node. Ensure that the correct DNS records exist and that the fully qualified domain name is resolvable via both forward and reverse DNS lookup.

- To access GlusterFS volumes, the `mount.glusterfs` command must be available on all schedulable nodes. For RPM-based systems, the `glusterfs-fuse` package must be installed:

```
# yum install glusterfs-fuse
```

This package comes installed on every RHEL system. However, it is recommended to update to the latest available version from Red Hat Gluster Storage. To do this, the following RPM repository must be enabled:

```
# subscription-manager repos --enable=rh-gluster-3-client-for-rhel-7-server-rpms
```

If `glusterfs-fuse` is already installed on the nodes, ensure that the latest version is installed:

```
# yum update glusterfs-fuse
```



## IMPORTANT

### Restrictions for using Snapshot

- After a snapshot is created, it must be accessed through the user-serviceable snapshots feature only. This can be used to copy the old versions of files into the required location.

Reverting the volume to a snapshot state is not supported and should never be done as it might damage the consistency of the data.

- On a volume with snapshots, volume changing operations, such as volume expansion, must not be performed.

## 3.2.5. Deployment and Scaling Guidelines

To prevent potential deployment or scaling issues, review the following guidelines before deploying converged mode or independent mode with OpenShift Container Platform.

Ensure that the Trusted Storage Pool is appropriately sized and you have room for dynamic scaling on demand. This action ensures that you do not scale beyond the following maximum limits:

- **Sizing guidelines on Converged mode or Independent mode**

- **Persistent volumes backed by the file interface:** For typical operations, size for 300-500 persistent volumes backed by files per three-node converged mode or independent mode cluster. The maximum limit of supported persistent volumes backed by the file interface is 1000 persistent volumes per three-node cluster in a converged mode or independent mode deployment. Considering that micro-services can dynamically scale as per demand, it is recommended that the initial sizing keep sufficient headroom for the scaling. If additional scaling is needed, add a new three-node converged mode or independent mode cluster to support additional persistent volumes

Creation of more than 1,000 persistent volumes per trusted storage pool is not supported for file-based storage.

- **Persistent volumes backed by block-based storage:** Size for a maximum of 300 persistent volumes per three-node converged mode or independent mode cluster. Be aware

that converged mode and independent mode supports only OpenShift Container Platform logging and metrics on block-backed persistent volumes.

- **Persistent volumes backed by file and block:** Size for 300-500 persistent volumes (backed by files) and 100-200 persistent volumes (backed by block). Do not exceed these maximum limits of file or block-backed persistent volumes or the combination of a maximum 1000 persistent volumes per three-node converged mode or independent mode cluster.
- 3-way distributed-replicated volumes and arbitrated volumes are the only supported volume types.
- Minimum Red Hat Openshift Container Storage cluster size (4): It is recommended to have a minimum of 4 nodes in the Red Hat Openshift Container Storage cluster to adequately meet high-availability requirements. Although 3 nodes are required to create a persistent volume claim, the failure of one node in a 3 node cluster prevents the persistent volume claim from being created. The fourth node provides high-availability and allows the persistent volume claim to be created even if a node fails.
- Each physical or virtual node that hosts a Red Hat Gluster Storage converged mode or independent mode peer requires the following:
  - a minimum of 8 GB RAM and 30 MB per persistent volume.
  - the same disk type.
  - the heketidb utilises 2 GB distributed replica volume.
- **Deployment guidelines on converged mode or independent mode:**
  - In converged mode, you can install the Red Hat Openshift Container Storage nodes, Heketi, and all provisioner pods on OpenShift Container Platform Infrastructure nodes or OpenShift Container Platform Application nodes.
  - In independent mode, you can install Heketi and all provisioners pods on OpenShift Container Platform Infrastructure nodes or on OpenShift Container Platform Application nodes
- Red Hat Gluster Storage Container Native with OpenShift Container Platform supports up to 14 snapshots per volume by default (snap-max-hard-limit =14 in Heketi Template).

# PART II. DEPLOY

## CHAPTER 4. DEPLOYING CONTAINERIZED STORAGE IN CONVERGED MODE

Before following the deployment workflow for your preferred solution, make sure to review [Section 4.1, “Specify Advanced Installer Variables”](#) to understand ansible variable and playbook recommendations and requirements.

To set up storage to containers on top of an OpenShift Cluster, select the workflow that meets your objectives.

**Table 4.1. Deployment Workflow**

Deployment workflow	Registry	Metrics	Logging	Applications
<a href="#">Section 4.2, “Deploying Red Hat OpenShift Container Storage in Converged Mode”</a>				✓
<a href="#">Section 4.3, “Deploying Red Hat OpenShift Container Storage in Converged Mode with Registry”</a>	✓			
<a href="#">Section 4.4, “Deploying Red Hat OpenShift Container Storage in Converged Mode with Logging and Metrics”</a>		✓	✓	
<a href="#">Section 4.5, “Deploying Red Hat OpenShift Container Storage in Converged mode for Applications with Registry, Logging, and Metrics”</a>	✓	✓	✓	✓



## NOTE

- Red Hat Openshift Container Storage does not support a simultaneous deployment of converged and independent mode with ansible workflow. Therefore, you must deploy either converged mode or independent mode: you cannot mix both modes during deployment.
- s3 is deployed manually and not through Ansible installer. For more information on manual deployment, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#S3\\_Object\\_Store](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#S3_Object_Store)

## 4.1. SPECIFY ADVANCED INSTALLER VARIABLES

The cluster installation, [https://access.redhat.com/documentation/en-us/openshift\\_container\\_platform/3.10/html-single/installing\\_clusters/#install-planning](https://access.redhat.com/documentation/en-us/openshift_container_platform/3.10/html-single/installing_clusters/#install-planning), process can be used to install one or both of two GlusterFS node groups:

- **glusterfs**: A general storage cluster for use by user applications.
- **glusterfs-registry**: A dedicated storage cluster for use by infrastructure applications such as an integrated OpenShift Container Registry.

It is recommended to deploy both groups to avoid potential impacts on performance in I/O and volume creation. Both of these are defined in the inventory hosts file.

The definition of the clusters is done by including the relevant names in the **[OSEv3:children]** group, creating similarly named groups, and then populating the groups with the node information. The clusters can then be configured through a variety of variables in the **[OSEv3:vars]** group. **glusterfs** variables begin with **openshift\_storage\_glusterfs\_** and **glusterfs-registry** variables begin with **openshift\_storage\_glusterfs\_registry\_**. A few other variables, such as **openshift\_hosted\_registry\_storage\_kind**, interact with the GlusterFS clusters.

It is recommended to specify image names and version tags for all containerized components. This is primarily to prevent components, particularly the Red Hat Gluster Storage pods, from upgrading after an outage which may lead to a cluster of widely disparate software versions. The relevant variables are:

- **openshift\_storage\_glusterfs\_image**
- **openshift\_storage\_glusterfs\_block\_image**
- **openshift\_storage\_glusterfs\_heketi\_image**
- **openshift\_storage\_glusterfs\_registry\_image**
- **openshift\_storage\_glusterfs\_registry\_block\_image**
- **openshift\_storage\_glusterfs\_registry\_heketi\_image**

The following are the recommended values for this release of Red Hat Openshift Container Storage


- **openshift\_storage\_glusterfs\_image=registry.access.redhat.com/rhgs3/rhgs-server-rhel7:v3.10**

- `openshift_storage_glusterfs_block_image=registry.access.redhat.com/rhgs3/rhgs-gluster-block-prov-rhel7:v3.10`
- `openshift_storage_glusterfs_heketi_image=registry.access.redhat.com/rhgs3/rhgs-volmanager-rhel7:v3.10`

For a complete list of variables, see the GlusterFS role README, [https://github.com/openshift/openshift-ansible/tree/master/roles/openshift\\_storage\\_glusterfs](https://github.com/openshift/openshift-ansible/tree/master/roles/openshift_storage_glusterfs), on GitHub.

Once the variables are configured, there are several playbooks available depending on the circumstances of the installation:

- The main playbook for cluster installations can be used to deploy the GlusterFS clusters in tandem with an initial installation of OpenShift Container Platform.
  - This includes deploying an integrated OpenShift Container Registry that uses GlusterFS storage.
- `/usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/config.yml` can be used to deploy the clusters onto an existing OpenShift Container Platform installation.
- `/usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/registry.yml` can be used to deploy the clusters onto an existing OpenShift Container Platform installation. In addition, this will deploy an integrated OpenShift Container Registry which uses GlusterFS storage.



### IMPORTANT

There must not be a pre-existing registry in the OpenShift Container Platform cluster.

- `playbooks/openshift-glusterfs/uninstall.yml` can be used to remove existing clusters matching the configuration in the inventory hosts file. This is useful for cleaning up the Red Hat OpenShift Container Storage environment in the case of a failed deployment due to configuration errors.



### NOTE

The GlusterFS playbooks are not guaranteed to be idempotent. Running the playbooks more than once for a given installation is currently not supported without deleting the entire GlusterFS installation (including disk data) and starting over.

## 4.2. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE

1. In your inventory file, include the following variables in the `[OSEv3:vars]` section, adjusting them as needed for your configuration:

```
[OSEv3:vars]
openshift_storage_glusterfs_namespace=app-storage
openshift_storage_glusterfs_storageclass=true
```

```

openshift_storage_glusterfs_storageclass_default=false
openshift_storage_glusterfs_block_deploy=true
openshift_storage_glusterfs_block_host_vol_create=true
openshift_storage_glusterfs_block_host_vol_size=100
openshift_storage_glusterfs_block_storageclass=true
openshift_storage_glusterfs_block_storageclass_default=false

```

2. In your inventory file, add **glusterfs** in the **[OSEv3:children]** section to enable the **[glusterfs]** group:

```

[OSEv3:children]
masters
etcd
nodes
glusterfs

```

3. Add a **[glusterfs]** section with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Specifying the variable takes the form:

```

<hostname_or_ip> glusterfs_devices='[ "</path/to/device1/>", "
</path/to/device2>", ... ]'

```

For example:

```

[glusterfs]
node11.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node12.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node13.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node14.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'

```

4. Add the hosts listed under **[glusterfs]** to the **[nodes]** group:

```

[nodes]
...
node11.example.com openshift_node_group_name="node-config-compute"
node12.example.com openshift_node_group_name="node-config-compute"
node13.example.com openshift_node_group_name="node-config-compute"
node14.example.com openshift_node_group_name="node-config-compute"

```

5. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

- o For an initial OpenShift Container Platform installation:

```

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml

```



- For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
glusterfs/config.yml
```

6. To verify the deployment see, [Section 4.6, “Verify your Deployment”](#).

### 4.3. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE WITH REGISTRY

1. In your inventory file, include the following variables in the [OSEv3:vars] section, adjusting them as needed for your configuration:

```
openshift_storage_glusterfs_registry_namespace=app-storage
openshift_storage_glusterfs_registry_storageclass=true
openshift_storage_glusterfs_registry_storageclass_default=false
openshift_storage_glusterfs_registry_block_deploy=true
openshift_storage_glusterfs_registry_block_host_vol_create=true
openshift_storage_glusterfs_registry_block_host_vol_size=100
openshift_storage_glusterfs_registry_block_storageclass=true
openshift_storage_glusterfs_registry_block_storageclass_default=false
```

2. In your inventory file, set the following variable under [OSEv3:vars]:

```
[OSEv3:vars]
...
openshift_hosted_registry_storage_kind=glusterfs
openshift_hosted_registry_storage_volume_size=5Gi
openshift_hosted_registry_selector='node-
role.kubernetes.io/infra=true'
```

3. Add **glusterfs\_registry** in the [OSEv3:children] section to enable the [glusterfs\_registry] group:

```
[OSEv3:children]
masters
etcd
nodes
glusterfs_registry
```

4. Add a [glusterfs\_registry] section with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Specifying the variable takes the form:

```
<hostname_or_ip> glusterfs_devices='[ "</path/to/device1/>", "
</path/to/device2>", ... ]'
```

For example:

```
[glusterfs_registry]
node11.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node12.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node13.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node14.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
```

5. Add the hosts listed under **[glusterfs\_registry]** to the **[nodes]** group:

```
[nodes]
...
node11.example.com openshift_node_group_name="node-config-compute"
node12.example.com openshift_node_group_name="node-config-compute"
node13.example.com openshift_node_group_name="node-config-compute"
node13.example.com openshift_node_group_name="node-config-compute"
```

6. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

- o For an initial OpenShift Container Platform installation:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml
```

- o For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
glusterfs/config.yml
```

7. To verify the deployment see, [Section 4.6, “Verify your Deployment”](#).

## 4.4. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE WITH LOGGING AND METRICS

1. In your inventory file, set the following variables under **[OSEv3:vars]**:

```
[OSEv3:vars]
...
openshift_metrics_install_metrics=true
openshift_metrics_storage_kind=dynamic
openshift_metrics_hawkular_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_cassandra_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_heapster_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_storage_volume_size=10Gi
openshift_metrics_cassandra_pvc_storage_class_name="glusterfs-
registry-block"
```

```

openshift_logging_install_logging=true
openshift_logging_es_pvc_dynamic=true
openshift_logging_kibana_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_curator_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_es_nodeselector={"node-role.kubernetes.io/infra":
"true"}
openshift_logging_es_pvc_size=10Gi
openshift_logging_es_pvc_storage_class_name="glusterfs-registry-
block"

openshift_storage_glusterfs_registry_namespace=infra-storage
openshift_storage_glusterfs_registry_storageclass=false
openshift_storage_glusterfs_registry_storageclass_default=false
openshift_storage_glusterfs_registry_block_deploy=true
openshift_storage_glusterfs_registry_block_host_vol_create=true
openshift_storage_glusterfs_registry_block_host_vol_size=100
openshift_storage_glusterfs_registry_block_storageclass=true
openshift_storage_glusterfs_registry_block_storageclass_default=fals
e

```



## NOTE

See the GlusterFS role README, [https://github.com/openshift/openshift-ansible/tree/master/roles/openshift\\_storage\\_glusterfs](https://github.com/openshift/openshift-ansible/tree/master/roles/openshift_storage_glusterfs), for details on these and other variables.

2. Add **glusterfs\_registry** in the **[OSEv3:children]** section to enable the **[glusterfs\_registry]** group:

```

[OSEv3:children]
masters
etcd
nodes
glusterfs_registry

```

3. Add a **[glusterfs\_registry]** section with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Specifying the variable takes the form:

```

<hostname_or_ip> glusterfs_devices='[ "</path/to/device1/>", "
</path/to/device2>", ... ]'

```

For example:

```

[glusterfs_registry]
node11.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node12.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'

```

```
node13.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node14.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
```

4. Add the hosts listed under **[glusterfs\_registry]** to the **[nodes]** group:

```
[nodes]
...
node11.example.com openshift_node_group_name="node-config-compute"
node12.example.com openshift_node_group_name="node-config-compute"
node13.example.com openshift_node_group_name="node-config-compute"
node14.example.com openshift_node_group_name="node-config-compute"
```

5. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

For an initial OpenShift Container Platform installation:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml
```

For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
glusterfs/config.yml

ansible-playbook -i <path_to_the_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
logging/config.yml

ansible-playbook -i <path_to_the_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
metrics/config.yml
```

6. To verify the deployment see, [Section 4.6, “Verify your Deployment”](#).

## 4.5. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE FOR APPLICATIONS WITH REGISTRY, LOGGING, AND METRICS

1. In your inventory file, set the following variables under **[OSEv3:vars]**:

```
[OSEv3:vars]
...
openshift_hosted_registry_selector='node-
role.kubernetes.io/infra=true'
openshift_hosted_registry_storage_volume_size=5Gi
openshift_hosted_registry_storage_kind=glusterfs
```

```
[OSEv3:vars]
...
openshift_metrics_install_metrics=true
openshift_metrics_storage_kind=dynamic
openshift_metrics_hawkular_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_cassandra_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_heapster_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_storage_volume_size=10Gi
openshift_metrics_cassandra_pvc_storage_class_name="glusterfs-
registry-block"

openshift_logging_install_logging=true
openshift_logging_es_pvc_dynamic=true
openshift_logging_kibana_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_curator_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_es_nodeselector={"node-role.kubernetes.io/infra":
"true"}
openshift_logging_es_pvc_size=10Gi
openshift_logging_es_pvc_storage_class_name="glusterfs-registry-
block"

openshift_storage_glusterfs_namespace=app-storage
openshift_storage_glusterfs_storageclass=true
openshift_storage_glusterfs_storageclass_default=false
openshift_storage_glusterfs_block_deploy=false

openshift_storage_glusterfs_registry_namespace=infra-storage
openshift_storage_glusterfs_registry_storageclass=false
openshift_storage_glusterfs_registry_storageclass_default=false
openshift_storage_glusterfs_registry_block_deploy=true
openshift_storage_glusterfs_registry_block_host_vol_create=true
openshift_storage_glusterfs_registry_block_host_vol_size=100
openshift_storage_glusterfs_registry_block_storageclass=true
openshift_storage_glusterfs_registry_block_storageclass_default=fals
e
```

2. Add **glusterfs** and **glusterfs\_registry** in the **[OSEv3:children]** section to enable the **[glusterfs]** and **[glusterfs\_registry]** groups:

```
[OSEv3:children]
...
glusterfs
glusterfs_registry
```

3. Add **[glusterfs]** and **[glusterfs\_registry]** sections with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Specifying the variable takes the form:

```
<hostname_or_ip> glusterfs_devices='[ "</path/to/device1/>", "  
</path/to/device2>", ... ]'
```

For example:

```
[glusterfs]
node11.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node12.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node13.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node14.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'

[glusterfs_registry]
node15.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node16.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
node17.example.com glusterfs_devices='[ "/dev/xvdc", "/dev/xvdd" ]'
```

4. Add the hosts listed under **[glusterfs]** and **[glusterfs\_registry]** to the **[nodes]** group:

```
[nodes]
...
node11.example.com openshift_node_group_name="node-config-compute"
node12.example.com openshift_node_group_name="node-config-compute"
node13.example.com openshift_node_group_name="node-config-compute"
node14.example.com openshift_node_group_name="node-config-compute"
node15.example.com openshift_node_group_name="node-config-infra"
node16.example.com openshift_node_group_name="node-config-infra"
node17.example.com openshift_node_group_name="node-config-infra"
```

5. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

- o For an initial OpenShift Container Platform installation:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml
```

- o For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
glusterfs/config.yml

ansible-playbook -i <path_to_the_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
logging/config.yml

ansible-playbook -i <path_to_the_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
metrics/config.yml
```

6. To verify the deployment see, [Section 4.6, “Verify your Deployment”](#).

## 4.6. VERIFY YOUR DEPLOYMENT

Execute the following steps to verify the deployment

### 1. Installation Verification for converged mode

1. Examine the installation for the app-storage namespace by running the following commands This can be done from an OCP master node or the ansible deploy host that has the OC CLI installed.

```
# switch to the app-storage namespace
oc project app-storage
# get the list of pods here (3 gluster pods +1 heketi pod)
oc get pods
NAME                                READY    STATUS    RESTARTS
AGE
glusterfs-storage-pm8sf 1/1      Running   0
1h
glusterfs-storage-rsb2v 1/1      Running   0
1h
glusterfs-storage-zmkfk 1/1      Running   0
1h
heketi-storage-1-v5skm 1/1      Running   0
1h
```

2. Examine the installation for the infra-storage namespace by running the following commands This can be done from an OCP master node or the ansible deploy host that has the OC CLI installed.

```
# switch to the infra-storage namespace
oc project infra-storage
# list the pods here (3 gluster pods, 1 heketi pod and 1
glusterblock-provisioner pod)
oc get pods
NAME                                READY    STATUS
RESTARTS    AGE
glusterblock-registry-provisioner-dc-1-28sfc 1/1    Running    0
1h
glusterfs-registry-cjp49                1/1    Running
0    1h
glusterfs-registry-lhgjj                1/1    Running    0
1h
glusterfs-registry-v4vqx                1/1    Running    0
1h
heketi-registry-5-lht6s                1/1    Running    0
1h
```

3. Check the existence of the registry PVC backed by OCP infrastructure Red Hat Openshift Container Storage. This volume was statically provisioned by openshift-ansible deployment.

```
oc get pvc -n default
```

NAME	STATUS	VOLUME	AGE
CAPACITY	ACCESSMODES	STORAGECLASS	
registry-claim	Bound	pvc-7ca4c8de-10ca-11e8-84d3-069df2c4f284	
25Gi		RWX	1h

Check the registry DeploymentConfig to verify it's using this glusterfs volume.

```
oc describe dc/docker-registry -n default | grep -A3 Volumes
Volumes:
  registry-storage:
    Type: PersistentVolumeClaim (a reference to a
    PersistentVolumeClaim in the same namespace)
    ClaimName: registry-claim
```

## 2. Storage Provisioning Verification for Converged Mode

1. The Storage Class resources can be used to create new PV claims for verification of the RHOCS deployment. Validate PV provisioning using the following OCP Storage Class created during the RHOCS deployment:

- Use the glusterfs-storage-block OCP Storage Class resource to create new PV claims if you deployed RHOCS using [Section 4.2, “Deploying Red Hat Openshift Container Storage in Converged Mode”](#).
- Use the glusterfs-registry-block OCP Storage Class resource to create new PV claims if you deployed RHOCS using one of the following workflows:
  - [Section 4.3, “Deploying Red Hat Openshift Container Storage in Converged Mode with Registry”](#)
  - [Section 4.4, “Deploying Red Hat Openshift Container Storage in Converged Mode with Logging and Metrics”](#)
  - [Section 4.5, “Deploying Red Hat Openshift Container Storage in Converged mode for Applications with Registry, Logging, and Metrics”](#)

```
# oc get storageclass
```

```
NAME                                     TYPE
glusterfs-storage                     kubernetes.io/glusterfs
Glusterfs-storage-block               gluster.org/glusterblock
$ cat pvc-file.yaml
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: rhocs-file-claim1
  annotations:
    volume.beta.kubernetes.io/storage-class: glusterfs-storage
spec:
  accessModes:
    - ReadWriteMany
  resources:
    requests:
      storage: 5Gi
```



```
# cat pvc-block.yaml
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: rhocs-block-claim1
  annotations:
    volume.beta.kubernetes.io/storage-class: glusterfs-storage-
block
spec:
  accessModes:
    - ReadWriteOnly
  resources:
    requests:
      storage: 5Gi
```

```
# oc create -f pvc-file.yaml
# oc create -f pvc-block.yaml
```

Validate that the two PVCs and respective PVs are created correctly:

```
# oc get pvc
```

### 3. Using the heketi-client for Verification

1. The heketi-client package needs to be installed on the ansible deploy host or on a OCP master. Once it is installed two new files should be created to easily export the required environment variables to run the heketi-client commands (or heketi-cli). The content of each file as well as useful heketi-cli commands are detailed here.

Create a new file (e.g. "heketi-exports-app") with the following contents:

```
export HEKETI_POD=$(oc get pods -l glusterfs=heketi-storage-pod -
n app-storage -o jsonpath="{.items[0].metadata.name}")
export HEKETI_CLI_SERVER=http://$(oc get route/heketi-storage -n
app-storage -o jsonpath='{.spec.host}')
export HEKETI_CLI_KEY=$(oc get pod/$HEKETI_POD -n app-storage -o
jsonpath='{.spec.containers[0].env[?
(@.name=="HEKETI_ADMIN_KEY")].value}')
export HEKETI_ADMIN_KEY_SECRET=$(echo -n ${HEKETI_CLI_KEY} |
base64)
export HEKETI_CLI_USER=admin
```

Source the file to create the HEKETI app-storage environment variables:

```
source heketi-exports-app
# see if heketi is alive
curl -w '\n' ${HEKETI_CLI_SERVER}/hello
Hello from Heketi
# ask heketi about the cluster it knows about
heketi-cli cluster list
Clusters:
Id:56ed234a384cef7dbef6c4aa106d4477 [file][block]
# ask heketi about the topology of the RHOCs cluster for apps
heketi-cli topology info
```

```
# ask heketi about the volumes already created (one for the
# heketi db should exist after the OCP initial installation)
heketi-cli volume list
Id:d71a4cbea22af3453615a9020f261b5c
Cluster:56ed234a384cef7dbef6c4aa106d4477
Name:heketidbstorage
```

Create a new file (e.g. "heketi-exports-infra") with the following contents:

```
export HEKETI_POD=$(oc get pods -l glusterfs=heketi-registry-pod
-n infra-storage -o jsonpath="{.items[0].metadata.name}")
export HEKETI_CLI_SERVER=http://$(oc get route/heketi-registry -n
infra-storage -o jsonpath='{.spec.host}')
export HEKETI_CLI_USER=admin
export HEKETI_CLI_KEY=$(oc get pod/$HEKETI_POD -n infra-storage -
o jsonpath='{.spec.containers[0].env[?
(@.name=="HEKETI_ADMIN_KEY")].value}')
export HEKETI_ADMIN_KEY_SECRET=$(echo -n ${HEKETI_CLI_KEY} |
base64)
```

Source the file to create the HEKETI infra-storage environment variables:

```
source heketi-exports-infra
# see if heketi is alive
curl -w '\n' ${HEKETI_CLI_SERVER}/hello
Hello from Heketi
# ask heketi about the cluster it knows about (the RHOCs cluster
for infrastructure)
heketi-cli cluster list
Clusters:
Id:baf91b261cbca2bb4b62caece63f60d0 [file][block]
# ask heketi about the volumes already created
heketi-cli volume list
Id:77baed02f79f4518326d8cc1db6c7af8
Cluster:baf91b261cbca2bb4b62caece63f60d0 Name:heketidbstorage
```

## 4.7. CREATING AN ARBITER VOLUME (OPTIONAL)

Arbiter volume supports all persistent volume types with better consistency and less disk space requirements. An arbitrated replicated volume, or arbiter volume, is a three-way replicated volume where every third brick is a special type of brick called an arbiter. Arbiter bricks do not store file data; they only store file names, structure, and metadata. The arbiter uses client quorum to compare this metadata with the metadata of the other nodes to ensure consistency in the volume and prevent split-brain conditions.

Advantages of arbitrated replicated volumes:

- **Better consistency:** When an arbiter is configured, arbitration logic uses client-side quorum in auto mode to prevent file operations that would lead to split-brain conditions.
- **Less disk space required:** Because an arbiter brick only stores file names and metadata, an arbiter brick can be much smaller than the other bricks in the volume.

For more information about Arbitrated Replicated Volumes, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_gluster\\_storage/3.4/html-single/administration\\_guide/#Creating\\_Arbitrated\\_Replicated\\_Volumes](https://access.redhat.com/documentation/en-us/red_hat_gluster_storage/3.4/html-single/administration_guide/#Creating_Arbitrated_Replicated_Volumes)

Before creating the arbiter volume, make sure `heketi-client` packages are installed.

```
# subscription-manager repos --enable=rh-gluster-3-for-rhel-7-server-rpms

# yum install heketi-client
```

If you want to upgrade your already existing Heketi server, then see, [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/deployment\\_guide/index#upgrade\\_heketi\\_rhgs](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/deployment_guide/index#upgrade_heketi_rhgs)

### 4.7.1. Creating an Arbiter Volume

Arbiter volume can be created using the Heketi CLI or by updating the storageclass file.

#### 4.7.1.1. Creating an Arbiter Volume using Heketi CLI

To create an Arbiter volume using the Heketi CLI one must request a replica 3 volume as well as provide the Heketi-specific volume option “`user.heketi.arbiter true`” that will instruct the system to create the Arbiter variant of replica 3.

For example:

```
# heketi-cli volume create --size=4 --gluster-volume-
options='user.heketi.arbiter true'
```

#### 4.7.1.2. Creating an Arbiter Volume using the Storageclass file

To create an arbiter volume using the storageclass file ensure to include the following two parameters in the storageclass file:

- `user.heketi.arbiter true`
- (Optional) `user.heketi.average-file-size 1024`

Following is a sample storageclass file:

```
# cat glusterfs-storageclass.yaml
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: gluster-container
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-project.cloudapps.mystorage.com"
  restuser: "admin"
  volumetype: "replicate:3"
  clusterid:
"630372ccdc720a92c681fb928f27b53f,796e6db1981f369ea0340913eeea4c9a"
  secretNamespace: "default"
  secretName: "heketi-secret"
```

```
    volumeoptions: "user.heketi.arbiter true,user.heketi.average-file-size
1024"
    volumenameprefix: "test-vol"
spec:
  persistentVolumeReclaimPolicy: Retain
  accessModes:
    - ReadWriteOnce
  resources:
    requests:
      storage: 5Gi
```

**NOTE**

For information about managing arbiter volumes see, [Chapter 9, \*Managing Arbitrated Replicated Volumes\*](#)

## CHAPTER 5. DEPLOY CONTAINERIZED STORAGE IN INDEPENDENT MODE

Before following the deployment workflow for your preferred solution, make sure to complete [Section 5.1, “Setting up a RHGS Cluster”](#) and review [Section 5.2, “Specify Advanced Installer Variables”](#) to understand ansible variable and playbook recommendations and requirements. To set up storage to containers as a stand-alone Red Hat Gluster Storage cluster, select the workflow that meets your objectives.

**Table 5.1. Deployment Workflow**

Deployment workflow	Registry	Metrics	Logging	Applications
<a href="#">Section 5.3, “Deploying Red Hat Openshift Container Storage in Independent Mode”</a>				✓
<a href="#">Section 5.4, “Deploying Red Hat Openshift Container Storage in Independent mode for Applications with Registry, Logging, and Metrics”</a>	✓	✓	✓	✓



### NOTE


- Red Hat Openshift Container Storage does not support a simultaneous deployment of converged and independent mode with ansible workflow. Therefore, you must deploy either converged mode or independent mode: you cannot mix both modes during deployment.
- s3 is deployed manually and not through Ansible installer. For more information on manual deployment, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#S3\\_Object\\_Store](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#S3_Object_Store)

## 5.1. SETTING UP A RHGS CLUSTER

In an independent mode set-up a dedicated Red Hat Gluster Storage cluster is available external to the OpenShift Container Platform. The storage is provisioned from the Red Hat Gluster Storage cluster.

### 5.1.1. Installing Red Hat Gluster Storage Server on Red Hat Enterprise Linux (Layered Install)

Layered install involves installing Red Hat Gluster Storage over Red Hat Enterprise Linux.



## IMPORTANT

It is recommended to create a separate `/var` partition that is large enough (50GB - 100GB) for log files, geo-replication related miscellaneous files, and other files.

### 1. Perform a base install of Red Hat Enterprise Linux 7 Server

Independent mode is supported only on Red Hat Enterprise Linux 7.

### 2. Register the System with Subscription Manager

Run the following command and enter your Red Hat Network username and password to register the system with the Red Hat Network:

```
# subscription-manager register
```

### 3. Identify Available Entitlement Pools

Run the following commands to find entitlement pools containing the repositories required to install Red Hat Gluster Storage:

```
# subscription-manager list --available
```

### 4. Attach Entitlement Pools to the System

Use the pool identifiers located in the previous step to attach the **Red Hat Enterprise Linux Server** and **Red Hat Gluster Storage** entitlements to the system. Run the following command to attach the entitlements:

```
# subscription-manager attach --pool=[POOLID]
```

For example:

```
# subscription-manager attach --  
pool=8a85f9814999f69101499c05aa706e47
```

### 5. Enable the Required Channels

#### For Red Hat Gluster Storage 3.3 on Red Hat Enterprise Linux 7.x

1. Run the following commands to enable the repositories required to install Red Hat Gluster Storage

```
# subscription-manager repos --enable=rhel-7-server-rpms  
# subscription-manager repos --enable=rh-gluster-3-for-rhel-7-  
server-rpms  
# subscription-manager repos --enable=rhel-7-server-extras-rpms
```

### 6. Verify if the Channels are Enabled


Run the following command to verify if the channels are enabled:

```
# yum repolist
```

### 7. Update all packages

Ensure that all packages are up to date by running the following command.

```
# yum update
```



## IMPORTANT

If any kernel packages are updated, reboot the system with the following command.

```
# shutdown -r now
```

### 8. Kernel Version Requirement

Independent mode requires the kernel-3.10.0-690.el7 version or higher to be used on the system. Verify the installed and running kernel versions by running the following command:

```
# rpm -q kernel
kernel-3.10.0-862.11.6.el7.x86_64
```

```
# uname -r
3.10.0-862.11.6.el7.x86_64
```

### 9. Install Red Hat Gluster Storage

Run the following command to install Red Hat Gluster Storage:

```
# yum install redhat-storage-server
```

1. To enable gluster-block execute the following command:

```
# yum install gluster-block
```

### 10. Reboot

Reboot the system.

## 5.1.2. Configuring Port Access

This section provides information about the ports that must be open for the independent mode.

Red Hat Gluster Storage Server uses the listed ports. You must ensure that the firewall settings do not prevent access to these ports.

Execute the following commands to open the required ports for both runtime and permanent configurations on all Red Hat Gluster Storage nodes:

```
# firewall-cmd --zone=zone_name --add-port=24010/tcp --add-port=3260/tcp -
-add-port=111/tcp --add-port=22/tcp --add-port=24007/tcp --add-
port=24008/tcp --add-port=49152-49664/tcp
# firewall-cmd --zone=zone_name --add-port=24010/tcp --add-port=3260/tcp -
-add-port=111/tcp --add-port=22/tcp --add-port=24007/tcp --add-
port=24008/tcp --add-port=49152-49664/tcp --permanent
```

**NOTE**

- Port 24010 and 3260 are for gluster-blockd and iSCSI targets respectively.
- The port range starting at 49664 defines the range of ports that can be used by GlusterFS for communication to its volume bricks. In the above example the total number of bricks allowed is 512. Configure the port range based on the maximum number of bricks that could be hosted on each node.

### 5.1.3. Enabling Kernel Modules

Execute the following commands to enable kernel modules:

1. You must ensure that the **dm\_thin\_pool** and **target\_core\_user** modules are loaded in the Red Hat Gluster Storage nodes.

```
# modprobe target_core_user
```

```
# modprobe dm_thin_pool
```

Execute the following command to verify if the modules are loaded:

```
# lsmod | grep dm_thin_pool
```

```
# lsmod | grep target_core_user
```

**NOTE**

To ensure these operations are persisted across reboots, create the following files and update each file with the content as mentioned:

```
# cat /etc/modules-load.d/dm_thin_pool.conf
dm_thin_pool
```

```
# cat /etc/modules-load.d/target_core_user.conf
target_core_user
```

2. You must ensure that the **dm\_multipath** module is loaded on all OpenShift Container Platform nodes.

```
# modprobe dm_multipath
```

Execute the following command to verify if the modules are loaded:

```
# lsmod | grep dm_multipath
```



**NOTE**

To ensure these operations are persisted across reboots, create the following file and update it with the content as mentioned:

```
# cat /etc/modules-load.d/dm_multipath.conf
dm_multipath
```

### 5.1.4. Starting and Enabling Services

Execute the following commands to start glusterd and gluster-blockd:

```
# systemctl start sshd

# systemctl enable sshd

# systemctl start glusterd

# systemctl enable glusterd

# systemctl start gluster-blockd

# systemctl enable gluster-blockd
```

## 5.2. SPECIFY ADVANCED INSTALLER VARIABLES

The cluster installation, [https://access.redhat.com/documentation/en-us/openshift\\_container\\_platform/3.10/html-single/installing\\_clusters/#install-planning](https://access.redhat.com/documentation/en-us/openshift_container_platform/3.10/html-single/installing_clusters/#install-planning), process can be used to install one or both of two GlusterFS node groups:

- **glusterfs**: A general storage cluster for use by user applications.
- **glusterfs-registry**: A dedicated storage cluster for use by infrastructure applications such as an integrated OpenShift Container Registry.

It is recommended to deploy both groups to avoid potential impacts on performance in I/O and volume creation. Both of these are defined in the inventory hosts file.

The definition of the clusters is done by including the relevant names in the **[OSEv3:children]** group, creating similarly named groups, and then populating the groups with the node information. The clusters can then be configured through a variety of variables in the **[OSEv3:vars]** group. **glusterfs** variables begin with **openshift\_storage\_glusterfs\_** and **glusterfs-registry** variables begin with **openshift\_storage\_glusterfs\_registry\_**. A few other variables, such as **openshift\_hosted\_registry\_storage\_kind**, interact with the GlusterFS clusters.

It is recommended to specify version tags for all containerized components. This is primarily to prevent components, particularly the Red Hat Gluster Storage pods, from upgrading after an outage which may lead to a cluster of widely disparate software versions. The relevant variables are:

- **openshift\_storage\_glusterfs\_version**

- `openshift_storage_glusterfs_block_version`
- `openshift_storage_glusterfs_heketi_version`
- `openshift_storage_glusterfs_registry_version`
- `openshift_storage_glusterfs_registry_block_version`
- `openshift_storage_glusterfs_registry_heketi_version`

**NOTE**

The image variables for gluster-block is only necessary if the corresponding deployment variables (the variables ending in `_block_deploy``) is true.


The following are the recommended values for this release of Red Hat OpenShift Container Storage

- `openshift_storage_glusterfs_image=registry.access.redhat.com/rhgs3/rhgs-server-rhel7:v3.10`
- `openshift_storage_glusterfs_block_image=registry.access.redhat.com/rhgs3/rhgs-gluster-block-prov-rhel7:v3.10`
- `openshift_storage_glusterfs_heketi_image=registry.access.redhat.com/rhgs3/rhgs-volmanager-rhel7:v3.10`

For a complete list of variables, see the GlusterFS role README, [https://github.com/openshift/openshift-ansible/tree/master/roles/openshift\\_storage\\_glusterfs](https://github.com/openshift/openshift-ansible/tree/master/roles/openshift_storage_glusterfs), on GitHub.

Once the variables are configured, there are several playbooks available depending on the circumstances of the installation:

- The main playbook for cluster installations can be used to deploy the GlusterFS clusters in tandem with an initial installation of OpenShift Container Platform.
  - This includes deploying an integrated OpenShift Container Registry that uses GlusterFS storage.
- `/usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/config.yml` can be used to deploy the clusters onto an existing OpenShift Container Platform installation.
- `/usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/registry.yml` can be used to deploy the clusters onto an existing OpenShift Container Platform installation. In addition, this will deploy an integrated OpenShift Container Registry which uses GlusterFS storage.

**IMPORTANT**

There must not be a pre-existing registry in the OpenShift Container Platform cluster.

- `playbooks/openshift-glusterfs/uninstall.yml` can be used to remove existing clusters matching the configuration in the inventory hosts file. This is useful for cleaning up the

Red Hat OpenShift Container Storage environment in the case of a failed deployment due to configuration errors.



## NOTE

The GlusterFS playbooks are not guaranteed to be idempotent. Running the playbooks more than once for a given installation is not supported without deleting the entire GlusterFS installation (including disk data) and starting over.

## 5.3. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE

1. In your inventory file, add **glusterfs** in the **[OSEv3:children]** section to enable the **[glusterfs]** group:

```
[OSEv3:children]
masters
etcd
nodes
glusterfs
```

2. Include the following variables in the **[OSEv3:vars]** section, adjusting them as needed for your configuration:

```
[OSEv3:vars]
...
openshift_storage_glusterfs_namespace=app-storage
openshift_storage_glusterfs_storageclass=true
openshift_storage_glusterfs_storageclass_default=false
openshift_storage_glusterfs_block_deploy=true
openshift_storage_glusterfs_block_host_vol_create=true
openshift_storage_glusterfs_block_host_vol_size=100
openshift_storage_glusterfs_block_storageclass=true
openshift_storage_glusterfs_block_storageclass_default=false
openshift_storage_glusterfs_is_native=false
openshift_storage_glusterfs_heketi_is_native=true
openshift_storage_glusterfs_heketi_executor=ssh
openshift_storage_glusterfs_heketi_ssh_port=22
openshift_storage_glusterfs_heketi_ssh_user=root
openshift_storage_glusterfs_heketi_ssh_sudo=false
openshift_storage_glusterfs_heketi_ssh_keyfile="/root/.ssh/id_rsa"
```

3. Add a **[glusterfs]** section with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Also, set **glusterfs\_ip** to the IP address of the node. Specifying the variable takes the form:

```
<hostname_or_ip> glusterfs_ip=<ip_address> glusterfs_devices='[ "  
</path/to/device1/>', "</path/to/device2>", ... ]'
```

For example:

```
[glusterfs]
gluster1.example.com glusterfs_ip=192.168.10.11 glusterfs_devices='[
"/dev/xvdc", "/dev/xvdd" ]'
gluster2.example.com glusterfs_ip=192.168.10.12 glusterfs_devices='[
"/dev/xvdc", "/dev/xvdd" ]'
gluster3.example.com glusterfs_ip=192.168.10.13 glusterfs_devices='[
"/dev/xvdc", "/dev/xvdd" ]'
```

4. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

- o For an initial OpenShift Container Platform installation:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml
```

- o For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>
/usr/share/ansible/openshift-ansible/playbooks/openshift-
glusterfs/config.yml
```

## 5.4. DEPLOYING RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE FOR APPLICATIONS WITH REGISTRY, LOGGING, AND METRICS

1. In your inventory file, set the following variables under **[OSEv3:vars]**:

```
[OSEv3:vars]
...
openshift_hosted_registry_selector='node-
role.kubernetes.io/infra=true'
openshift_hosted_registry_storage_volume_size=5Gi
openshift_hosted_registry_storage_kind=glusterfs

openshift_metrics_install_metrics=true
openshift_metrics_storage_kind=dynamic
openshift_metrics_hawkular_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_cassandra_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_heapster_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_metrics_storage_volume_size=10Gi
openshift_metrics_cassandra_pvc_storage_class_name="glusterfs-
registry-block"

openshift_logging_install_logging=true
openshift_logging_es_pvc_dynamic=true
```

```

openshift_logging_kibana_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_curator_nodeselector={"node-
role.kubernetes.io/infra": "true"}
openshift_logging_es_nodeselector={"node-role.kubernetes.io/infra":
"true"}
openshift_logging_es_pvc_size=10Gi
openshift_logging_es_pvc_storage_class_name="glusterfs-registry-
block"

openshift_storage_glusterfs_namespace=app-storage
openshift_storage_glusterfs_storageclass=true
openshift_storage_glusterfs_storageclass_default=false
openshift_storage_glusterfs_block_deploy=false
openshift_storage_glusterfs_is_native=false
openshift_storage_glusterfs_heketi_is_native=true
openshift_storage_glusterfs_heketi_executor=ssh
openshift_storage_glusterfs_heketi_ssh_port=22
openshift_storage_glusterfs_heketi_ssh_user=root
openshift_storage_glusterfs_heketi_ssh_sudo=false
openshift_storage_glusterfs_heketi_ssh_keyfile="/root/.ssh/id_rsa"

openshift_storage_glusterfs_registry_namespace=infra-storage
openshift_storage_glusterfs_registry_storageclass=false
openshift_storage_glusterfs_registry_storageclass_default=false
openshift_storage_glusterfs_registry_block_deploy=true
openshift_storage_glusterfs_registry_block_host_vol_create=true
openshift_storage_glusterfs_registry_block_host_vol_size=100
openshift_storage_glusterfs_registry_block_storageclass=true
openshift_storage_glusterfs_registry_block_storageclass_default=fals
e
openshift_storage_glusterfs_registry_is_native=false
openshift_storage_glusterfs_registry_heketi_is_native=true
openshift_storage_glusterfs_registry_heketi_executor=ssh
openshift_storage_glusterfs_registry_heketi_ssh_port=22
openshift_storage_glusterfs_registry_heketi_ssh_user=root
openshift_storage_glusterfs_registry_heketi_ssh_sudo=false
openshift_storage_glusterfs_registry_heketi_ssh_keyfile="/root/.ssh/
id_rsa"

```

2. Add **glusterfs** and **glusterfs\_registry** in the **[OSEv3:children]** section to enable the **[glusterfs]** and **[glusterfs\_registry]** groups:

```

[OSEv3:children]
...
glusterfs
glusterfs_registry

```

3. Add **[glusterfs]** and **[glusterfs\_registry]** sections with entries for each storage node that will host the GlusterFS storage. For each node, set **glusterfs\_devices** to a list of raw block devices that will be completely managed as part of a GlusterFS cluster. There must be at least one device listed. Each device must be bare, with no partitions or LVM PVs. Specifying the variable takes the form:

```
<hostname_or_ip> glusterfs_ip=<ip_address> glusterfs_devices='[ "  
</path/to/device1/>', "</path/to/device2>", ... ]'
```

For example:

```
[glusterfs]
node11.example.com glusterfs_ip=192.168.10.11 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
node12.example.com glusterfs_ip=192.168.10.12 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
node13.example.com glusterfs_ip=192.168.10.13 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
node14.example.com glusterfs_ip=192.168.10.14 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'

[glusterfs_registry]
node15.example.com glusterfs_ip=192.168.10.15 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
node16.example.com glusterfs_ip=192.168.10.16 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
node17.example.com glusterfs_ip=192.168.10.17 glusterfs_devices='[ "  
/dev/xvdc", "/dev/xvdd" ]'
```

4. The preceding steps detail options that need to be added to a larger, complete inventory file. To use the complete inventory file to deploy {gluster} provide the file path as an option to the following playbooks:

- For an initial OpenShift Container Platform installation:

```
ansible-playbook -i <path_to_inventory_file>  
/usr/share/ansible/openshift-ansible/playbooks/prerequisites.yml

ansible-playbook -i <path_to_inventory_file>  
/usr/share/ansible/openshift-ansible/playbooks/deploy_cluster.yml
```

- For a standalone installation onto an existing OpenShift Container Platform cluster:

```
ansible-playbook -i <path_to_inventory_file>  
/usr/share/ansible/openshift-ansible/playbooks/openshift-  
glusterfs/config.yml
```

5. To verify the deployment see, [Section 5.5, “Verify your Deployment”](#).

## 5.5. VERIFY YOUR DEPLOYMENT

Execute the following steps to verify the deployment

1. Installation Verification for Independent mode

1. Examine the installation for the app-storage namespace by running the following commands:

```
# switch to the app-storage namespace
```

```
oc project app-storage

# get the list of pods here (1 heketi pod)
oc get pods
NAME                                READY          STATUS          RESTARTS
AGE
heketi-storage-1-v5skm 1/1            Running         0
1h
```

2. Examine the installation for the infra-storage namespace by running the following commands This can be done from an OCP master node or the ansible deploy host that has the OC CLI installed.

```
# switch to the infra-storage namespace
oc project infra-storage

# list the pods here (1 heketi pod and 1 glusterblock-provisioner pod)
oc get pods
NAME                                READY
STATUS          RESTARTS          AGE
glusterblock-registry-provisioner-dc-1-28sfc 1/1 Running
0 1h
heketi-registry-5-lht6s 1/1
Running 0 1h
```

3. Check the existence of the registry PVC backed by OCP infrastructure Red Hat OpenShift Container Storage. This volume was statically provisioned by openshift-ansible deployment.

```
oc get pvc -n default
NAME                                STATUS          VOLUME
CAPACITY          ACCESSMODES      STORAGECLASS          AGE
registry-claim    Bound          pvc-7ca4c8de-10ca-11e8-84d3-069df2c4f284 25Gi RWX
1h
```

Check the registry DeploymentConfig to verify it's using this glusterfs volume.

```
oc describe dc/docker-registry -n default | grep -A3 Volumes
Volumes:
  registry-storage:
    Type: PersistentVolumeClaim (a reference to a
    PersistentVolumeClaim in the same namespace)
    ClaimName: registry-claim
```

## 2. Storage Provisioning Verification for Independent Mode

1. Validate PV provisioning using the glusterfs and glusterblock OCP Storage Class created during the OCP deployment. The two Storage Class resources, glusterfs-storage and glusterfs-storage-block, can be used to create new PV claims for verification of the Red Hat

OpenShift Container Storage deployment. The new PVC using the glusterfs-storage storageclass will be using storage available to gluster pods in app-storage project.

```
# oc get storageclass

NAME                                     TYPE
glusterfs-storage                      kubernetes.io/glusterfs
Glusterfs-storage-block                gluster.org/glusterblock
$ cat pvc-file.yaml
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: rhocs-file-claim1
  annotations:
    volume.beta.kubernetes.io/storage-class: glusterfs-storage
spec:
  accessModes:
    - ReadWriteMany
  resources:
    requests:
      storage: 5Gi

# cat pvc-block.yaml

kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: rhocs-block-claim1
  annotations:
    volume.beta.kubernetes.io/storage-class: glusterfs-storage-
block
spec:
  accessModes:
    - ReadWriteOnly
  resources:
    requests:
      storage: 5Gi

# oc create -f pvc-file.yaml
# oc create -f pvc-block.yaml
```

Validate that the two PVCs and respective PVs are created correctly:

```
# oc get pvc
```

### 3. Using the heketi-client for Verification

1. The heketi-client package needs to be installed on the ansible deploy host or on a OCP master. Once it is installed two new files should be created to easily export the required environment variables to run the heketi-client commands (or heketi-cli). The content of each file as well as useful heketi-cli commands are detailed here.

Create a new file (e.g. "heketi-exports-app") with the following contents:



```

export HEKETI_POD=$(oc get pods -l glusterfs=heketi-storage-pod -
n app-storage -o jsonpath="{.items[0].metadata.name}")
export HEKETI_CLI_SERVER=http://$(oc get route/heketi-storage -n
app-storage -o jsonpath='{.spec.host}')
export HEKETI_CLI_KEY=$(oc get pod/$HEKETI_POD -n app-storage -o
jsonpath='{.spec.containers[0].env[?
(@.name=="HEKETI_ADMIN_KEY")].value}')
export HEKETI_ADMIN_KEY_SECRET=$(echo -n ${HEKETI_CLI_KEY} |
base64)
export HEKETI_CLI_USER=admin

```

Source the file to create the HEKETI app-storage environment variables:

```

source heketi-exports-app
# see if heketi is alive
curl -w '\n' ${HEKETI_CLI_SERVER}/hello
Hello from Heketi
# ask heketi about the cluster it knows about
heketi-cli cluster list
Clusters:
Id:56ed234a384cef7dbef6c4aa106d4477 [file][block]
# ask heketi about the topology of the RHOCs cluster for apps
heketi-cli topology info
# ask heketi about the volumes already created (one for the
heketi db should exist after the OCP initial installation)
heketi-cli volume list
Id:d71a4cbea22af3453615a9020f261b5c
Cluster:56ed234a384cef7dbef6c4aa106d4477
Name:heketidbstorage

```

Create a new file (e.g. "heketi-exports-infra") with the following contents:

```

export HEKETI_POD=$(oc get pods -l glusterfs=heketi-registry-pod
-n infra-storage -o jsonpath="{.items[0].metadata.name}")
export HEKETI_CLI_SERVER=http://$(oc get route/heketi-registry -n
infra-storage -o jsonpath='{.spec.host}')
export HEKETI_CLI_USER=admin
export HEKETI_CLI_KEY=$(oc get pod/$HEKETI_POD -n infra-storage -
o jsonpath='{.spec.containers[0].env[?
(@.name=="HEKETI_ADMIN_KEY")].value}')
export HEKETI_ADMIN_KEY_SECRET=$(echo -n ${HEKETI_CLI_KEY} |
base64)

```

Source the file to create the HEKETI infra-storage environment variables:

```

source heketi-exports-infra
# see if heketi is alive
curl -w '\n' ${HEKETI_CLI_SERVER}/hello
Hello from Heketi
# ask heketi about the cluster it knows about (the RHOCs cluster
for infrastructure)
heketi-cli cluster list
Clusters:

```

```
Id:baf91b261cbca2bb4b62caece63f60d0 [file][block]
# ask heketi about the volumes already created
heketi-cli volume list
Id:77baed02f79f4518326d8cc1db6c7af8
Cluster:baf91b261cbca2bb4b62caece63f60d0 Name:heketidbstorage
```

## 5.6. CREATING AN ARBITER VOLUME (OPTIONAL)

Arbiter volume supports all persistent volume types with better consistency and less disk space requirements. An arbitrated replicated volume, or arbiter volume, is a three-way replicated volume where every third brick is a special type of brick called an arbiter. Arbiter bricks do not store file data; they only store file names, structure, and metadata. The arbiter uses client quorum to compare this metadata with the metadata of the other nodes to ensure consistency in the volume and prevent split-brain conditions.

Advantages of arbitrated replicated volumes:

- Better consistency: When an arbiter is configured, arbitration logic uses client-side quorum in auto mode to prevent file operations that would lead to split-brain conditions.
- Less disk space required: Because an arbiter brick only stores file names and metadata, an arbiter brick can be much smaller than the other bricks in the volume.

For more information about Arbitrated Replicated Volumes, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_gluster\\_storage/3.4/html-single/administration\\_guide/#Creating\\_Arbitrated\\_Replicated\\_Volumes](https://access.redhat.com/documentation/en-us/red_hat_gluster_storage/3.4/html-single/administration_guide/#Creating_Arbitrated_Replicated_Volumes)

Before creating the arbiter volume, make sure heketi-client packages are installed.

```
# subscription-manager repos --enable=rh-gluster-3-for-rhel-7-server-rpms

# yum install heketi-client
```

If you want to upgrade your already existing Heketi server, then see, [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/deployment\\_guide/index#upgrade\\_heketi\\_rhgs](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/deployment_guide/index#upgrade_heketi_rhgs)

### 5.6.1. Creating an Arbiter Volume

Arbiter volume can be created using the Heketi CLI or by updating the storageclass file.

#### 5.6.1.1. Creating an Arbiter Volume using Heketi CLI

To create an Arbiter volume using the Heketi CLI one must request a replica 3 volume as well as provide the Heketi-specific volume option “user.heketi.arbiter true” that will instruct the system to create the Arbiter variant of replica 3.

For example:

```
# heketi-cli volume create --size=4 --gluster-volume-
options='user.heketi.arbiter true'
```

#### 5.6.1.2. Creating an Arbiter Volume using the Storageclass file

To create an arbiter volume using the storageclass file ensure to include the following two parameters in the storageclass file:

- `user.heketi.arbiter true`
- (Optional) `user.heketi.average-file-size 1024`

Following is a sample storageclass file:

```
# cat glusterfs-storageclass.yaml
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: gluster-container
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-project.cloudapps.mystorage.com"
  restuser: "admin"
  volumetype: "replicate:3"
  clusterid:
    "630372ccdc720a92c681fb928f27b53f,796e6db1981f369ea0340913eeea4c9a"
  secretNamespace: "default"
  secretName: "heketi-secret"
  volumeoptions: "user.heketi.arbiter true,user.heketi.average-file-size
1024"
  volumenameprefix: "test-vol"
spec:
  persistentVolumeReclaimPolicy: Retain
  accessModes:
    - ReadWriteOnce
  resources:
    requests:
      storage: 5Gi
```



## NOTE

For information about managing arbiter volumes see, [Chapter 9, Managing Arbitrated Replicated Volumes](#)

# PART III. UPGRADE

## CHAPTER 6. UPGRADING YOUR RED HAT OPENSIFT CONTAINER STORAGE IN CONVERGED MODE

This chapter describes the procedure to upgrade your environment from Container-Native Storage 3.9 to Red Hat Openshift Container Storage in Converged Mode 3.10.

### 6.1. PREREQUISITES

Ensure the following prerequisites are met:

- [Section 3.1.3, “Red Hat OpenShift Container Platform and Red Hat Openshift Container Storage Requirements”](#)
- Ensure to have the supported versions of OpenShift Container Platform with Red Hat Gluster Storage Server and Red Hat Openshift Container Storage. For more information on supported versions, see [Section 3.1.1, “Supported Versions”](#)

### 6.2. RESTORING ORIGINAL LABEL VALUES FOR /DEV/LOG

To restore the original selinux label, execute the following commands:

1. Create a directory and soft links on all nodes that run gluster pods:

```
# mkdir /srv/<directory_name>
# cd /srv/<directory_name>/ # same dir as above
# ln -sf /dev/null systemd-tmpfiles-setup-dev.service
# ln -sf /dev/null systemd-journald.service
# ln -sf /dev/null systemd-journald.socket
```


2. Edit the daemonset that creates the glusterfs pods on the node which has oc client:

```
# oc edit daemonset <daemonset_name>
```

Under volumeMounts section add a mapping for the volume:

```
- mountPath: /usr/lib/systemd/system/systemd-journald.service
  name: systemd-journald-service
- mountPath: /usr/lib/systemd/system/systemd-journald.socket
  name: systemd-journald-socket
- mountPath: /usr/lib/systemd/system/systemd-tmpfiles-setup-dev.service
  name: systemd-tmpfiles-setup-dev-service
```

Under volumes section add a new host path for each service listed:



#### NOTE

The path mentioned in here should be the same as mentioned in Step 1.

```
- hostPath:
  path: /srv/<directory_name>/systemd-journald.socket
  type: ""
```

```
name: systemd-journald-socket
- hostPath:
  path: /srv/<directory_name>/systemd-journald.service
  type: ""
name: systemd-journald-service
- hostPath:
  path: /srv/<directory_name>/systemd-tmpfiles-setup-dev.service
  type: ""
name: systemd-tmpfiles-setup-dev-service
```

3. Run the following command on all nodes that run gluster pods. This will reset the label:

```
# restorecon /dev/log
```

4. Execute the following command on the node which has oc client to delete the gluster pod:

```
# oc delete pod <gluster_pod_name>
```

5. To verify if the pod is ready, execute the following command:

```
# oc get pods -l glusterfs=storage-pod
```

6. Login to the node hosting the pod and check the selinux label of /dev/log

```
# ls -lZ /dev/log
```

The output should show devlog\_t label

For example:

```
# ls -lZ /dev/log
srw-rw-rw-. root root system_u:object_r:devlog_t:s0 /dev/log
```

Exit the node.

7. In the gluster pod, check if the label value is devlog\_t:

```
# oc rsh <gluster_pod_name>
# ls -lZ /dev/log
```

For example:

```
# ls -lZ /dev/log
srw-rw-rw-. root root system_u:object_r:devlog_t:s0 /dev/log
```

8. Execute the following command to check the status of self heal for all volumes:

```
# oc rsh <gluster_pod_name>
# for each_volume in `gluster volume list`; do gluster volume heal
$each_volume info ; done | grep "Number of entries: [^0]$"

Wait for self-heal to complete.
```

9. Perform steps 4 to 8 for other pods.

## 6.3. UPGRADING CNS-DEPLOY AND HEKETI SERVER

The following commands must be executed on the client machine.

1. Execute the following command to update the heketi client and cns-deploy packages:



### NOTE

"yum update cns-deploy -y" is not required to be executed if CNS 3.9 was deployed via Ansible.

```
# yum update cns-deploy -y
# yum update heketi-client -y
```

2. Backup the Heketi database file

```
# oc rsh <heketi_pod_name>
# cp -a /var/lib/heketi/heketi.db /var/lib/heketi/heketi.db.`date
+%s`.`heketi --version | awk '{print $2}'`
# exit
```

3. Execute the following steps if CNS 3.9 is deployed via cns-deploy:

1. Execute the following command to delete the heketi template.

```
# oc delete templates heketi
```

2. Execute the following command to install the heketi template.

```
# oc create -f /usr/share/heketi/templates/heketi-template.yaml
template "heketi" created
```

3. Execute the following command to grant the heketi Service Account the necessary privileges.

```
# oc policy add-role-to-user edit system:serviceaccount:
<project_name>:heketi-service-account
# oc adm policy add-scc-to-user privileged -z heketi-service-
account
```

For example,

```
# oc policy add-role-to-user edit system:serviceaccount:storage-
project:heketi-service-account
# oc adm policy add-scc-to-user privileged -z heketi-service-
account
```

4. Execute the following command to generate a new heketi configuration file.

```
# sed -e "s/\${HEKETI_EXECUTOR}/kubernetes/" -e
"s#\${HEKETI_FSTAB}#/var/lib/heketi/fstab#" -e
"s/\${SSH_PORT}/22/" -e "s/\${SSH_USER}/root/" -e
"s/\${SSH_SUDO}/false/" -e "s/\${BLOCK_HOST_CREATE}/true/" -e
"s/\${BLOCK_HOST_SIZE}/500/"
"/usr/share/heketi/templates/heketi.json.template" > heketi.json
```

- The **BLOCK\_HOST\_SIZE** parameter controls the size (in GB) of the automatically created Red Hat Gluster Storage volumes hosting the gluster-block volumes (For more information, see [https://access.redhat.com/documentation/en-us/container-native-storage/3.9/html-single/container-native-storage\\_for\\_openshift\\_container\\_platform/#Block\\_Storage](https://access.redhat.com/documentation/en-us/container-native-storage/3.9/html-single/container-native-storage_for_openshift_container_platform/#Block_Storage)). This default configuration will dynamically create block-hosting volumes of 500GB in size as more space is required.
- Alternatively, copy the file **/usr/share/heketi/templates/heketi.json.template** to **heketi.json** in the current directory and edit the new file directly, replacing each **"\${VARIABLE}"** string with the required parameter.

**NOTE**

JSON formatting is strictly required (e.g. no trailing spaces, booleans in all lowercase).

5.

**NOTE**

If the **heketi-config-secret** file already exists, then delete the file and run the following command.

Execute the following command to create a secret to hold the configuration file.

```
# oc create secret generic heketi-config-secret --from-
file=heketi.json
```

4. Execute the following step if CNS 3.9 is installed via Ansible:

Depending on the OCP version, edit the heketi template to change the **IMAGE\_NAME**, **IMAGE\_VERSION** and **CLUSTER\_NAME**.

```
# oc get templates
NAME      DESCRIPTION      PARAMETERS  OBJECTS
glusterblock-provisioner  glusterblock provisioner  3 (2 blank) 4
template
glusterfs  GlusterFS DaemonSet  5 (1 blank) 1
template
heketi     Heketi service deployment  7 (3 blank) 3
template
```

- For OCP 3.10:

```
# oc edit template heketi
.....
```



```
- displayName: heketi container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-volmanager-rhel7:v3.10
```

- o For OCP 3.9:

```
# oc edit template heketi
.....
- displayName: heketi container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-volmanager-rhel7
- displayName: heketi container image version
  name: IMAGE_VERSION
  required: true
  value: v3.10
```

5. Execute the following command to delete the deployment configuration, service, and route for heketi:

- o For cns-deploy:

```
# oc delete deploymentconfig,service,route heketi-storage
```

- o For Ansible:

```
# oc delete deploymentconfig,service,route heketi
```

6. Execute the following command to deploy the Heketi service which will be used to create persistent volumes for OpenShift:

```
# oc process heketi | oc create -f -
```

For example:

```
# oc process heketi | oc create -f -

service "heketi" created
route "heketi" created
deploymentconfig "heketi" created
```

7. Execute the following command to verify that the containers are running:

```
# oc get pods
```

For example:

```
# oc get pods
```

NAME	READY	STATUS	RESTARTS	
AGE				
glusterfs-0h68l	1/1	Running	0	3d
glusterfs-0vcf3	1/1	Running	0	3d

glusterfs-gr9gh	1/1	Running	0	3d
heketi-1-zpw4d	1/1	Running	0	3h
storage-project-router-2-db2wl	1/1	Running	0	4d

## 6.4. UPGRADING THE RED HAT GLUSTER STORAGE PODS

The following commands must be executed on the client machine. .

Following are the steps for updating a DaemonSet for glusterfs:

1. Execute the following command to find the DaemonSet name for gluster

```
# oc get ds
```

2. Execute the following command to delete the DeamonSet:

```
# oc delete ds <ds-name> --cascade=false
```

Using **--cascade=false** option while deleting the old DaemonSet does not delete the gluster pods but deletes only the DaemonSet. After deleting the old DaemonSet, you must load the new one. When you manually delete the old pods, the new pods which are created will have the configurations of the new DaemonSet.

For example,

```
# oc delete ds glusterfs --cascade=false
daemonset "glusterfs" deleted
```

3. Execute the following commands to verify all the old pods are up:

```
# oc get pods
```

For example,

```
# oc get pods
```

NAME	READY	STATUS	RESTARTS	AGE
glusterfs-0h68l	1/1	Running	0	3d
glusterfs-0vcf3	1/1	Running	0	3d
glusterfs-gr9gh	1/1	Running	0	3d
heketi-1-zpw4d	1/1	Running	0	3h
storage-project-router-2-db2wl	1/1	Running	0	4d

4. If CNS 3.9 is deployed via cns-deploy, then execute the following command to delete the old glusterfs template.

```
# oc delete templates glusterfs
```

For example,

```
# oc delete templates glusterfs
template "glusterfs" deleted
```

5. If CNS 3.9 is deployed via Ansible, then execute the following command to edit the old glusterfs template.

```
# oc get templates
NAME      DESCRIPTION      PARAMETERS  OBJECTS
glusterblock-provisioner glusterblock provisioner  3 (2 blank) 4
template
glusterfs  GlusterFS DaemonSet      5 (1 blank) 1
template
heketi     Heketi service deployment  7 (3 blank) 3
template
```

- o For OCP 3.10:

```
# oc edit template glusterfs
- displayName: GlusterFS container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-server-rhel7:v3.10
```

- o For OCP 3.9:

```
# oc edit template glusterfs
- displayName: GlusterFS container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-server-rhel7
- displayName: GlusterFS container image version
  name: IMAGE_VERSION
  required: true
  value: v3.10
```

6. Label all the OpenShift Container Platform nodes that has the Red Hat Gluster Storage pods:

1. Check if the nodes are labelled using the following command:

```
# oc get nodes --show-labels
```

If the Red Hat Gluster Storage nodes do not have the **storagenode=glusterfs** label, then label the nodes as shown in step ii.

If CNS 3.9 was deployed via Ansible, then the label is **glusterfs=storage-host**

2. Label all the OpenShift Container Platform nodes that has the Red Hat Gluster Storage pods:

```
# oc label nodes <node name> storagenode=glusterfs
```

If CNS 3.9 was deployed via Ansible, then:

```
# oc label nodes <node name> glusterfs=storage-host
```

- Execute the following command to register new gluster template. This step is not applicable if CNS 3.9 was deployed via Ansible:

```
# oc create -f /usr/share/heketi/templates/glusterfs-template.yaml
```

For example,

```
# oc create -f /usr/share/heketi/templates/glusterfs-template.yaml
template "glusterfs" created
```

- Execute the following commands to create the gluster DaemonSet:

```
# oc process glusterfs | oc create -f -
```

For example,

```
# oc process glusterfs | oc create -f -
Daemonset "glusterfs" created
```

- Execute the following command to identify the old gluster pods that needs to be deleted:

```
# oc get pods
```

For example,

```
# oc get pods
```

NAME	READY	STATUS	RESTARTS	
AGE				
glusterfs-0h68l	1/1	Running	0	3d
glusterfs-0vcf3	1/1	Running	0	3d
glusterfs-gr9gh	1/1	Running	0	3d
heketi-1-zpw4d	1/1	Running	0	3h
storage-project-router-2-db2wl	1/1	Running	0	4d

- Execute the following command to delete the old gluster pods. **Gluster pods should follow rolling upgrade. Hence, you must ensure that the new pod is running before deleting the next old gluster pod. We support OnDelete Strategy DaemonSet update strategy.** With **OnDelete Strategy** update strategy, after you update a DaemonSet template, new DaemonSet pods will only be created when you manually delete old DaemonSet pods.

- To delete the old gluster pods, execute the following command:

```
# oc delete pod <gluster_pod>
```

For example,

```
# oc delete pod glusterfs-0vcf3
pod "glusterfs-0vcf3" deleted
```

**NOTE**

Before deleting the next pod, self heal check has to be made:

1. Run the following command to access shell on gluster pod:

```
# oc rsh <gluster_pod_name>
```

2. Run the following command to obtain the volume names:

```
# gluster volume list
```

3. Run the following command on each volume to check the self-heal status:

```
# gluster volume heal <volname> info
```

2. The delete pod command will terminate the old pod and create a new pod. Run **# oc get pods -w** and check the **Age** of the pod and **READY** status should be 1/1. The following is the example output showing the status progression from termination to creation of the pod.

```
# oc get pods -w
NAME                                READY    STATUS
RESTARTS   AGE
glusterfs-0vcf3                1/1      Terminating    0
3d
...

# oc get pods -w
NAME                                READY    STATUS
RESTARTS   AGE
glusterfs-pqfs6                0/1      ContainerCreating    0
1s
...

# oc get pods -w
NAME                                READY    STATUS
RESTARTS   AGE
glusterfs-pqfs6                1/1      Running           0
2m
```

11. Execute the following command to verify that the pods are running:

```
# oc get pods
```

For example,

```
# oc get pods
NAME                                READY    STATUS    RESTARTS
AGE
glusterfs-j241c                1/1      Running    0          4m
glusterfs-pqfs6                1/1      Running    0          7m
glusterfs-wrn6n                1/1      Running    0
12m
```

heketi-1-zpw4d	1/1	Running	0	4h
storage-project-router-2-db2wl	1/1	Running	0	4d

12. Execute the following command to verify if you have upgraded the pod to the latest version:

```
# oc rsh <gluster_pod_name> glusterd --version
```

For example:

```
# oc rsh glusterfs-storage-6zdhn glusterd --version
glusterfs 3.12.2
```

## NOTE

- If the setup also has registry deployed, the templates have to be modified accordingly to upgrade the pods in the registry namespace. The same steps for gluster pod upgrade can be followed for glusterfs registry pod upgrade by making necessary changes to the parameters accordingly.
- Edit the **multipath.conf** file as shown below and then restart multipathd.

```
cat << /etc/multipath.conf >>EOF
# LIO iSCSI
devices {
    device {
        vendor "LIO-ORG"
        user_friendly_names "yes" # names
like mpatha
path_grouping_policy "failover" # one
path per group
        hardware_handler "1 alua"
        path_selector "round-robin 0"
        failback immediate
        path_checker "tur"
        prio "alua"
        no_path_retry 120
    }
}
EOF
# systemctl restart multipathd
```

This has to be executed on all the Openshift nodes.

13. Check the Red Hat Gluster Storage op-version by executing the following command on one of the gluster pods.

## NOTE

If the setup has registry configured using glusterfs, then the glusterfs registry pods should also be upgraded before setting cluster.op-version

```
# gluster vol get all cluster.op-version
```

- o Set the cluster.op-version to 31302 on any one of the pods:

**NOTE**

Ensure all the gluster pods are updated before changing the cluster.op-version.

```
# gluster volume set all cluster.op-version 31302
```

14. If a gluster-block-provisioner-pod already exists then delete it by executing the following commands:

```
# oc delete dc <gluster-block-dc>
```

For example:

```
# oc delete dc glusterblock-provisioner-dc
```

15. If CNS 3.9 is deployed via cns-deploy, then execute the following commands to deploy the gluster-block provisioner:

```
# sed -e 's/\\\$NAMESPACE/<NAMESPACE>/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml | oc
create -f -
```

```
# oc adm policy add-cluster-role-to-user glusterblock-provisioner-
runner system:serviceaccount:<NAMESPACE>:glusterblock-provisioner
```

For example:

```
# sed -e 's/\\\$NAMESPACE/storage-project/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml | oc
create -f -
```

```
# oc adm policy add-cluster-role-to-user glusterblock-provisioner-
runner system:serviceaccount:storage-project:glusterblock-
provisioner
```

16. If CNS 3.9 is deployed via Ansible, depending on the OCP version, edit the glusterblock-provisioner template to change the IMAGE\_NAME, IMAGE\_VERSION and NAMESPACE.

```
# oc get templates
NAME      DESCRIPTION      PARAMETERS  OBJECTS
glusterblock-provisioner glusterblock provisioner 3 (2 blank) 4
template
glusterfs  GlusterFS DaemonSet      5 (1 blank) 1
template
heketi     Heketi service deployment 7 (3 blank) 3
template
```

- o For OCP 3.10:

```
# oc edit template glusterblock-provisioner
- displayName: glusterblock provisioner container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-gluster-block-prov-rhel7:v3.10
- description: The namespace in which these resources are being
created
  displayName: glusterblock provisioner namespace
  name: NAMESPACE
  required: true
  value: glusterfs
```

- o For OCP 3.9:

```
# oc edit template glusterblock-provisioner
- displayName: glusterblock provisioner container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-gluster-block-prov-rhel7
- displayName: glusterblock provisioner container image version
  name: IMAGE_VERSION
  required: true
  value: v3.10
- description: The namespace in which these resources are being
created
  displayName: glusterblock provisioner namespace
  name: NAMESPACE
  required: true
  value: glusterfs
```

After editing the template, execute the following command to create the deployment configuration:

```
# oc process <gluster_block_provisioner_template> | oc create -f -
```

17. Brick multiplexing is a feature that allows adding multiple bricks into one process. This reduces resource consumption and allows us to run more bricks than before with the same memory consumption. It is enabled by default from Container-Native Storage 3.6. During an upgrade from Container-Native Storage 3.9 to Red Hat Openshift Container Storage 3.10, to turn brick multiplexing on, execute the following commands:

1. To exec into the Gluster pod, execute the following command and rsh into any of the gluster pods:

```
# oc rsh <gluster_pod_name>
```

2. Verify if brick multiplexing is enabled. If it is disabled, then execute the following command to enable brick multiplexing:

```
# gluster volume set all cluster.brick-multiplex on
```



**NOTE**

You can check the brick multiplex status by executing the following command:

```
# gluster v get all all
```

For example:

```
# oc rsh glusterfs-770ql

sh-4.2# gluster volume set all cluster.brick-multiplex on
Brick-multiplexing is supported only for container workloads
(CNS/CRS). Also it is advised to make sure that either all
volumes are in stopped state or no bricks are running before this
option is modified.Do you still want to continue? (y/n) y
volume set: success
```

3. List all the volumes in the trusted storage pool. This step is only required if the volume set operation is performed:

For example:

```
# gluster volume list

heketidbstorage
vol_194049d2565d2a4ad78ef0483e04711e
...
...
```

Restart all the volumes. This step is only required if the volume set operation is performed along with the previous step:

```
# gluster vol stop <VOLNAME>
# gluster vol start <VOLNAME>
```

18. From Container-Native Storage 3.6, support for S3 compatible Object Store in Red Hat Openshift Container Storage is under technology preview. To enable S3 compatible object store, see [https://access.redhat.com/documentation/en-us/container-native\\_storage/3.9/html-single/container-native\\_storage\\_for\\_openshift\\_container\\_platform/#S3\\_Object\\_Store](https://access.redhat.com/documentation/en-us/container-native_storage/3.9/html-single/container-native_storage_for_openshift_container_platform/#S3_Object_Store).

## 6.5. UPGRADING THE CLIENT ON RED HAT OPENSIFT CONTAINER PLATFORM NODES

Execute the following commands on each of the nodes:

1. To drain the pod, execute the following command on the master node (or any node with cluster-admin access):

```
# oc adm drain <node_name> --ignore-daemonsets
```

2. To check if all the pods are drained, execute the following command on the master node (or any node with cluster-admin access) :

```
# oc get pods --all-namespaces --field-selector=spec.nodeName=  
<node_name>
```

3. Execute the command on the node to upgrade the client on the node:

```
# yum update glusterfs-client
```

4. To enable node for pod scheduling execute the following command on the master node (or any node with cluster-admin access):

```
# oc adm manage-node --schedulable=true <node_name>
```

## CHAPTER 7. UPGRADING YOUR RED HAT OPENSIFT CONTAINER STORAGE IN INDEPENDENT MODE

This chapter describes the procedures to follow to upgrade your independent mode environment.

### 7.1. PREREQUISITES

Ensure the following prerequisites are met:

- [Section 3.1.3, “Red Hat OpenShift Container Platform and Red Hat Openshift Container Storage Requirements”](#)
- Configuring Port Access: [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/deployment\\_guide/#CRS\\_port\\_access](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/deployment_guide/#CRS_port_access)
- Enabling Kernel Modules: [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/deployment\\_guide/#CRS\\_enable\\_kernel](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/deployment_guide/#CRS_enable_kernel)
- Starting and Enabling Services: [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/deployment\\_guide/#Start\\_enable\\_service](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/deployment_guide/#Start_enable_service)
- Ensure to have the supported versions of OpenShift Container Platform with Red Hat Gluster Storage Server and Red Hat Openshift Container Storage. For more information on supported versions, see [Section 3.1.1, “Supported Versions”](#)
- If Heketi is running as a standalone service in one of the Red Hat Gluster Storage nodes, then ensure to open the port for Heketi. By default the port number for Heketi is 8080. To open this port execute the following command on the node where Heketi is running:

```
# firewall-cmd --zone=zone_name --add-port=8080/tcp
# firewall-cmd --zone=zone_name --add-port=8080/tcp --permanent
```

If Heketi is configured to listen on a different port, then change the port number in the command accordingly.

### 7.2. UPGRADING YOUR INDEPENDENT MODE SETUP

Follow the steps in the sections ahead to upgrade your independent mode Setup.

#### 7.2.1. Upgrading the Red Hat Gluster Storage Cluster

To upgrade the Red Hat Gluster Storage cluster, see [In-Service Software Upgrade](#).

#### 7.2.2. Upgrading Heketi in RHGS node



#### NOTE

If Heketi is in an Openshift node, then skip this section and see [Section 7.2.3, “Upgrading Heketi in Openshift node”](#) instead.

Upgrade Heketi by executing the following commands on the Red Hat Gluster Storage node where Heketi is running:

1. Backup the Heketi database file

```
# cp -a /var/lib/heketi/heketi.db /var/lib/heketi/heketi.db.`date +%s`.`heketi --version | awk '{print $2}'`
```

2. Update Heketi by executing the following command in one of the Red Hat Gluster Storage nodes where Heketi is running:

```
# yum update heketi
```

3. Restart the Heketi service:

```
# systemctl restart heketi
```

### 7.2.3. Upgrading Heketi in Openshift node

The following commands must be executed on the client machine.

1. Execute the following command to update the heketi client and cns-deploy packages:



#### NOTE

"yum update cns-deploy -y" is not required to be executed if CNS 3.9 was deployed via Ansible.

```
# yum update cns-deploy -y
# yum update heketi-client -y
```

2. Backup the Heketi database file

```
# oc rsh <heketi_pod_name>
# cp -a /var/lib/heketi/heketi.db /var/lib/heketi/heketi.db.`date +%s`.`heketi --version | awk '{print $2}'`
# exit
```

3. Execute the following steps if CNS 3.9 is deployed via cns-deploy:

1. Execute the following command to delete the heketi template.

```
# oc delete templates heketi
```

2. Execute the following command to install the heketi template.

```
# oc create -f /usr/share/heketi/templates/heketi-template.yaml
template "heketi" created
```

3. Execute the following command to grant the heketi Service Account the necessary privileges.

```
# oc policy add-role-to-user edit system:serviceaccount:
<project_name>:heketi-service-account
# oc adm policy add-scc-to-user privileged -z heketi-service-
account
```

For example,

```
# oc policy add-role-to-user edit system:serviceaccount:storage-
project:heketi-service-account
# oc adm policy add-scc-to-user privileged -z heketi-service-
account
```

4. Execute the following command to generate a new heketi configuration file.

```
# sed -e "s/\${HEKETI_EXECUTOR}/kubernetes/" -e
"s#\${HEKETI_FSTAB}#/var/lib/heketi/fstab#" -e
"s/\${SSH_PORT}/22/" -e "s/\${SSH_USER}/root/" -e
"s/\${SSH_SUDO}/false/" -e "s/\${BLOCK_HOST_CREATE}/true/" -e
"s/\${BLOCK_HOST_SIZE}/500/"
"/usr/share/heketi/templates/heketi.json.template" > heketi.json
```

- The **BLOCK\_HOST\_SIZE** parameter controls the size (in GB) of the automatically created Red Hat Gluster Storage volumes hosting the gluster-block volumes (For more information, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#Block\\_Storage](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#Block_Storage)). This default configuration will dynamically create block-hosting volumes of 500GB in size as more space is required.
- Alternatively, copy the file **/usr/share/heketi/templates/heketi.json.template** to **heketi.json** in the current directory and edit the new file directly, replacing each "**\${VARIABLE}**" string with the required parameter.



#### NOTE

JSON formatting is strictly required (e.g. no trailing spaces, booleans in all lowercase).

5.



#### NOTE

If the **heketi-config-secret** file already exists, then delete the file and run the following command.

Execute the following command to create a secret to hold the configuration file.

```
# oc create secret generic heketi-config-secret --from-
file=heketi.json
```

4. Execute the following step if CNS 3.9 is installed via Ansible:

Depending on the OCP version, edit the heketi template to change the **IMAGE\_NAME**, **IMAGE\_VERSION**, **CLUSTER\_NAME**, **HEKETI\_FSTAB** and **HEKETI\_ROUTE**.

```
# oc get templates
NAME      DESCRIPTION      PARAMETERS  OBJECTS
glusterblock-provisioner glusterblock provisioner  3 (2 blank) 4
template
glusterfs  GlusterFS DaemonSet      5 (1 blank) 1
template
heketi     Heketi service deployment 7 (3 blank) 3
template
```

- o For OCP 3.10:

```
# oc edit template heketi
..... *
- description: Set the executor type, kubernetes or ssh
  displayName: heketi executor type
  name: HEKETI_EXECUTOR
  value: ssh
- description: Set the fstab path, file that is populated
with bricks that heketi
  creates
  displayName: heketi fstab path
  name: HEKETI_FSTAB
  value: /etc/fstab
- description: Set the hostname for the route URL
  displayName: heketi route name
  name: HEKETI_ROUTE
  value: heketi-storage
- displayName: heketi container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-volmanager-rhel7
- description: A unique name to identify this heketi service,
useful for running multiple
  heketi instances
  displayName: GlusterFS cluster name
  name: CLUSTER_NAME
  value: storage
```

- o For OCP 3.9:

```
# oc edit template heketi
..... *
- description: Set the executor type, kubernetes or ssh
  displayName: heketi executor type
  name: HEKETI_EXECUTOR
  value: ssh
- description: Set the fstab path, file that is populated
with bricks that heketi
  creates
  displayName: heketi fstab path
  name: HEKETI_FSTAB
  value: /etc/fstab
- description: Set the hostname for the route URL
  displayName: heketi route name
  name: HEKETI_ROUTE
```

```

        value: heketi-storage
    - displayName: heketi container image name
      name: IMAGE_NAME
      required: true
      value: rhgs3/rhgs-volmanager-rhel7
    - displayName: heketi container image version
      name: IMAGE_VERSION
      required: true
      value: v3.10
    - description: A unique name to identify this heketi service,
      useful for running multiple
      heketi instances
      displayName: GlusterFS cluster name
      name: CLUSTER_NAME
      value: storage

```

5. Execute the following command to delete the deployment configuration, service, and route for heketi:

- For cns-deploy:

```
# oc delete deploymentconfig,service,route heketi-storage
```

- For Ansible:

```
# oc delete deploymentconfig,service,route heketi
```

6. Execute the following command to deploy the Heketi service which will be used to create persistent volumes for OpenShift:

```
# oc process heketi | oc create -f -
```

For example:

```

# oc process heketi | oc create -f -

service "heketi" created
route "heketi" created
deploymentconfig "heketi" created

```

7. Execute the following command to verify that the containers are running:

```
# oc get pods
```

For example:

```

# oc get pods
NAME                                READY    STATUS    RESTARTS
AGE
glusterfs-0h68l                    1/1      Running   0         3d
glusterfs-0vcf3                    1/1      Running   0         3d

```

glusterfs-gr9gh	1/1	Running	0	3d
heketi-1-zpw4d	1/1	Running	0	3h
storage-project-router-2-db2wl	1/1	Running	0	4d

### 7.2.4. Upgrading Gluster Block

Execute the following steps to upgrade gluster block.

1. Execute the following command to install gluster block:

```
# yum install gluster-block
```

2. Enable and start the gluster block service:

```
# systemctl enable gluster-blockd
# systemctl start gluster-blockd
```

3. Execute the following command to update the heketi client and cns-deploy packages

```
# yum install cns-deploy -y
# yum update cns-deploy -y
# yum update heketi-client -y
```



#### NOTE

Do not update the cns-deploy package if CNS is deployed via Ansible.

4. To use gluster block, add the following two parameters to the **glusterfs** section in the heketi configuration file at `/etc/heketi/heketi.JSON`:

```
auto_create_block_hosting_volume
block_hosting_volume_size
```

Where:

**auto\_create\_block\_hosting\_volume:** Creates Block Hosting volumes automatically if not found or if the existing volume is exhausted. To enable this, set the value to **true**.

**block\_hosting\_volume\_size:** New block hosting volume will be created in the size mentioned. This is considered only if `auto_create_block_hosting_volume` is set to true. Recommended size is 500G.

For example:

```
.....
.....
"glusterfs" : {

                "executor" : "ssh",

                "db" : "/var/lib/heketi/heketi.db",
```




```

        "sshexec" : {
        "rebalance_on_expansion": true,
        "keyfile" : "/etc/heketi/private_key"
        },

        "auto_create_block_hosting_volume": true,

        "block_hosting_volume_size": 500G
    },
    .....
    .....

```

**NOTE**

This step is not applicable if CNS is deployed via Ansible.

5. Restart the Heketi service:

```
# systemctl restart heketi
```

**NOTE**

This step is not applicable if heketi is running as a pod.

6. If a gluster-block-provisioner-pod already exists then delete it by executing the following commands:

```
# oc delete dc <gluster-block-dc>
```

For example:

```
# oc delete dc glusterblock-provisioner-dc
```

7. If CNS 3.9 is deployed via cns-deploy, then execute the following commands to deploy the gluster-block provisioner:

```
# sed -e 's/\\\$NAMESPACE/<NAMESPACE>/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml | oc
create -f -
```

```
# oc adm policy add-cluster-role-to-user glusterblock-provisioner-
runner system:serviceaccount:<NAMESPACE>:glusterblock-provisioner
```

For example:

```
# sed -e 's/\\\$NAMESPACE/storage-project/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml | oc
create -f -
```

```
# oc adm policy add-cluster-role-to-user glusterblock-provisioner-
runner system:serviceaccount:storage-project:glusterblock-
provisioner
```

8. If CNS 3.9 is deployed via Ansible, depending on the OCP version, edit the glusterblock-provisioner template to change the IMAGE\_NAME, IMAGE\_VERSION and NAMESPACE.

```
# oc get templates
NAME          DESCRIPTION          PARAMETERS  OBJECTS
glusterblock-provisioner glusterblock provisioner 3 (2 blank) 4
template

heketi        Heketi service deployment 7 (3 blank) 3
template
```

- o For OCP 3.10:

```
# oc edit template glusterblock-provisioner
- displayName: glusterblock provisioner container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-gluster-block-prov-rhel7:v3.10
- description: The namespace in which these resources are being
created
  displayName: glusterblock provisioner namespace
  name: NAMESPACE
  required: true
  value: glusterfs
```

- o For OCP 3.9:

```
# oc edit template glusterblock-provisioner
- displayName: glusterblock provisioner container image name
  name: IMAGE_NAME
  required: true
  value: rhgs3/rhgs-gluster-block-prov-rhel7
- displayName: glusterblock provisioner container image version
  name: IMAGE_VERSION
  required: true
  value: v3.10
- description: The namespace in which these resources are being
created
  displayName: glusterblock provisioner namespace
  name: NAMESPACE
  required: true
  value: glusterfs
```

9. Execute the following command to create a glusterblock-provisioner.

```
# oc process <gluster_block_provisioner_template> | oc create -f -
```

### 7.2.5. Enabling S3 Compatible Object store

Support for S3 compatible Object Store is under technology preview. To enable S3 compatible object store, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#S3\\_Object\\_Store](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#S3_Object_Store).

## 7.3. UPGRADING THE CLIENT ON RED HAT OPENSIFT CONTAINER PLATFORM NODES

Execute the following commands on each of the nodes:

1. To drain the pod, execute the following command on the master node (or any node with cluster-admin access):

```
# oc adm drain <node_name> --ignore-daemonsets
```

2. To check if all the pods are drained, execute the following command on the master node (or any node with cluster-admin access):

```
# oc get pods --all-namespaces --field-selector=spec.nodeName=<node_name>
```

3. Execute the command on the node to upgrade the client on the node:

```
# yum update glusterfs-client
```

4. To enable node for pod scheduling execute the following command on the master node (or any node with cluster-admin access):

```
# oc adm manage-node --schedulable=true <node_name>
```

# PART IV. UNINSTALLING

## CHAPTER 8. UNINSTALL RED HAT OPENSIFT CONTAINER STORAGE

For Red Hat Openshift Container Storage, the OpenShift Container Platform Advanced Installer comes with a playbook to uninstall all resources and artifacts from the cluster. To use it, provide the original inventory file that was used to install the target instance of Red Hat Openshift Container Storage and run the following playbook:



### WARNING

This procedure will destroy data. Proceed with caution.

```
ansible-playbook -i <path_to_inventory_file> /usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/uninstall.yml
```

In addition, the playbook supports the use of a variable called **openshift\_storage\_glusterfs\_wipe** which, when enabled, will destroy any data on the block devices that were used for Red Hat Gluster Storage backend storage. For more information about the settings/variables that will be destroyed, see [Appendix B, Settings that are destroyed when using uninstall playbook](#). It is recommended to use this variable in the following format:

```
ansible-playbook -i <path_to_inventory_file> -e  
"openshift_storage_glusterfs_wipe=true" /usr/share/ansible/openshift-ansible/playbooks/openshift-glusterfs/uninstall.yml
```

# PART V. WORKLOADS

## CHAPTER 9. MANAGING ARBITRATED REPLICATED VOLUMES

### 9.1. MANAGING ARBITER BRICK SIZE

A standard replica 3 volume has the same sized bricks in each set, however, an arbiter volume will have one brick in the brick set that can be smaller than the data bricks.

In order to better optimize the sizing of the Arbiter brick, Heketi allows the user to provide an average file size value that is used to calculate the final size of the Arbiter brick. This is done using the volume option "user.heketi.average-file-size NUM" where NUM is an integer value in KiB. By default Heketi uses a value of 64KiB.

To create an arbiter volume with a custom average file size using the `heketi-cli` command line tool the volume options "user.heketi.arbiter true" and "user.heketi.average-file-size 1024" must be provided.

For example:

```
# heketi-cli volume create --size=4 --gluster-volume-
options='user.heketi.arbiter true,user.heketi.average-file-size 1024'
```

### 9.2. MANAGING ARBITER BRICK PLACEMENT

To accomplish the task of controlling where arbiter bricks are placed, Heketi uses specific node and device tags. For the Arbiter feature, the tag "arbiter" can be applied to a node or device with the values of "supported", "required", or "disabled".

where:

- supported: both arbiter bricks and data bricks are allowed.
- required: only arbiter bricks are allowed, data bricks are rejected.
- disabled: only data bricks are allowed, arbiter bricks are rejected.

Based on your use case, you can set tags on a node or a device.

For example, to use arbiter in order to split nodes such that arbiter nodes can act as dedicated "tiebreakers" between the nodes that host data, you can set a tag on the node.

The following example shows how to set tags on a device. The nodes have heterogeneous device types and you want to set a particular space saving pattern: one node with a small nvme device and two (or more) nodes with larger SSDs. To do this, set a tag on the device by identifying the small device as d1 (arbiter:required) and the larger devices as d2 and d3 (arbiter:disabled).



#### NOTE

A device without an explicit tag will automatically inherit the arbiter tag value from the node it is connected to. An explicit tag on the device always has priority over the node's tag.

#### 9.2.1. Setting Tags with the Heketi CLI

To set tags on nodes and device via the `heketi-cli` command line tool, execute the following commands:

### Node

```
# heketi-cli node settags <node id> arbiter:<tag>
```

For example:

```
# heketi-cli node settags e2a792a43ca9a6bac4b9bfa792e89347  
arbiter:disabled
```

### Device

```
# heketi-cli device settags <device id> arbiter:<tag>
```

For example:

```
# heketi-cli device settags 167fe2831ad0a91f7173dac79172f8d7  
arbiter:required
```

## 9.2.2. Removing Tags using Heketi CLI

If you want to remove the arbiter tags, then execute the following commands:

### Node

```
# heketi-cli node rmtags <node id> arbiter
```

For example:

```
# heketi-cli node rmtags e2a792a43ca9a6bac4b9bfa792e89347 arbiter
```

### Device

```
# heketi-cli device rmtags <device id> arbiter
```

For example:

```
# heketi-cli device rmtags 167fe2831ad0a91f7173dac79172f8d7 arbiter
```

## 9.2.3. Viewing Tags with the Heketi CLI

To view the tags, execute the following commands. If the node or device has any tags it will be displayed in a list below the heading "Tags":

### Node

```
# heketi-cli node info <node id>
```

For example:

```
# heketi-cli node info e2a792a43ca9a6bac4b9bfa792e89347  
Node Id: e2a792a43ca9a6bac4b9bfa792e89347
```



```

State: online
Cluster Id: ddb14817873c13c5bb42a5c04969daf9
Zone: 1
Management Hostname: 10.0.0.1
Storage Hostname: 10.0.0.1
Tags:
  arbiter: disabled
  test: demonstration
Devices:
Id:0b39f89c0677e8c0b796caf00204e726   Name:/dev/vdb
State:online      Size (GiB):500      Used (GiB):0      Free (GiB):500
Bricks:0
Id:167fe2831ad0a91f7173dac79172f8d7   Name:/dev/vdg
State:online      Size (GiB):500      Used (GiB):0      Free (GiB):500
Bricks:0

```

Device

```
# heketi-cli device info <device id>
```

For example:

```

# heketi-cli device info 167fe2831ad0a91f7173dac79172f8d7
Device Id: 167fe2831ad0a91f7173dac79172f8d7
Name: /dev/vdg
State: online
Size (GiB): 500
Used (GiB): 0
Free (GiB): 500
Tags:
  arbiter: required
  foobar: magic
Bricks:

```

## 9.3. CREATING PERSISTENT VOLUMES

For more information about creating persistent volumes, see

[https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-OpenShift\\_Creating\\_Persistent\\_Volumes-Dynamic\\_Prov](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-OpenShift_Creating_Persistent_Volumes-Dynamic_Prov)



## IMPORTANT

In the Storage Class file ensure to add "user.heketi.arbiter true" under the volumeoptions parameter to create Arbiter volumes.

For example:

```
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: gluster-container
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-
project.cloudapps.mystorage.com"
  restuser: "admin"
  volumetype: "replicate:3"
  clusterid:
"630372ccdc720a92c681fb928f27b53f,796e6db1981f369ea0340913eeea4
c9a"
  secretNamespace: "default"
  secretName: "heketi-secret"
  volumeoptions: "user.heketi.arbiter true"
  volumenameprefix: "test-vol"
allowVolumeExpansion: "true"
```

## CHAPTER 10. SETTING UP CUSTOM VOLUME OPTIONS

To set up shared persistent volumes, execute the following commands in one of the Red Hat OpenShift Container Storage pod:

1. For static provisioning: Execute the following commands to set the volume options:

```
# gluster volume set VOLUME performance.open-behind off
# gluster volume set VOLUME performance.write-behind off
# gluster volume set VOLUME performance.stat-prefetch off
# gluster volume set VOLUME performance.quick-read off
# gluster volume set VOLUME performance.strict-o-direct on
# gluster volume set VOLUME performance.read-ahead off
# gluster volume set VOLUME performance.io-cache off
# gluster volume set VOLUME performance.readdir-ahead off
```

2. To verify, execute the following command:

```
# gluster volume get VOLUME all | grep <performance translator>
```

For example:

```
# gluster volume get VOLUME all | egrep "performance.stat-prefetch
| performance.write-behind | performance.open-behind |
performance.quick-read | performance.strict-o-direct |
performance.read-ahead | performance.io-cache | performance.readdir-
ahead"
```

3. For dynamic provisioning, the volume options can be listed under "parameter" in the storage class file. For example:

```
parameters:
  resturl: http://heketi-storage-
glusterfs.router.default.svc.cluster.local
  restuser: admin
  secretName: heketi-storage-admin-secret
  secretNamespace: glusterfs
  volumeoptions: performance.stat-prefetch off performance.write-
behind off performance.open-behind off performance.quick-read off
performance.strict-o-direct on performance.read-ahead off
performance.io-cache off performance.readdir-ahead off
```

For more information on registering a storage class for file storage see

[https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-OpenShift\\_Creating\\_Persistent\\_Volumes-Dynamic\\_Prov](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-OpenShift_Creating_Persistent_Volumes-Dynamic_Prov)

For more information on registering a storage class for block storage see

[https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#Block\\_dynamic\\_prov\\_vol](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#Block_dynamic_prov_vol)

PART VI. APPENDIX

## APPENDIX A. OPTIONAL DEPLOYMENT METHOD (WITH CNS-DEPLOY)

Following sections provides an optional method to deploy Red Hat OpenShift Container Storage using `cns-deploy`.

### A.1. SETTING UP CONVERGED MODE

The converged mode environment addresses the use-case where applications require both shared storage and the flexibility of a converged infrastructure with compute and storage instances being scheduled and run from the same set of hardware.

#### A.1.1. Configuring Port Access

- On each of the OpenShift nodes that will host the Red Hat Gluster Storage container, add the following rules to `/etc/sysconfig/iptables` in order to open the required ports:

```
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport
24007 -j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport
24008 -j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport 2222
-j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m multiport --
dports 49152:49664 -j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport
24010 -j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport 3260
-j ACCEPT
-A OS_FIREWALL_ALLOW -p tcp -m state --state NEW -m tcp --dport 111
-j ACCEPT
```



#### NOTE

- Port 24010 and 3260 are for gluster-blockd and iSCSI targets respectively.
- The port range starting at 49664 defines the range of ports that can be used by GlusterFS for communication to its volume bricks. In the above example the total number of bricks allowed is 512. Configure the port range based on the maximum number of bricks that could be hosted on each node.

For more information about Red Hat Gluster Storage Server ports, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_gluster\\_storage/3.4/html/administration\\_guide/chap-getting\\_started](https://access.redhat.com/documentation/en-us/red_hat_gluster_storage/3.4/html/administration_guide/chap-getting_started).

- Execute the following command to reload the iptables:

```
# systemctl reload iptables
```

- Execute the following command on each node to verify if the iptables are updated:

```
# iptables -L
```

### A.1.2. Enabling Kernel Modules

Before running the **cns-deploy** tool, you must ensure that the **dm\_thin\_pool**, **dm\_multipath**, and **target\_core\_user** modules are loaded in the OpenShift Container Platform node. Execute the following commands only on Gluster nodes to verify if the modules are loaded:

```
# lsmod | grep dm_thin_pool
```

```
# lsmod | grep dm_multipath
```

```
# lsmod | grep target_core_user
```

If the modules are not loaded, then execute the following command to load the modules:

```
# modprobe dm_thin_pool
```

```
# modprobe dm_multipath
```

```
# modprobe target_core_user
```

#### NOTE

To ensure these operations are persisted across reboots, create the following files and update each with the content as mentioned:

```
# cat /etc/modules-load.d/dm_thin_pool.conf
dm_thin_pool
```

```
# cat /etc/modules-load.d/dm_multipath.conf
dm_multipath
```

```
# cat /etc/modules-load.d/target_core_user.conf
target_core_user
```

### A.1.3. Starting and Enabling Services

Execute the following commands to enable and run rpcbind on all the nodes hosting the gluster pod :

```
# systemctl add-wants multi-user rpcbind.service
# systemctl enable rpcbind.service
# systemctl start rpcbind.service
```

Execute the following command to check the status of rpcbind

```
# systemctl status rpcbind

rpcbind.service - RPC bind service
   Loaded: loaded (/usr/lib/systemd/system/rpcbind.service; enabled;
   vendor preset: enabled)
   Active: active (running) since Wed 2017-08-30 21:24:21 IST; 1 day 13h
```

```
ago
Main PID: 9945 (rpcbind)
  CGroup: /system.slice/rpcbind.service
          └─9945 /sbin/rpcbind -w
```

Next Step: Proceed to [Section A.3, “Setting up the Environment”](#) to prepare the environment for Red Hat Gluster Storage Container Converged in OpenShift.

## NOTE

To remove an installation of Red Hat Openshift Container Storage done using `cns-deploy`, run the **`cns-deploy --abort`** command. Use the **`-g`** option if Gluster is containerized.

When the pods are deleted, not all Gluster states are removed from the node. Therefore, you must also run **`rm -rf /var/lib/heketi /etc/glusterfs /var/lib/glusterd /var/log/glusterfs`** command on every node that was running a Gluster pod and also run **`wipefs -a <device>`** for every storage device that was consumed by Heketi. This erases all the remaining Gluster states from each node. You must be an administrator to run the device wiping command

## A.2. SETTING UP INDEPENDENT MODE

In an independent mode set-up, a dedicated Red Hat Gluster Storage cluster is available external to the OpenShift Container Platform. The storage is provisioned from the Red Hat Gluster Storage cluster.

### A.2.1. Installing Red Hat Gluster Storage Server on Red Hat Enterprise Linux (Layered Install)

Layered install involves installing Red Hat Gluster Storage over Red Hat Enterprise Linux.

## IMPORTANT

It is recommended to create a separate **`/var`** partition that is large enough (50GB - 100GB) for log files, geo-replication related miscellaneous files, and other files.

#### 1. Perform a base install of Red Hat Enterprise Linux 7 Server

Independent mode is supported only on Red Hat Enterprise Linux 7.

#### 2. Register the System with Subscription Manager

Run the following command and enter your Red Hat Network username and password to register the system with the Red Hat Network:

```
# subscription-manager register
```

#### 3. Identify Available Entitlement Pools

Run the following commands to find entitlement pools containing the repositories required to install Red Hat Gluster Storage:

```
# subscription-manager list --available
```

#### 4. Attach Entitlement Pools to the System

Use the pool identifiers located in the previous step to attach the **Red Hat Enterprise Linux Server** and **Red Hat Gluster Storage** entitlements to the system. Run the following command to attach the entitlements:

```
# subscription-manager attach --pool=[POOLID]
```

For example:

```
# subscription-manager attach --  
pool=8a85f9814999f69101499c05aa706e47
```

## 5. Enable the Required Channels

### For Red Hat Gluster Storage 3.3 on Red Hat Enterprise Linux 7.x

1. Run the following commands to enable the repositories required to install Red Hat Gluster Storage

```
# subscription-manager repos --enable=rhel-7-server-rpms  
# subscription-manager repos --enable=rh-gluster-3-for-rhel-7-  
server-rpms
```

## 6. Verify if the Channels are Enabled


Run the following command to verify if the channels are enabled:

```
# yum repolist
```

## 7. Update all packages

Ensure that all packages are up to date by running the following command.

```
# yum update
```



### IMPORTANT

If any kernel packages are updated, reboot the system with the following command.

```
# shutdown -r now
```

## 8. Kernel Version Requirement

Independent mode requires the kernel-3.10.0-690.el7 version or higher to be used on the system. Verify the installed and running kernel versions by running the following command:

```
# rpm -q kernel  
kernel-3.10.0-862.11.6.el7.x86_64
```

```
# uname -r  
3.10.0-862.11.6.el7.x86_64
```

## 9. Install Red Hat Gluster Storage



Run the following command to install Red Hat Gluster Storage:

```
# yum install redhat-storage-server
```

1. To enable gluster-block execute the following command:

```
# yum install gluster-block
```

#### 10. Reboot

Reboot the system.


### A.2.2. Configuring Port Access

This section provides information about the ports that must be open for the independent mode.

Red Hat Gluster Storage Server uses the listed ports. You must ensure that the firewall settings do not prevent access to these ports.

Execute the following commands to open the required ports for both runtime and permanent configurations on all Red Hat Gluster Storage nodes:

```
# firewall-cmd --zone=zone_name --add-port=24010/tcp --add-port=3260/tcp --add-port=111/tcp --add-port=22/tcp --add-port=24007/tcp --add-port=24008/tcp --add-port=49152-49664/tcp
# firewall-cmd --zone=zone_name --add-port=24010/tcp --add-port=3260/tcp --add-port=111/tcp --add-port=22/tcp --add-port=24007/tcp --add-port=24008/tcp --add-port=49152-49664/tcp --permanent
```



#### NOTE

- Port 24010 and 3260 are for gluster-blockd and iSCSI targets respectively.
- The port range starting at 49664 defines the range of ports that can be used by GlusterFS for communication to its volume bricks. In the above example, the total number of bricks allowed is 512. Configure the port range based on the maximum number of bricks that could be hosted on each node.

### A.2.3. Enabling Kernel Modules

Execute the following commands to enable kernel modules:

1. You must ensure that the **dm\_thin\_pool** and **target\_core\_user** modules are loaded in the Red Hat Gluster Storage nodes.

```
# modprobe target_core_user
```

```
# modprobe dm_thin_pool
```

Execute the following command to verify if the modules are loaded:

```
# lsmod | grep dm_thin_pool
```

```
# lsmod | grep target_core_user
```

#### NOTE

To ensure these operations are persisted across reboots, create the following files and update each file with the content as mentioned:

```
# cat /etc/modules-load.d/dm_thin_pool.conf
dm_thin_pool
```

```
# cat /etc/modules-load.d/target_core_user.conf
target_core_user
```

2. You must ensure that the **dm\_multipath** module is loaded on all OpenShift Container Platform nodes.

```
# modprobe dm_multipath
```

Execute the following command to verify if the modules are loaded:

```
# lsmod | grep dm_multipath
```

#### NOTE

To ensure these operations are persisted across reboots, create the following file and update it with the content as mentioned:

```
# cat /etc/modules-load.d/dm_multipath.conf
dm_multipath
```

### A.2.4. Starting and Enabling Services

Execute the following commands to start glusterd and gluster-blockd:

```
# systemctl start sshd
```

```
# systemctl enable sshd
```

```
# systemctl start glusterd
```

```
# systemctl enable glusterd
```

```
# systemctl start gluster-blockd
```

```
# systemctl enable gluster-blockd
```

Next Step: Proceed to [Section A.3, "Setting up the Environment"](#) to prepare the environment for Red Hat Gluster Storage Container Converged in OpenShift.

## A.3. SETTING UP THE ENVIRONMENT

This chapter outlines the details for setting up the environment for Red Hat OpenShift Container Platform.

### A.3.1. Preparing the Red Hat OpenShift Container Platform Cluster

Execute the following steps to prepare the Red Hat OpenShift Container Platform cluster:

1. On the master or client, execute the following command to login as the cluster admin user:

```
# oc login
```

For example:

```
oc login
Authentication required for https://dhcp46-
24.lab.eng.blr.redhat.com:8443 (openshift)
Username: test
Password:
Login successful.
```

You have access to the following projects and can switch between them with 'oc project <project\_name>':

```
* default
  kube-system
  logging
  management-infra
  openshift
  openshift-infra
```

Using project "default".

2. On the master or client, execute the following command to create a project, which will contain all the containerized Red Hat Gluster Storage services:

```
# oc new-project <project_name>
```

For example:

```
# oc new-project storage-project

Now using project "storage-project" on server
"https://master.example.com:8443"
```

3. After the project is created, execute the following command on the master node to enable the deployment of the privileged containers as Red Hat Gluster Storage container can only run in the privileged mode.

```
# oc adm policy add-scc-to-user privileged -z default
```

4. Execute the following steps on the master to set up the router:

**NOTE**

If a router already exists, proceed to Step 5. To verify if the router is already deployed, execute the following command:

```
# oc get dc --all-namespaces
```

To list all routers in all namespaces execute the following command:

```
# oc get dc --all-namespaces --selector=router=router
NAMESPACE      NAME      REVISION    DESIRED    CURRENT
TRIGGERED BY
default         router    31           5          5
config
```

1. Execute the following command to enable the deployment of the router:

```
# oc adm policy add-scc-to-user privileged -z router
```

2. Execute the following command to deploy the router:

```
# oc adm router storage-project-router --replicas=1
```

3. Edit the subdomain name in the config.yaml file located at **/etc/origin/master/master-config.yaml**.

For example:

```
subdomain: "cloudapps.mystorage.com"
```

For more information, see [https://access.redhat.com/documentation/en-us/openshift\\_container\\_platform/3.10/html-single/installation\\_and\\_configuration/#customizing-the-default-routing-subdomain](https://access.redhat.com/documentation/en-us/openshift_container_platform/3.10/html-single/installation_and_configuration/#customizing-the-default-routing-subdomain).

4. For OpenShift Container Platform 3.7 and 3.9 execute the following command to restart the services :

```
# systemctl restart atomic-openshift-master-api atomic-openshift-master-controllers
```

**NOTE**

If the router setup fails, use the port forward method as described in [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Dokumentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Port\\_Fwding](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Dokumentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Port_Fwding).

For more information regarding router setup, see <https://access.redhat.com/documentation/en/openshift-container-platform/3.10/paged/installation-and-configuration/chapter-4-setting-up-a-router>

5. Execute the following command to verify if the router is running:

```
# oc get dc <router_name>
```

For example:

```
# oc get dc storage-project-router
NAME                                REVISION  DESIRED  CURRENT  TRIGGERED BY
storage-project-router             1          1         1         config
```



#### NOTE

Ensure you do not edit the `/etc/dnsmasq.conf` file until the router has started.

6. After the router is running, the client has to be setup to access the services in the OpenShift cluster. Execute the following steps on the client to set up the DNS.

1. Execute the following command to find the IP address of the router:

```
# oc get pods -o wide --all-namespaces | grep router
storage-project storage-project-router-1-cm874      1/1
Running 119d      10.70.43.132  dhcp43-
132.lab.eng.blr.redhat.com
```

2. Edit the `/etc/dnsmasq.conf` file and add the following line to the file:

```
address=/.cloudapps.mystorage.com/<Router_IP_Address>
```

where, *Router\_IP\_Address* is the IP address of the node where the router is running.

3. Restart the **dnsmasq** service by executing the following command:

```
# systemctl restart dnsmasq
```

4. Edit `/etc/resolv.conf` and add the following line:

```
nameserver 127.0.0.1
```

For more information regarding setting up the DNS, see <https://access.redhat.com/documentation/en/openshift-container-platform/3.10/single/installation-and-configuration/#environment-requirements>.

### A.3.2. Deploying Containerized Red Hat Gluster Storage Solutions

The following section covers deployment of the converged mode pods, independent mode pods, and using the **cns-deploy** tool.



## NOTE

- It is recommended that a separate cluster for OpenShift Container Platform infrastructure workload (registry, logging and metrics) and application pod storage. Hence, if you have more than 6 nodes ensure you create multiple clusters with a minimum of 3 nodes each. The infrastructure cluster should belong to the **default** project namespace.
- If you want to enable encryption on Red Hat Openshift Container Storage setup, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Enabling\\_Encryption](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Enabling_Encryption) before proceeding with the following steps.

1. You must first provide a topology file for heketi which describes the topology of the Red Hat Gluster Storage nodes and their attached storage devices. A sample, formatted topology file (topology-sample.json) is installed with the 'heketi-client' package in the /usr/share/heketi/ directory.

```
{
  "clusters": [
    {
      "nodes": [
        {
          "node": {
            "hostnames": {
              "manage": [
                "node1.example.com"
              ],
              "storage": [
                "192.168.68.3"
              ]
            },
            "zone": 1
          },
          "devices": [
            "/dev/sdb",
            "/dev/sdc",
            "/dev/sdd",
            "/dev/sde",
            "/dev/sdf",
            "/dev/sdg",
            "/dev/sdh",
            "/dev/sdi"
          ]
        },
        {
          "node": {
            "hostnames": {
              "manage": [
                "node2.example.com"
              ],
              "storage": [
                "192.168.68.2"
              ]
            }
          }
        }
      ]
    }
  ]
}
```

```

        ],
        },
        "zone": 2
    },
    "devices": [
        "/dev/sdb",
        "/dev/sdc",
        "/dev/sdd",
        "/dev/sde",
        "/dev/sdf",
        "/dev/sdg",
        "/dev/sdh",
        "/dev/sdi"
    ]
},

```

.....  
 .....

where,

- clusters: Array of clusters.

Each element on the array is a map which describes the cluster as follows.

- nodes: Array of OpenShift nodes that will host the Red Hat Gluster Storage container

Each element on the array is a map which describes the node as follows

- node: It is a map of the following elements:
  - zone: The value represents the zone number that the node belongs to; the zone number is used by heketi for choosing optimum position of bricks by having replicas of bricks in different zones. Hence zone number is similar to a failure domain.
  - hostnames: It is a map which lists the manage and storage addresses
    - manage: It is the hostname/IP Address that is used by Heketi to communicate with the node
    - storage: It is the IP address that is used by other OpenShift nodes to communicate with the node. Storage data traffic will use the interface attached to this IP. This must be the IP address and not the hostname because, in an OpenShift environment, Heketi considers this to be the endpoint too.
- devices: Name of each disk to be added



## NOTE

Copy the topology file from the default location to your location and then edit it:

```
# cp /usr/share/heketi/topology-sample.json
/<Path>/topology.json
```

Edit the topology file based on the Red Hat Gluster Storage pod hostname under the **node.hostnames.manage** section and **node.hostnames.storage** section with the IP address. For simplicity, the `/usr/share/heketi/topology-sample.json` file only sets up 4 nodes with 8 drives each.



## IMPORTANT

Heketi stores its database on a Red Hat Gluster Storage volume. In cases where the volume is down, the Heketi service does not respond due to the unavailability of the volume served by a disabled trusted storage pool. To resolve this issue, restart the trusted storage pool which contains the Heketi volume.

### A.3.2.1. Deploying Converged Mode

Execute the following commands to deploy converged mode:

1. Execute the following command on the client to deploy the heketi and Red Hat Gluster Storage pods:

```
# cns-deploy -n <namespace> -g --admin-key <Key> topology.json
```



## NOTE

- o From Container-Native Storage 3.6, support for S3 compatible Object Store in Red Hat Openshift Container Storage is under technology preview. To deploy S3 compatible object store in Red Hat Openshift Container Storage see Step 1a below.
- o In the above command, the value for **admin-key** is the secret string for heketi admin user. The heketi administrator will have access to all APIs and commands. Default is to use no secret.
- o The **BLOCK\_HOST\_SIZE** parameter in `cns-deploy` controls the size (in GB) of the automatically created Red Hat Gluster Storage volumes hosting the gluster-block volumes. This default configuration will dynamically create block-hosting volumes of 500GB in size when more space is required. If you want to change this value then use `--block-host` in `cns-deploy`. For example:

```
# cns-deploy -n storage-project -g --admin-key secret
--block-host 1000 topology.json
```

For example:

```
# cns-deploy -n storage-project -g --admin-key secret topology.json
```

Welcome to the deployment tool for GlusterFS on Kubernetes and OpenShift.

Before getting started, this script has some requirements of the execution environment and of the container platform that you should verify.

The client machine that will run this script must have:



- \* Administrative access to an existing Kubernetes or OpenShift cluster

- \* Access to a python interpreter 'python'

Each of the nodes that will host GlusterFS must also have appropriate firewall

rules for the required GlusterFS ports:

- \* 111 - rpcbind (for glusterblock)
- \* 2222 - sshd (if running GlusterFS in a pod)
- \* 3260 - iSCSI targets (for glusterblock)
- \* 24006 - glusterblockd
- \* 24007 - GlusterFS Management
- \* 24008 - GlusterFS RDMA
- \* 49152 to 49251 - Each brick for every volume on the host requires its own port. For every new brick, one new port will be used starting at 49152. We recommend a default range of 49152-49251 on each host, though you can adjust this to fit your needs.

The following kernel modules must be loaded:

- \* dm\_snapshot
- \* dm\_mirror
- \* dm\_thin\_pool
- \* dm\_multipath
- \* target\_core\_user

For systems with SELinux, the following settings need to be considered:

- \* virt\_sandbox\_use\_fusefs should be enabled on each node to allow writing to remote GlusterFS volumes

In addition, for an OpenShift deployment you must:

- \* Have 'cluster\_admin' role on the administrative account doing the deployment
- \* Add the 'default' and 'router' Service Accounts to the 'privileged' SCC
- \* Have a router deployed that is configured to allow apps to access services running in the cluster

Do you wish to proceed with deployment?

[Y]es, [N]o? [Default: Y]: Y

Using OpenShift CLI.

Using namespace "storage-project".

Checking for pre-existing resources...

GlusterFS pods ... not found.

deploy-heketi pod ... not found.

heketi pod ... not found.

glusterblock-provisioner pod ... not found.

gluster-s3 pod ... not found.

Creating initial resources ... template "deploy-heketi" created  
serviceaccount "heketi-service-account" created

```

template "heketi" created
template "glusterfs" created
role "edit" added: "system:serviceaccount:storage-project:heketi-
service-account"
OK
node "ip-172-18-5-29.ec2.internal" labeled
node "ip-172-18-8-205.ec2.internal" labeled
node "ip-172-18-6-100.ec2.internal" labeled
daemonset "glusterfs" created
Waiting for GlusterFS pods to start ... OK
secret "heketi-config-secret" created
secret "heketi-config-secret" labeled
service "deploy-heketi" created
route "deploy-heketi" created
deploymentconfig "deploy-heketi" created
Waiting for deploy-heketi pod to start ... OK
Creating cluster ... ID: 30cd12e60f860fce21e7e7457d07db36
Allowing file volumes on cluster.
Allowing block volumes on cluster.
Creating node ip-172-18-5-29.ec2.internal ... ID:
4077242c76e5f477a27c5c47247cb348
Adding device /dev/xvdc ... OK
Creating node ip-172-18-8-205.ec2.internal ... ID:
dda0e7d568d7b2f76a7e7491cfc26dd3
Adding device /dev/xvdc ... OK
Creating node ip-172-18-6-100.ec2.internal ... ID:
30a1795ca515c85dca32b09be7a68733
Adding device /dev/xvdc ... OK
heketi topology loaded.
Saving /tmp/heketi-storage.json
secret "heketi-storage-secret" created
endpoints "heketi-storage-endpoints" created
service "heketi-storage-endpoints" created
job "heketi-storage-copy-job" created
service "heketi-storage-endpoints" labeled
deploymentconfig "deploy-heketi" deleted
route "deploy-heketi" deleted
service "deploy-heketi" deleted
job "heketi-storage-copy-job" deleted
pod "deploy-heketi-1-frjpt" deleted
secret "heketi-storage-secret" deleted
template "deploy-heketi" deleted
service "heketi" created
route "heketi" created
deploymentconfig "heketi" created
Waiting for heketi pod to start ... OK

```

heketi is now running and accessible via <http://heketi-storage-project.cloudapps.mystorage.com> . To run administrative commands you can install 'heketi-cli' and use it as follows:

```

# heketi-cli -s http://heketi-storage-
project.cloudapps.mystorage.com --user admin --secret '<ADMIN_KEY>'
cluster list

```

You can find it at <https://github.com/heketi/heketi/releases> .  
Alternatively,  
use it from within the heketi pod:

```
# /bin/oc -n storage-project exec -it <HEKETI_POD> -- heketi-cli -
s http://localhost:8080 --user admin --secret '<ADMIN_KEY>' cluster
list
```

For dynamic provisioning, create a StorageClass similar to this:

```
---
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: glusterfs-storage
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-project.cloudapps.mystorage.com"
```

```
Ready to create and provide GlusterFS volumes.
clusterrole "glusterblock-provisioner-runner" created
serviceaccount "glusterblock-provisioner" created
clusterrolebinding "glusterblock-provisioner" created
deploymentconfig "glusterblock-provisioner-dc" created
Waiting for glusterblock-provisioner pod to start ... OK
Ready to create and provide Gluster block volumes.
```

Deployment complete!



## NOTE

For more information on the cns-deploy commands, refer to the man page of cns-deploy.

```
# cns-deploy --help
```

1. To deploy S3 compatible object store along with Heketi and Red Hat Gluster Storage pods, execute the following command:

```
# cns-deploy /opt/topology.json --deploy-gluster --namespace
<namespace> --yes --admin-key <key> --log-file=<path/to/logfile>
--object-account <object account name> --object-user <object user
name> --object-password <object user password> --verbose
```

**object-account**, **object-user**, and **object-password** are required credentials for deploying the gluster-s3 container. If any of these are missing, gluster-s3 container deployment will be skipped.

**object-sc** and **object-capacity** are optional parameters. Where, **object-sc** is used to specify a pre-existing StorageClass to use to create Red Hat Gluster Storage volumes to back the object store and **object-capacity** is the total capacity of the Red Hat Gluster Storage volume which will store the object data.

For example:

```
# cns-deploy /opt/topology.json --deploy-gluster --namespace
storage-project --yes --admin-key secret --log-file=/var/log/cns-
deploy/444-cns-deploy.log --object-account testvolume --object-
user adminuser --object-password itsmine --verbose
Using OpenShift CLI.

Checking status of namespace matching 'storage-project':
storage-project Active 56m
Using namespace "storage-project".
Checking for pre-existing resources...
  GlusterFS pods ...
Checking status of pods matching '--selector=glusterfs=pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=pod'.
not found.
  deploy-heketi pod ...
Checking status of pods matching '--selector=deploy-heketi=pod':
No resources found.
Timed out waiting for pods matching '--selector=deploy-
heketi=pod'.
not found.
  heketi pod ...
Checking status of pods matching '--selector=heketi=pod':
No resources found.
Timed out waiting for pods matching '--selector=heketi=pod'.
not found.
  glusterblock-provisioner pod ...
Checking status of pods matching '--selector=glusterfs=block-
provisioner-pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=block-
provisioner-pod'.
not found.
  gluster-s3 pod ...
Checking status of pods matching '--selector=glusterfs=s3-pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=s3-
pod'.
not found.
Creating initial resources ... /usr/bin/oc -n storage-project
create -f /usr/share/heketi/templates/deploy-heketi-template.yaml
2>&1
template "deploy-heketi" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/heketi-service-account.yaml 2>&1
serviceaccount "heketi-service-account" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/heketi-template.yaml 2>&1
template "heketi" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/glusterfs-template.yaml 2>&1
template "glusterfs" created
/usr/bin/oc -n storage-project policy add-role-to-user edit
system:serviceaccount:storage-project:heketi-service-account 2>&1
role "edit" added: "system:serviceaccount:storage-project:heketi-
service-account"
```

```

/usr/bin/oc -n storage-project adm policy add-scc-to-user
privileged -z heketi-service-account
OK
Marking 'dhcp46-122.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
122.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-122.lab.eng.blr.redhat.com" labeled
Marking 'dhcp46-9.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
9.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-9.lab.eng.blr.redhat.com" labeled
Marking 'dhcp46-134.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
134.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-134.lab.eng.blr.redhat.com" labeled
Deploying GlusterFS pods.
/usr/bin/oc -n storage-project process -p NODE_LABEL=glusterfs
glusterfs | /usr/bin/oc -n storage-project create -f - 2>&1
daemonset "glusterfs" created
Waiting for GlusterFS pods to start ...
Checking status of pods matching '--selector=glusterfs=pod':
glusterfs-6fj2v    1/1      Running    0          52s
glusterfs-ck40f    1/1      Running    0          52s
glusterfs-kbtz4    1/1      Running    0          52s
OK
/usr/bin/oc -n storage-project create secret generic heketi-
config-secret --from-file=private_key=/dev/null --from-
file=./heketi.json --from-file=topology.json=/opt/topology.json
secret "heketi-config-secret" created
/usr/bin/oc -n storage-project label --overwrite secret heketi-
config-secret glusterfs=heketi-config-secret heketi=config-secret
secret "heketi-config-secret" labeled
/usr/bin/oc -n storage-project process -p
HEKETI_EXECUTOR=kubernetes -p HEKETI_FSTAB=/var/lib/heketi/fstab
-p HEKETI_ADMIN_KEY= -p HEKETI_USER_KEY= deploy-heketi |
/usr/bin/oc -n storage-project create -f - 2>&1
service "deploy-heketi" created
route "deploy-heketi" created
deploymentconfig "deploy-heketi" created
Waiting for deploy-heketi pod to start ...
Checking status of pods matching '--selector=deploy-heketi=pod':
deploy-heketi-1-hf9rn  1/1      Running    0          2m
OK
Determining heketi service URL ... OK
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --
heketi-cli -s http://localhost:8080 --user admin --secret ''
topology load --json=/etc/heketi/topology.json 2>&1
Creating cluster ... ID: 252509038eb8568162ec5920c12bc243
Allowing file volumes on cluster.
Allowing block volumes on cluster.
Creating node dhcp46-122.lab.eng.blr.redhat.com ... ID:
73ad287ae1ef231f8a0db46422367c9a
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp46-9.lab.eng.blr.redhat.com ... ID:

```

```

0da1b20daaad2d5c57dbfc4f6ab78001
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp46-134.lab.eng.blr.redhat.com ... ID:
4b3b62fc0efd298dedbcdacf0b498e65
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
heketi topology loaded.
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --
heketi-cli -s http://localhost:8080 --user admin --secret ''
setup-openshift-heketi-storage --listfile=/tmp/heketi-
storage.json --image rhgs3/rhgs-volmanager-rhel7:3.3.0-17 2>&1
Saving /tmp/heketi-storage.json
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --
cat /tmp/heketi-storage.json | /usr/bin/oc -n storage-project
create -f - 2>&1
secret "heketi-storage-secret" created
endpoints "heketi-storage-endpoints" created
service "heketi-storage-endpoints" created
job "heketi-storage-copy-job" created

Checking status of pods matching '--selector=job-name=heketi-
storage-copy-job':
heketi-storage-copy-job-87v6n    0/1          Completed    0
7s
/usr/bin/oc -n storage-project label --overwrite svc heketi-
storage-endpoints glusterfs=heketi-storage-endpoints
heketi=storage-endpoints
service "heketi-storage-endpoints" labeled
/usr/bin/oc -n storage-project delete
all,service,jobs,deployment,secret --selector="deploy-heketi"
2>&1
deploymentconfig "deploy-heketi" deleted
route "deploy-heketi" deleted
service "deploy-heketi" deleted
job "heketi-storage-copy-job" deleted
pod "deploy-heketi-1-hf9rn" deleted
secret "heketi-storage-secret" deleted
/usr/bin/oc -n storage-project delete dc,route,template --
selector="deploy-heketi" 2>&1
template "deploy-heketi" deleted
/usr/bin/oc -n storage-project process -p
HEKETI_EXECUTOR=kubernetes -p HEKETI_FSTAB=/var/lib/heketi/fstab
-p HEKETI_ADMIN_KEY= -p HEKETI_USER_KEY= heketi | /usr/bin/oc -n
storage-project create -f - 2>&1
service "heketi" created
route "heketi" created
deploymentconfig "heketi" created
Waiting for heketi pod to start ...
Checking status of pods matching '--selector=heketi=pod':
heketi-1-zzblp    1/1          Running    0          31s
OK
Determining heketi service URL ... OK

```

heketi is now running and accessible via `http://heketi-storage-project.cloudapps.mystorage.com` . To run administrative commands you can install 'heketi-cli' and use it as follows:

```
# heketi-cli -s http://heketi-storage-
project.cloudapps.mystorage.com --user admin --secret
'<ADMIN_KEY>' cluster list
```

You can find it at `https://github.com/heketi/heketi/releases` . Alternatively, use it from within the heketi pod:

```
# /usr/bin/oc -n storage-project exec -it <HEKETI_POD> --
heketi-cli -s http://localhost:8080 --user admin --secret
'<ADMIN_KEY>' cluster list
```

For dynamic provisioning, create a StorageClass similar to this:

```
---
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: glusterfs-storage
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-
project.cloudapps.mystorage.com"
```

Ready to create and provide GlusterFS volumes.

```
sed -e 's/\${NAMESPACE}/storage-project/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml |
/usr/bin/oc -n storage-project create -f - 2>&1
clusterrole "glusterblock-provisioner-runner" created
serviceaccount "glusterblock-provisioner" created
clusterrolebinding "glusterblock-provisioner" created
deploymentconfig "glusterblock-provisioner-dc" created
Waiting for glusterblock-provisioner pod to start ...
Checking status of pods matching '--selector=glusterfs=block-
provisioner-pod':
```

```
glusterblock-provisioner-dc-1-xm6bv    1/1      Running    0
6s
```

OK

Ready to create and provide Gluster block volumes.

```
/usr/bin/oc -n storage-project create secret generic heketi-
storage-project-admin-secret --from-literal=key= --
type=kubernetes.io/glusterfs
secret "heketi-storage-project-admin-secret" created
/usr/bin/oc -n storage-project label --overwrite secret heketi-
storage-project-admin-secret glusterfs=s3-heketi-storage-project-
admin-secret gluster-s3=heketi-storage-project-admin-secret
secret "heketi-storage-project-admin-secret" labeled
sed -e 's/\${STORAGE_CLASS}/glusterfs-for-s3/' -e
's/\${HEKETI_URL}/heketi-storage-
project.cloudapps.mystorage.com/' -e 's/\${NAMESPACE}/storage-
project/' /usr/share/heketi/templates/gluster-s3-
```

```

storageclass.yaml | /usr/bin/oc -n storage-project create -f -
2>&1
storageclass "glusterfs-for-s3" created
sed -e 's/\${STORAGE_CLASS}/glusterfs-for-s3/' -e
's/\${VOLUME_CAPACITY}/2Gi/' /usr/share/heketi/templates/gluster-
s3-pvcs.yaml | /usr/bin/oc -n storage-project create -f - 2>&1
persistentvolumeclaim "gluster-s3-claim" created
persistentvolumeclaim "gluster-s3-meta-claim" created

Checking status of persistentvolumeclaims matching '--
selector=glusterfs in (s3-pvc, s3-meta-pvc)':
gluster-s3-claim          Bound          pvc-35b6c1f0-9c65-11e7-9c8c-
005056b3ded1    2Gi          RWX          glusterfs-for-s3    18s
gluster-s3-meta-claim    Bound          pvc-35b86e7a-9c65-11e7-9c8c-
005056b3ded1    1Gi          RWX          glusterfs-for-s3    18s
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/gluster-s3-template.yaml 2>&1
template "gluster-s3" created
/usr/bin/oc -n storage-project process -p S3_ACCOUNT=testvolume -
p S3_USER=adminuser -p S3_PASSWORD=itsmine gluster-s3 |
/usr/bin/oc -n storage-project create -f - 2>&1
service "gluster-s3-service" created
route "gluster-s3-route" created
deploymentconfig "gluster-s3-dc" created
Waiting for gluster-s3 pod to start ...
Checking status of pods matching '--selector=glusterfs=s3-pod':
gluster-s3-dc-1-x3x4q    1/1          Running    0          6s
OK
Ready to create and provide Gluster object volumes.

Deployment complete!

```

2. Execute the following command to let the client communicate with the container:

```
# export HEKETI_CLI_SERVER=http://heketi-<project_name>.<sub_domain_name>
```

For example:

```
# export HEKETI_CLI_SERVER=http://heketi-storage-
project.cloudapps.mystorage.com
```

To verify if Heketi is loaded with the topology execute the following command:

```
# heketi-cli topology info
```



## NOTE

The cns-deploy tool does not support scaling up of the cluster. To manually scale-up the cluster, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Managing\\_Clusters](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Managing_Clusters)



Next step: If you are installing the independent mode 3.10, proceed to [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Updating\\_Registry](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Updating_Registry).

### A.3.2.2. Deploying Independent Mode

Execute the following commands to deploy Red Hat Openshift Container Storage in Independent mode:

1. To set a passwordless SSH to all Red Hat Gluster Storage nodes, execute the following command on the client for each of the Red Hat Gluster Storage node:

```
# ssh-copy-id -i /root/.ssh/id_rsa root@<ip/hostname_rhgs node>
```

2. Execute the following command on the client to deploy heketi pod and to create a cluster of Red Hat Gluster Storage nodes:

```
# cns-deploy -n <namespace> --admin-key <Key> -s /root/.ssh/id_rsa topology.json
```

#### NOTE

- Support for S3 compatible Object Store is under technology preview. To deploy S3 compatible object store see Step 2a below.
- In the above command, the value for **admin-key** is the secret string for heketi admin user. The heketi administrator will have access to all APIs and commands. Default is to use no secret.
- The **BLOCK\_HOST\_SIZE** parameter in cns-deploy controls the size (in GB) of the automatically created Red Hat Gluster Storage volumes hosting the gluster-block volumes. This default configuration will dynamically create block-hosting volumes of 500GB in size when more space is required. If you want to change this value then use --block-host in cns-deploy. For example:

```
# cns-deploy -n storage-project -g --admin-key secret --block-host 1000 topology.json
```

For example:

```
# cns-deploy -n storage-project --admin-key secret -s /root/.ssh/id_rsa topology.json
Welcome to the deployment tool for GlusterFS on Kubernetes and OpenShift.
```

Before getting started, this script has some requirements of the execution environment and of the container platform that you should verify.

The client machine that will run this script must have:

- \* Administrative access to an existing Kubernetes or OpenShift cluster
- \* Access to a python interpreter 'python'

Each of the nodes that will host GlusterFS must also have appropriate firewall rules for the required GlusterFS ports:

- \* 2222 - sshd (if running GlusterFS in a pod)
- \* 24007 - GlusterFS Management
- \* 24008 - GlusterFS RDMA
- \* 49152 to 49251 - Each brick for every volume on the host requires its own port. For every new brick, one new port will be used starting at 49152. We recommend a default range of 49152-49251 on each host, though you can adjust this to fit your needs.

The following kernel modules must be loaded:

- \* dm\_snapshot
- \* dm\_mirror
- \* dm\_thin\_pool

For systems with SELinux, the following settings need to be considered:

- \* virt\_sandbox\_use\_fusefs should be enabled on each node to allow writing to remote GlusterFS volumes

In addition, for an OpenShift deployment you must:

- \* Have 'cluster\_admin' role on the administrative account doing the deployment
- \* Add the 'default' and 'router' Service Accounts to the 'privileged' SCC
- \* Have a router deployed that is configured to allow apps to access services running in the cluster

Do you wish to proceed with deployment?

[Y]es, [N]o? [Default: Y]: y

Using OpenShift CLI.

Using namespace "storage-project".

Checking for pre-existing resources...

GlusterFS pods ... not found.

deploy-heketi pod ... not found.

heketi pod ... not found.

Creating initial resources ... template "deploy-heketi" created

serviceaccount "heketi-service-account" created

template "heketi" created

role "edit" added: "system:serviceaccount:storage-project:heketi-service-account"

OK

secret "heketi-config-secret" created

secret "heketi-config-secret" labeled

service "deploy-heketi" created

route "deploy-heketi" created

deploymentconfig "deploy-heketi" created

Waiting for deploy-heketi pod to start ... OK

```

Creating cluster ... ID: 60bf06636eb4eb81d4e9be4b04cfce92
Allowing file volumes on cluster.
Allowing block volumes on cluster.
Creating node dhcp47-104.lab.eng.blr.redhat.com ... ID:
eadc66f9d03563bcfc3db3fe636c34be
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp47-83.lab.eng.blr.redhat.com ... ID:
178684b0a0425f51b8f1a032982ffe4d
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp46-152.lab.eng.blr.redhat.com ... ID:
08cd7034ef7ac66499dc040d93cf4a93
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
heketi topology loaded.
Saving /tmp/heketi-storage.json
secret "heketi-storage-secret" created
endpoints "heketi-storage-endpoints" created
service "heketi-storage-endpoints" created
job "heketi-storage-copy-job" created
service "heketi-storage-endpoints" labeled
deploymentconfig "deploy-heketi" deleted
route "deploy-heketi" deleted
service "deploy-heketi" deleted
job "heketi-storage-copy-job" deleted
pod "deploy-heketi-1-30c06" deleted
secret "heketi-storage-secret" deleted
template "deploy-heketi" deleted
service "heketi" created
route "heketi" created
deploymentconfig "heketi" created
Waiting for heketi pod to start ... OK

heketi is now running and accessible via http://heketi-storage-
project.cloudapps.mystorage.com . To run
administrative commands you can install 'heketi-cli' and use it as
follows:

# heketi-cli -s http://heketi-storage-
project.cloudapps.mystorage.com --user admin --secret '<ADMIN_KEY>'
cluster list

You can find it at https://github.com/heketi/heketi/releases .
Alternatively,
use it from within the heketi pod:

# /usr/bin/oc -n storage-project exec -it <HEKETI_POD> -- heketi-
cli -s http://localhost:8080 --user admin --secret '<ADMIN_KEY>'
cluster list

```

For dynamic provisioning, create a StorageClass similar to this:

```

---
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: glusterfs-storage
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-project.cloudapps.mystorage.com"

```

Deployment complete!



## NOTE

For more information on the `cns-deploy` commands, refer to the man page of the `cns-deploy`.

```
# cns-deploy --help
```

1. To deploy S3 compatible object store along with Heketi and Red Hat Gluster Storage pods, execute the following command:

```

# cns-deploy /opt/topology.json --deploy-gluster --namespace
<namespace> --admin-key <Key> --yes --log-file=<path/to/logfile>
--object-account <object account name> --object-user <object user
name> --object-password <object user password> --verbose

```

**object-account**, **object-user**, and **object-password** are required credentials for deploying the `gluster-s3` container. If any of these are missing, `gluster-s3` container deployment will be skipped.

**object-sc** and **object-capacity** are optional parameters. Where, **object-sc** is used to specify a pre-existing `StorageClass` to use to create Red Hat Gluster Storage volumes to back the object store and **object-capacity** is the total capacity of the Red Hat Gluster Storage volume which will store the object data.

For example:

```

# cns-deploy /opt/topology.json --deploy-gluster --namespace
storage-project --admin-key secret --yes --log-file=/var/log/cns-
deploy/444-cns-deploy.log --object-account testvolume --object-
user adminuser --object-password itsmine --verbose
Using OpenShift CLI.

```

```

Checking status of namespace matching 'storage-project':
storage-project  Active    56m
Using namespace "storage-project".
Checking for pre-existing resources...
  GlusterFS pods ...
Checking status of pods matching '--selector=glusterfs=pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=pod'.
not found.
  deploy-heketi pod ...

```

```

Checking status of pods matching '--selector=deploy-heketi=pod':
No resources found.
Timed out waiting for pods matching '--selector=deploy-
heketi=pod'.
not found.
    heketi pod ...
Checking status of pods matching '--selector=heketi=pod':
No resources found.
Timed out waiting for pods matching '--selector=heketi=pod'.
not found.
    glusterblock-provisioner pod ...
Checking status of pods matching '--selector=glusterfs=block-
provisioner-pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=block-
provisioner-pod'.
not found.
    gluster-s3 pod ...
Checking status of pods matching '--selector=glusterfs=s3-pod':
No resources found.
Timed out waiting for pods matching '--selector=glusterfs=s3-
pod'.
not found.
Creating initial resources ... /usr/bin/oc -n storage-project
create -f /usr/share/heketi/templates/deploy-heketi-template.yaml
2>&1
template "deploy-heketi" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/heketi-service-account.yaml 2>&1
serviceaccount "heketi-service-account" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/heketi-template.yaml 2>&1
template "heketi" created
/usr/bin/oc -n storage-project create -f
/usr/share/heketi/templates/glusterfs-template.yaml 2>&1
template "glusterfs" created
/usr/bin/oc -n storage-project policy add-role-to-user edit
system:serviceaccount:storage-project:heketi-service-account 2>&1
role "edit" added: "system:serviceaccount:storage-project:heketi-
service-account"
/usr/bin/oc -n storage-project adm policy add-scc-to-user
privileged -z heketi-service-account
OK
Marking 'dhcp46-122.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
122.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-122.lab.eng.blr.redhat.com" labeled
Marking 'dhcp46-9.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
9.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-9.lab.eng.blr.redhat.com" labeled
Marking 'dhcp46-134.lab.eng.blr.redhat.com' as a GlusterFS node.
/usr/bin/oc -n storage-project label nodes dhcp46-
134.lab.eng.blr.redhat.com storagenode=glusterfs 2>&1
node "dhcp46-134.lab.eng.blr.redhat.com" labeled
Deploying GlusterFS pods.

```

```

/usr/bin/oc -n storage-project process -p NODE_LABEL=glusterfs
glusterfs | /usr/bin/oc -n storage-project create -f - 2>&1
daemonset "glusterfs" created
Waiting for GlusterFS pods to start ...
Checking status of pods matching '--selector=glusterfs=pod':
glusterfs-6fj2v    1/1      Running    0          52s
glusterfs-ck40f    1/1      Running    0          52s
glusterfs-kbtz4    1/1      Running    0          52s
OK
/usr/bin/oc -n storage-project create secret generic heketi-
config-secret --from-file=private_key=/dev/null --from-
file=./heketi.json --from-file=topology.json=/opt/topology.json
secret "heketi-config-secret" created
/usr/bin/oc -n storage-project label --overwrite secret heketi-
config-secret glusterfs=heketi-config-secret heketi=config-secret
secret "heketi-config-secret" labeled
/usr/bin/oc -n storage-project process -p
HEKETI_EXECUTOR=kubernetes -p HEKETI_FSTAB=/var/lib/heketi/fstab
-p HEKETI_ADMIN_KEY= -p HEKETI_USER_KEY= deploy-heketi |
/usr/bin/oc -n storage-project create -f - 2>&1
service "deploy-heketi" created
route "deploy-heketi" created
deploymentconfig "deploy-heketi" created
Waiting for deploy-heketi pod to start ...
Checking status of pods matching '--selector=deploy-heketi=pod':
deploy-heketi-1-hf9rn  1/1      Running    0          2m
OK
Determining heketi service URL ... OK
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --
heketi-cli -s http://localhost:8080 --user admin --secret ''
topology load --json=/etc/heketi/topology.json 2>&1
Creating cluster ... ID: 252509038eb8568162ec5920c12bc243
Allowing file volumes on cluster.
Allowing block volumes on cluster.
Creating node dhcp46-122.lab.eng.blr.redhat.com ... ID:
73ad287ae1ef231f8a0db46422367c9a
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp46-9.lab.eng.blr.redhat.com ... ID:
0da1b20daaad2d5c57dbfc4f6ab78001
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
Creating node dhcp46-134.lab.eng.blr.redhat.com ... ID:
4b3b62fc0efd298dedbcdacf0b498e65
Adding device /dev/sdd ... OK
Adding device /dev/sde ... OK
Adding device /dev/sdf ... OK
heketi topology loaded.
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --
heketi-cli -s http://localhost:8080 --user admin --secret ''
setup-openshift-heketi-storage --listfile=/tmp/heketi-
storage.json --image rhgs3/rhgs-volmanager-rhel7:3.3.0-17 2>&1
Saving /tmp/heketi-storage.json
/usr/bin/oc -n storage-project exec -it deploy-heketi-1-hf9rn --

```

```

cat /tmp/heketi-storage.json | /usr/bin/oc -n storage-project
create -f - 2>&1
secret "heketi-storage-secret" created
endpoints "heketi-storage-endpoints" created
service "heketi-storage-endpoints" created
job "heketi-storage-copy-job" created

Checking status of pods matching '--selector=job-name=heketi-
storage-copy-job':
heketi-storage-copy-job-87v6n    0/1          Completed    0
7s
/usr/bin/oc -n storage-project label --overwrite svc heketi-
storage-endpoints glusterfs=heketi-storage-endpoints
heketi=storage-endpoints
service "heketi-storage-endpoints" labeled
/usr/bin/oc -n storage-project delete
all,service,jobs,deployment,secret --selector="deploy-heketi"
2>&1
deploymentconfig "deploy-heketi" deleted
route "deploy-heketi" deleted
service "deploy-heketi" deleted
job "heketi-storage-copy-job" deleted
pod "deploy-heketi-1-hf9rn" deleted
secret "heketi-storage-secret" deleted
/usr/bin/oc -n storage-project delete dc,route,template --
selector="deploy-heketi" 2>&1
template "deploy-heketi" deleted
/usr/bin/oc -n storage-project process -p
HEKETI_EXECUTOR=kubernetes -p HEKETI_FSTAB=/var/lib/heketi/fstab
-p HEKETI_ADMIN_KEY= -p HEKETI_USER_KEY= heketi | /usr/bin/oc -n
storage-project create -f - 2>&1
service "heketi" created
route "heketi" created
deploymentconfig "heketi" created
Waiting for heketi pod to start ...
Checking status of pods matching '--selector=heketi=pod':
heketi-1-zzblp    1/1          Running    0          31s
OK
Determining heketi service URL ... OK

heketi is now running and accessible via http://heketi-storage-
project.cloudapps.mystorage.com . To run
administrative commands you can install 'heketi-cli' and use it as
follows:

# heketi-cli -s http://heketi-storage-
project.cloudapps.mystorage.com --user admin --secret
'<ADMIN_KEY>' cluster list

You can find it at https://github.com/heketi/heketi/releases .
Alternatively,
use it from within the heketi pod:

# /usr/bin/oc -n storage-project exec -it <HEKETI_POD> --
heketi-cli -s http://localhost:8080 --user admin --secret
'<ADMIN_KEY>' cluster list

```

For dynamic provisioning, create a StorageClass similar to this:

```
---
apiVersion: storage.k8s.io/v1beta1
kind: StorageClass
metadata:
  name: glusterfs-storage
provisioner: kubernetes.io/glusterfs
parameters:
  resturl: "http://heketi-storage-
project.cloudapps.mystorage.com"
```

Ready to create and provide GlusterFS volumes.

```
sed -e 's/\${NAMESPACE}/storage-project/'
/usr/share/heketi/templates/glusterblock-provisioner.yaml |
/usr/bin/oc -n storage-project create -f - 2>&1
clusterrole "glusterblock-provisioner-runner" created
serviceaccount "glusterblock-provisioner" created
clusterrolebinding "glusterblock-provisioner" created
deploymentconfig "glusterblock-provisioner-dc" created
Waiting for glusterblock-provisioner pod to start ...
Checking status of pods matching '--selector=glusterfs=block-
provisioner-pod':
```

```
glusterblock-provisioner-dc-1-xm6bv    1/1      Running    0
6s
OK
```

Ready to create and provide Gluster block volumes.

```
/usr/bin/oc -n storage-project create secret generic heketi-
storage-project-admin-secret --from-literal=key= --
type=kubernetes.io/glusterfs
secret "heketi-storage-project-admin-secret" created
/usr/bin/oc -n storage-project label --overwrite secret heketi-
storage-project-admin-secret glusterfs=s3-heketi-storage-project-
admin-secret gluster-s3=heketi-storage-project-admin-secret
secret "heketi-storage-project-admin-secret" labeled
sed -e 's/\${STORAGE_CLASS}/glusterfs-for-s3/' -e
's/\${HEKETI_URL}/heketi-storage-
project.cloudapps.mystorage.com/' -e 's/\${NAMESPACE}/storage-
project/' /usr/share/heketi/templates/gluster-s3-
storageclass.yaml | /usr/bin/oc -n storage-project create -f -
2>&1
storageclass "glusterfs-for-s3" created
sed -e 's/\${STORAGE_CLASS}/glusterfs-for-s3/' -e
's/\${VOLUME_CAPACITY}/2Gi/' /usr/share/heketi/templates/gluster-
s3-pvcs.yaml | /usr/bin/oc -n storage-project create -f - 2>&1
persistentvolumeclaim "gluster-s3-claim" created
persistentvolumeclaim "gluster-s3-meta-claim" created
```

Checking status of persistentvolumeclaims matching '--
selector=glusterfs in (s3-pvc, s3-meta-pvc)':

```
gluster-s3-claim          Bound          pvc-35b6c1f0-9c65-11e7-9c8c-
005056b3ded1    2Gi          RWX          glusterfs-for-s3    18s
gluster-s3-meta-claim     Bound          pvc-35b86e7a-9c65-11e7-9c8c-
005056b3ded1    1Gi          RWX          glusterfs-for-s3    18s
/usr/bin/oc -n storage-project create -f
```



```

/usr/share/heketi/templates/gluster-s3-template.yaml 2>&1
template "gluster-s3" created
/usr/bin/oc -n storage-project process -p S3_ACCOUNT=testvolume -
p S3_USER=adminuser -p S3_PASSWORD=itsmine gluster-s3 |
/usr/bin/oc -n storage-project create -f - 2>&1
service "gluster-s3-service" created
route "gluster-s3-route" created
deploymentconfig "gluster-s3-dc" created
Waiting for gluster-s3 pod to start ...
Checking status of pods matching '--selector=glusterfs=s3-pod':
gluster-s3-dc-1-x3x4q 1/1 Running 0 6s
OK
Ready to create and provide Gluster object volumes.

Deployment complete!

```

3. Brick multiplexing is a feature that allows adding multiple bricks into one process. This reduces resource consumption and allows us to run more bricks than before with the same memory consumption. Execute the following commands on one of the Red Hat Gluster Storage nodes on each cluster to enable brick-multiplexing:

1. Execute the following command to enable brick multiplexing:

```
# gluster vol set all cluster.brick-multiplex on
```

For example:

```

# gluster vol set all cluster.brick-multiplex on
Brick-multiplexing is supported only for container workloads
(CNS/CRS). Also it is advised to make sure that either all
volumes are in stopped state or no bricks are running before this
option is modified.Do you still want to continue? (y/n) y
volume set: success

```

2. Restart the heketidb volumes:

```

# gluster vol stop heketidbstorage
Stopping volume will make its data inaccessible. Do you want to
continue? (y/n) y
volume stop: heketidbstorage: success

```

```

# gluster vol start heketidbstorage
volume start: heketidbstorage: success

```

4. Execute the following command to let the client communicate with the container:

```
# export HEKETI_CLI_SERVER=http://heketi-<project_name>.  
<sub_domain_name>
```

For example:

```
# export HEKETI_CLI_SERVER=http://heketi-storage-  
project.cloudapps.mystorage.com
```

To verify if Heketi is loaded with the topology execute the following command:

```
# heketi-cli topology info
```



## NOTE

The cns-deploy tool does not support scaling up of the cluster. To manually scale-up the cluster, see [https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Managing\\_Clusters](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Managing_Clusters).

Next step: If you are installing converged mode, proceed to

[https://access.redhat.com/documentation/en-us/red\\_hat\\_openshift\\_container\\_storage/3.10/html-single/operations\\_guide/#chap-Documentation-Red\\_Hat\\_Gluster\\_Storage\\_Container\\_Native\\_with\\_OpenShift\\_Platform-Updating\\_Registry](https://access.redhat.com/documentation/en-us/red_hat_openshift_container_storage/3.10/html-single/operations_guide/#chap-Documentation-Red_Hat_Gluster_Storage_Container_Native_with_OpenShift_Platform-Updating_Registry).

## APPENDIX B. SETTINGS THAT ARE DESTROYED WHEN USING UNINSTALL PLAYBOOK

When running the `uninstall.yml` playbook the following two files are called:

- `glusterfs_config_facts.yml`
- `glusterfs_registry_facts.yml`

When the following command is executed then the data/resources/content/settings related to `glusterfs_config_facts.yml` and `glusterfs_registry_facts.yml` is destroyed.

```
ansible-playbook -i <path_to_inventory_file> -e
"openshift_storage_glusterfs_wipe=true" /usr/share/ansible/openshift-
ansible/playbooks/openshift-glusterfs/uninstall.yml
```

`glusterfs_config_facts.yml` variables:

```
glusterfs_timeout: "{{ openshift_storage_glusterfs_timeout }}"
glusterfs_namespace: "{{ openshift_storage_glusterfs_namespace }}"
glusterfs_is_native: "{{ openshift_storage_glusterfs_is_native | bool
}}"
glusterfs_name: "{{ openshift_storage_glusterfs_name }}"
# map_from_pairs is a custom filter plugin in role lib_utils
glusterfs_nodeselector: "{{ openshift_storage_glusterfs_nodeselector |
default(['storage node', openshift_storage_glusterfs_name] | join('=')) |
map_from_pairs }}"
glusterfs_use_default_selector: "{{
openshift_storage_glusterfs_use_default_selector }}"
glusterfs_storageclass: "{{ openshift_storage_glusterfs_storageclass
}}"
glusterfs_storageclass_default: "{{
openshift_storage_glusterfs_storageclass_default | bool }}"
glusterfs_image: "{{ openshift_storage_glusterfs_image }}"
glusterfs_block_deploy: "{{ openshift_storage_glusterfs_block_deploy |
bool }}"
glusterfs_block_image: "{{ openshift_storage_glusterfs_block_image }}"
glusterfs_block_host_vol_create: "{{
openshift_storage_glusterfs_block_host_vol_create }}"
glusterfs_block_host_vol_size: "{{
openshift_storage_glusterfs_block_host_vol_size }}"
glusterfs_block_host_vol_max: "{{
openshift_storage_glusterfs_block_host_vol_max }}"
glusterfs_block_storageclass: "{{
openshift_storage_glusterfs_block_storageclass | bool }}"
glusterfs_block_storageclass_default: "{{
openshift_storage_glusterfs_block_storageclass_default | bool }}"
glusterfs_s3_deploy: "{{ openshift_storage_glusterfs_s3_deploy | bool
}}"
glusterfs_s3_image: "{{ openshift_storage_glusterfs_s3_image }}"
glusterfs_s3_account: "{{ openshift_storage_glusterfs_s3_account }}"
glusterfs_s3_user: "{{ openshift_storage_glusterfs_s3_user }}"
glusterfs_s3_password: "{{ openshift_storage_glusterfs_s3_password }}"
glusterfs_s3_pvc: "{{ openshift_storage_glusterfs_s3_pvc }}"
glusterfs_s3_pvc_size: "{{ openshift_storage_glusterfs_s3_pvc_size }}"
```

```

glusterfs_s3_meta_pvc: "{{ openshift_storage_glusterfs_s3_meta_pvc }}"
glusterfs_s3_meta_pvc_size: "{{
openshift_storage_glusterfs_s3_meta_pvc_size }}"
glusterfs_wipe: "{{ openshift_storage_glusterfs_wipe | bool }}"
glusterfs_heketi_is_native: "{{
openshift_storage_glusterfs_heketi_is_native | bool }}"
glusterfs_heketi_is_missing: "{{
openshift_storage_glusterfs_heketi_is_missing | bool }}"
glusterfs_heketi_deploy_is_missing: "{{
openshift_storage_glusterfs_heketi_deploy_is_missing | bool }}"
glusterfs_heketi_cli: "{{ openshift_storage_glusterfs_heketi_cli }}"
glusterfs_heketi_image: "{{ openshift_storage_glusterfs_heketi_image
}}"
glusterfs_heketi_admin_key: "{{
openshift_storage_glusterfs_heketi_admin_key }}"
glusterfs_heketi_user_key: "{{
openshift_storage_glusterfs_heketi_user_key }}"
glusterfs_heketi_topology_load: "{{
openshift_storage_glusterfs_heketi_topology_load | bool }}"
glusterfs_heketi_wipe: "{{ openshift_storage_glusterfs_heketi_wipe |
bool }}"
glusterfs_heketi_url: "{{ openshift_storage_glusterfs_heketi_url }}"
glusterfs_heketi_port: "{{ openshift_storage_glusterfs_heketi_port }}"
glusterfs_heketi_executor: "{{
openshift_storage_glusterfs_heketi_executor }}"
glusterfs_heketi_ssh_port: "{{
openshift_storage_glusterfs_heketi_ssh_port }}"
glusterfs_heketi_ssh_user: "{{
openshift_storage_glusterfs_heketi_ssh_user }}"
glusterfs_heketi_ssh_sudo: "{{
openshift_storage_glusterfs_heketi_ssh_sudo | bool }}"
glusterfs_heketi_ssh_keyfile: "{{
openshift_storage_glusterfs_heketi_ssh_keyfile }}"
glusterfs_heketi_fstab: "{{ openshift_storage_glusterfs_heketi_fstab
}}"
glusterfs_nodes: "{{ groups.glusterfs | default([]) }}"

```

glusterfs\_registry\_facts.yml variables:

```

glusterfs_timeout: "{{ openshift_storage_glusterfs_registry_timeout
}}"
glusterfs_namespace: "{{
openshift_storage_glusterfs_registry_namespace }}"
glusterfs_is_native: "{{
openshift_storage_glusterfs_registry_is_native | bool }}"
glusterfs_name: "{{ openshift_storage_glusterfs_registry_name }}"
# map_from_pairs is a custom filter plugin in role lib_utils
glusterfs_nodeselector: "{{
openshift_storage_glusterfs_registry_nodeselector |
default(['storagenode', openshift_storage_glusterfs_registry_name] |
join('=')) | map_from_pairs }}"
glusterfs_use_default_selector: "{{
openshift_storage_glusterfs_registry_use_default_selector }}"
glusterfs_storageclass: "{{
openshift_storage_glusterfs_registry_storageclass }}"
glusterfs_storageclass_default: "{{

```

```

openshift_storage_glusterfs_registry_storageclass_default | bool }}"
  glusterfs_image: "{{ openshift_storage_glusterfs_registry_image }}"
  glusterfs_block_deploy: "{{
openshift_storage_glusterfs_registry_block_deploy | bool }}"
  glusterfs_block_image: "{{
openshift_storage_glusterfs_registry_block_image }}"
  glusterfs_block_host_vol_create: "{{
openshift_storage_glusterfs_registry_block_host_vol_create }}"
  glusterfs_block_host_vol_size: "{{
openshift_storage_glusterfs_registry_block_host_vol_size }}"
  glusterfs_block_host_vol_max: "{{
openshift_storage_glusterfs_registry_block_host_vol_max }}"
  glusterfs_block_storageclass: "{{
openshift_storage_glusterfs_registry_block_storageclass | bool }}"
  glusterfs_block_storageclass_default: "{{
openshift_storage_glusterfs_registry_block_storageclass_default | bool }}"
  glusterfs_s3_deploy: "{{
openshift_storage_glusterfs_registry_s3_deploy | bool }}"
  glusterfs_s3_image: "{{ openshift_storage_glusterfs_registry_s3_image
}}"
  glusterfs_s3_account: "{{
openshift_storage_glusterfs_registry_s3_account }}"
  glusterfs_s3_user: "{{ openshift_storage_glusterfs_registry_s3_user
}}"
  glusterfs_s3_password: "{{
openshift_storage_glusterfs_registry_s3_password }}"
  glusterfs_s3_pvc: "{{ openshift_storage_glusterfs_registry_s3_pvc }}"
  glusterfs_s3_pvc_size: "{{
openshift_storage_glusterfs_registry_s3_pvc_size }}"
  glusterfs_s3_meta_pvc: "{{
openshift_storage_glusterfs_registry_s3_meta_pvc }}"
  glusterfs_s3_meta_pvc_size: "{{
openshift_storage_glusterfs_registry_s3_meta_pvc_size }}"
  glusterfs_wipe: "{{ openshift_storage_glusterfs_registry_wipe | bool
}}"
  glusterfs_heketi_is_native: "{{
openshift_storage_glusterfs_registry_heketi_is_native | bool }}"
  glusterfs_heketi_is_missing: "{{
openshift_storage_glusterfs_registry_heketi_is_missing | bool }}"
  glusterfs_heketi_deploy_is_missing: "{{
openshift_storage_glusterfs_registry_heketi_deploy_is_missing | bool }}"
  glusterfs_heketi_cli: "{{
openshift_storage_glusterfs_registry_heketi_cli }}"
  glusterfs_heketi_image: "{{
openshift_storage_glusterfs_registry_heketi_image }}"
  glusterfs_heketi_admin_key: "{{
openshift_storage_glusterfs_registry_heketi_admin_key }}"
  glusterfs_heketi_user_key: "{{
openshift_storage_glusterfs_registry_heketi_user_key }}"
  glusterfs_heketi_topology_load: "{{
openshift_storage_glusterfs_registry_heketi_topology_load | bool }}"
  glusterfs_heketi_wipe: "{{
openshift_storage_glusterfs_registry_heketi_wipe | bool }}"
  glusterfs_heketi_url: "{{
openshift_storage_glusterfs_registry_heketi_url }}"
  glusterfs_heketi_port: "{{

```

```
openshift_storage_glusterfs_registry_heketi_port }}"
    glusterfs_heketi_executor: "{{
openshift_storage_glusterfs_registry_heketi_executor }}"
    glusterfs_heketi_ssh_port: "{{
openshift_storage_glusterfs_registry_heketi_ssh_port }}"
    glusterfs_heketi_ssh_user: "{{
openshift_storage_glusterfs_registry_heketi_ssh_user }}"
    glusterfs_heketi_ssh_sudo: "{{
openshift_storage_glusterfs_registry_heketi_ssh_sudo | bool }}"
    glusterfs_heketi_ssh_keyfile: "{{
openshift_storage_glusterfs_registry_heketi_ssh_keyfile }}"
    glusterfs_heketi_fstab: "{{
openshift_storage_glusterfs_registry_heketi_fstab }}"
    glusterfs_nodes: "{% if groups.glusterfs_registry is defined and
groups['glusterfs_registry'] | length > 0 %}{% set nodes =
groups.glusterfs_registry %}{% elif 'groups.glusterfs' is defined and
groups['glusterfs'] | length > 0 %}{% set nodes = groups.glusterfs %}{%
else %}{% set nodes = '[]' %}{% endif %}}{{ nodes }}"
```

---

## APPENDIX C. REVISION HISTORY

**Revision 1.0-02****Wed Sep 12 2018****Bhavana Mohan**

Publishing for Red Hat OpenShift Container Storage 3.10

**Revision 1.0-01****Tue Sep 11 2018****Bhavana Mohan**

Rebranded the product from Container-Native Storage to Red Hat OpenShift Container Storage. The terms describing the method of deployment have also been changed to Converged mode (formerly referred to as 'Container Native Storage' or 'CNS') and Independent mode (formerly referred to as 'Container Ready Storage' or 'CRS'):

Created two separate guides; one for Deployment and upgrade and another for administrative tasks.

Documented details about Arbiter volume support, that enables availability with efficient storage utilization and better performance.

Documented the installation procedure to deploy Red Hat OpenShift Container Storage with Ansible as the primary mode of installation.

Documented procedure to uninstall GlusterFS-related resources and configurations.

Documented upgrade procedures to upgrade Red Hat OpenShift Container Storage in converged mode.

Documented upgrade procedures to upgrade Red Hat OpenShift Container Storage in independent mode.

Documented details about the supported workloads.

Documented procedure for restoring original label values for /dev/log.

Documented steps to upgrade gluster client packages for Red Hat OpenShift Container Storage