



Red Hat Satellite 6.12

Managing Content

A guide to managing content from Red Hat and custom sources

Red Hat Satellite 6.12 Managing Content

A guide to managing content from Red Hat and custom sources

Red Hat Satellite Documentation Team

satellite-doc-list@redhat.com

Legal Notice

Copyright © 2023 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux[®] is the registered trademark of Linus Torvalds in the United States and other countries.

Java[®] is a registered trademark of Oracle and/or its affiliates.

XFS[®] is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL[®] is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js[®] is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack[®] Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

Use this guide to understand and manage content in Satellite 6. Examples of such content include RPM files, and ISO images. Red Hat Satellite 6 manages this content using a set of Content Views promoted across the application lifecycle. This guide demonstrates how to create an application lifecycle that suits your organization and content views that fulfils host states within lifecycle environments. These content views eventually form the basis for provisioning and updating hosts in your Red Hat Satellite 6 environment.

Table of Contents

CHAPTER 1. INTRODUCTION TO CONTENT MANAGEMENT	5
CHAPTER 2. CONTENT TYPES OVERVIEW	6
CHAPTER 3. MANAGING RED HAT SUBSCRIPTIONS	7
3.1. IMPORTING A RED HAT SUBSCRIPTION MANIFEST INTO SATELLITE SERVER	7
3.2. LOCATING A RED HAT SUBSCRIPTION	8
3.3. ADDING RED HAT SUBSCRIPTIONS TO SUBSCRIPTION ALLOCATIONS	9
3.4. REMOVING RED HAT SUBSCRIPTIONS FROM SUBSCRIPTION ALLOCATIONS	9
3.5. UPDATING AND REFRESHING RED HAT SUBSCRIPTION MANIFESTS	9
3.6. ATTACHING RED HAT SUBSCRIPTIONS TO CONTENT HOSTS	10
3.7. UPDATING RED HAT SUBSCRIPTIONS ON MULTIPLE HOSTS	11
CHAPTER 4. IMPORTING CONTENT	12
4.1. PRODUCTS AND REPOSITORIES IN SATELLITE	12
4.2. IMPORTING CUSTOM SSL CERTIFICATES	12
4.3. CREATING A CUSTOM PRODUCT	13
4.4. ADDING CUSTOM RPM REPOSITORIES	14
4.5. ENABLING RED HAT REPOSITORIES	15
4.6. SYNCHRONIZING REPOSITORIES	16
4.7. SYNCHRONIZING ALL REPOSITORIES IN AN ORGANIZATION	17
4.8. DOWNLOAD POLICIES OVERVIEW	18
4.9. CHANGING THE DEFAULT DOWNLOAD POLICY	18
4.10. CHANGING THE DOWNLOAD POLICY FOR A REPOSITORY	19
4.11. MIRRORING POLICIES OVERVIEW	20
4.12. CHANGING THE MIRRORING POLICY FOR A REPOSITORY	20
4.13. UPLOADING CONTENT TO CUSTOM RPM REPOSITORIES	21
4.14. CONFIGURING SELINUX TO PERMIT CONTENT SYNCHRONIZATION ON CUSTOM PORTS	21
4.15. RECOVERING A CORRUPTED REPOSITORY	22
4.16. ADDING AN HTTP PROXY	23
4.17. CHANGING THE HTTP PROXY POLICY FOR A PRODUCT	24
4.18. CHANGING THE HTTP PROXY POLICY FOR A REPOSITORY	25
4.19. CREATING A SYNC PLAN	25
4.20. ASSIGNING A SYNC PLAN TO A PRODUCT	26
4.21. ASSIGNING A SYNC PLAN TO MULTIPLE PRODUCTS	27
4.22. LIMITING SYNCHRONIZATION CONCURRENCY	27
4.23. IMPORTING A CUSTOM GPG KEY	27
4.24. RESTRICTING CUSTOM REPOSITORIES TO RHEL 9 IN SATELLITE	29
CHAPTER 5. MANAGING APPLICATION LIFE CYCLES	30
5.1. INTRODUCTION TO APPLICATION LIFE CYCLE	30
5.2. CONTENT PROMOTION ACROSS THE APPLICATION LIFE CYCLE	31
5.3. CREATING A LIFE CYCLE ENVIRONMENT PATH	32
5.4. REMOVING LIFE CYCLE ENVIRONMENTS FROM SATELLITE SERVER	33
5.5. REMOVING LIFE CYCLE ENVIRONMENTS FROM CAPSULE SERVER	34
5.6. ADDING LIFE CYCLE ENVIRONMENTS TO CAPSULE SERVERS	35
CHAPTER 6. MANAGING CONTENT VIEWS	37
6.1. CREATING A CONTENT VIEW	38
6.2. VIEWING MODULE STREAMS	39
6.3. PROMOTING A CONTENT VIEW	40
6.4. PROMOTING A CONTENT VIEW ACROSS ALL LIFE CYCLE ENVIRONMENTS WITHIN AN ORGANIZATION	41

6.5. COMPOSITE CONTENT VIEWS OVERVIEW	42
6.6. CREATING A COMPOSITE CONTENT VIEW	43
6.7. CONTENT FILTER OVERVIEW	44
6.8. RESOLVING PACKAGE DEPENDENCIES	46
6.9. CONTENT FILTER EXAMPLES	46
6.10. CREATING A CONTENT FILTER FOR YUM CONTENT	47
CHAPTER 7. SYNCHRONIZING CONTENT BETWEEN SATELLITE SERVERS	50
7.1. HOW TO SYNCHRONIZE CONTENT USING EXPORT AND IMPORT	50
7.1.1. Using an Upstream Satellite Server as a Content Store	50
7.1.2. Using an Upstream Satellite Server to Sync Content View Versions	51
7.1.3. Synchronizing a Single Repository	52
7.2. EXPORTING THE LIBRARY ENVIRONMENT	53
7.3. EXPORTING THE LIBRARY ENVIRONMENT IN A SYNCABLE FORMAT	54
7.4. EXPORTING THE LIBRARY ENVIRONMENT INCREMENTALLY	55
7.5. EXPORTING A CONTENT VIEW VERSION	56
7.6. EXPORTING A CONTENT VIEW VERSION IN A SYNCABLE FORMAT	57
7.7. EXPORTING A CONTENT VIEW VERSION INCREMENTALLY	58
7.8. EXPORTING A REPOSITORY	59
7.9. EXPORTING A REPOSITORY IN A SYNCABLE FORMAT	60
7.10. EXPORTING A REPOSITORY INCREMENTALLY	61
7.11. KEEPING TRACK OF YOUR EXPORTS	62
7.12. IMPORTING INTO THE LIBRARY ENVIRONMENT	62
7.13. IMPORTING A CONTENT VIEW VERSION	63
7.14. IMPORTING A REPOSITORY	64
7.15. EXPORTING AND IMPORTING CONTENT USING HAMMER CLI CHEAT SHEET	65
CHAPTER 8. MANAGING ACTIVATION KEYS	67
8.1. CREATING AN ACTIVATION KEY	67
8.2. UPDATING SUBSCRIPTIONS ASSOCIATED WITH AN ACTIVATION KEY	70
8.3. USING ACTIVATION KEYS FOR HOST REGISTRATION	71
8.4. ENABLING AUTO-ATTACH	73
8.5. SETTING THE SERVICE LEVEL	74
CHAPTER 9. MANAGING ERRATA	75
9.1. INSPECTING AVAILABLE ERRATA	75
9.2. PARAMETERS AVAILABLE FOR ERRATA SEARCH	77
9.3. APPLYING INSTALLABLE ERRATA	78
9.4. SUBSCRIBING TO ERRATA NOTIFICATIONS	78
9.5. LIMITATIONS TO REPOSITORY DEPENDENCY RESOLUTION	78
9.6. CREATING A CONTENT VIEW FILTER FOR ERRATA	79
9.7. ADDING ERRATA TO AN INCREMENTAL CONTENT VIEW	81
9.8. APPLYING ERRATA TO HOSTS	81
9.8.1. Applying Errata to Hosts Running Red Hat Enterprise Linux 9	82
9.8.2. Applying Errata to Hosts Running Red Hat Enterprise Linux 8	82
9.8.3. Applying Errata to Hosts Running Red Hat Enterprise Linux 7	83
9.9. APPLYING ERRATA TO MULTIPLE HOSTS	84
9.10. APPLYING ERRATA TO A HOST COLLECTION	85
CHAPTER 10. INSTALLING PACKAGES ON A HOST	87
CHAPTER 11. UPGRADING PACKAGES ON A HOST IN BULK	88
CHAPTER 12. REMOVING PACKAGES FROM A HOST	89

CHAPTER 13. MANAGING CONTAINER IMAGES	90
13.1. IMPORTING CONTAINER IMAGES	90
13.2. MANAGING CONTAINER NAME PATTERNS	91
13.3. MANAGING CONTAINER REGISTRY AUTHENTICATION	92
13.4. CONFIGURING PODMAN AND DOCKER TO TRUST THE CERTIFICATE AUTHORITY	93
13.5. USING CONTAINER REGISTRIES	93
CHAPTER 14. MANAGING ISO IMAGES	95
14.1. IMPORTING ISO IMAGES FROM RED HAT	95
14.2. IMPORTING INDIVIDUAL ISO IMAGES AND FILES	96
CHAPTER 15. MANAGING CUSTOM FILE TYPE CONTENT	98
15.1. CREATING A LOCAL SOURCE FOR A CUSTOM FILE TYPE REPOSITORY	98
15.2. CREATING A REMOTE SOURCE FOR A CUSTOM FILE TYPE REPOSITORY	99
15.3. CREATING A CUSTOM FILE TYPE REPOSITORY	100
15.4. UPLOADING FILES TO A CUSTOM FILE TYPE REPOSITORY	102
15.5. DOWNLOADING FILES TO A HOST FROM A CUSTOM FILE TYPE REPOSITORY	103
APPENDIX A. USING AN NFS SHARE FOR CONTENT STORAGE	105
APPENDIX B. IMPORTING KICKSTART REPOSITORIES	107
B.1. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 9	107
B.2. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 8	111
B.3. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 7	115
APPENDIX C. IMPORTING CONTENT ISOS INTO A CONNECTED SATELLITE	117

CHAPTER 1. INTRODUCTION TO CONTENT MANAGEMENT

In the context of Satellite, *content* is defined as the software installed on systems. This includes, but is not limited to, the base operating system, middleware services, and end-user applications. With Red Hat Satellite, you can manage the various types of content for Red Hat Enterprise Linux systems at every stage of the software life cycle.

Red Hat Satellite manages the following content:

Subscription management

This provides organizations with a method to manage their Red Hat subscription information.

Content management

This provides organizations with a method to store Red Hat content and organize it in various ways.

CHAPTER 2. CONTENT TYPES OVERVIEW

With Red Hat Satellite, you can manage the following content types:

RPM Packages

Import RPM packages from repositories related to your Red Hat subscriptions. Satellite Server downloads the RPM files from Red Hat's Content Delivery Network and stores them locally. You can use these repositories and their RPM files in Content Views.

Kickstart Trees

Import the kickstart trees for creating a system. New systems access these kickstart trees over a network to use as base content for their installation. Red Hat Satellite also contains some predefined kickstart templates as well as the ability to create your own, which are used to provision systems and customize the installation.

You can also manage other types of custom content in Satellite. For example:

ISO and KVM Images

Download and manage media for installation and provisioning. For example, Satellite downloads, stores, and manages ISO images and guest images for specific Red Hat Enterprise Linux and non-Red Hat operating systems.

Custom File Type

You can manage custom content for any type of file you require, such as SSL certificates and OVAL files.

CHAPTER 3. MANAGING RED HAT SUBSCRIPTIONS

Red Hat Satellite can import content from the Red Hat Content Delivery Network (CDN). Satellite requires a Red Hat Subscription Manifest to find, access, and download content from the corresponding repositories. You must have a Red Hat Subscription Manifest containing a subscription allocation for each organization on Satellite Server. All subscription information is available in your Red Hat Customer Portal account.

Before you can complete the tasks in this chapter, you must create a Red Hat Subscription Manifest in the Customer Portal.

Note that the subscription model is deprecated and will be removed in a future release. Red Hat recommends that you use [Simple Content Access](#) as a substitute.

To create, manage, and export a Red Hat Subscription Manifest in the Customer Portal, see [Creating and managing manifests for a connected Satellite Server](#) in *Subscription Central*.

Use this chapter to import a Red Hat Subscription Manifest and manage the manifest within the Satellite web UI.

Subscription Allocations and Organizations

You can manage more than one organization if you have more than one subscription allocation. Satellite requires a single allocation for each organization configured in Satellite Server. The advantage of this is that each organization maintains separate subscriptions so that you can support multiple organizations, each with their own Red Hat accounts.

Future-Dated subscriptions

You can use future-dated subscriptions in a subscription allocation. When you add future-dated subscriptions to content hosts before the expiry date of the existing subscriptions, you can have uninterrupted access to repositories.

Manually attach the future-dated subscriptions to your content hosts before the current subscriptions expire. Do not rely on the auto-attach method because this method is designed for a different purpose and might not work. For more information, see [Section 3.6, "Attaching Red Hat Subscriptions to Content Hosts"](#).

Additional resources

- [Configuring Satellite Server to Consume Content from a Custom CDN](#) in *Installing Satellite Server in a Disconnected Network Environment*

3.1. IMPORTING A RED HAT SUBSCRIPTION MANIFEST INTO SATELLITE SERVER

Use the following procedure to import a Red Hat Subscription Manifest into Satellite Server.

Prerequisites

- You must have a Red Hat Subscription Manifest file exported from the [Red Hat Customer Portal](#). For more information, see [Using Manifests](#) in *Using Red Hat Subscription Management*.

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Content > Subscriptions** and click **Manage Manifest**.
3. In the Manage Manifest window, click **Browse**.
4. Navigate to the location that contains the Red Hat Subscription Manifest file, then click **Open**. If the Manage Manifest window does not close automatically, click **Close** to return to the Subscriptions window.

CLI procedure

1. Copy the Red Hat Subscription Manifest file from your client to Satellite Server:

```
$ scp ~/manifest_file.zip root@satellite.example.com:~/.
```

2. Log in to Satellite Server as the **root** user and import the Red Hat Subscription Manifest file:

```
# hammer subscription upload \  
--file ~/manifest_file.zip \  
--organization "My_Organization"
```

You can now enable repositories and import Red Hat content. For more information, see [Importing Content](#) in *Managing Content*.

3.2. LOCATING A RED HAT SUBSCRIPTION

When you import a Red Hat Subscription Manifest into Satellite Server, the subscriptions from your manifest are listed in the Subscriptions window. If you have a high volume of subscriptions, you can filter the results to find a specific subscription.

Prerequisite

- You must have a Red Hat Subscription Manifest file imported to Satellite Server. For more information, see [Section 3.1, "Importing a Red Hat Subscription Manifest into Satellite Server"](#).

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Content > Subscriptions**.
3. In the Subscriptions window, click the **Search** field to view the list of search criteria for building your search query.
4. Select search criteria to display further options.
5. When you have built your search query, click the search icon.

For example, if you place your cursor in the **Search** field and select **expires**, then press the space bar, another list appears with the options of placing a **>**, **<**, or **=** character. If you select **>** and press the space bar, another list of automatic options appears. You can also enter your own criteria.

3.3. ADDING RED HAT SUBSCRIPTIONS TO SUBSCRIPTION ALLOCATIONS

Use the following procedure to add Red Hat subscriptions to a subscription allocation in the Satellite web UI.

Prerequisite

- You must have a Red Hat Subscription Manifest file imported to Satellite Server. For more information, see [Section 3.1, “Importing a Red Hat Subscription Manifest into Satellite Server”](#).

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Content > Subscriptions**.
3. In the Subscriptions window, click **Add Subscriptions**.
4. On the row of each subscription you want to add, enter the quantity in the **Quantity to Allocate** column.
5. Click **Submit**

3.4. REMOVING RED HAT SUBSCRIPTIONS FROM SUBSCRIPTION ALLOCATIONS

Use the following procedure to remove Red Hat subscriptions from a subscription allocation in the Satellite web UI.



NOTE

Manifests must not be deleted. If you delete the manifest from the Red Hat Customer Portal or in the Satellite web UI, all of the entitlements for all of your content hosts will be removed.

Prerequisite

- You must have a Red Hat Subscription Manifest file imported to Satellite Server. For more information, see [Section 3.1, “Importing a Red Hat Subscription Manifest into Satellite Server”](#).

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Content > Subscriptions**.
3. On the row of each subscription you want to remove, select the corresponding checkbox.
4. Click **Delete**, and then confirm deletion.

3.5. UPDATING AND REFRESHING RED HAT SUBSCRIPTION MANIFESTS

Every time that you change a subscription allocation, you must refresh the manifest to reflect these changes. For example, you must refresh the manifest if you take any of the following actions:

- Renewing a subscription
- Adjusting subscription quantities
- Purchasing additional subscriptions

You can refresh the manifest directly in the Satellite web UI. Alternatively, you can import an updated manifest that contains the changes.

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Content > Subscriptions**.
3. In the Subscriptions window, click **Manage Manifest**.
4. In the Manage Manifest window, click **Refresh**.

3.6. ATTACHING RED HAT SUBSCRIPTIONS TO CONTENT HOSTS

Using activation keys is the main method to attach subscriptions to content hosts during the provisioning process. However, an activation key cannot update an existing host. If you need to attach new or additional subscriptions, such as future-dated subscriptions, to one host, use the following procedure.

For more information about updating multiple hosts, see [\]. For more information about activation keys, see `xref:Managing_Activation_Keys_content-management\[`.](#)

Smart Management Subscriptions

In Satellite, you must maintain a Red Hat Enterprise Linux Smart Management subscription for every Red Hat Enterprise Linux host that you want to manage.

However, you are not required to attach Smart Management subscriptions to each content host. Smart Management subscriptions cannot attach automatically to content hosts in Satellite because they are not associated with any product certificates. Adding a Smart Management subscription to a content host does not provide any content or repository access. If you want, you can add a Smart Management subscription to a manifest for your own recording or tracking purposes.

Prerequisite

- You must have a Red Hat Subscription Manifest file imported to Satellite Server.

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Hosts > Content Hosts**.
3. On the row of each content host whose subscription you want to change, select the corresponding checkbox.

4. From the **Select Action** list, select **Manage Subscriptions**.
5. Optionally, enter a key and value in the **Search** field to filter the subscriptions displayed.
6. Select the checkbox to the left of the subscriptions that you want to add or remove and click **Add Selected** or **Remove Selected** as required.
7. Click **Done** to save the changes.

CLI procedure

1. Connect to Satellite Server as the root user, and then list the available subscriptions:

```
# hammer subscription list \  
--organization-id 1
```

2. Attach a subscription to the host:

```
# hammer host subscription attach \  
--host host_name \  
--subscription-id subscription_id
```

3.7. UPDATING RED HAT SUBSCRIPTIONS ON MULTIPLE HOSTS

Use this procedure for post-installation changes to multiple content hosts at the same time.

Procedure

1. In the Satellite web UI, ensure the context is set to the organization you want to use.
2. In the Satellite web UI, navigate to **Hosts > Content Hosts**.
3. On the row of each content host whose subscription you want to change, select the corresponding checkbox.
4. From the **Select Action** list, select **Manage Subscriptions**.
5. Optionally, enter a key and value in the **Search** field to filter the subscriptions displayed.
6. Select the checkbox to the left of the subscriptions to be added or removed and click **Add Selected** or **Remove Selected** as required.
7. Click **Done** to save the changes.

CHAPTER 4. IMPORTING CONTENT

This chapter outlines how you can import different types of custom content to Satellite. If you want to import RPMs, Files, or different content types to Satellite, it is done with largely the same procedures in this chapter.

For example, you can use the following chapters for information on specific types of custom content but the underlying procedures are the same:

- [Chapter 14, *Managing ISO Images*](#)
- [Chapter 15, *Managing Custom File Type Content*](#)

4.1. PRODUCTS AND REPOSITORIES IN SATELLITE

Both Red Hat content and custom content in Satellite have similarities:

- The relationship between a Product and its repositories is the same and the repositories still require synchronization.
- Custom Products require a subscription for hosts to access, similar to subscriptions to Red Hat Products. Satellite creates a subscription for each custom Product you create.

Red Hat content is already organized into Products. For example, Red Hat Enterprise Linux Server is a *Product* in Satellite. The repositories for that Product consist of different versions, architectures, and add-ons. For Red Hat repositories, Products are created automatically after enabling the repository. For more information, see [Section 4.5, "Enabling Red Hat Repositories"](#).

Other content can be organized into custom Products however you want. For example, you might create an EPEL (Extra Packages for Enterprise Linux) Product and add an "EPEL 7 x86_64" repository to it.

For more information about creating and packaging RPMs, see the [Red Hat Enterprise Linux RPM Packaging Guide](#).

4.2. IMPORTING CUSTOM SSL CERTIFICATES

Before you synchronize custom content from an external source, you might need to import SSL certificates into your custom Product. This might include client certs and keys or CA certificates for the upstream repositories you want to synchronize.

If you require SSL certificates and keys to download RPMs, you can add them to Satellite.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Content Credentials**. In the Content Credentials window, click **Create Content Credential**.
2. In the **Name** field, enter a name for your SSL certificate.
3. From the **Type** list, select **SSL Certificate**.
4. In the **Content Credentials Content** field, paste your SSL certificate, or click **Browse** to upload your SSL certificate.

5. Click **Save**.

CLI procedure

1. Copy the SSL certificate to your Satellite Server:

```
$ scp My_SSL_Certificate root@satellite.example.com:~/.
```

Or download the SSL certificate to your Satellite Server from an online source:

```
$ wget -P ~ http://upstream-satellite.example.com/pub/katello-server-ca.crt
```

2. Upload the SSL Certificate to Satellite:

```
# hammer content-credential create \
--content-type cert \
--name "My_SSL_Certificate" \
--organization "My_Organization" \
--path ~/My_SSL_Certificate
```

4.3. CREATING A CUSTOM PRODUCT

Use this procedure to create a custom Product that you can then add repositories to. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products**, click **Create Product**.
2. In the **Name** field, enter a name for the product. Satellite automatically completes the **Label** field based on what you have entered for **Name**.
3. Optional: From the **GPG Key** list, select the GPG key for the product.
4. Optional: From the **SSL CA Cert** list, select the SSL CA certificate for the product.
5. Optional: From the **SSL Client Cert** list, select the SSL client certificate for the product.
6. Optional: From the **SSL Client Key** list, select the SSL client key for the product.
7. Optional: From the **Sync Plan** list, select an existing sync plan or click **Create Sync Plan** and create a sync plan for your product requirements.
8. In the **Description** field, enter a description of the product.
9. Click **Save**.

CLI procedure

To create the product, enter the following command:

```
# hammer product create \
--name "My_Product" \
--sync-plan "Example Plan" \
```

```
--description "Content from My Repositories" \
--organization "My_Organization"
```

4.4. ADDING CUSTOM RPM REPOSITORIES

Use this procedure to add custom RPM repositories in Satellite. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

The Products window in the Satellite web UI also provides a **Repo Discovery** function that finds all repositories from a URL and you can select which ones to add to your custom Product. For example, you can use the **Repo Discovery** to search <http://yum.postgresql.org/9.5/redhat/> and list all repositories for different Red Hat Enterprise Linux versions and architectures. This helps users save time importing multiple repositories from a single source.

Support for Custom RPMs

Red Hat does not support the upstream RPMs directly from third-party sites. These RPMs are used to demonstrate the synchronization process. For any issues with these RPMs, contact the third-party developers.

Procedure

1. In the Satellite web UI, navigate to **Content > Products** and select the product that you want to use, and then click **New Repository**.
2. In the **Name** field, enter a name for the repository. Satellite automatically completes the **Label** field based on what you have entered for **Name**.
3. Optional: In the **Description** field, enter a description for the repository.
4. From the **Type** list, select **yum** as type of repository.
5. Optional: From the **Restrict to Architecture** list, select an architecture. If you want to make the repository available to all hosts regardless of the architecture, ensure to select **No restriction**.
6. Optional: From the **Restrict to OS Version** list, select the OS version. If you want to make the repository available to all hosts regardless of the OS version, ensure to select **No restriction**.
7. Optional: In the **Upstream URL** field, enter the URL of the external repository to use as a source. Satellite supports three protocols: **http://**, **https://**, and **file://**. If you are using a **file://** repository, you have to place it under **/var/lib/pulp/sync_imports/** directory. If you do not enter an upstream URL, you can manually upload packages.
8. Optional: Check the **Ignore SRPMs** checkbox to exclude source RPM packages from being synchronized to Satellite.
9. Select the **Verify SSL** checkbox if you want to verify that the upstream repository's SSL certificates are signed by a trusted CA.
10. Optional: In the **Upstream Username** field, enter the user name for the upstream repository if required for authentication. Clear this field if the repository does not require authentication.
11. Optional: In the **Upstream Password** field, enter the corresponding password for the upstream repository. Clear this field if the repository does not require authentication.

12. Optional: In the **Upstream Authentication Token** field, provide the token of the upstream repository user for authentication. Leave this field empty if the repository does not require authentication.
13. From the **Download Policy** list, select the type of synchronization Satellite Server performs. For more information, see [Section 4.8, "Download Policies Overview"](#).
14. From the **Mirroring Policy** list, select the type of content synchronization Satellite Server performs. For more information, see [Section 4.11, "Mirroring Policies Overview"](#).
15. Optional: In the **Retain package versions** field, enter the number of versions you want to retain per package.
16. Optional: In the **HTTP Proxy Policy** field, select an HTTP proxy.
17. From the **Checksum** list, select the checksum type for the repository.
18. Optional: You can clear the **Unprotected** checkbox to require a subscription entitlement certificate for accessing this repository. By default, the repository is published through HTTP.
19. Optional: From the **GPG Key** list, select the GPG key for the product.
20. Optional: In the **SSL CA Cert** field, select the SSL CA Certificate for the repository.
21. Optional: In the **SSL Client cert** field, select the SSL Client Certificate for the repository.
22. Optional: In the **SSL Client Key** field, select the SSL Client Key for the repository.
23. Click **Save** to create the repository.

CLI procedure

1. Enter the following command to create the repository:

```
# hammer repository create \
--arch "My_Architecture" \
--content-type "yum" \
--gpg-key-id My_GPG_Key_ID \
--name "My_Repository" \
--organization "My_Organization" \
--os-version "My_OS_Version" \
--product "My_Product" \
--publish-via-http true \
--url My_Upstream_URL
```

Continue to [synchronize the repository](#).

4.5. ENABLING RED HAT REPOSITORIES

If outside network access requires usage of an HTTP proxy, configure a default HTTP proxy for your server. For more information, see [Adding a Default HTTP Proxy](#).

To select the repositories to synchronize, you must first identify the Product that contains the repository, and then enable that repository based on the relevant release version and base architecture.

For Red Hat Enterprise Linux 8 Hosts

To provision Red Hat Enterprise Linux 8 hosts, you require the **Red Hat Enterprise Linux 8 for x86_64 - AppStream (RPMs)** and **Red Hat Enterprise Linux 8 for x86_64 - BaseOS (RPMs)** repositories.

For Red Hat Enterprise Linux 7 Hosts

To provision Red Hat Enterprise Linux 7 hosts, you require the **Red Hat Enterprise Linux 7 Server (RPMs)** repository.

The difference between associating Red Hat Enterprise Linux operating system release version with either **7Server** repositories or **7.X** repositories is that **7Server** repositories contain all the latest updates while **Red Hat Enterprise Linux 7.X** repositories stop getting updates after the next minor version release. Note that Kickstart repositories only have minor versions.

Procedure

1. In the Satellite web UI, navigate to **Content > Red Hat Repositories**.
2. To find repositories, either enter the repository name, or toggle the **Recommended Repositories** button to the on position to view a list of repositories that you require.
3. In the Available Repositories pane, click a repository to expand the repository set.
4. Click the **Enable** icon next to the base architecture and release version that you want.

CLI procedure

1. To search for your Product, enter the following command:

```
# hammer product list --organization "My_Organization"
```

2. List the repository set for the Product:

```
# hammer repository-set list \  
--product "Red Hat Enterprise Linux Server" \  
--organization "My_Organization"
```

3. Enable the repository using either the name or ID number. Include the release version, such as **7Server**, and base architecture, such as **x86_64**.

```
# hammer repository-set enable \  
--name "Red Hat Enterprise Linux 7 Server (RPMs)" \  
--releasever "7Server" \  
--basearch "x86_64" \  
--product "Red Hat Enterprise Linux Server" \  
--organization "My_Organization"
```

4.6. SYNCHRONIZING REPOSITORIES

You must synchronize repositories to download content into Satellite. You can use this procedure for an initial synchronization of repositories or to synchronize repositories manually as you need.

You can also sync all repositories in an organization. For more information, see [Section 4.7, "Synchronizing All Repositories in an Organization"](#).

Create a sync plan to ensure updates on a regular basis. For more information, see [Section 4.19, "Creating a Sync Plan"](#).

The synchronization duration depends on the size of each repository and the speed of your network connection. The following table provides estimates of how long it would take to synchronize content, depending on the available Internet bandwidth:

	Single Package (10Mb)	Minor Release (750Mb)	Major Release (6Gb)
256 Kbps	5 Mins 27 Secs	6 Hrs 49 Mins 36 Secs	2 Days 7 Hrs 55 Mins
512 Kbps	2 Mins 43.84 Secs	3 Hrs 24 Mins 48 Secs	1 Day 3 Hrs 57 Mins
T1 (1.5 Mbps)	54.33 Secs	1 Hr 7 Mins 54.78 Secs	9 Hrs 16 Mins 20.57 Secs
10 Mbps	8.39 Secs	10 Mins 29.15 Secs	1 Hr 25 Mins 53.96 Secs
100 Mbps	0.84 Secs	1 Min 2.91 Secs	8 Mins 35.4 Secs
1000 Mbps	0.08 Secs	6.29 Secs	51.54 Secs

Procedure

1. In the Satellite web UI, navigate to **Content** > **Products** and select the Product that contains the repositories that you want to synchronize.
2. Select the repositories that you want to synchronize and click **Sync Now**.
3. Optional: To view the progress of the synchronization in the Satellite web UI, navigate to **Content** > **Sync Status** and expand the corresponding Product or repository tree.

CLI procedure

- Synchronize an entire Product:

```
# hammer product synchronize \
--name "My_Product" \
--organization "My_Organization"
```

- Synchronize an individual repository:

```
# hammer repository synchronize \
--name "My_Repository" \
--organization "My_Organization" \
--product "My_Product"
```

4.7. SYNCHRONIZING ALL REPOSITORIES IN AN ORGANIZATION

Use this procedure to synchronize all repositories within an organization.

Procedure

1. Log in to your Satellite Server using SSH.
2. Run the following Bash script:

```
ORG="My_Organization"

for i in $(hammer --no-headers --csv repository list --organization $ORG | awk -F, {'print $1'})
do
  hammer repository synchronize --id ${i} --organization $ORG --async
done
```

4.8. DOWNLOAD POLICIES OVERVIEW

Red Hat Satellite provides multiple download policies for synchronizing RPM content. For example, you might want to download only the content metadata while deferring the actual content download for later.

Satellite Server has the following policies:

Immediate

Satellite Server downloads all metadata and packages during synchronization.

On Demand

Satellite Server downloads only the metadata during synchronization. Satellite Server only fetches and stores packages on the file system when Capsules or directly connected clients request them. This setting has no effect if you set a corresponding repository on a Capsule to **Immediate** because Satellite Server is forced to download all the packages.

The **On Demand** policy acts as a *Lazy Synchronization* feature because they save time synchronizing content. The lazy synchronization feature must be used only for **yum** repositories. You can add the packages to Content Views and promote to life cycle environments as normal.

Capsule Server has the following policies:

Immediate

Capsule Server downloads all metadata and packages during synchronization. Do not use this setting if the corresponding repository on Satellite Server is set to **On Demand** as Satellite Server is forced to download all the packages.

On Demand

Capsule Server only downloads the metadata during synchronization. Capsule Server fetches and stores packages only on the file system when directly connected clients request them. When you use an **On Demand** download policy, content is downloaded from Satellite Server if it is not available on Capsule Server.

Inherit

Capsule Server inherits the download policy for the repository from the corresponding repository on Satellite Server.

4.9. CHANGING THE DEFAULT DOWNLOAD POLICY

You can set the default download policy that Satellite applies to repositories that you create in all organizations.

Depending on whether it is a Red Hat or non-Red Hat custom repository, Satellite uses separate settings. Changing the default value does not change existing settings.

Procedure

1. In the Satellite web UI, navigate to **Administer** > **Settings**.
2. Click the **Content** tab.
3. Change the default download policy depending on your requirements:
 - To change the default download policy for a Red Hat repository, change the value of the **Default Red Hat Repository download policy** setting.
 - To change the default download policy for a custom repository, change the value of the **Default Custom Repository download policy** setting.

CLI procedure

- To change the default download policy for Red Hat repositories to one of **immediate** or **on_demand**, enter the following command:

```
# hammer settings set \
--name default_redhat_download_policy \
--value immediate
```

- To change the default download policy for a non-Red Hat custom repository to one of **immediate** or **on_demand**, enter the following command:

```
# hammer settings set \
--name default_download_policy \
--value immediate
```

4.10. CHANGING THE DOWNLOAD POLICY FOR A REPOSITORY

You can set the download policy for a repository.

Procedure

1. In the Satellite web UI, navigate to **Content** > **Products**.
2. Select the required product name.
3. On the **Repositories** tab, click the required repository name, locate the **Download Policy** field, and click the edit icon.
4. From the list, select the required download policy and then click **Save**.

CLI procedure

1. List the repositories for an organization:

```
# hammer repository list \
--organization-label My_Organization_Label
```

2. Change the download policy for a repository to **immediate** or **on_demand**:

```
# hammer repository update \
--download-policy immediate \
--name "My_Repository" \
--organization-label My_Organization_Label \
--product "My_Product"
```

4.11. MIRRORING POLICIES OVERVIEW

Mirroring keeps the local repository exactly in synchronization with the upstream repository. If any content is removed from the upstream repository since the last synchronization, with the next synchronization, it will be removed from the local repository as well.

You can use mirroring policies for finer control over mirroring of repodata and content when synchronizing a repository. For example, if it is not possible to mirror the repodata for a repository, you can set the mirroring policy to mirror only content for this repository.

Satellite Server has the following mirroring policies:

Additive

Neither the content nor the repodata is mirrored. Thus, only new content added since the last synchronization is added to the local repository and nothing is removed.

Content Only

Mirrors only content and not the repodata. Some repositories do not support metadata mirroring, in such cases you can set the mirroring policy to content only to only mirror the content.

Complete Mirroring

Mirrors content as well as repodata. This is the fastest method. This mirroring policy is only available for Yum content.

4.12. CHANGING THE MIRRORING POLICY FOR A REPOSITORY

You can set the mirroring policy for a repository.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select the product name.
3. On the **Repositories** tab, click the repository name, locate the **Mirroring Policy** field, and click the edit icon.
4. From the list, select a mirroring policy and click **Save**.

CLI procedure

1. List the repositories for an organization:

```
# hammer repository list \
--organization-label My_Organization_Label
```


- 2. Change the mirroring policy for a repository to **additive**, **mirror_complete**, or **mirror_content_only**:

```
# hammer repository update \
--id 1 \
--mirroring-policy mirror_complete
```

4.13. UPLOADING CONTENT TO CUSTOM RPM REPOSITORIES

You can upload individual RPMs and source RPMs to custom RPM repositories. You can upload RPMs using the Satellite web UI or the Hammer CLI. You must use the Hammer CLI to upload source RPMs.

Procedure

1. In the Satellite web UI, click **Content > Products**.
2. Click the name of the custom Product.
3. In the **Repositories** tab, click the name of the custom RPM repository.
4. Under **Upload Package**, click **Browse...** and select the RPM you want to upload.
5. Click **Upload**.

To view all RPMs in this repository, click the number next to **Packages** under **Content Counts**.

CLI procedure

- Enter the following command to upload an RPM:

```
# hammer repository upload-content \
--id Repository_ID \
--path /path/to/example-package.rpm
```

- Enter the following command to upload a source RPM:

```
# hammer repository upload-content \
--content-type srpm \
--id Repository_ID \
--path /path/to/example-package.src.rpm
```

When the upload is complete, you can view information about a source RPM by using the commands **hammer srpm list** and **hammer srpm info --id *srpm_ID***.

4.14. CONFIGURING SELINUX TO PERMIT CONTENT SYNCHRONIZATION ON CUSTOM PORTS

SELinux permits access of Satellite for content synchronization only on specific ports. By default, connecting to web servers running on the following ports is permitted: 80, 81, 443, 488, 8008, 8009, 8443, and 9000.

Procedure

1. On Satellite, to verify the ports that are permitted by SELinux for content synchronization, enter a command as follows:

```
# semanage port -l | grep ^http_port_t
http_port_t tcp 80, 81, 443, 488, 8008, 8009, 8443, 9000
```

2. To configure SELinux to permit a port for content synchronization, for example 10011, enter a command as follows:

```
# semanage port -a -t http_port_t -p tcp 10011
```

4.15. RECOVERING A CORRUPTED REPOSITORY

In case of repository corruption, you can recover it by using an advanced synchronization, which has three options:

Optimized Sync

Synchronizes the repository bypassing RPMs that have no detected differences from the upstream RPMs.

Complete Sync

Synchronizes all RPMs regardless of detected changes. Use this option if specific RPMs could not be downloaded to the local repository even though they exist in the upstream repository.

Verify Content Checksum

Synchronizes all RPMs and then verifies the checksum of all RPMs locally. If the checksum of an RPM differs from the upstream, it re-downloads the RPM. This option is relevant only for **yum** repositories. Use this option if you have one of the following errors:

- Specific RPMs cause a **404** error while synchronizing with **yum**.
- **Package does not match intended download** error, which means that specific RPMs are corrupted.

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select the product containing the corrupted repository.
3. Select the name of a repository you want to synchronize.
4. To perform optimized sync or complete sync, select **Advanced Sync** from the **Select Action** menu.
5. Select the required option and click **Sync**.
6. Optional: To verify the checksum, click **Verify Content Checksum** from the **Select Action** menu.

CLI procedure

1. Obtain a list of repository IDs:

```
# hammer repository list \
--organization "My_Organization"
```

2. Synchronize a corrupted repository using the necessary option:

- For the optimized synchronization:

```
# hammer repository synchronize \
--id My_ID
```

- For the complete synchronization:

```
# hammer repository synchronize \
--id My_ID \
--skip-metadata-check true
```

- For the validate content synchronization:

```
# hammer repository synchronize \
--id My_ID \
--validate-contents true
```

4.16. ADDING AN HTTP PROXY

Use this procedure to add HTTP proxies to Satellite. You can then specify which HTTP proxy to use for Products, repositories, and supported compute resources.

Prerequisites

Your HTTP proxy must allow access to the following hosts:

Host name	Port	Protocol
subscription.rhsm.redhat.com	443	HTTPS
cdn.redhat.com	443	HTTPS
*.akamaiedge.net	443	HTTPS
cert.console.redhat.com (if using Red Hat Insights)	443	HTTPS
api.access.redhat.com (if using Red Hat Insights)	443	HTTPS
cert-api.access.redhat.com (if using Red Hat Insights)	443	HTTPS

If Satellite Server uses a proxy to communicate with `subscription.rhsm.redhat.com` and `cdn.redhat.com` then the proxy must not perform SSL inspection on these communications.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Infrastructure** > **HTTP Proxies** and select **New HTTP Proxy**.
2. In the **Name** field, enter a name for the HTTP proxy.
3. In the **URL** field, enter the URL for the HTTP proxy, including the port number.
4. If your HTTP proxy requires authentication, enter a **Username** and **Password**.
5. Optional: In the **Test URL** field, enter the HTTP proxy URL, then click **Test Connection** to ensure that you can connect to the HTTP proxy from Satellite.
6. Click the **Locations** tab and add a location.
7. Click the **Organization** tab and add an organization.
8. Click **Submit**.

CLI procedure

- On Satellite Server, enter the following command to add an HTTP proxy:

```
# hammer http-proxy create \  
--name proxy-name \  
--url proxy-URL:port-number
```

If your HTTP proxy requires authentication, add the **--username *name*** and **--password *password*** options.

For further information, see the Knowledgebase article [How to access Red Hat Subscription Manager \(RHSM\) through a firewall or proxy](#) on the Red Hat Customer Portal.

4.17. CHANGING THE HTTP PROXY POLICY FOR A PRODUCT

For granular control over network traffic, you can set an HTTP proxy policy for each Product. A Product's HTTP proxy policy applies to all repositories in the Product, unless you set a different policy for individual repositories.

To set an HTTP proxy policy for individual repositories, see [Section 4.18, "Changing the HTTP Proxy Policy for a Repository"](#).

Procedure

1. In the Satellite web UI, navigate to **Content** > **Products** and select the checkbox next to each of the Products that you want to change.
2. From the **Select Action** list, select **Manage HTTP Proxy**.
3. Select an **HTTP Proxy Policy** from the list:
 - **Global Default:** Use the global default proxy setting.
 - **No HTTP Proxy:** Do not use an HTTP proxy, even if a global default proxy is configured.

- **Use specific HTTP Proxy:** Select an **HTTP Proxy** from the list. You must add HTTP proxies to Satellite before you can select a proxy from this list. For more information, see [Section 4.16, "Adding an HTTP Proxy"](#).

4. Click **Update**.

4.18. CHANGING THE HTTP PROXY POLICY FOR A REPOSITORY

For granular control over network traffic, you can set an HTTP proxy policy for each repository. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

To set the same HTTP proxy policy for all repositories in a Product, see [Section 4.17, "Changing the HTTP Proxy Policy for a Product"](#).

Procedure

1. In the Satellite web UI, navigate to **Content** > **Products** and click the name of the Product that contains the repository.
2. In the **Repositories** tab, click the name of the repository.
3. Locate the **HTTP Proxy** field and click the edit icon.
4. Select an **HTTP Proxy Policy** from the list:
 - **Global Default:** Use the global default proxy setting.
 - **No HTTP Proxy:** Do not use an HTTP proxy, even if a global default proxy is configured.
 - **Use specific HTTP Proxy:** Select an **HTTP Proxy** from the list. You must add HTTP proxies to Satellite before you can select a proxy from this list. For more information, see [Section 4.16, "Adding an HTTP Proxy"](#).
5. Click **Save**.

CLI procedure

- On Satellite Server, enter the following command, specifying the HTTP proxy policy you want to use:

```
# hammer repository update \
--http-proxy-policy HTTP_Proxy_Policy \
--id Repository_ID
```

Specify one of the following options for **--http-proxy-policy**:

- **none:** Do not use an HTTP proxy, even if a global default proxy is configured.
- **global_default_http_proxy:** Use the global default proxy setting.
- **use_selected_http_proxy:** Specify an HTTP proxy using either **--http-proxy *My_HTTP_Proxy_Name*** or **--http-proxy-id *My_HTTP_Proxy_ID***. To add a new HTTP proxy to Satellite, see [Section 4.16, "Adding an HTTP Proxy"](#).

4.19. CREATING A SYNC PLAN

A sync plan checks and updates the content at a scheduled date and time. In Satellite, you can create a sync plan and assign products to the plan.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Sync Plans** and click **New Sync Plan**.
2. In the **Name** field, enter a name for the plan.
3. Optional: In the **Description** field, enter a description of the plan.
4. From the **Interval** list, select the interval at which you want the plan to run.
5. From the **Start Date** and **Start Time** lists, select when to start running the synchronization plan.
6. Click **Save**.

CLI procedure

1. To create the synchronization plan, enter the following command:

```
# hammer sync-plan create \  
--description "My_Description" \  
--enabled true \  
--interval daily \  
--name "My_Products" \  
--organization "My_Organization" \  
--sync-date "2023-01-01 01:00:00"
```

2. View the available sync plans for an organization to verify that the sync plan has been created:

```
# hammer sync-plan list --organization "My_Organization"
```

4.20. ASSIGNING A SYNC PLAN TO A PRODUCT

A sync plan checks and updates the content at a scheduled date and time. In Satellite, you can assign a sync plan to products to update content regularly.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select a product.
3. On the **Details** tab, select a **Sync Plan** from the drop down menu.

CLI procedure

1. Assign a sync plan to a product:

```
# hammer product set-sync-plan \
--name "My_Product_Name" \
--organization "My_Organization" \
--sync-plan "My_Sync_Plan_Name"
```

4.21. ASSIGNING A SYNC PLAN TO MULTIPLE PRODUCTS

Use this procedure to assign a sync plan to the products in an organization that have been synchronized at least once and contain at least one repository.

Procedure

1. Run the following Bash script:

```
ORG="Your_Organization"
SYNC_PLAN="daily_sync_at_3_a.m"

for i in $(hammer --no-headers --csv product list --organization $ORG --per-page 999 | grep -
vi not_synced | awk -F, '{{ if ($5!=0) print $1}}')
do
  hammer sync-plan create --name $SYNC_PLAN --interval daily --sync-date "2018-06-20
03:00:00" --enabled true --organization $ORG
  hammer product set-sync-plan --sync-plan $SYNC_PLAN --organization $ORG --id $i
done
```

2. After executing the script, view the products assigned to the sync plan:

```
# hammer product list --organization $ORG --sync-plan $SYNC_PLAN
```

4.22. LIMITING SYNCHRONIZATION CONCURRENCY

By default, each Repository Synchronization job can fetch up to ten files at a time. This can be adjusted on a per repository basis.

Increasing the limit may improve performance, but can cause the upstream server to be overloaded or start rejecting requests. If you are seeing Repository syncs fail due to the upstream servers rejecting requests, you may want to try lowering the limit.

CLI procedure

```
# hammer repository update \
--download-concurrency 5 \
--id Repository_ID \
--organization "My_Organization"
```

4.23. IMPORTING A CUSTOM GPG KEY

When clients are consuming signed custom content, ensure that the clients are configured to validate the installation of packages with the appropriate GPG Key. This helps to ensure that only packages from authorized sources can be installed.

Red Hat content is already configured with the appropriate GPG key and thus GPG Key management of Red Hat Repositories is not supported.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Prerequisites

Ensure that you have a copy of the GPG key used to sign the RPM content that you want to use and manage in Satellite. Most RPM distribution providers provide their GPG Key on their website. You can also extract this manually from an RPM:

1. Download a copy of the version specific repository package to your client system:

```
$ wget http://www.example.com/9.5/example-9.5-2.noarch.rpm
```

2. Extract the RPM file without installing it:

```
$ rpm2cpio example-9.5-2.noarch.rpm | cpio -idmv
```

The GPG key is located relative to the extraction at **etc/pki/rpm-gpg/RPM-GPG-KEY-EXAMPLE-95**.

Procedure

1. In the Satellite web UI, navigate to **Content > Content Credentials** and in the upper-right of the window, click **Create Content Credential**.
2. Enter the name of your repository and select **GPG Key** from the **Type** list.
3. Either paste the GPG key into the **Content Credential Contents** field, or click **Browse** and select the GPG key file that you want to import.
If your custom repository contains content signed by multiple GPG keys, you must enter all required GPG keys in the **Content Credential Contents** field with new lines between each key, for example:

```
-----BEGIN PGP PUBLIC KEY BLOCK-----

mQINBFy/HE4BEADttv2TCPzVrre+aJ9f5QsR6oWZMm7N5Lwxjm5x5zA9BLiPPGFN
4aTUR/g+K1S0aqCU+ZS3Rnxb+6fnBxD+COH9kMqXHi3M5UNzbp5WhCdUpISXjipU
XIFFWBPuBfyr/FKRknFH15P+9kLZLxCpVZZLsweLWCuw+JKCMmnA
=F6VG
-----END PGP PUBLIC KEY BLOCK-----

-----BEGIN PGP PUBLIC KEY BLOCK-----

mQINBFw467UBEACmREzDeK/kuScCmfJfHJa0Wgh/2fbJLLt3KSvsgDhORlptf+PP
OTFDIKuLkJx99ZYG5xMnBG47C7ByoMec1j94YeXczuBbynOyyPlvduma/zf8oB9e
WI5GnzcLGAAnUSRamfqGUWcyMMinHHIKIc1X1P4I=
=WPpl
-----END PGP PUBLIC KEY BLOCK-----
```

4. Click **Save**.

CLI procedure

1. Copy the GPG key to your Satellite Server:


```
$ scp ~/etc/pki/rpm-gpg/RPM-GPG-KEY-EXAMPLE-95 root@satellite.example.com:~/.
```

2. Upload the GPG key to Satellite:

```
# hammer content-credentials create \  
--content-type gpg_key \  
--name "My_GPG_Key" \  
--organization "My_Organization" \  
--path ~/RPM-GPG-KEY-EXAMPLE-95
```

4.24. RESTRICTING CUSTOM REPOSITORIES TO RHEL 9 IN SATELLITE

Procedure

1. In the Satellite web UI, navigate to **Content** > **Products**.
2. Select the product that contains the repository sets that you want to restrict.
3. In the **Repositories** tab, click the repository that you want to restrict.
4. From the **Restrict to OS** list, select the operating system to include Red Hat Enterprise Linux operating systems for their corresponding Red Hat Enterprise Linux repositories.
5. Click **Save** to submit your change.

CHAPTER 5. MANAGING APPLICATION LIFE CYCLES

This chapter outlines the application life cycle in Satellite and how to create and remove application life cycles for Satellite and Capsule.

5.1. INTRODUCTION TO APPLICATION LIFE CYCLE

The *application life cycle* is a concept central to Satellite's content management functions. The application life cycle defines how a particular system and its software look at a particular stage. For example, an application life cycle might be simple; you might only have a development stage and production stage. In this case the application life cycle might look like this:

- Development
- Production

However, a more complex application life cycle might have further stages, such as a phase for testing or a beta release. This adds extra stages to the application life cycle:

- Development
- Testing
- Beta Release
- Production


Satellite provides methods to customize each application life cycle stage so that it suits your specifications.

Each stage in the application life cycle is called an *environment* in Satellite. Each environment uses a specific collection of content. Satellite defines these content collections as a Content View. Each Content View acts as a filter where you can define what repositories, and packages to include in a particular environment. This provides a method for you to define specific sets of content to designate to each environment.

For example, an email server might only require a simple application life cycle where you have a production-level server for real-world use and a test server for trying out the latest mail server packages. When the test server passes the initial phase, you can set the production-level server to use the new packages.

Another example is a development life cycle for a software product. To develop a new piece of software in a development environment, test it in a quality assurance environment, pre-release as a beta, then release the software as a production-level application.

Figure 5.1. The Satellite Application Life Cycle

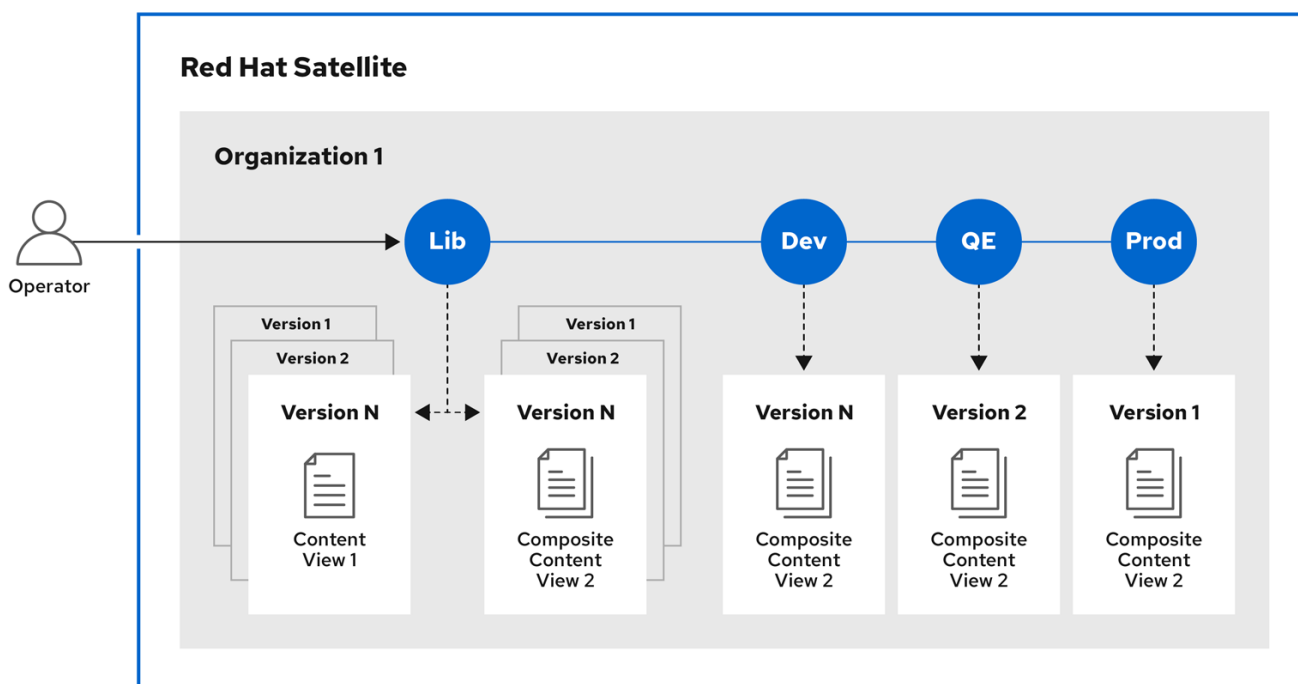

278_Satellite_0922

5.2. CONTENT PROMOTION ACROSS THE APPLICATION LIFE CYCLE

In the application life cycle chain, when content moves from one environment to the next, this is called *promotion*.

Example Content Promotion Across Satellite Life Cycle Environments

Each environment contains a set of systems registered to Red Hat Satellite. These systems only have access to repositories relevant to their environment. When you promote packages from one environment to the next, the target environment's repositories receive new package versions. As a result, each system in the target environment can update to the new package versions.

Development	Testing	Production
<code>example_software-1.1-0.noarch.rpm</code>	<code>example_software-1.0-0.noarch.rpm</code>	<code>example_software-1.0-0.noarch.rpm</code>

After completing development on the patch, you promote the package to the Testing environment so the Quality Engineering team can review the patch. The application life cycle then contains the following package versions in each environment:

Development	Testing	Production
<code>example_software-1.1-0.noarch.rpm</code>	<code>example_software-1.1-0.noarch.rpm</code>	<code>example_software-1.0-0.noarch.rpm</code>

While the Quality Engineering team reviews the patch, the Development team starts work on `example_software 2.0`. This results in the following application life cycle:

Development	Testing	Production
<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-1.1-0.noarch.rpm</code>	<code>example_software-1.0-0.noarch.rpm</code>

The Quality Engineering team completes their review of the patch. Now `example_software` 1.1 is ready to release. You promote 1.1 to the *Production* environment:

Development	Testing	Production
<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-1.1-0.noarch.rpm</code>	<code>example_software-1.1-0.noarch.rpm</code>

The Development team completes their work on `example_software` 2.0 and promotes it to the Testing environment:

Development	Testing	Production
<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-1.1-0.noarch.rpm</code>

Finally, the Quality Engineering team reviews the package. After a successful review, promote the package to the *Production* environment:

Development	Testing	Production
<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-2.0-0.noarch.rpm</code>	<code>example_software-2.0-0.noarch.rpm</code>

For more information, see [Section 6.3, "Promoting a Content View"](#).

5.3. CREATING A LIFE CYCLE ENVIRONMENT PATH

To create an application life cycle for developing and releasing software, use the *Library* environment as the initial environment to create environment paths. Then optionally add additional environments to the environment paths.

Procedure

1. In the Satellite web UI, navigate to **Content > Lifecycle Environments**.
2. Click **New Environment Path** to start a new application life cycle.
3. In the **Name** field, enter a name for your environment.
4. In the **Description** field, enter a description for your environment.
5. Click **Save**.

- Optional: To add an environment to the environment path, click **Add New Environment**, complete the **Name** and **Description** fields, and select the prior environment from the **Prior Environment** list.

CLI procedure

- To create an environment path, enter the **hammer lifecycle-environment create** command and specify the Library environment with the **--prior** option:

```
# hammer lifecycle-environment create \  
--name "Environment Path Name" \  
--description "Environment Path Description" \  
--prior "Library" \  
--organization "My_Organization"
```

- Optional: To add an environment to the environment path, enter the **hammer lifecycle-environment create** command and specify the parent environment with the **--prior** option:

```
# hammer lifecycle-environment create \  
--name "Environment Name" \  
--description "Environment Description" \  
--prior "Prior Environment Name" \  
--organization "My_Organization"
```

- To view the chain of the life cycle environment, enter the following command:

```
# hammer lifecycle-environment paths --organization "My_Organization"
```

5.4. REMOVING LIFE CYCLE ENVIRONMENTS FROM SATELLITE SERVER

Use this procedure to remove a life cycle environment.

Procedure

- In the Satellite web UI, navigate to **Content > Life Cycle Environments**.
- Click the name of the life cycle environment that you want to remove, and then click **Remove Environment**.
- Click **Remove** to remove the environment.

CLI procedure

- List the life cycle environments for your organization and note the name of the life cycle environment you want to remove:

```
# hammer lifecycle-environment list \  
--organization "My_Organization"
```

- Use the **hammer lifecycle-environment delete** command to remove an environment:

```
# hammer lifecycle-environment delete \
--name "My_Environment" \
--organization "My_Organization"
```

5.5. REMOVING LIFE CYCLE ENVIRONMENTS FROM CAPSULE SERVER

When life cycle environments are no longer relevant to the host system or environments are added incorrectly to Capsule Server, you can remove the life cycle environments from Capsule Server.

You can use both the Satellite web UI and the Hammer CLI to remove life cycle environments from Capsule.

Procedure

1. In the Satellite web UI, navigate to **Infrastructure** > **Capsules**, and select the Capsule that you want to remove a life cycle from.
2. Click **Edit** and click the **Life Cycle Environments** tab.
3. From the right menu, select the life cycle environments that you want to remove from Capsule, and then click **Submit**.
4. To synchronize Capsule's content, click the **Overview** tab, and then click **Synchronize**.
5. Select either **Optimized Sync** or **Complete Sync**.

CLI procedure

1. Select Capsule Server that you want from the list and take note of its **id**:

```
# hammer capsule list
```

2. To verify Capsule Server's details, enter the following command:

```
# hammer capsule info \
--id Capsule_ID
```

3. Verify the list of life cycle environments currently attached to Capsule Server and take note of the **Environment ID**:

```
# hammer capsule content lifecycle-environments \
--id Capsule_ID
```

4. Remove the life cycle environment from Capsule Server:

```
# hammer capsule content remove-lifecycle-environment \
--id Capsule_ID \
--lifecycle-environment-id Lifecycle_Environment_ID
```

Repeat this step for every life cycle environment that you want to remove from Capsule Server.

5. Synchronize the content from Satellite Server's environment to Capsule Server:

```
# hammer capsule content synchronize \
--id Capsule_ID
```

5.6. ADDING LIFE CYCLE ENVIRONMENTS TO CAPSULE SERVERS

If your Capsule Server has the content functionality enabled, you must add an environment so that Capsule can synchronize content from Satellite Server and provide content to host systems.

Do not assign the *Library* lifecycle environment to your Capsule Server because it triggers an automated Capsule sync every time the CDN updates a repository. This might consume multiple system resources on Capsules, network bandwidth between Satellite and Capsules, and available disk space on Capsules.

You can use Hammer CLI on Satellite Server or the Satellite web UI.

Procedure

1. In the Satellite web UI, navigate to **Infrastructure** > **Capsules**, and select the Capsule that you want to add a life cycle to.
2. Click **Edit** and click the **Life Cycle Environments** tab.
3. From the left menu, select the life cycle environments that you want to add to Capsule and click **Submit**.
4. To synchronize the content on the Capsule, click the **Overview** tab and click **Synchronize**.
5. Select either **Optimized Sync** or **Complete Sync**.
For definitions of each synchronization type, see [Recovering a Repository](#).

CLI procedure

1. To display a list of all Capsule Servers, on Satellite Server, enter the following command:

```
# hammer capsule list
```

Note the Capsule ID of the Capsule that you want to add a life cycle to.

2. Using the ID, verify the details of your Capsule:

```
# hammer capsule info --id capsule_id
```

3. To view the life cycle environments available for your Capsule Server, enter the following command and note the ID and the organization name:

```
# hammer capsule content available-lifecycle-environments --id capsule_id
```

4. Add the life cycle environment to your Capsule Server:

```
# hammer capsule content add-lifecycle-environment \
--id capsule_id --organization "My_Organization" \
--lifecycle-environment-id lifecycle-environment_id
```

Repeat for each life cycle environment you want to add to Capsule Server.

5. Synchronize the content from Satellite to Capsule.

- To synchronize all content from your Satellite Server environment to Capsule Server, enter the following command:

```
# hammer capsule content synchronize --id capsule_id
```

- To synchronize a specific life cycle environment from your Satellite Server to Capsule Server, enter the following command:

```
# hammer capsule content synchronize --id external_capsule_id \  
--lifecycle-environment-id lifecycle-environment_id
```


CHAPTER 6. MANAGING CONTENT VIEWS

Red Hat Satellite uses Content Views to create customized repositories from the repositories. To do this, you must define which repositories to use and then apply certain filters to the content. These filters include package filters, package group filters, errata filters, module stream filters, and container image tag filters. You can use Content Views to define which software versions a particular environment uses. For example, a *Production* environment might use a Content View containing older package versions, while a *Development* environment might use a Content View containing newer package versions.

Alternatively, a *Default Organization View* is an application-controlled Content View for all content that is synchronized to Satellite. This type is useful if you want to register a host to Satellite and access content using a subscription, without manipulating content views and lifecycle environments.

Each Content View creates a set of repositories across each environment, which Satellite Server stores and manages. When you promote a Content View from one environment to the next environment in the application life cycle, the respective repository on Satellite Server updates and publishes the packages.

	Development	Testing	Production
Content View Version and Contents	Version 2 – <i>example_software-1.1-0.noarch.rpm</i>	Version 1 – <i>example_software-1.0-0.noarch.rpm</i>	Version 1 – <i>example_software-1.0-0.noarch.rpm</i>

The repositories for Testing and Production contain the ***example_software-1.0-0.noarch.rpm*** package. If you promote Version 2 of the Content View from Development to Testing, the repository for Testing regenerates and then contains the ***example_software-1.1-0.noarch.rpm*** package:

	Development	Testing	Production
Content View Version and Contents	Version 2 – <i>example_software-1.1-0.noarch.rpm</i>	Version 2 – <i>example_software-1.1-0.noarch.rpm</i>	Version 1 – <i>example_software-1.0-0.noarch.rpm</i>

This ensures systems are designated to a specific environment but receive updates when that environment uses a new version of the Content View.

The general workflow for creating Content Views for filtering and creating snapshots is as follows:

1. Create a Content View.
2. Add one or more repositories that you want to the Content View.
3. Optional: Create one or more filters to refine the content of the Content View. For more information, see [Section 6.9, “Content Filter Examples”](#).
4. Optional: Resolve any package dependencies for a Content View. For more information, see [Section 6.8, “Resolving Package Dependencies”](#).
5. Publish the Content View.
6. Optional: Promote the Content View to another environment. For more information, see [Section 6.3, “Promoting a Content View”](#).

7. Attach the content host to the Content View.

If a repository is not associated with the Content View, the file `/etc/yum.repos.d/redhat.repo` remains empty and systems registered to it cannot receive updates.

Hosts can only be associated with a single Content View. To associate a host with multiple Content Views, create a composite Content View. For more information, see [Section 6.6, "Creating a Composite Content View"](#).

6.1. CREATING A CONTENT VIEW

Use this procedure to create a simple Content View. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Prerequisites

While you can stipulate whether you want to resolve any package dependencies on a Content View by Content View basis, you might want to change the default Satellite settings to enable or disable package resolution for all Content Views. For more information, see [Section 6.8, "Resolving Package Dependencies"](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Content Views** and click **Create content view**
2. In the **Name** field, enter a name for the view. Satellite automatically completes the **Label** field from the name you enter.
3. In the **Description** field, enter a description of the view.
4. In the **Type** field, select a **Content view** or a **Composite content view**
5. Optional: If you want to solve dependencies automatically every time you publish this Content View, select the **Solve dependencies** checkbox. Dependency solving slows the publishing time and might ignore any Content View filters you use. This can also cause errors when resolving dependencies for errata.
6. Optional: If you want to designate this Content View for importing from an upstream server, select the **Import only** checkbox. Import-only content views cannot be published directly.
7. Click **Create content view**

Content View Steps

1. Click **Create content view** to create the Content View.
2. In the **Repositories** tab, select the repository from the **Type** list that you want to add to your Content View, select the checkbox next to the available repositories you want to add, then click **Add repositories**.
3. Click **Publish new version** and in the **Description** field, enter information about the version to log changes.
4. Optional: You can enable a promotion path by clicking **Promote** to **Select a lifecycle environment from the available promotion paths to promote new version**.

5. Click **Next**.
6. On the **Review** page, you can review the environments you are trying to publish.
7. Click **Finish**.



NOTE

Remove and **Delete** are similar but the **Delete** option deletes an entire Content View and the versions associated with that lifecycle environment. The **Remove** option allows you to choose which version you want removed from the lifecycle environment.

You can view the Content View in the Content Views window. To view more information about the Content View, click the Content View name. To register a host to your Content View, see [Registering Hosts](#) in *Managing Hosts*.

CLI procedure

1. Obtain a list of repository IDs:

```
# hammer repository list --organization "My_Organization"
```

2. Create the Content View and add repositories:

```
# hammer content-view create \
--description "My_Content_View" \
--name "My_Content_View" \
--organization "My_Organization" \
--repository-ids 1,2
```

For the **--repository-ids** option, you can find the IDs in the output of the **hammer repository list** command.

3. Publish the view:

```
# hammer content-view publish \
--description "My_Content_View" \
--name "My_Content_View" \
--organization "My_Organization"
```

4. Optional: To add a repository to an existing Content View, enter the following command:

```
# hammer content-view add-repository \
--name "My_Content_View" \
--organization "My_Organization" \
--repository-id repository_ID
```

Satellite Server creates the new version of the view and publishes it to the Library environment.

6.2. VIEWING MODULE STREAMS

In Satellite, you can view the module streams of the repositories in your Content Views.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to a published version of a **Content View** > **Module Streams** to view the module streams that are available for the Content Types.
2. Use the **Search** field to search for specific modules.
3. To view the information about the module, click the module and its corresponding tabs to include **Details**, **Repositories**, **Profiles**, and **Artifacts**.

CLI procedure

1. List all organizations:

```
# hammer organization list
```

2. View all module streams for your organization:

```
# hammer module-stream list \  
--organization-id My_Organization_ID
```

6.3. PROMOTING A CONTENT VIEW

Use this procedure to promote Content Views across different lifecycle environments. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Permission Requirements for Content View Promotion

Non-administrator users require two permissions to promote a Content View to an environment:

1. **promote_or_remove_content_views**
2. **promote_or_remove_content_views_to_environment**.

The **promote_or_remove_content_views** permission restricts which Content Views a user can promote.

The **promote_or_remove_content_views_to_environment** permission restricts the environments to which a user can promote Content Views.

With these permissions you can assign users permissions to promote certain Content Views to certain environments, but not to other environments. For example, you can limit a user so that they are permitted to promote to test environments, but not to production environments.

You must assign both permissions to a user to allow them to promote Content Views.

Procedure

1. In the Satellite web UI, navigate to **Content** > **Content Views** and select the Content View that you want to promote.
2. Select the version that you want to promote, click the vertical ellipsis icon, and click **Promote**.

3. Select the environment where you want to promote the Content View and click **Promote**.

Now the repository for the Content View appears in all environments.

CLI procedure

- Promote the Content View using the **hammer content-view version promote** each time:

```
# hammer content-view version promote \
--content-view "Database" \
--version 1 \
--to-lifecycle-environment "Development" \
--organization "My_Organization"
# hammer content-view version promote \
--content-view "Database" \
--version 1 \
--to-lifecycle-environment "Testing" \
--organization "My_Organization"
# hammer content-view version promote \
--content-view "Database" \
--version 1 \
--to-lifecycle-environment "Production" \
--organization "My_Organization"
```

Now the database content is available in all environments.

To register a host to your Content View, see [Registering Hosts](#) in *Managing Hosts*.

6.4. PROMOTING A CONTENT VIEW ACROSS ALL LIFE CYCLE ENVIRONMENTS WITHIN AN ORGANIZATION

Use this procedure to promote Content Views across all lifecycle environments within an organization.

Procedure

1. To promote a selected Content View version from Library across all life cycle environments within an organization, run the following Bash script:

```
ORG="My_Organization"
CVV_ID=3

for i in $(hammer --no-headers --csv lifecycle-environment list --organization $ORG | awk -F,
{'print $1'} | sort -n)
do
    hammer content-view version promote --organization $ORG --to-lifecycle-environment-id $i
--id $CVV_ID
done
```

2. Display information about your Content View version to verify that it is promoted to the required lifecycle environments:

```
# hammer content-view version info --id 3
```

6.5. COMPOSITE CONTENT VIEWS OVERVIEW

A Composite Content View combines the content from several Content Views. For example, you might have separate Content Views to manage an operating system and an application individually. You can use a Composite Content View to merge the contents of both Content Views into a new repository. The repositories for the original Content Views still exist but a new repository also exists for the combined content.

If you want to develop an application that supports different database servers. The *example_application* appears as:

<i>example_software</i>
Application
Database
Operating System

Example of four separate Content Views:

- Red Hat Enterprise Linux (Operating System)
- PostgreSQL (Database)
- MariaDB (Database)
- *example_software* (Application)

From the previous Content Views, you can create two Composite Content Views.

Example Composite Content View for a PostgreSQL database:

Composite Content View 1 – <i>example_software</i> on PostgreSQL
<i>example_software</i> (Application)
PostgreSQL (Database)
Red Hat Enterprise Linux (Operating System)

Example Composite Content View for a MariaDB:

Composite Content View 2 – <i>example_software</i> on MariaDB
<i>example_software</i> (Application)
MariaDB (Database)

Composite Content View 2 – *example_software* on MariaDB

Red Hat Enterprise Linux (Operating System)

Each Content View is then managed and published separately. When you create a version of the application, you publish a new version of the Composite Content Views. You can also select the **Auto Publish** option when creating a Composite Content View, and then the Composite Content View is automatically republished when a Content View it includes is republished.

Repository Restrictions

You cannot include more than one of each repository in Composite Content Views. For example, if you attempt to include two Content Views using the same repository in a Composite Content View, Satellite Server reports an error.

6.6. CREATING A COMPOSITE CONTENT VIEW

Use this procedure to create a composite Content View. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Content Views** and click **Create content view**
2. In the **Create content view** window, enter a name for the view in the **Name** field. Red Hat Satellite automatically completes the **Label** field from the name you enter.
3. Optional: In the **Description** field, enter a description of the view.
4. On the **Type** tab, select **Composite content view**.
5. Optional: If you want to automatically publish a new version of the Composite Content View when a Content View is republished, select the **Auto publish** checkbox.
6. Click **Create content view**
7. On the **Content views** tab, select the Content Views that you want to add to the Composite Content View, and then click **Add content views**
8. In the **Add content views** window, select the version of each Content View.
9. Optional: If you want to automatically update the Content View to the latest version, select the **Always update to latest version** checkbox.
10. Click **Add**, then click **Publish new version**.
11. Optional: In the **Description** field, enter a description of the Content View.
12. In the **Publish** window, set the **Promote** switch, then select the lifecycle environment.
13. Click **Next**, then click **Finish**.

CLI procedure

1. Before you create the Composite Content Views, list the version IDs for your existing Content Views:

```
# hammer content-view version list \
--organization "My_Organization"
```

2. Create a new Composite Content View. When the **--auto-publish** option is set to **yes**, the Composite Content View is automatically republished when a Content View it includes is republished:

```
# hammer content-view create \
--composite \
--auto-publish yes \
--name "Example_Composite_Content_View" \
--description "Example Composite Content View" \
--organization "My_Organization"
```

3. Add a Content View to the Composite Content View. You must include the Content View Version ID and use the **--latest** option. To add multiple Content Views to the Composite Content View, repeat this step for every Content View you want to include:

```
# hammer content-view component add \
--component-content-view-id Content_View_Version_ID \
--latest \
--composite-content-view "Example_Composite_Content_View"
```

4. Publish the Composite Content View:

```
# hammer content-view publish \
--name "Example_Composite_Content_View" \
--description "Initial version of Composite Content View" \
--organization "My_Organization"
```

5. Promote the Composite Content View across all environments:

```
# hammer content-view version promote \
--content-view "Example_Composite_Content_View" \
--version 1 \
--to-lifecycle-environment "Development" \
--organization "My_Organization"
# hammer content-view version promote \
--content-view "Example_Composite_Content_View" \
--version 1 \
--to-lifecycle-environment "Testing" \
--organization "My_Organization"
# hammer content-view version promote \
--content-view "Example_Composite_Content_View" \
--version 1 \
--to-lifecycle-environment "Production" \
--organization "My_Organization"
```

6.7. CONTENT FILTER OVERVIEW

Content Views also use filters to include or restrict certain RPM content. Without these filters, a Content View includes everything from the selected repositories.

There are two types of content filters:

Table 6.1. Filter Types

Filter Type	Description
Include	You start with no content, then select which content to add from the selected repositories. Use this filter to combine multiple content items.
Exclude	You start with all content from selected repositories, then select which content to remove. Use this filter when you want to use most of a particular content repository but exclude certain packages, such as blacklisted packages. The filter uses all content in the repository except for the content you select.

Include and Exclude Filter Combinations

If using a combination of Include and Exclude filters, publishing a Content View triggers the include filters first, then the exclude filters. In this situation, select which content to include, then which content to exclude from the inclusive subset.

Content Types

There are also five types of content to filter:

Table 6.2. Content Types

Content Type	Description
RPM	Filter packages based on their name and version number. The RPM option filters non-modular RPM packages and errata.
Package Group	Filter packages based on package groups. The list of package groups is based on the repositories added to the Content View.
Erratum (by ID)	Select which specific errata to add to the filter. The list of Errata is based on the repositories added to the Content View.
Erratum (by Date and Type)	Select a issued or updated date range and errata type (Bugfix, Enhancement, or Security) to add to the filter.
Module Streams	Select whether to include or exclude specific module streams. The Module Streams option filters modular RPMs and errata, but does not filter non-modular content that is associated with the selected module stream.
Container Image Tag	Select whether to include or exclude specific container image tags.

6.8. RESOLVING PACKAGE DEPENDENCIES

In Satellite, you can use the package dependency resolution feature to ensure that any dependencies that packages have within a Content View are added to the dependent repository as part of the Content View publication process.

You can select to resolve package dependencies for any Content View that you want, or you can change the default setting to enable or disable resolving package dependencies for all new Content Views.

Note that resolving package dependencies can cause significant delays to Content View promotion. The package dependency resolution feature does not consider packages that are installed on your system independently of the Content View or solve dependencies across repositories.

Resolving Package Dependencies and Filters

Filters do not resolve any dependencies of the packages listed in the filters. This might require some level of testing to determine what dependencies are required.

If you add a filter that excludes some packages that are required and the Content View has dependency resolution enabled, Satellite ignores the rules you create in your filter in favor of resolving the package dependency.

If you create a content filter for security purposes, to resolve a package dependency, Satellite can add packages that you might consider insecure.

6.9. CONTENT FILTER EXAMPLES

Use any of the following examples with the procedure that follows to build custom content filters.

Example 1

Create a repository with the base Red Hat Enterprise Linux packages. This filter requires a Red Hat Enterprise Linux repository added to the Content View.

Filter:

- **Inclusion Type:** Include
- **Content Type:** Package Group
- **Filter:** Select only the **Base** package group

Example 2

Create a repository that excludes all errata, except for security updates, after a certain date. This is useful if you want to perform system updates on a regular basis with the exception of critical security updates, which must be applied immediately. This filter requires a Red Hat Enterprise Linux repository added to the Content View.

Filter:

- **Inclusion Type:** Exclude
- **Content Type:** Erratum (by Date and Type)
- **Filter:** Select only the **Bugfix** and **Enhancement** errata types, and clear the **Security** errata type. Set the **Date Type** to **Updated On**. Set the **Start Date** to the date you want to restrict errata. Leave the **End Date** blank to ensure any new non-security errata is filtered.

Example 3

A combination of Example 1 and Example 2 where you only require the operating system packages and want to exclude recent bug fix and enhancement errata. This requires two filters attached to the same Content View. The Content View processes the Include filter first, then the Exclude filter.

Filter 1:

- **Inclusion Type:** Include
- **Content Type:** Package Group
- **Filter:** Select only the **Base** package group

Filter 2:

- **Inclusion Type:** Exclude
- **Content Type:** Erratum (by Date and Type)
- **Filter:** Select only the **Bugfix** and **Enhancement** errata types, and clear the **Security** errata type. Set the **Date Type** to **Updated On**. Set the **Start Date** to the date you want to restrict errata. Leave the **End Date** blank to ensure any new non-security errata is filtered.

Example 4

Filter a specific module stream in a Content View.

Filter 1:

- **Inclusion Type:** Include
- **Content Type:** Module Stream
- **Filter:** Select only the specific module stream that you want for the Content View, for example **ant**, and click **Add Module Stream**.

Filter 2:

- **Inclusion Type:** Exclude
- **Content Type:** Package
- **Filter:** Add a rule to filter any non-modular packages that you want to exclude from the Content View. If you do not filter the packages, the Content View filter includes all non-modular packages associated with the module stream **ant**. Add a rule to exclude all ***** packages, or specify the package names that you want to exclude.

For another example of how content filters work, see the following article: "[How do content filters work in Satellite 6](#)".

6.10. CREATING A CONTENT FILTER FOR YUM CONTENT

You can filter Content Views containing Yum content to include or exclude specific packages, package groups, errata, or module streams. Filters are based on a combination of the *name*, *version*, and *architecture*.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

For examples of how to build a filter, see [Section 6.9, "Content Filter Examples"](#).

Procedure

1. In the Satellite web UI, navigate to **Content** > **Content Views** and select a Content View.
2. On the **Filters** tab, click **Create filter**.
3. Enter a name.
4. From the **Content type** list, select a content type.
5. From the **Inclusion Type** list, select either **Include filter** or **Exclude filter**.
6. Optional: In the **Description** field, enter a description for the filter.
7. Click **Create filter** to create your content filter.
8. Depending on what you enter for **Content Type**, add rules to create the filter that you want.
9. Select if you want the filter to **Apply to subset of repositories** or **Apply to all repositories**.
10. Click **Publish New Version** to publish the filtered repository.
11. Optional: In the **Description** field, enter a description of the changes.
12. Click **Create filter** to publish a new version of the Content View.
You can promote this Content View across all environments.

CLI procedure

1. Add a filter to the Content View. Use the **--inclusion false** option to set the filter to an Exclude filter:

```
# hammer content-view filter create \
--name "Errata Filter" \
--type erratum --content-view "Example_Content_View" \
--description "My latest filter" \
--inclusion false \
--organization "My_Organization"
```

2. Add a rule to the filter:

```
# hammer content-view filter rule create \
--content-view "Example_Content_View" \
--content-view-filter "Errata Filter" \
--start-date "YYYY-MM-DD" \
--types enhancement,bugfix \
--date-type updated \
--organization "My_Organization"
```

3. Publish the Content View:

```
# hammer content-view publish \
--name "Example_Content_View" \
```

```
--description "Adding errata filter" \  
--organization "My_Organization"
```

4. Promote the view across all environments:

```
# hammer content-view version promote \  
--content-view "Example_Content_View" \  
--version 1 \  
--to-lifecycle-environment "Development" \  
--organization "My_Organization"  
# hammer content-view version promote \  
--content-view "Example_Content_View" \  
--version 1 \  
--to-lifecycle-environment "Testing" \  
--organization "My_Organization"  
# hammer content-view version promote \  
--content-view "Example_Content_View" \  
--version 1 \  
--to-lifecycle-environment "Production" \  
--organization "My_Organization"
```

CHAPTER 7. SYNCHRONIZING CONTENT BETWEEN SATELLITE SERVERS

In a Satellite setup with multiple Satellite Servers, you can use Inter-Satellite Synchronization (ISS) to synchronize content from one upstream server to one or more downstream servers.

There are two possible ISS configurations of Satellite, depending on how you deployed your infrastructure. Configure your Satellite for ISS as appropriate for your use case scenario. For more information, see [How to Configure Inter-Satellite Synchronization](#) in *Installing Satellite Server in a Disconnected Network Environment*.

7.1. HOW TO SYNCHRONIZE CONTENT USING EXPORT AND IMPORT

There are multiple approaches for synchronizing content using the export and import workflow:

- You employ the upstream Satellite Server as a content store, which means that you sync the whole Library rather than Content View versions. This approach offers the simplest export/import workflow. In such case, you can manage the versions downstream. For more information, see [Section 7.1.1, “Using an Upstream Satellite Server as a Content Store”](#).
- You use the upstream Satellite Server to sync Content View versions. This approach offers more control over what content is synced between Satellite Servers. For more information, see [Section 7.1.2, “Using an Upstream Satellite Server to Sync Content View Versions”](#).
- You sync a single repository. This can be useful if you use the Content-View syncing approach, but you want to sync an additional repository without adding it to an existing Content View. For more information, see [Section 7.1.3, “Synchronizing a Single Repository”](#).

7.1.1. Using an Upstream Satellite Server as a Content Store

In this scenario, you use the upstream Satellite Server as a content store for updates rather than to manage content. You use the downstream Satellite Server to manage content for all infrastructure behind the isolated network. You export the Library content from the upstream Satellite Server and import it into the downstream Satellite Server.

On the upstream Satellite Server

1. Ensure that repositories are using the **Immediate** download policy in one of the following ways:
 - a. For existing repositories using **On Demand**, change their download policy on the repository details page to **Immediate**.
 - b. For new repositories, ensure that the **Default Red Hat Repository download policy** setting is set to **Immediate** before enabling Red Hat repositories, and that the **Default download policy** is set to **Immediate** for custom repositories.

For more information, see [Section 4.8, “Download Policies Overview”](#).

2. Enable the content that you want to synchronize. For more information, see [Section 4.5, “Enabling Red Hat Repositories”](#).
If you want to sync custom content, first [create a custom Product](#) and [synchronize Product repositories](#).
3. Synchronize the enabled content:

- a. On the first export, perform a **complete** Library export so that all the synchronized content is exported. This generates content archives that you can later import into one or more downstream Satellite Servers. For more information on performing a complete Library export, see [Section 7.2, “Exporting the Library Environment”](#).
- b. Export all future updates on the upstream Satellite Server incrementally. This generates leaner content archives that contain only a recent set of updates. For example, if you enable and synchronize a new repository, the next exported content archive contains content only from the newly enabled repository. For more information on performing an incremental Library export, see [Section 7.4, “Exporting the Library Environment Incrementally”](#).

On the downstream Satellite Server

1. Bring the content exported from the upstream Satellite Server over to the hard disk.
2. Place it inside a directory under `/var/lib/pulp/imports`.
3. Import the content to an organization using the procedure outlined in [Section 7.12, “Importing into the Library Environment”](#).
You can then manage content using Content Views or Lifecycle Environments as you require.

7.1.2. Using an Upstream Satellite Server to Sync Content View Versions

In this scenario, you use the upstream Satellite Server not only as a content store, but also to synchronize content for all infrastructure behind the isolated network. You curate updates coming from the CDN into Content Views and Lifecycle Environments. Once you promote content to a designated Lifecycle Environment, you can export the content from the upstream Satellite Server and import it into the downstream Satellite Server.

On the upstream Satellite Server

1. Ensure that repositories are using the **Immediate** download policy in one of the following ways:
 - a. For existing repositories using **On Demand**, change their download policy on the repository details page to **Immediate**.
 - b. For new repositories, ensure that the **Default Red Hat Repository download policy** setting is set to **Immediate** before enabling Red Hat repositories, and that the **Default download policy** is set to **Immediate** for custom repositories.

For more information, see [Section 4.8, “Download Policies Overview”](#).

2. Enable the content that you want to synchronize. For more information, see [Section 4.5, “Enabling Red Hat Repositories”](#).
If you want to sync custom content, first [create a custom Product](#) and [synchronize Product repositories](#).
3. Synchronize the enabled content:
 - a. For the first export, perform a **complete** Version export on the Content View Version that you want to export. For more information see, [Section 7.5, “Exporting a Content View Version”](#). This generates content archives that you can import into one or more downstream Satellite Servers.
 - b. Export all future updates in the connected Satellite Servers incrementally. This generates leaner content archives that contain changes only from the recent set of updates. For

example, if your Content View has a new repository, this exported content archive contains only the latest changes. For more information, see [Section 7.7, “Exporting a Content View Version Incrementally”](#).

- c. When you have new content, republish the Content Views that include this content before exporting the increment. For more information, see [Chapter 6, Managing Content Views](#). This creates a new Content View Version with the appropriate content to export.

On the downstream Satellite Server

1. Bring the content exported from the upstream Satellite Server over to the hard disk.
2. Place it inside a directory under `/var/lib/pulp/imports`.
3. Import the content to the organization that you want. For more information, see [Section 7.13, “Importing a Content View Version”](#). This will create a Content View Version from the exported content archives and then import content appropriately.

7.1.3. Synchronizing a Single Repository

In this scenario, you export and import a single repository.

On the upstream Satellite Server

1. Ensure that the repository is using the **Immediate** download policy in one of the following ways:
 - a. For existing repositories using **On Demand**, change their download policy on the repository details page to **Immediate**.
 - b. For new repositories, ensure that the **Default Red Hat Repository download policy** setting is set to **Immediate** before enabling Red Hat repositories, and that the **Default download policy** is set to **Immediate** for custom repositories.

For more information, see [Section 4.8, “Download Policies Overview”](#).

2. Enable the content that you want to synchronize. For more information, see [Section 4.5, “Enabling Red Hat Repositories”](#).

If you want to sync custom content, first [create a custom Product](#) and [synchronize Product repositories](#).

3. Synchronize the enabled content:
 - a. On the first export, perform a **complete** repository export so that all the synchronized content is exported. This generates content archives that you can later import into one or more downstream Satellite Servers. For more information on performing a complete repository export, see [Section 7.8, “Exporting a Repository”](#).
 - b. Export all future updates on the upstream Satellite Server incrementally. This generates leaner content archives that contain only a recent set of updates. For more information on performing an incremental repository export, see [Section 7.10, “Exporting a Repository Incrementally”](#).

On the downstream Satellite Server

1. Bring the content exported from the upstream Satellite Server over to the hard disk.

2. Place it inside a directory under **/var/lib/pulp/imports**.
3. Import the content to an organization. See [Section 7.14, "Importing a Repository"](#).
You can then manage content using Content Views or Lifecycle Environments as you require.

7.2. EXPORTING THE LIBRARY ENVIRONMENT

You can export contents of all Yum repositories in the Library environment of an organization to an archive file from Satellite Server and use this archive file to create the same repositories in another Satellite Server or in another Satellite Server organization. The exported archive file contains the following data:

- A JSON file containing Content View version metadata.
- An archive file containing all the repositories from the Library environment of the organization.

Satellite Server exports only RPM and kickstart files included in a Content View version. Satellite does not export the following content:

- Docker content

Prerequisites

To export the contents of the Library lifecycle environment of the organization, ensure that Satellite Server where you want to export meets the following conditions:

- Ensure that the export directory has free storage space to accommodate the export.
- Ensure that the **/var/lib/pulp/exports** directory has free storage space equivalent to the size of the repositories being exported for temporary files created during the export process.
- Ensure that you set download policy to **Immediate** for all repositories within the Library lifecycle environment you export. For more information, see [Section 4.8, "Download Policies Overview"](#).
- Ensure that you synchronize Products that you export to the required date.

Export the Library Content of an Organization

1. Use the organization name or ID to export.

```
# hammer content-export complete library --organization="My_Organization"
```

2. Verify that the archive containing the exported version of a Content View is located in the export directory:

```
# ls -lh /var/lib/pulp/exports/My_Organization/Export-Library/1.0/2021-03-02T03-35-24-00-00
total 68M
-rw-r--r--. 1 pulp pulp 68M Mar  2 03:35 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335.tar.gz
-rw-r--r--. 1 pulp pulp 333 Mar  2 03:35 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335-toc.json
-rw-r--r--. 1 pulp pulp 443 Mar  2 03:35 metadata.json
```

You need all three files, the **tar.gz**, the **toc.json**, and the **metadata.json** file to be able to import.

3. A new Content View **Export-Library** is created in the organization. This Content View contains all the repositories belonging to this organization. A new version of this Content View is published and exported automatically.

Export with chunking

In many cases the exported archive content may be several gigabytes in size. If you want to split it into smaller sizes or chunks. You can use the **--chunk-size-gb** flag directly in the export command to handle this. In the following example, you can see how to specify **--chunk-size-gb=2** to split the archives in **2 GB** chunks.

```
# hammer content-export complete library \
--chunk-size-gb=2 \
--organization="My_Organization"

Generated /var/lib/pulp/exports/My_Organization/Export-Library/2.0/2021-03-02T04-01-25-00-00/metadata.json

# ls -lh /var/lib/pulp/exports/My_Organization/Export-Library/2.0/2021-03-02T04-01-25-00-00/
```

7.3. EXPORTING THE LIBRARY ENVIRONMENT IN A SYNCABLE FORMAT

You can export contents of all yum repositories, Kickstart repositories and file repositories in the Library environment of an organization to a syncable format that you can use to create your custom CDN and synchronize the content from the custom CDN over HTTP/HTTPS.

You can then serve the generated content using a local web server on the importing Satellite Server or in another Satellite Server organization.

You cannot directly import Syncable Format exports. Instead, on the importing Satellite Server you must:

- Copy the generated content to an HTTP/HTTPS web server that is accessible to importing Satellite Server.
- Update your CDN configuration to **Custom CDN**.
- Set the CDN URL to point to the web server.
- Optional: Set an SSL/TLS CA Credential if the web server requires it.
- Enable the repository.
- Synchronize the repository.

You can export the following content in a syncable format from Satellite Server:

- Yum repositories
- Kickstart repositories
- File repositories

You cannot export Ansible, DEB, and Docker content.

The export contains directories with the packages, **listing** files, and metadata of the repository in Yum format that can be used to synchronize in the importing Satellite Server.

Prerequisites

- Ensure that you set the download policy to **Immediate** for all repositories within the Library lifecycle environment you export. For more information, see [Section 4.8, "Download Policies Overview"](#).
- Ensure that you synchronize products you export to the required date.
- Ensure that the user exporting the content has the **Content Exporter** role.

Procedure

1. Use the organization name or ID to export:

```
# hammer content-export complete library \
--organization="My_Organization" \
--format=syncable
```

2. Optional: Verify that the exported content is located in the export directory:

```
# du -sh /var/lib/pulp/exports/My_Organization/Export-My_Repository/1.0/2021-03-02T03-35-24-00-00
```

7.4. EXPORTING THE LIBRARY ENVIRONMENT INCREMENTALLY

Exporting Library content can be a very expensive operation in terms of system resources. Organizations that have multiple Red Hat Enterprise Linux trees can occupy several gigabytes of space on Satellite Server.

In such cases, you can use **Incremental Export** to export only pieces of content that changed since the previous export. Incremental exports typically result in smaller archive files than the full exports.

The example below shows incremental export of all repositories in the organization's Library.

Procedure

1. Create an incremental export:

```
# hammer content-export incremental library --organization="My_Organization"

Generated /var/lib/pulp/exports/My_Organization/Export-Library/3.0/2021-03-02T04-22-14-00-00/metadata.json
```

2. Optional: View the exported data:

```
# ls -lh /var/lib/pulp/exports/My_Organization/Export-Library/3.0/2021-03-02T04-22-14-00-00/
total 172K
-rw-r--r--. 1 pulp pulp 161K Mar  2 04:22 export-436882d8-de5a-48e9-a30a-17169318f908-20210302_0422.tar.gz
```

```
-rw-r--r--. 1 pulp pulp 333 Mar 2 04:22 export-436882d8-de5a-48e9-a30a-17169318f908-20210302_0422-toc.json
-rw-r--r--. 1 pulp pulp 492 Mar 2 04:22 metadata.json
```

7.5. EXPORTING A CONTENT VIEW VERSION

You can export a version of a Content View to an archive file from Satellite Server and use this archive file to create the same Content View version on another Satellite Server or on another Satellite Server organization. Satellite exports composite Content Views as normal Content Views. The composite nature is not retained. On importing the exported archive, a regular Content View is created or updated on your downstream Satellite Server. The exported archive file contains the following data:

- A JSON file containing Content View version metadata
- An archive file containing all the repositories included into the Content View version

Satellite Server exports only RPM and kickstart files added to a version of a Content View. Satellite does not export the following content:

- Docker content
- Content View definitions and metadata, such as package filters.

Prerequisites

To export a Content View, ensure that Satellite Server where you want to export meets the following conditions:

- Ensure that the export directory has free storage space to accommodate the export.
- Ensure that the `/var/lib/pulp/exports` directory has free storage space equivalent to the size of the repositories being exported for temporary files created during the export process.
- Ensure that you set download policy to **Immediate** for all repositories within the Content View you export. For more information, see [Section 4.8, "Download Policies Overview"](#).
- Ensure that you synchronize Products that you export to the required date.
- Ensure that the user exporting the content has the **Content Exporter** role.

To Export a Content View Version

1. List versions of the Content View that are available for export:

```
# hammer content-view version list \
--content-view="My_Content_View" \
--organization="My_Organization"

---|-----|-----|-----|-----
ID | NAME   | VERSION | DESCRIPTION | LIFECYCLE ENVIRONMENTS
---|-----|-----|-----|-----
5 | view 3.0 | 3.0   |           | Library
4 | view 2.0 | 2.0   |           |
3 | view 1.0 | 1.0   |           |
---|-----|-----|-----|-----
```

Export a Content View version

1. Get the version number of desired version. The following example targets version **1.0** for export.

```
# hammer content-export complete version \  
--content-view="Content_View_Name" \  
--version=1.0 \  
--organization="My_Organization"
```

2. Verify that the archive containing the exported version of a Content View is located in the export directory:

```
# ls -lh /var/lib/pulp/exports/My_Organization/Content_View_Name/1.0/2021-02-25T18-59-26-00-00/
```

You require all three files, for example, the **tar.gz** archive file, the **toc.json** and **metadata.json** to import the content successfully.

Export with chunking

In many cases, the exported archive content can be several gigabytes in size. You might want to split it smaller sizes or chunks. You can use the **--chunk-size-gb** option with in the **hammer content-export** command to handle this. The following example uses the **--chunk-size-gb=2** to split the archives into **2 GB** chunks.

```
# hammer content-export complete version \  
--chunk-size-gb=2 \  
--content-view="Content_View_Name" \  
--organization="My_Organization" \  
--version=1.0  
# ls -lh /var/lib/pulp/exports/My_Organization/view/1.0/2021-02-25T21-15-22-00-00/
```

7.6. EXPORTING A CONTENT VIEW VERSION IN A SYNCABLE FORMAT

You can export a version of a Content View to a syncable format that you can use to create your custom CDN and synchronize the content from the custom CDN over HTTP/HTTPS.

You can then serve the generated content using a local web server on the importing Satellite Server or in another Satellite Server organization.

You cannot directly import Syncable Format exports. Instead, on the importing Satellite Server you must:

- Copy the generated content to an HTTP/HTTPS web server that is accessible to importing Satellite Server.
- Update your CDN configuration to **Custom CDN**.
- Set the CDN URL to point to the web server.
- Optional: Set an SSL/TLS CA Credential if the web server requires it.
- Enable the repository.

- Synchronize the repository.

You can export the following content in a syncable format from Satellite Server:

- Yum repositories
- Kickstart repositories
- File repositories

You cannot export Ansible, DEB, and Docker content.

The export contains directories with the packages, **listing** files, and metadata of the repository in Yum format that can be used to synchronize in the importing Satellite Server.

Prerequisites

- Ensure that you set the download policy to **Immediate** for all repositories within the Content View you export. For more information, see [Section 4.8, "Download Policies Overview"](#).
- Ensure that you synchronize products you export to the required date.
- Ensure that the user exporting the content has the **Content Exporter** role.

To Export a Content View Version

- List versions of the Content View that are available for export:

```
# hammer content-view version list \
--content-view="My_Content_View" \
--organization="My_Organization"
```

Procedure

1. Get the version number of desired version. The following example targets version **1.0** for export:

```
# hammer content-export complete version \
--content-view="Content_View_Name" \
--version=1.0 \
--organization="My_Organization" \
--format=syncable
```

2. Optional: Verify that the exported content is located in the export directory:

```
# ls -lh /var/lib/pulp/exports/My_Organization/My_Content_View_Name/1.0/2021-02-25T18-59-26-00-00/
```

7.7. EXPORTING A CONTENT VIEW VERSION INCREMENTALLY

Exporting complete versions can be a very expensive operation in terms of system resources. Content View versions that have multiple Red Hat Enterprise Linux trees can occupy several gigabytes of space on Satellite Server.

In such cases, you can use **Incremental Export** to export only pieces of content that changed since the previous export. Incremental exports typically result in smaller archive files than the full exports.

The example below targets the version **2.0** for export, because the version **1.0** was exported previously.

Procedure

1. Create an incremental export:

```
# hammer content-export incremental version \  
--content-view="Content_View_Name" \  
--organization="My_Organization" \  
--version=2.0
```

2. Optional: View the exported Content View:

```
# ls -lh /var/lib/pulp/exports/My_Organization/view/2.0/2021-02-25T21-45-34-00-00/
```

7.8. EXPORTING A REPOSITORY

You can export the content of a repository in the Library environment of an organization from Satellite Server. You can use this archive file to create the same repository in another Satellite Server or in another Satellite Server organization.

You can export the following content from Satellite Server:

- Ansible repositories
- Kickstart repositories
- Yum repositories
- File repositories
- Docker content

The export contains the following data:

- Two JSON files containing repository metadata.
- One or more archive files containing the contents of the repository from the Library environment of the organization.

You need all the files, **tar.gz**, **toc.json** and **metadata.json**, to be able to import.

Prerequisites

- Ensure that the export directory has enough free storage space to accommodate the export.
- Ensure that the **/var/lib/pulp/exports** directory has enough free storage space equivalent to the size of all repositories that you want to export.
- Ensure that you set download policy to **Immediate** for the repository within the Library lifecycle environment you export. For more information, see [Section 4.8, "Download Policies Overview"](#).

- Ensure that you synchronize products that you export to the required date.

Procedure

1. Export a repository using the product name and repository name:

```
# hammer content-export complete repository \
--name="My_Repository" \
--product="My_Product"
```



NOTE

The size of the exported archive depends on the number and size of the packages within the repository. If you want to split the exported archive into chunks, export your repository using the **--chunk-size-gb** argument to limit the size by an integer value in gigabytes, for example **---chunk-size-gb=2**.

2. Optional: Verify that the exported archive is located in the export directory:

```
# ls -lh /var/lib/pulp/exports/My_Organization/Export-My_Repository/1.0/2022-09-02T03-35-24-00-00/
```

7.9. EXPORTING A REPOSITORY IN A SYNCABLE FORMAT

You can export the content of a repository in the Library environment of an organization to a syncable format that you can use to create your custom CDN and synchronize the content from the custom CDN over HTTP/HTTPS.

You can then serve the generated content using a local web server on the importing Satellite Server or in another Satellite Server organization.

You cannot directly import Syncable Format exports. Instead, on the importing Satellite Server you must:

- Copy the generated content to an HTTP/HTTPS web server that is accessible to importing Satellite Server.
- Update your CDN configuration to **Custom CDN**.
- Set the CDN URL to point to the web server.
- Optional: Set an SSL/TLS CA Credential if the web server requires it.
- Enable the repository.
- Synchronize the repository.

You can export the following content in a syncable format from Satellite Server:

- Yum repositories
- Kickstart repositories
- File repositories

You cannot export Ansible, DEB, and Docker content.

The export contains directories with the packages, **listing** files, and metadata of the repository in Yum format that can be used to synchronize in the importing Satellite Server.

Prerequisite

- Ensure that you set the download policy to **Immediate** for the repository within the Library lifecycle environment you export. For more information, see [Section 4.8, "Download Policies Overview"](#).

Procedure

1. Export a repository using the repository name or ID:

```
# hammer content-export complete repository \
--organization="My_Organization" \
--product="My_Product" \
--name="My_Repository" \
--format=syncable
```

2. Optional: Verify that the exported content is located in the export directory:

```
# du -sh /var/lib/pulp/exports/My_Organization/Export-My_Repository/1.0/2021-03-02T03-35-24-00-00
```

7.10. EXPORTING A REPOSITORY INCREMENTALLY

Exporting a repository can be a very expensive operation in terms of system resources. A typical Red Hat Enterprise Linux tree may occupy several gigabytes of space on Satellite Server.

In such cases, you can use **Incremental Export** to export only pieces of content that changed since the previous export. Incremental exports typically result in smaller archive files than the full exports.

The example below shows incremental export of a repository in the Library lifecycle environment.

Procedure

1. Create an incremental export:

```
# hammer content-export incremental repository \
--organization="My_Organization" \
--product="My_Product" \
--name="My_Repository"
```

```
Generated /var/lib/pulp/exports/My_Organization/Export-My_Repository/3.0/2021-03-02T03-35-24-00-00/metadata.json
```

2. Optional: View the exported data:

```
# ls -lh /var/lib/pulp/exports/My_Organization/Export-My_Repository/3.0/2021-03-02T03-35-24-00-00/
total 172K
-rw-r--r--. 1 pulp pulp 20M Mar  2 04:22 export-436882d8-de5a-48e9-a30a-17169318f908-
```

```
20210302_0422.tar.gz
-rw-r--r--. 1 pulp pulp 333 Mar 2 04:22 export-436882d8-de5a-48e9-a30a-17169318f908-
20210302_0422-toc.json
-rw-r--r--. 1 root root 492 Mar 2 04:22 metadata.json
```

7.11. KEEPING TRACK OF YOUR EXPORTS

Satellite keeps records of all exports. Each time you export content on the upstream Satellite Server, the export is recorded and maintained for future querying. You can use the records to organize and manage your exports, which is useful especially when exporting incrementally.

When exporting content from the upstream Satellite Server for several downstream Satellite Servers, you can also keep track of content exported for specific servers. This helps you track which content was exported and to where.

Use the **--destination-server** argument during export to indicate the target server. This option is available for all **content-export** operations.

Tracking Destinations of Library Exports

- Specify the destination server when exporting the Library:

```
# hammer content-export complete library \
--destination-server=My_Downstream_Server_1 \
--organization="My_Organization" \
--version=1.0
```

Tracking Destinations of Content View Exports

- Specify the destination server when exporting a Content View version:

```
# hammer content-export complete version \
--content-view="Content_View_Name" \
--destination-server=My_Downstream_Server_1 \
--organization="My_Organization" \
--version=1.0
```

Querying Export Records

- List content exports using the following command:

```
# hammer content-export list --organization="My_Organization"
```

7.12. IMPORTING INTO THE LIBRARY ENVIRONMENT

You can import exported Library content into the Library lifecycle environment of an organization on another Satellite Server. For more information about exporting contents from the Library environment, see [Section 7.2, "Exporting the Library Environment"](#).

Prerequisites

- The exported files must be in a directory under **/var/lib/pulp/imports**.

- If there are any Red Hat repositories in the exported content, the importing organization's manifest must contain subscriptions for the products contained within the export.
- The user importing the content must have the *Content Importer* Role.

Procedure

1. Copy the exported files to a subdirectory of **/var/lib/pulp/imports** on Satellite Server where you want to import.
2. Set the ownership of the import directory and its contents to **pulp:pulp**.

```
# chown -R pulp:pulp /var/lib/pulp/imports/2021-03-02T03-35-24-00-00
# ls -lh /var/lib/pulp/imports/2021-03-02T03-35-24-00-00
total 68M
-rw-r--r--. 1 pulp pulp 68M Mar  2 04:29 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335.tar.gz
-rw-r--r--. 1 pulp pulp 333 Mar  2 04:29 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335-toc.json
-rw-r--r--. 1 pulp pulp 443 Mar  2 04:29 metadata.json
```

3. Identify the Organization that you wish to import into.
4. To import the Library content to Satellite Server, enter the following command:

```
# hammer content-import library \
--organization="My_Organization" \
--path=/var/lib/pulp/imports/2021-03-02T03-35-24-00-00
```

Note you must enter the full path **/var/lib/pulp/imports/My_Exported_Library_Dir**. Relative paths do not work.

5. To verify that you imported the Library content, check the contents of the Product and Repositories. A new Content View called **Import-Library** is created in the target organization. This Content View is used to facilitate the Library content import. By default, this Content View is not shown in the Satellite web UI. **Import-Library** is not meant to be assigned directly to hosts. Instead, assign your hosts to **Default Organization View** or another Content View as you would normally.

7.13. IMPORTING A CONTENT VIEW VERSION

You can import an exported Content View version to create a version with the same content in an organization on another Satellite Server. For more information about exporting a Content View version, see [Section 7.5, "Exporting a Content View Version"](#).

When you import a Content View version, it has the same major and minor version numbers and contains the same repositories with the same packages and errata. Custom Repositories, Products and Content Views are automatically created if they do not exist in the importing organization.

Prerequisites

- The exported files must be in a directory under **/var/lib/pulp/imports**.
- If there are any Red Hat repositories in the exported content, the importing organization's manifest must contain subscriptions for the products contained within the export.

- The user importing the Content View version must have the *Content Importer* Role.

Procedure

1. Copy the exported files to a subdirectory of **/var/lib/pulp/imports** on Satellite Server where you want to import.
2. Set the ownership of the import directory and its contents to **pulp:pulp**.

```
# chown -R pulp:pulp /var/lib/pulp/imports/2021-02-25T21-15-22-00-00/
```

3. Verify that the ownership is set correctly:

```
# ls -lh /var/lib/pulp/imports/2021-02-25T21-15-22-00-00/
```

4. To import the Content View version to Satellite Server, enter the following command:

```
# hammer content-import version \
  --organization-id=My_Organization_ID \
  --path=/var/lib/pulp/imports/2021-02-25T21-15-22-00-00/
```

Note that you must enter the full path **/var/lib/pulp/imports/My_Exported_Version_Dir**. Relative paths do not work.

5. To verify that you imported the Content View version successfully, list Content View versions for your organization:

```
# hammer content-view version list \
  --organization-id=My_Organization_ID
```

7.14. IMPORTING A REPOSITORY

You can import an exported repository into an organization on another Satellite Server. For more information about exporting content of a repository, see [Section 7.8, "Exporting a Repository"](#).

Prerequisites

- The export files must be in a directory under **/var/lib/pulp/imports**.
- If the export contains any Red Hat repositories, the manifest of the importing organization must contain subscriptions for the products contained within the export.
- The user importing the content must have the *Content Importer* Role.

Procedure

1. Copy the exported files to a subdirectory of **/var/lib/pulp/imports** on Satellite Server where you want to import.
2. Set the ownership of the import directory and its contents to **pulp:pulp**.

```
# chown -R pulp:pulp /var/lib/pulp/imports/2021-03-02T03-35-24-00-00
# ls -lh /var/lib/pulp/imports/2021-03-02T03-35-24-00-00
```

```
total 68M
-rw-r--r--. 1 pulp pulp 68M Mar  2 04:29 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335.tar.gz
-rw-r--r--. 1 pulp pulp 333 Mar  2 04:29 export-1e25417c-6d09-49d4-b9a5-23df4db3d52a-
20210302_0335-toc.json
-rw-r--r--. 1 pulp pulp 443 Mar  2 04:29 metadata.json
```

- Identify the Organization that you wish to import into.
- To import the Library content to Satellite Server, enter the following command:

```
# hammer content-import repository \
--organization="My_Organization" \
--path=/var/lib/pulp/imports/2021-03-02T03-35-24-00-00
```

Note that you must enter the full path `/var/lib/pulp/imports/My_Exported_Repo_Dir`. Relative paths do not work.

- To verify that you imported the repository, check the contents of the Product and Repository.

7.15. EXPORTING AND IMPORTING CONTENT USING HAMMER CLI CHEAT SHEET

Table 7.1. Export

Intent	Command
Fully export an Organization's Library	hammer content-export complete library --organization="My_Organization"
Incrementally export an Organization's Library (assuming you have exported something previously)	hammer content-export incremental library --organization="My_Organization"
Fully export a Content View version	hammer content-export complete version --content-view="My_Content_View" --version=1.0 --organization="My_Organization"
Export a Content View version promoted to the Dev Environment	hammer content-export complete version --content-view="My_Content_View" --organization="My_Organization" --lifecycle-environment="Dev"
Export a Content View in smaller chunks (2-GB slabs)	hammer content-export complete version --content-view="My_Content_View" --version=1.0 --organization="My_Organization" --chunk-size-gb=2

Intent	Command
Incrementally export a Content View version (assuming you have exported something previously)	hammer content-export incremental version --content-view="My_Content_View" --version=2.0 --organization="My_Organization"
Fully export a Repository	hammer content-export complete repository --product="My_Product" --name="My_Repository" --organization="My_Organization"
Incrementally export a Repository (assuming you have exported something previously)	hammer content-export incremental repository --product="My_Product" --name="My_Repository" --organization="My_Organization"
List exports	hammer content-export list --content-view="My_Content_View" --organization="My_Organization"

Table 7.2. Import

Intent	Command
Import into an Organization's Library	hammer content-import library --organization="My_Organization" --path="/var/lib/pulp/imports/My_Exported_Library_Dir"
Import to a Content View version	hammer content-import version --organization="My_Organization" --path="/var/lib/pulp/imports/My_Exported_Version_Dir"
Import a Repository	hammer content-import repository --organization="My_Organization" --path="/var/lib/pulp/imports/My_Exported_Repo_Dir"

CHAPTER 8. MANAGING ACTIVATION KEYS

Activation keys provide a method to automate system registration and subscription attachment. You can create multiple keys and associate them with different environments and Content Views. For example, you might create a basic activation key with a subscription for Red Hat Enterprise Linux workstations and associate it with Content Views from a particular environment.

You can use activation keys during content host registration to improve the speed, simplicity and consistency of the process. Note that activation keys are used only when hosts are registered. If changes are made to an activation key, it is applicable only to hosts that are registered with the amended activation key in the future. The changes are not made to existing hosts.

Activation keys can define the following properties for content hosts:

- Associated subscriptions and subscription attachment behavior
- Available products and repositories
- A life cycle environment and a Content View
- Host collection membership
- System purpose

Content View Conflicts between Host Creation and Registration

When you provision a host, Satellite uses provisioning templates and other content from the Content View that you set in the host group or host settings. When the host is registered, the Content View from the activation key overwrites the original Content View from the host group or host settings. Then Satellite uses the Content View from the activation key for every future task, for example, rebuilding a host.

When you rebuild a host, ensure that you set the Content View that you want to use in the activation key and not in the host group or host settings.

Using the Same Activation Key with Multiple Content Hosts

You can apply the same activation key to multiple content hosts if it contains enough subscriptions. However, activation keys set only the initial configuration for a content host. When the content host is registered to an organization, the organization's content can be attached to the content host manually.

Using Multiple Activation Keys with a Content Host

A content host can be associated with multiple activation keys that are combined to define the host settings. In case of conflicting settings, the last specified activation key takes precedence. You can specify the order of precedence by setting a host group parameter as follows:

```
$ hammer hostgroup set-parameter \  
--hostgroup "My_Host_Group" \  
--name "My_Activation_Key" \  
--value "name_of_first_key", "name_of_second_key", ...
```

8.1. CREATING AN ACTIVATION KEY

You can use activation keys to define a specific set of subscriptions to attach to hosts during registration. The subscriptions that you add to an activation key must be available within the associated Content View.

Subscription Manager attaches subscriptions differently depending on the following factors:

- Are there any subscriptions associated with the activation key?
- Is the auto-attach option enabled?
- For Red Hat Enterprise Linux 8 hosts: Is there system purpose set on the activation key?

Note that Satellite automatically attaches subscriptions only for the products installed on a host. For subscriptions that do not list products installed on Red Hat Enterprise Linux by default, such as the Extended Update Support (EUS) subscription, use an activation key specifying the required subscriptions and with the auto-attach disabled.

Based on the previous factors, there are three possible scenarios for subscribing with activation keys:

1. Activation key that attaches subscriptions automatically.
With no subscriptions specified and auto-attach enabled, hosts using the activation key search for the best fitting subscription from the ones provided by the Content View associated with the activation key. This is similar to entering the **subscription-manager --auto-attach** command. For Red Hat Enterprise Linux 8 hosts, you can configure the activation key to set system purpose on hosts during registration to enhance the automatic subscriptions attachment.
2. Activation key providing a custom set of subscription for auto-attach.
If there are subscriptions specified and auto-attach is enabled, hosts using the activation key select the best fitting subscription from the list specified in the activation key. Setting system purpose on the activation key does not affect this scenario.
3. Activation key with the exact set of subscriptions.
If there are subscriptions specified and auto-attach is disabled, hosts using the activation key are associated with all subscriptions specified in the activation key. Setting system purpose on the activation key does not affect this scenario.

Custom Products

If a custom Product, typically containing content not provided by Red Hat, is assigned to an activation key, this product is always enabled for the registered content host regardless of the auto-attach setting.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Activation keys** and click **Create Activation Key**.
2. In the **Name** field, enter the name of the activation key.
3. If you want to set a limit, clear the **Unlimited hosts** checkbox, and in the **Limit** field, enter the maximum number of systems you can register with the activation key. If you want unlimited hosts to register with the activation key, ensure the **Unlimited Hosts** checkbox is selected.
4. Optional: In the **Description** field, enter a description for the activation key.
5. From the **Environment** list, select the environment to use.

6. From the **Content View** list, select a Content View to use. If you intend to use the deprecated **Katello Agent** instead of **Remote Execution**, the Content View must contain the Satellite Client 6 repository because it contains the **katello-agent** package.
7. If Simple Content Access (SCA) is not enabled:
 - a. Click the **Subscriptions** tab, then click the **Add** submenu.
 - b. Click the checkbox under the subscription you created before.
 - c. Click **Add Selected**.
8. If SCA is enabled:
 - a. In the **Repository Sets** tab, ensure only your named repository is enabled.
9. Click **Save**.
10. Optional: For Red Hat Enterprise Linux 8 hosts, in the **System Purpose** section, you can configure the activation key with system purpose to set on hosts during registration to enhance subscriptions auto attachment.

CLI procedure

1. Create the activation key:

```
# hammer activation-key create \
--name "My_Activation_Key" \
--unlimited-hosts \
--description "Example Stack in the Development Environment" \
--lifecycle-environment "Development" \
--content-view "Stack" \
--organization "My_Organization"
```

2. Optional: For Red Hat Enterprise Linux 8 hosts, enter the following command to configure the activation key with system purpose to set on hosts during registration to enhance subscriptions auto attachment.

```
# hammer activation-key update \
--organization "My_Organization" \
--name "My_Activation_Key" \
--service-level "Standard" \
--purpose-usage "Development/Test" \
--purpose-role "Red Hat Enterprise Linux Server" \
--purpose-addons "addons"
```

3. Obtain a list of your subscription IDs:

```
# hammer subscription list --organization "My_Organization"
```

4. Attach the Red Hat Enterprise Linux subscription UUID to the activation key:

```
# hammer activation-key add-subscription \
--name "My_Activation_Key" \
--subscription-id My_Subscription_ID \
```

```
--organization "My_Organization"
```

- List the product content associated with the activation key:

```
# hammer activation-key product-content \
--name "My_Activation_Key" \
--organization "My_Organization"
```

- Override the default auto-enable status for the Satellite Client 6 repository. The default status is set to disabled. To enable, enter the following command:

```
# hammer activation-key content-override \
--name "My_Activation_Key" \
--content-label rhel-7-server-satellite-client-6-rpms \
--value 1 \
--organization "My_Organization"
```

8.2. UPDATING SUBSCRIPTIONS ASSOCIATED WITH AN ACTIVATION KEY

Use this procedure to change the subscriptions associated with an activation key. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Note that changes to an activation key apply only to machines provisioned after the change. To update subscriptions on existing content hosts, see [Section 3.7, "Updating Red Hat Subscriptions on Multiple Hosts"](#).

Procedure

- In the Satellite web UI, navigate to **Content > Activation keys** and click the name of the activation key.
- Click the **Subscriptions** tab.
- To remove subscriptions, select **List/Remove**, and then select the checkboxes to the left of the subscriptions to be removed and then click **Remove Selected**.
- To add subscriptions, select **Add**, and then select the checkboxes to the left of the subscriptions to be added and then click **Add Selected**.
- Click the **Repository Sets** tab and review the repositories' status settings.
- To enable or disable a repository, select the checkbox for a repository and then change the status using the **Select Action** list.
- Click the **Details** tab, select a Content View for this activation key, and then click **Save**.

CLI procedure

- List the subscriptions that the activation key currently contains:

```
# hammer activation-key subscriptions \
--name My_Activation_Key \
--organization "My_Organization"
```

- Remove the required subscription from the activation key:

```
# hammer activation-key remove-subscription \
--name "My_Activation_Key" \
--subscription-id ff808181533518d50152354246e901aa \
--organization "My_Organization"
```

For the **--subscription-id** option, you can use either the UUID or the ID of the subscription.

- Attach new subscription to the activation key:

```
# hammer activation-key add-subscription \
--name "My_Activation_Key" \
--subscription-id ff808181533518d50152354246e901aa \
--organization "My_Organization"
```

For the **--subscription-id** option, you can use either the UUID or the ID of the subscription.

- List the product content associated with the activation key:

```
# hammer activation-key product-content \
--name "My_Activation_Key" \
--organization "My_Organization"
```

- Override the default auto-enable status for the required repository:

```
# hammer activation-key content-override \
--name "My_Activation_Key" \
--content-label content_label \
--value 1 \
--organization "My_Organization"
```

For the **--value** option, enter **1** for enable, **0** for disable.

8.3. USING ACTIVATION KEYS FOR HOST REGISTRATION

You can use activation keys to complete the following tasks:

- Registering new hosts during provisioning through Red Hat Satellite. The kickstart provisioning templates in Red Hat Satellite contain commands to register the host using an activation key that is defined when creating a host.
- Registering existing Red Hat Enterprise Linux hosts. Configure Subscription Manager to use Satellite Server for registration and specify the activation key when running the **subscription-manager register** command.

You can register hosts with Satellite using the host registration feature, the Satellite API, or Hammer CLI.

Procedure

- In the Satellite web UI, navigate to **Hosts > Register Host**.
- Click **Generate** to create the registration command.

3. Click on the *files* icon to copy the command to your clipboard.
4. Log in to the host you want register and run the previously generated command.
5. Update subscription manager configuration for **rhsm.baseurl** and **server.hostname**:

```
# subscription-manager config \
--rhsm.baseurl=https://loadbalancer.example.com/pulp/content \
--server.hostname=loadbalancer.example.com
```

6. Check the `/etc/yum.repos.d/redhat.repo` file and ensure that the appropriate repositories have been enabled.

CLI procedure

1. Generate the host registration command using the Hammer CLI:

```
# hammer host-registration generate-command \
--activation-keys "My_Activation_Key"
```

2. Log in to the host you want register and run the previously generated command.
3. Update subscription manager configuration for **rhsm.baseurl** and **server.hostname**:

```
# subscription-manager config \
--rhsm.baseurl=https://loadbalancer.example.com/pulp/content \
--server.hostname=loadbalancer.example.com
```

4. Check the `/etc/yum.repos.d/redhat.repo` file and ensure that the appropriate repositories have been enabled.

API procedure

1. Generate the host registration command using the Satellite API:

```
# curl -X POST https://satellite.example.com/api/registration_commands \
--user "My_User_Name" \
-H 'Content-Type: application/json' \
-d '{"registration_command": {"activation_keys": ["My_Activation_Key_1",
My_Activation_Key_2"]}}'
```

Use an activation key to simplify specifying the environments. For more information, see [Managing Activation Keys](#) in *Managing Content*.

To enter a password as command line argument, use **username:password** syntax. Keep in mind this can save the password in the shell history.

For more information about registration see [Registering a Host to Red Hat Satellite](#) in *Managing Hosts*.

2. Log in to the host you want register and run the previously generated command.
3. Update subscription manager configuration for **rhsm.baseurl** and **server.hostname**:

```
# subscription-manager config \
--rhsm.baseurl=https://loadbalancer.example.com/pulp/content \
--server.hostname=loadbalancer.example.com
```

4. Check the `/etc/yum.repos.d/redhat.repo` file and ensure that the appropriate repositories have been enabled.

Multiple Activation Keys

You can use multiple activation keys when registering a content host. You can then create activation keys for specific subscription sets and combine them according to content host requirements. For example, the following command registers a content host to your organization with both VDC and OpenShift subscriptions:

```
# subscription-manager register --org="My_Organization" \
--activationkey="ak-VDC,ak-OpenShift"
```

Settings Conflicts

If there are conflicting settings in activation keys, the rightmost key takes precedence.

- Settings that conflict: **Service Level**, **Release Version**, **Environment**, **Content View**, and **Product Content**.
- Settings that do not conflict and the host gets the union of them: **Subscriptions** and **Host Collections**.
- Settings that influence the behavior of the key itself and not the host configuration: **Content Host Limit** and **Auto-Attach**.

8.4. ENABLING AUTO-ATTACH

When auto-attach is enabled on an activation key and there are subscriptions associated with the key, the subscription management service selects and attaches the best-matched associated subscriptions based on a set of criteria like currently installed products, architecture, and preferences like service level.

You can enable auto-attach and have no subscriptions associated with the key. This type of key is commonly used to register virtual machines when you do not want the virtual machine to consume a physical subscription, but to inherit a host-based subscription from the hypervisor. For more information, see [Configuring Virtual Machine Subscriptions in Red Hat Satellite](#).

Auto-attach is enabled by default. Disable the option if you want to force attach all subscriptions associated with the activation key.

Procedure

1. In the Satellite web UI, navigate to **Content > Activation Keys**.
2. Click the activation key name that you want to edit.
3. Click the **Subscriptions** tab.
4. Click the edit icon next to **Auto-Attach**.
5. Select or clear the checkbox to enable or disable auto-attach.

6. Click **Save**.

CLI procedure

- Enter the following command to enable auto-attach on the activation key:

```
# hammer activation-key update --name "My_Activation_Key" \  
--organization "My_Organization" --auto-attach true
```

8.5. SETTING THE SERVICE LEVEL

You can configure an activation key to define a default service level for the new host created with the activation key. Setting a default service level selects only the matching subscriptions to be attached to the host. For example, if the default service level on an activation key is set to Premium, only subscriptions with premium service levels are attached to the host upon registration.

Procedure

1. In the Satellite web UI, navigate to **Content > Activation Keys**.
2. Click the activation key name you want to edit.
3. Click the edit icon next to **Service Level**.
4. Select the required service level from the list. The list only contains service levels available to the activation key.
5. Click **Save**.

CLI procedure

- Enter the following command to set a default service level to Premium on the activation key:

```
# hammer activation-key update --name "My_Activation_Key" \  
--organization "My_Organization" --service-level premium
```

CHAPTER 9. MANAGING ERRATA

As a part of Red Hat’s quality control and release process, we provide customers with updates for each release of official Red Hat RPMs. Red Hat compiles groups of related package into an **erratum** along with an advisory that provides a description of the update. There are three types of advisories (in order of importance):

Security Advisory

Describes fixed security issues found in the package. The security impact of the issue can be Low, Moderate, Important, or Critical.

Bug Fix Advisory

Describes bug fixes for the package.

Product Enhancement Advisory

Describes enhancements and new features added to the package.

Red Hat Satellite imports this errata information when synchronizing repositories with Red Hat’s Content Delivery Network (CDN). Red Hat Satellite also provides tools to inspect and filter errata, allowing for precise update management. This way, you can select relevant updates and propagate them through Content Views to selected content hosts.

Errata are labeled according to the most important advisory type they contain. Therefore, errata labeled as **Product Enhancement Advisory** can contain only enhancement updates, while **Bug Fix Advisory** errata can contain both bug fixes and enhancements, and **Security Advisory** can contain all three types.

In Red Hat Satellite, there are two keywords that describe an erratum’s relationship to the available content hosts:

Applicable

An erratum that applies to one or more content hosts, which means it updates packages present on the content host. Although these errata apply to content hosts, until their state changes to **Installable**, the errata are not ready to be installed. Installable errata are automatically applicable.

Installable

An erratum that applies to one or more content hosts and is available to install on the content host. Installable errata are available to a content host from life cycle environment and the associated Content View, but are not yet installed.

This chapter shows how to manage errata and apply them to either a single host or multiple hosts.

9.1. INSPECTING AVAILABLE ERRATA

The following procedure describes how to view and filter the available errata and how to display metadata of the selected advisory. To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Errata** to view the list of available errata.
2. Use the filtering tools at the top of the page to limit the number of displayed errata:
 - Select the repository to be inspected from the list. **All Repositories** is selected by default.

- The **Applicable** checkbox is selected by default to view only applicable errata in the selected repository. Select the **Installable** checkbox to view only errata marked as installable.
- To search the table of errata, type the query in the **Search** field in the form of:

```
parameter operator value
```

See [Section 9.2, “Parameters Available for Errata Search”](#) for the list of parameters available for search. Find the list of applicable operators in [Supported Operators for Granular Search](#) in *Administering Red Hat Satellite*. Automatic suggestion works as you type. You can also combine queries with the use of **and** and **or** operators. For example, to display only security advisories related to the **kernel** package, type:

```
type = security and package_name = kernel
```

Press **Enter** to start the search.

3. Click the **Errata ID** of the erratum you want to inspect:
 - The **Details** tab contains the description of the updated package as well as documentation of important fixes and enhancements provided by the update.
 - On the **Content Hosts** tab, you can apply the erratum to selected content hosts as described in [Section 9.9, “Applying Errata to Multiple Hosts”](#).
 - The **Repositories** tab lists repositories that already contain the erratum. You can filter repositories by the environment and Content View, and search for them by the repository name.

You can also use the new Host page to view to inspect available errata and select errata to install.

1. In the Satellite web UI, navigate to **Hosts > All Hosts** and select the host you require.
2. If there are errata associated with the host, an Installable Errata card on the new Host page displays an interactive pie chart showing a breakdown of the security advisories, bugfixes, and enhancements.
3. On the new Host page, select the **Content** tab.
4. On the Content page select the **Errata** tab.
5. The page displays installable errata for the chosen host.
6. Click the checkbox for any errata you wish to install.
7. Using the vertical ellipsis icon next to the errata you want to add to the host, select **Apply via Katello agent** if you have no connectivity to the target host using SSH.
8. Select **Apply via Remote Execution** to use Remote Execution, or **Apply via customized remote execution** if you want to customize the remote execution.
9. Click **Submit**.

CLI procedure

- To view errata that are available for all organizations, enter the following command:

```
■
```



```
# hammer erratum list
```

- To view details of a specific erratum, enter the following command:

```
# hammer erratum info --id erratum_ID
```

- You can search errata by entering the query with the **--search** option. For example, to view applicable errata for the selected product that contains the specified bugs ordered so that the security errata are displayed on top, enter the following command:

```
# hammer erratum list \
--product-id 7 \
--search "bug = 1213000 or bug = 1207972" \
--errata-restrict-applicable 1 \
--order "type desc"
```

9.2. PARAMETERS AVAILABLE FOR ERRATA SEARCH

Parameter	Description	Example
bug	Search by the Bugzilla number.	<i>bug = 1172165</i>
cve	Search by the CVE number.	<i>cve = CVE-2015-0235</i>
id	Search by the errata ID. The auto-suggest system displays a list of available IDs as you type.	<i>id = RHBA-2014:2004</i>
issued	Search by the issue date. You can specify the exact date, like "Feb16,2015", or use keywords, for example "Yesterday", or "1 hour ago". The time range can be specified with the use of the "<" and ">" operators.	<i>issued < "Jan 12,2015"</i>
package	Search by the full package build name. The auto-suggest system displays a list of available packages as you type.	<i>package = glib2-2.22.5-6.el6.i686</i>
package_name	Search by the package name. The auto-suggest system displays a list of available packages as you type.	<i>package_name = glib2</i>
severity	Search by the severity of the issue fixed by the security update. Specify <i>Critical</i> , <i>Important</i> , or <i>Moderate</i> .	<i>severity = Critical</i>

Parameter	Description	Example
title	Search by the advisory title.	<i>title ~ openssl</i>
type	Search by the advisory type. Specify <i>security</i> , <i>bugfix</i> , or <i>enhancement</i> .	<i>type = bugfix</i>
updated	Search by the date of the last update. You can use the same formats as with the issued parameter.	<i>updated = "6 days ago"</i>

9.3. APPLYING INSTALLABLE ERRATA

Use the following procedure to view a list of installable errata and select errata to install. .Procedure

1. In the Satellite web UI, navigate to **Hosts > All Hosts** and select the host you require.
2. If there are errata associated with the host they are displayed in an Installable Errata card on the new Host page.
3. On the **Content** tab, **Errata** displays installable errata for the chosen host.
4. Click the checkbox for any errata you wish to install.
5. Using the vertical ellipsis icon next to the errata you want to add to the host, select **Apply via Remote Execution** to use Remote Execution. Select **Apply via customized remote execution** if you want to customize the remote execution, or select **Apply via Katello agent** if you have no connectivity to the target host using SSH.
6. Click **Submit**.

9.4. SUBSCRIBING TO ERRATA NOTIFICATIONS

You can configure email notifications for Satellite users. Users receive a summary of applicable and installable errata, notifications on Content View promotion or after synchronizing a repository. For more information, see [Configuring Email Notification Preferences](#) in *Administering Red Hat Satellite*.

9.5. LIMITATIONS TO REPOSITORY DEPENDENCY RESOLUTION

With Satellite, using incremental updates to your Content Views solves some repository dependency problems. However, dependency resolution at a repository level still remains problematic on occasion.

When a repository update becomes available with a new dependency, Satellite retrieves the newest version of the package to solve the dependency, even if there are older versions available in the existing repository package. This can create further dependency resolution problems when installing packages.

Example scenario

A repository on your client has the package **example_repository-1.0** with the dependency **example_repository-libs-1.0**. The repository also has another package **example_tools-1.0**.

A security erratum becomes available with the package **example_tools-1.1**. The **example_tools-1.1** package requires the **example_repository-libs-1.1** package as a dependency.

After an incremental Content View update, the **example_tools-1.1**, **example_tools-1.0**, and **example_repository-libs-1.1** are now in the repository. The repository also has the packages **example_repository-1.0** and **example_repository-libs-1.0**. Note that the incremental update to the Content View did not add the package **example_repository-1.1**. Because you can install all these packages using yum, no potential problem is detected. However, when the client installs the **example_tools-1.1** package, a dependency resolution problem occurs because both **example_repository-libs-1.0** and **example_repository-libs-1.1** cannot be installed.

There is currently no workaround for this problem. The larger the time frame, and minor Y releases between the base set of RPMs and the errata being applied, the higher the chance of a problem with dependency resolution.

9.6. CREATING A CONTENT VIEW FILTER FOR ERRATA

You can use content filters to limit errata. Such filters include:

- **ID** – Select specific erratum to allow into your resulting repositories.
- **Date Range** – Define a date range and include a set of errata released during that date range.
- **Type** – Select the type of errata to include such as bug fixes, enhancements, and security updates.

Create a content filter to exclude errata after a certain date. This ensures your production systems in the application life cycle are kept up to date to a certain point. Then you can modify the filter's start date to introduce new errata into your testing environment to test the compatibility of new packages into your application life cycle.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Prerequisites

- A Content View with the repositories that contain required errata is created. For more information, see [Section 6.1, "Creating a Content View"](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Content Views** and select a Content View that you want to use for applying errata.
2. Select **Yum Content > Filters** and click **New Filter**.
3. In the **Name** field, enter **Errata Filter**.
4. From the **Content Type** list, select **Erratum – Date and Type**
5. From the **Inclusion Type** list, select **Exclude**.
6. In the **Description** field, enter **Exclude errata items from YYYY-MM-DD**.
7. Click **Save**.

8. For **Errata Type**, select the checkboxes of errata types you want to exclude. For example, select the **Enhancement** and **Bugfix** checkboxes and clear the **Security** checkbox to exclude enhancement and bugfix errata after certain date, but include all the security errata.
9. For **Date Type**, select one of two checkboxes:
 - **Issued On** for the issued date of the erratum.
 - **Updated On** for the date of the erratum's last update.
10. Select the **Start Date** to exclude all errata on or after the selected date.
11. Leave the **End Date** field blank.
12. Click **Save**.
13. Click **Publish New Version** to publish the resulting repository.
14. Enter **Adding errata filter** in the **Description** field.
15. Click **Save**.
When the Content View completes publication, notice the **Content** column reports a reduced number of packages and errata from the initial repository. This means the filter successfully excluded the all non-security errata from the last year.
16. Click the **Versions** tab.
17. Click **Promote** to the right of the published version.
18. Select the environments you want to promote the Content View version to.
19. In the **Description** field, enter the description for promoting.
20. Click **Promote Version** to promote this Content View version across the required environments.

CLI procedure

1. Create a filter for the errata:

```
# hammer content-view filter create --name "Filter Name" \
--description "Exclude errata items from the YYYY-MM-DD" \
--content-view "CV Name" --organization "Default Organization" \
--type "erratum"
```

2. Create a filter rule to exclude all errata on or after the *Start Date* that you want to set:

```
# hammer content-view filter rule create --start-date "YYYY-MM-DD" \
--content-view "CV Name" --content-view-filter="Filter Name" \
--organization "Default Organization" --types=security,enhancement,bugfix
```

3. Publish the Content View:

```
# hammer content-view publish --name "CV Name" \
--organization "Default Organization"
```

- Promote the Content View to the lifecycle environment so that the included errata are available to that lifecycle environment:

```
# hammer content-view version promote \
--content-view "CV Name" \
--organization "Default Organization" \
--to-lifecycle-environment "Lifecycle Environment Name"
```

9.7. ADDING ERRATA TO AN INCREMENTAL CONTENT VIEW

If errata are available but not installable, you can create an incremental Content View version to add the errata to your content hosts. For example, if the Content View is version 1.0, it becomes Content View version 1.1, and when you publish, it becomes Content View version 2.0.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

- In the Satellite web UI, navigate to **Content > Errata**.
- From the **Errata** list, click the name of the errata that you want to apply.
- Select the content hosts that you want to apply the errata to, and click **Apply to Hosts**. This creates the incremental update to the Content View.
- If you want to apply the errata to the content host, select the **Apply Errata to Content Hosts immediately after publishing** checkbox.
- Click **Confirm** to apply the errata.

CLI procedure

- List the errata and its corresponding IDs:

```
# hammer erratum list
```

- List the different content-view versions and the corresponding IDs:

```
# hammer content-view version list
```

- Apply a single erratum to content-view version. You can add more IDs in a comma-separated list.

```
# hammer content-view version incremental-update \
--content-view-version-id 319 --errata-ids 34068b
```

9.8. APPLYING ERRATA TO HOSTS

Use these procedures to review and apply errata to hosts.

Prerequisites

- Synchronize Red Hat Satellite repositories with the latest errata available from Red Hat. For more information, see [Section 4.6, "Synchronizing Repositories"](#).
- Register the host to an environment and Content View on Satellite Server. For more information, see [Registering Hosts](#) in *Managing Hosts*.
- Configure the host for remote execution. For more information about running remote execution jobs, see [Configuring and Setting Up Remote Jobs](#) in *Managing Hosts*.



NOTE

If the host is already configured to receive content updates with the deprecated Katello Agent, migrate to remote execution instead. For more information, see [Migrating From Katello Agent to Remote Execution](#) in *Managing Hosts*.

The procedure to apply an erratum to a managed host depends on its operating system.

9.8.1. Applying Errata to Hosts Running Red Hat Enterprise Linux 9

Use this procedure to review and apply errata to a host running Red Hat Enterprise Linux 9.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Hosts** > **Content Hosts** and select the host you want to apply errata to.
2. Navigate to the **Errata** tab to see the list of errata.
3. Select the errata to apply and click **Apply Selected**. In the confirmation window, click **Apply**.
4. After the task to update all packages associated with the selected errata completes, click the **Details** tab to view the updated packages.

CLI procedure

1. List all errata for the host:

```
# hammer host errata list \  
--host client.example.com
```

2. Find the module stream an erratum belongs to:

```
# hammer erratum info --id ERRATUM_ID
```

3. On the host, update the module stream:

```
# dnf update Module_Stream_Name
```

9.8.2. Applying Errata to Hosts Running Red Hat Enterprise Linux 8

Use this procedure to review and apply errata to a host running Red Hat Enterprise Linux 8.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Hosts** > **Content Hosts** and select the host you want to apply errata to.
2. Navigate to the **Errata** tab to see the list of errata.
3. Select the errata to apply and click **Apply Selected**. In the confirmation window, click **Apply**.
4. After the task to update all packages associated with the selected errata completes, click the **Details** tab to view the updated packages.

CLI procedure

1. List all errata for the host:

```
# hammer host errata list \
--host client.example.com
```

2. Find the module stream an erratum belongs to:

```
# hammer erratum info --id ERRATUM_ID
```

3. On the host, update the module stream:

```
# dnf update Module_Stream_Name
```

9.8.3. Applying Errata to Hosts Running Red Hat Enterprise Linux 7

Use this procedure to review and apply errata to a host running Red Hat Enterprise Linux 7.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Hosts** > **Content Hosts** and select the host you want to apply errata to.
2. Navigate to the **Errata** tab to see the list of errata.
3. Select the errata to apply and click **Apply Selected**. In the confirmation window, click **Apply**.
4. After the task to update all packages associated with the selected errata completes, click the **Details** tab to view the updated packages.

CLI procedure

1. List all errata for the host:

```
# hammer host errata list \
--host client.example.com
```

2. Apply the most recent erratum to the host. Identify the erratum to apply using the erratum ID. Using **Remote Execution**

```
# hammer job-invocation create \
--feature katello_errata_install \
--inputs errata=ERRATUM_ID1,ERRATUM_ID2 \
--search-query "name = client.example.com"
```

Using **Katello Agent** (deprecated)


```
# hammer host errata apply \
--errata-ids ERRATUM_ID1,ERRATUM_ID2... \
--host "client.example.com"
```

9.9. APPLYING ERRATA TO MULTIPLE HOSTS

Use these procedures to review and apply errata to multiple RHEL 7 hosts.

Prerequisites

- Synchronize Red Hat Satellite repositories with the latest errata available from Red Hat. For more information, see [Section 4.6, "Synchronizing Repositories"](#).
- Register the hosts to an environment and Content View on Satellite Server. For more information, see [Registering Hosts](#) in *Managing Hosts*.
- Configure the host for remote execution. For more information about running remote execution jobs, see [Configuring and Setting Up Remote Jobs](#) in *Managing Hosts*.



NOTE

If the host is already configured to receive content updates with the deprecated Katello Agent, migrate to remote execution instead. For more information, see [Migrating From Katello Agent to Remote Execution](#) in *Managing Hosts*.

Procedure

1. In the Satellite web UI, navigate to **Content > Errata**.
2. Click the name of an erratum you want to apply.
3. Click to **Content Hosts** tab.
4. Select the hosts you want to apply errata to and click **Apply to Hosts**.
5. Click **Confirm**.

CLI procedure

1. List all installable errata:

```
# hammer erratum list \
--errata-restrict-installable true \
--organization "Default Organization"
```


-
- 2. Apply one of the errata to multiple hosts:

Using **Remote Execution**

```
# hammer job-invocation create \
--feature katello_errata_install \
--inputs errata=ERRATUM_ID \
--search-query "applicable_errata = ERRATUM_ID"
```

Using **Katello Agent** (deprecated)

Identify the erratum you want to use and list the hosts that this erratum is applicable to:

```
# hammer host list \
--search "applicable_errata = ERRATUM_ID" \
--organization "Default Organization"
```

The following Bash script applies an erratum to each host for which this erratum is available:

```
for HOST in hammer --csv --csv-separator "|" host list --search "applicable_errata =
ERRATUM_ID" --organization "Default Organization" | tail -n+2 | awk -F "|" '{ print $2 }' ;
do
  echo "== Applying to $HOST ==" ; hammer host errata apply --host $HOST --errata-ids
ERRATUM_ID1,ERRATUM_ID2 ;
done
```

This command identifies all hosts with *erratum_IDs* as an applicable erratum and then applies the erratum to each host.

- 3. To see if an erratum is applied successfully, find the corresponding task in the output of the following command:

```
# hammer task list
```

- 4. View the state of a selected task:

```
# hammer task progress --id task_ID
```

9.10. APPLYING ERRATA TO A HOST COLLECTION

Using **Remote Execution**

```
# hammer job-invocation create \
--feature katello_errata_install \
--inputs errata=ERRATUM_ID1,ERRATUM_ID2,... \
--search-query "host_collection = HOST_COLLECTION_NAME"
```

Using **Katello Agent** (deprecated)

```
# hammer host-collection erratum install \
--errata "erratum_ID1,erratum_ID2,..." \
--name "host_collection_name"
```

█ --organization "*My_Organization*"

CHAPTER 10. INSTALLING PACKAGES ON A HOST

Use this procedure to review and install packages on a host using the Satellite web UI. The list of packages available for installation depends on the Content View and Lifecycle Environment assigned to the host.

Procedure

1. In the Satellite web UI, navigate to **Hosts** > **All Hosts** and select the host you want to install packages on.
2. On the **Content** tab, select the **Packages** tab.
3. On the vertical ellipsis icon next to the upgrade button, click **Install Packages**.
4. In the **Install packages** window, select the package or packages that you want to install on the host.
5. Click **Install**.

By default, the packages are installed using remote execution. For more information about running remote execution jobs, see [Configuring and Setting up Remote Jobs](#) in *Managing Hosts*.

CHAPTER 11. UPGRADING PACKAGES ON A HOST IN BULK

You can upgrade packages on a host in bulk in the Satellite web UI.

Procedure

1. In the Satellite web UI, navigate to **Hosts > All Hosts**.
2. Click the name of the host you want to modify.
3. Click the **Content** tab, then click the **Packages** tab.
4. Select **Upgradable** from the **Status** list.
5. Select the packages you want to upgrade.
6. Click the **Upgrade** button. You get a REX job notification once the remote execution job is complete.

CHAPTER 12. REMOVING PACKAGES FROM A HOST

You can remove packages from a host in the Satellite web UI.

Procedure

1. In the Satellite web UI, navigate to **Hosts > All Hosts**.
2. Click the name of the host you want to modify.
3. Click the **Content** tab, then click the **Packages** tab.
4. Click the vertical ellipsis for the package you want to remove and select **Remove**. You get a REX job notification once the remote execution job is complete.

CHAPTER 13. MANAGING CONTAINER IMAGES

With Satellite, you can import container images from various sources and distribute them to external containers using Content Views.

For information about containers, see [Getting Started with Containers](#) in *Red Hat Enterprise Linux Atomic Host 7*.

13.1. IMPORTING CONTAINER IMAGES

You can import container image repositories from Red Hat Registry or from other image registries.

This procedure uses repository discovery to find container images and import them as repositories. For more information about creating a product and repository manually, see [Chapter 4, Importing Content](#).

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products** and click **Repo Discovery**.
2. From the **Repository Type** list, select **Container Images**.
3. In the **Registry to Discover** field, enter the URL of the registry to import images from.
4. In the **Registry Username** field, enter the name that corresponds with your user name for the container image registry.
5. In the **Registry Password** field, enter the password that corresponds with the user name that you enter.
6. In the **Registry Search Parameter** field, enter any search criteria that you want to use to filter your search, and then click **Discover**.
7. Optional: To further refine the **Discovered Repository** list, in the **Filter** field, enter any additional search criteria that you want to use.
8. From the **Discovered Repository** list, select any repositories that you want to import, and then click **Create Selected**.
9. Optional: To change the download policy for this docker repository to *on demand*, see [Section 4.10, "Changing the Download Policy for a Repository"](#).
10. Optional: If you want to create a product, from the **Product** list, select **New Product**.
 11. In the **Name** field, enter a product name.
 12. Optional: In the **Repository Name** and **Repository Label** columns, you can edit the repository names and labels.
13. Click **Run Repository Creation**.
14. When repository creation is complete, you can click each new repository to view more information.

15. Optional: To filter the content you import to a repository, click a repository, and then navigate to **Limit Sync Tags**. Click to edit, and add any tags that you want to limit the content that synchronizes to Satellite.
16. In the Satellite web UI, navigate to **Content > Products** and select the name of your product.
17. Select the new repositories and then click **Sync Now** to start the synchronization process.

To view the progress of the synchronization, navigate to **Content > Sync Status** and expand the repository tree.

When the synchronization completes, you can click **Container Image Manifests** to list the available manifests. From the list, you can also remove any manifests that you do not require.

CLI procedure

1. Create the custom **Red Hat Container Catalog** product:

```
# hammer product create \
--description "Red Hat Container Catalog content" \
--name "Red Hat Container Catalog" \
--organization "My_Organization" \
--sync-plan "My_Sync_Plan"
```

2. Create the repository for the container images:

```
# hammer repository create \
--name "RHEL7" \
--content-type "docker" \
--url "http://registry.access.redhat.com/" \
--docker-upstream-name "rhel7" \
--product "Red Hat Container Catalog" \
--organization "My_Organization"
```

3. Synchronize the repository:

```
# hammer repository synchronize \
--name "RHEL7" \
--product "Red Hat Container Catalog" \
--organization "My_Organization"
```

13.2. MANAGING CONTAINER NAME PATTERNS

When you use Satellite to create and manage your containers, as the container moves through Content View versions and different stages of the Satellite lifecycle environment, the container name changes at each stage. For example, if you synchronize a container image with the name **ssh** from an upstream repository, when you add it to a Satellite product and organization and then publish as part of a Content View, the container image can have the following name: **my_organization_production-custom_spin-my_product-custom_ssh**. This can create problems when you want to pull a container image because container registries can contain only one instance of a container name. To avoid problems with Satellite naming conventions, you can set a registry name pattern to override the default name to ensure that your container name is clear for future use.

Limitations

If you use a registry name pattern to manage container naming conventions, because registry naming patterns must generate globally unique names, you might experience naming conflict problems. For example:

- If you set the **repository.docker_upstream_name** registry name pattern, you cannot publish or promote Content Views with container content with identical repository names to the **Production** lifecycle.
- If you set the **lifecycle_environment.name** registry name pattern, this can prevent the creation of a second container repository with the identical name.

You must proceed with caution when defining registry naming patterns for your containers.

Procedure

To manage container naming with a registry name pattern, complete the following steps:

1. In the Satellite web UI, navigate to **Content > Lifecycle Environments**, and either create a lifecycle environment or select a lifecycle environment to edit.
2. In the **Container Image Registry** area, click the edit icon to the right of **Registry Name Pattern** area.
3. Use the list of variables and examples to determine which registry name pattern you require.
4. In the **Registry Name Pattern** field, enter the registry name pattern that you want to use. For example, to use the **repository.docker_upstream_name**:

```
<%= repository.docker_upstream_name %>
```

5. Click **Save**.

13.3. MANAGING CONTAINER REGISTRY AUTHENTICATION

You can manage the authentication settings for accessing containers images from Satellite. By default, users must authenticate to access containers images in Satellite.

You can specify whether you want users to authenticate to access container images in Satellite in a lifecycle environment. For example, you might want to permit users to access container images from the **Production** lifecycle without any authentication requirement and restrict access the **Development** and **QA** environments to authenticated users.

Procedure

1. In the Satellite web UI, navigate to **Content > Lifecycle Environments**.
2. Select the lifecycle environment that you want to manage authentication for.
3. To permit unauthenticated access to the containers in this lifecycle environment, select the **Unauthenticated Pull** checkbox. To restrict unauthenticated access, clear the **Unauthenticated Pull** checkbox.
4. Click **Save**.

13.4. CONFIGURING PODMAN AND DOCKER TO TRUST THE CERTIFICATE AUTHORITY

Podman uses two paths to locate the CA file, namely, `/etc/containers/certs.d/` and `/etc/docker/certs.d/`.

Copy the root CA file to one of these locations, with the exact path determined by the server hostname, and naming the file `ca.crt`

In the following examples, replace `hostname.example.com` with `satellite-server.example.com` or `capsule-server.example.com`, depending on your use case.

- You might first need to create the relevant location using:

```
# mkdir -p /etc/containers/certs.d/hostname.example.com
```

or

```
# mkdir -p /etc/docker/certs.d/hostname.example.com
```

- For podman, use:

```
# cp rootCA.pem /etc/containers/certs.d/hostname.example.com/ca.crt
```

- Alternatively, if you are using Docker, copy the root CA file to the equivalent Docker directory:

```
# cp rootCA.pem /etc/docker/certs.d/hostname.example.com/ca.crt
```

You no longer need to use the `--tls-verify=false` option when logging in to the registry:

```
$ podman login hostname.example.com
```

```
Username: admin
```

```
Password:
```

```
Login Succeeded!
```

13.5. USING CONTAINER REGISTRIES

Podman and Docker can be used to fetch content from container registries.

Container Registries on Capsules

On Capsules with content, the [Container Gateway](#) Capsule plugin acts as the container registry. It caches authentication information from Katello and proxies incoming requests to Pulp. The Container Gateway is available by default on Capsules with content.

Procedure

Logging in to the container registry:

```
# podman login satellite.example.com
```

Listing container images:

█ # podman search satellite.example.com/

Pulling container images:

█ # podman pull satellite.example.com/my-image:<optional_tag>

CHAPTER 14. MANAGING ISO IMAGES

You can use Satellite to store ISO images, either from Red Hat's Content Delivery Network or other sources. You can also upload other files, such as virtual machine images, and publish them in repositories.

14.1. IMPORTING ISO IMAGES FROM RED HAT

The Red Hat Content Delivery Network provides ISO images for certain products. The procedure for importing this content is similar to the procedure for enabling repositories for RPM content.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Red Hat Repositories**.
2. In the **Search** field, enter an image name, for example, **Red Hat Enterprise Linux 7 Server (ISOs)**.
3. In the Available Repositories window, expand **Red Hat Enterprise Linux 7 Server (ISOs)**
4. For the **x86_64 7.2** entry, click the **Enable** icon to enable the repositories for the image.
5. In the Satellite web UI, navigate to **Content > Products** and click **Red Hat Enterprise Linux Server**.
6. Click the **Repositories** tab of the Red Hat Enterprise Linux Server window, and click **Red Hat Enterprise Linux 7 Server ISOs x86_64 7.2**.
7. In the upper right of the Red Hat Enterprise Linux 7 Server ISOs x86_64 7.2 window, click **Select Action** and select **Sync Now**.

To view the Synchronization Status

- In the Satellite web UI, navigate to **Content > Sync Status** and expand **Red Hat Enterprise Linux Server**.

CLI procedure

1. Locate the Red Hat Enterprise Linux Server product for **file** repositories:

```
# hammer repository-set list \
--product "Red Hat Enterprise Linux Server" \
--organization "My_Organization" | grep "file"
```

2. Enable the **file** repository for Red Hat Enterprise Linux 7.2 Server ISO:

```
# hammer repository-set enable \
--product "Red Hat Enterprise Linux Server" \
--name "Red Hat Enterprise Linux 7 Server (ISOs)" \
--releasever 7.2 \
--basearch x86_64 \
--organization "My_Organization"
```

3. Locate the repository in the product:

```
# hammer repository list \
--product "Red Hat Enterprise Linux Server" \
--organization "My_Organization"
```

4. Synchronize the repository in the product:

```
# hammer repository synchronize \
--name "Red Hat Enterprise Linux 7 Server ISOs x86_64 7.2" \
--product "Red Hat Enterprise Linux Server" \
--organization "My_Organization"
```

14.2. IMPORTING INDIVIDUAL ISO IMAGES AND FILES

Use this procedure to manually import ISO content and other files to Satellite Server. To import files, you can complete the following steps in the Satellite web UI or using the Hammer CLI. However, if the size of the file that you want to upload is larger than 15 MB, you must use the Hammer CLI to upload it to a repository.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products**, and in the Products window, click **Create Product**.
2. In the **Name** field, enter a name to identify the product. This name populates the **Label** field.
3. Optional: In the **GPG Key** field, enter a GPG Key for the product.
4. Optional: From the **Sync Plan** list, select a synchronization plan for the product.
5. Optional: In the **Description** field, enter a description of the product.
6. Click **Save**.
7. In the Products window, click the new product and then click **Create Repository**.
8. In the **Name** field, enter a name for the repository. This automatically populates the **Label** field.
9. From the **Type** list, select **file**.
10. In the **Upstream URL** field, enter the URL of the registry to use as a source. Add a corresponding user name and password in the **Upstream Username** and **Upstream Password** fields.
11. Click **Save**.
12. Select the new repository.
13. Navigate to **Upload File** and click **Browse**.
14. Select the **.iso** file and click **Upload**.

CLI procedure

CLI procedure

1. Create the custom Product:

```
# hammer product create \  
--name "My_ISOs" \  
--sync-plan "Example Plan" \  
--description "My_Product" \  
--organization "My_Organization"
```

2. Create the repository:

```
# hammer repository create \  
--name "My_ISOs" \  
--content-type "file" \  
--product "My_Product" \  
--organization "My_Organization"
```

3. Upload the ISO file to the repository:

```
# hammer repository upload-content \  
--path ~/bootdisk.iso \  
--id repo_ID \  
--organization "My_Organization"
```

CHAPTER 15. MANAGING CUSTOM FILE TYPE CONTENT

In Satellite, you might require methods of managing and distributing SSH keys and source code files or larger files such as virtual machine images and ISO files. To achieve this, custom Products in Red Hat Satellite include repositories for custom file types. This provides a generic method to incorporate arbitrary files in a product.

You can upload files to the repository and synchronize files from an upstream Satellite Server. When you add files to a custom file type repository, you can use the normal Satellite management functions such as adding a specific version to a Content View to provide version control and making the repository of files available on various Capsule Servers. Clients must download the files over HTTP or HTTPS using **curl -O**.

You can create a file type repository in Satellite Server only in a custom Product, but there is flexibility in how you create the repository source. You can create an independent repository source in a directory on Satellite Server, or on a remote HTTP server, and then synchronize the contents of that directory into Satellite. This method is useful when you have multiple files to add to a Satellite repository.

15.1. CREATING A LOCAL SOURCE FOR A CUSTOM FILE TYPE REPOSITORY

You can create a custom file type repository source, from a directory of files, on the base system where Satellite is installed using **Pulp Manifest**. You can then synchronize the files into a repository and manage the custom file type content like any other content type.

Use this procedure to configure a repository in a directory on the base system where Satellite is installed. To create a file type repository in a directory on a remote server, see [Section 15.2, “Creating a Remote Source for a Custom File Type Repository”](#).

Procedure

1. Ensure the Utils repository is enabled:

```
# subscription-manager repos \
--enable=rhel-8-for-x86_64-appstream-rpms \
--enable=rhel-8-for-x86_64-baseos-rpms \
--enable=satellite-utils-6.12-for-rhel-8-x86_64-rpms
```

2. Install the Pulp Manifest package:

```
# satellite-maintain packages install python39-pulp_manifest
```

Note that this command stops the Satellite service and re-runs **satellite-installer**. Alternatively, to prevent downtime caused by stopping the service, you can use the following:

```
# satellite-maintain packages unlock
# dnf install python39-pulp_manifest
# satellite-maintain packages lock
```

3. Create a directory that you want to use as the file type repository, such as:

```
# mkdir -p /var/lib/pulp/local_repos/my_file_repo
```

4. Add the parent folder into allowed import paths:

```
# satellite-installer --foreman-proxy-content-pulpcore-additional-import-paths
/var/lib/pulp/local_repos
```

5. Add files to the directory or create a test file:

```
# touch /var/lib/pulp/local_repos/my_file_repo/test.txt
```

6. Run the Pulp Manifest command to create the manifest:

```
# pulp-manifest /var/lib/pulp/local_repos/my_file_repo
```

7. Verify the manifest was created:

```
# ls /var/lib/pulp/local_repos/my_file_repo
PULP_MANIFEST test.txt
```

Now, you can import your local source as a custom file type repository. Use the **file://** URL scheme and the name of the directory to specify an **Upstream URL**, such as **file:///my_file_repo**. For more information, see [Section 15.3, “Creating a Custom File Type Repository”](#).

If you update the contents of your directory, re-run Pulp Manifest and sync the repository in Satellite. For more information, see [Section 4.6, “Synchronizing Repositories”](#).

15.2. CREATING A REMOTE SOURCE FOR A CUSTOM FILE TYPE REPOSITORY

You can create a custom file type repository source from a directory of files that is external to Satellite Server using **Pulp Manifest**. You can then synchronize the files into a repository on Satellite Server over HTTP or HTTPS and manage the custom file type content like any other content type.

Use this procedure to configure a repository in a directory on a remote server. To create a file type repository in a directory on the base system where Satellite Server is installed, see [Section 15.1, “Creating a Local Source for a Custom File Type Repository”](#).

Prerequisites

- You have a server running Red Hat Enterprise Linux 8 registered to your Satellite or the Red Hat CDN.
- Your server has an entitlement to the Red Hat Enterprise Linux Server and Red Hat Satellite Utils repositories.
- You have installed an HTTP server. For more information about configuring a web server, see [Setting up the Apache HTTP web server](#) in *Deploying different types of servers*.

Procedure

1. On your server, ensure that the right repositories are enabled:

```
# subscription-manager repos \
```

```
--enable=rhel-8-for-x86_64-appstream-rpms \  
--enable=rhel-8-for-x86_64-baseos-rpms \  
--enable=satellite-utils-6.12-for-rhel-8-x86_64-rpms
```

2. Install the Pulp Manifest package:

```
# dnf install python39-pulp_manifest
```

3. Create a directory that you want to use as the file type repository in the HTTP server's public folder:

```
# mkdir /var/www/html/pub/my_file_repo
```

4. Add files to the directory or create a test file:

```
# touch /var/www/html/pub/my_file_repo/test.txt
```

5. Run the Pulp Manifest command to create the manifest:

```
# pulp-manifest /var/www/html/pub/my_file_repo
```

6. Verify the manifest was created:

```
# ls /var/www/html/pub/my_file_repo  
PULP_MANIFEST test.txt
```

Now, you can import your remote source as a custom file type repository. Use the path to the directory to specify an **Upstream URL**, such as **http://satellite.example.com/my_file_repo**. For more information, see [Section 15.3, "Creating a Custom File Type Repository"](#).

If you update the contents of your directory, re-run Pulp Manifest and sync the repository in Satellite. For more information, see [Section 4.6, "Synchronizing Repositories"](#).

15.3. CREATING A CUSTOM FILE TYPE REPOSITORY

The procedure for creating a custom file type repository is the same as the procedure for creating any custom content, except that when you create the repository, you select the **file** type. You must create a product and then add a custom repository.

To use the CLI instead of the Satellite web UI, see the [CLI procedure](#).

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select a product that you want to create a repository for.
3. On the **Repositories** tab, click **New Repository**.
4. In the **Name** field, enter a name for the repository. Satellite automatically completes the **Label** field based on the name.
5. Optional: In the **Description** field, enter a description for the repository.

6. From the **Type** list, select **file** as type of repository.
7. Optional: In the **Upstream URL** field, enter the URL of the upstream repository to use as a source.
8. Select the **Verify SSL** checkbox if you want to verify that the upstream repository's SSL certificates are signed by a trusted CA.
9. Optional: In the **Upstream Username** field, enter the user name for the upstream repository if required for authentication. Clear this field if the repository does not require authentication.
10. Optional: In the **Upstream Password** field, enter the corresponding password for the upstream repository. Clear this field if the repository does not require authentication.
11. Optional: In the **Upstream Authentication Token** field, provide the token of the upstream repository user for authentication. Leave this field empty if the repository does not require authentication.
12. From the **Mirroring Policy** list, select the type of content synchronization Satellite Server performs. For more information, see [Section 4.11, "Mirroring Policies Overview"](#).
13. Optional: In the **HTTP Proxy Policy** field, select or unselect using a HTTP proxy. By default, it uses the **Global Default** HTTP proxy.
14. Optional: You can clear the **Unprotected** checkbox to require a subscription entitlement certificate for accessing this repository. By default, the repository is published through HTTP.
15. Optional: In the **SSL CA Cert** field, select the SSL CA Certificate for the repository.
16. Optional: In the **SSL Client Cert** field, select the SSL Client Certificate for the repository.
17. Optional: In the **SSL Client Key** field, select the SSL Client Key for the repository.
18. Click **Save** to create the repository.

CLI procedure

1. Create a custom Product:

```
# hammer product create \
--description "My_Files" \
--name "My_File_Product" \
--organization "My_Organization" \
--sync-plan "My_Sync_Plan"
```

Table 15.1. Optional Parameters for the `hammer product create` Command

Option	Description
--gpg-key-id <i>gpg_key_id</i>	GPG key numeric identifier
--sync-plan-id <i>sync_plan_id</i>	Sync plan numeric identifier
--sync-plan <i>sync_plan_name</i>	Sync plan name to search by

2. Create a **file** type repository:

```
# hammer repository create \
--content-type "file" \
--name "My_Files" \
--organization "My_Organization" \
--product "My_File_Product"
```

Table 15.2. Optional Parameters for the `hammer repository create` Command

Option	Description
--checksum-type <i>sha_version</i>	Repository checksum, currently 'sha1' & 'sha256' are supported
--download-policy <i>policy_name</i>	Download policy for yum repos (either 'immediate' or 'on_demand').
--gpg-key-id <i>gpg_key_id</i>	GPG key numeric identifier
--gpg-key <i>gpg_key_name</i>	Key name to search by
--mirror-on-sync <i>boolean</i>	Must this repo be mirrored from the source, and stale RPMs removed, when synced? Set to true or false , yes or no , 1 or 0 .
--publish-via-http <i>boolean</i>	Must this also be published using HTTP? Set to true or false , yes or no , 1 or 0 .
--upstream-password <i>repository_password</i>	Password for the upstream repository user
--upstream-username <i>repository_username</i>	Upstream repository user, if required for authentication
--url <i>source_repo_url</i>	URL of the Source repository
--verify-ssl-on-sync <i>boolean</i>	Must Katello verify that the upstream URL's SSL certificates are signed by a trusted CA? Set to true or false , yes or no , 1 or 0 .

15.4. UPLOADING FILES TO A CUSTOM FILE TYPE REPOSITORY

Use this procedure to upload files to a custom file type repository.

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select a custom Product by name.
3. Select a file type repository by name.

4. Click **Browse** to search and select the file you want to upload.
5. Click **Upload** to upload the selected file to Satellite Server.
6. Visit the URL where the repository is published to see the file.

CLI procedure

```
# hammer repository upload-content \
--id repo_ID \
--organization "My_Organization" \
--path example_file
```

The **--path** option can indicate a file, a directory of files, or a glob expression of files. Globs must be escaped by single or double quotes.

15.5. DOWNLOADING FILES TO A HOST FROM A CUSTOM FILE TYPE REPOSITORY

You can download files to a client over HTTPS using **curl -O**, and optionally over HTTP if the **Unprotected** option for repositories is selected.

Prerequisites

- You have a custom file type repository. For more information, see [Section 15.3, “Creating a Custom File Type Repository”](#).
- You know the name of the file you want to download to clients from the file type repository.
- To use HTTPS you require the following certificates on the client:
 1. The **katello-server-ca.crt**. For more information, see [Importing the Katello Root CA Certificate](#) in *Administering Red Hat Satellite*.
 2. An Organization Debug Certificate. For more information, see [Creating an Organization Debug Certificate](#) in *Administering Red Hat Satellite*.

Procedure

1. In the Satellite web UI, navigate to **Content > Products**.
2. Select a custom Product by name.
3. Select a file type repository by name.
4. Ensure to select the **Unprotected** checkbox to access the repository is published through HTTP.
5. Copy the URL where the repository is published.

CLI procedure

1. List the file type repositories.

```
# hammer repository list --content-type file
```

```

---|-----|-----|-----|----
ID | NAME      | PRODUCT          | CONTENT TYPE | URL
---|-----|-----|-----|----
7  | My_Files  | My_File_Product | file         |
---|-----|-----|-----|----

```

2. Display the repository information.

```

# hammer repository info \
--name "My_Files" \
--organization-id My_Organization_ID \
--product "My_File_Product"

```

If **Unprotected** is enabled, the output is similar to this:

```

Publish Via HTTP: yes
Published At: http://satellite.example.com/pulp/isos/uuid/

```

If **Unprotected** is not enabled, the output is similar to this:

```

Publish Via HTTP: no
Published At: https://satellite.example.com/pulp/isos/uuid/

```

3. On the client, enter a command in the appropriate format for HTTP or HTTPS:
For HTTP:

```

# curl -O satellite.example.com/pulp/isos/uuid/my_file

```

For HTTPS:

```

# curl -O --cert ./Default\ Organization-key-cert.pem --cacert katello-server-ca.crt
satellite.example.com/pulp/isos/uuid/my_file

```

APPENDIX A. USING AN NFS SHARE FOR CONTENT STORAGE

Your environment requires adequate hard disk space to fulfill content storage. In some situations, it is useful to use an NFS share to store this content. This appendix shows how to mount the NFS share on your Satellite Server's content management component.



IMPORTANT

Use high-bandwidth, low-latency storage for the `/var/lib/pulp` file system. Red Hat Satellite has many I/O-intensive operations; therefore, high-latency, low-bandwidth storage might have issues with performance degradation.

Procedure

1. Create the NFS share. This example uses a share at `nfs.example.com:/Satellite/pulp`. Ensure this share provides the appropriate permissions to Satellite Server and its `apache` user.

2. Stop Satellite services on your Satellite Server:

```
# satellite-maintain service stop
```

3. Ensure Satellite Server has the `nfs-utils` package installed:

```
# satellite-maintain packages install nfs-utils
```

4. You need to copy the existing contents of `/var/lib/pulp` to the NFS share. First, mount the NFS share to a temporary location:

```
# mkdir /mnt/temp  
# mount -o rw nfs.example.com:/Satellite/pulp /mnt/temp
```

Copy the existing contents of `/var/lib/pulp` to the temporary location:

```
# cp -r /var/lib/pulp/* /mnt/temp/.
```

5. Set the permissions for all files on the share to use the `pulp` user.

6. Unmount the temporary storage location:

```
# umount /mnt/temp
```

7. Remove the existing contents of `/var/lib/pulp`:

```
# rm -rf /var/lib/pulp/*
```

8. Edit the `/etc/fstab` file and add the following line:

```
nfs.example.com:/Satellite/pulp /var/lib/pulp nfs  
rw,hard,intr,context="system_u:object_r:pulpcore_var_lib_t:s0"
```

This makes the mount persistent across system reboots. Ensure to include the SELinux context.

9. Enable the mount:

```
# mount -a
```

10. Confirm the NFS share mounts to **var/lib/pulp**:

```
# df
Filesystem              1K-blocks  Used Available Use% Mounted on
...
nfs.example.com:/Satellite/pulp 309506048 58632800 235128224 20% /var/lib/pulp
...
```

Also confirm that the existing content exists at the mount on **var/lib/pulp**:

```
# ls /var/lib/pulp
```

11. Start Satellite services on your Satellite Server:

```
# satellite-maintain service start
```

Satellite Server now uses the NFS share to store content. Run a content synchronization to ensure the NFS share works as expected. For more information, see [Section 4.6, "Synchronizing Repositories"](#).

APPENDIX B. IMPORTING KICKSTART REPOSITORIES

Kickstart repositories are not provided by the Content ISO image. To use Kickstart repositories in your disconnected Satellite, you must download a binary DVD ISO file for the version of Red Hat Enterprise Linux that you want to use and copy the Kickstart files to Satellite.

To import Kickstart repositories for Red Hat Enterprise Linux 9, complete [Section B.1, “Importing Kickstart Repositories for Red Hat Enterprise Linux 9”](#).

To import Kickstart repositories for Red Hat Enterprise Linux 8, complete [Section B.2, “Importing Kickstart Repositories for Red Hat Enterprise Linux 8”](#).

To import Kickstart repositories for Red Hat Enterprise Linux 7, complete [Section B.3, “Importing Kickstart Repositories for Red Hat Enterprise Linux 7”](#).

B.1. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 9

Use this procedure to import Kickstart repositories for Red Hat Enterprise Linux 9.

Procedure

1. Navigate to the Red Hat Customer Portal at access.redhat.com/downloads and log in.
2. Click **Red Hat Enterprise Linux**.
3. Select a product variant and a product version from the list. For example, product variant **Red Hat Enterprise Linux for x86_64** and product version **9.0**.
4. Locate the full installation image, for example, **Red Hat Enterprise Linux 9.0 Binary DVD**, and click **Download Now**. Note that you cannot provision hosts using the minimal ISO.
5. When the download completes, copy the ISO image to Satellite Server.
6. On Satellite Server, create a mount point and temporarily mount the ISO image at that location:

```
# mkdir /mnt/iso
# mount -o loop rhel-binary-dvd.iso /mnt/iso
```

Replace *rhel-binary-dvd.iso* with the name of your ISO image.

7. Create directories for Red Hat Enterprise Linux 9 AppStream and BaseOS Kickstart repositories:

```
# mkdir --parents /var/www/html/pub/satellite-
import/content/dist/rhel9/9.0/x86_64/appstream/kickstart
# mkdir --parents /var/www/html/pub/satellite-
import/content/dist/rhel9/9.0/x86_64/baseos/kickstart
```

8. Copy the **kickstart** files from the ISO image:

```
# cp -a /mnt/iso/AppStream/* /var/www/html/pub/satellite-
import/content/dist/rhel9/9.0/x86_64/appstream/kickstart
# cp -a /mnt/iso/BaseOS/* /mnt/iso/images/ /var/www/html/pub/satellite-
```

```
import/content/dist/rhel9/9.0/x86_64/baseos/kickstart
```

Note that for BaseOS, you must also copy the contents of the `/mnt/iso/images/` directory.

9. Add the following entries to the listing files:

To the `/var/www/html/pub/satellite-import/content/dist/rhel9/9.0/x86_64/appstream/listing` file, append **kickstart** with a new line.

To the `/var/www/html/pub/satellite-import/content/dist/rhel9/9.0/x86_64/baseos/listing` file, append **kickstart** with a new line.

To the `/var/www/html/pub/satellite-import/content/dist/rhel8/listing` file, append the version number with a new line. For example, for the Red Hat Enterprise Linux 9.0 binary ISO, append **9.0**.

10. Copy the **.treeinfo** files from the ISO image:

```
# cp /mnt/iso/.treeinfo /var/www/html/pub/satellite-
import/content/dist/rhel9/9.0/x86_64/appstream/kickstart/treeinfo
# cp /mnt/iso/.treeinfo /var/www/html/pub/satellite-
import/content/dist/rhel9/9.0/x86_64/baseos/kickstart/treeinfo
```

11. Open the `/var/www/html/pub/satellite-`

import/content/dist/rhel9/9.0/x86_64/baseos/kickstart/treeinfo file for editing.

12. In the **[general]** section, make the following changes:

- Change **packagedir = AppStream/Packages** to **packagedir = Packages**
- Change **repository = AppStream** to **repository = .**
- Change **variant = AppStream** to **variant = BaseOS**
- Change **variants = AppStream,BaseOS** to **variants = BaseOS**

13. In the **[tree]** section, change **variants = AppStream,BaseOS** to **variants = BaseOS**.

14. In the **[variant-BaseOS]** section, make the following changes:

- Change **packages = BaseOS/Packages** to **packages = Packages**
- Change **repository = BaseOS** to **repository = .**

15. Delete the **[media]** and **[variant-AppStream]** sections.

16. Save and close the file.

17. Verify that the `/var/www/html/pub/satellite-`

import/content/dist/rhel9/9.0/x86_64/baseos/kickstart/treeinfo file has the following format:

```
[checksums]
images/efiboot.img =
sha256:c01c18acc6778d6e66c8d0872bac59bfd7219ccf3cfa70a5c605c0fb37f33a83
images/install.img =
sha256:ddd08e5a5d92edee150f91ff4f12f39253eae72ff496465cf1b2766fe4a4df49
images/pxeboot/initrd.img =
sha256:a09a8ec89d485d71ed1bdad83584d6d816e67448221172d9aad97886cd70adca
```



```

images/pxeboot/vmlinuz =
sha256:6e523d7c3266e26c695923ab12b2873b16b0c61fb2e48ade608ad8998821584b

[general]
; WARNING.0 = This section provides compatibility with pre-productmd treeinfos.
; WARNING.1 = Read productmd documentation for details about new format.
arch = x86_64
family = Red Hat Enterprise Linux
name = Red Hat Enterprise Linux 9.0.0
packagedir = Packages
platforms = x86_64,xen
repository = .
timestamp = 1571146127
variant = BaseOS
variants = BaseOS
version = 9.0.0

[header]
type = productmd.treeinfo
version = 1.2

[images-x86_64]
efiboot.img = images/efiboot.img
initrd = images/pxeboot/initrd.img
kernel = images/pxeboot/vmlinuz

[images-xen]
initrd = images/pxeboot/initrd.img
kernel = images/pxeboot/vmlinuz

[release]
name = Red Hat Enterprise Linux
short = RHEL
version = 9.0.0

[stage2]
mainimage = images/install.img

[tree]
arch = x86_64
build_timestamp = 1571146127
platforms = x86_64,xen
variants = BaseOS

[variant-BaseOS]
id = BaseOS
name = BaseOS
packages = Packages
repository = .
type = variant
uid = BaseOS

```

18. Open the `/var/www/html/pub/satellite-import/content/dist/rhel9/9.0/x86_64/appstream/kickstart/treeinfo` file for editing.
19. In the **[general]** section, make the following changes:

- Change **packagedir = AppStream/Packages** to **packagedir = Packages**
 - Change **repository = AppStream** to **repository = .**
 - Change **variants = AppStream,BaseOS** to **variants = AppStream**
20. In the **[tree]** section, change **variants = AppStream,BaseOS** to **variants = AppStream**
21. In the **[variant-AppStream]** section, make the following changes:
- Change **packages = AppStream/Packages** to **packages = Packages**
 - Change **repository = AppStream** to **repository = .**
22. Delete the following sections from the file: **[checksums]**, **[images-x86_64]**, **[images-xen]**, **[media]**, **[stage2]**, **[variant-BaseOS]**.
23. Save and close the file.
24. Verify that the **/var/www/html/pub/satellite-import/content/dist/rhel9/9.0/x86_64/appstream/kickstart/treeinfo** file has the following format:

```
[general]
; WARNING.0 = This section provides compatibility with pre-productmd treeinfos.
; WARNING.1 = Read productmd documentation for details about new format.
arch = x86_64
family = Red Hat Enterprise Linux
name = Red Hat Enterprise Linux 9.0.0
packagedir = Packages
platforms = x86_64,xen
repository = .
timestamp = 1571146127
variant = AppStream
variants = AppStream
version = 9.0.0

[header]
type = productmd.treeinfo
version = 1.2

[release]
name = Red Hat Enterprise Linux
short = RHEL
version = 9.0.0

[tree]
arch = x86_64
build_timestamp = 1571146127
platforms = x86_64,xen
variants = AppStream

[variant-AppStream]
id = AppStream
name = AppStream
packages = Packages
```

```
repository = .
type = variant
uid = AppStream
```

25. If you do not plan to use the mounted binary DVD ISO image, unmount and remove the directory:

```
# umount /mnt/iso
# rmdir /mnt/iso
```

26. In the Satellite web UI, enable the Kickstart repositories.

B.2. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 8

Use this procedure to import Kickstart repositories for Red Hat Enterprise Linux 8.

Procedure

1. Navigate to the Red Hat Customer Portal at access.redhat.com/downloads and log in.
2. Click **Red Hat Enterprise Linux**.
3. Select a product variant and a product version from the list. For example, product variant **Red Hat Enterprise Linux for x86_64** and product version **8.1**.
4. Locate the full installation image, for example, **Red Hat Enterprise Linux 8.1 Binary DVD**, and click **Download Now**.
5. When the download completes, copy the ISO image to Satellite Server.
6. On Satellite Server, create a mount point and temporarily mount the ISO image at that location:

```
# mkdir /mnt/iso
# mount -o loop rhel-binary-dvd.iso /mnt/iso
```

Replace *rhel-binary-dvd.iso* with the name of your ISO image.

7. Create directories for Red Hat Enterprise Linux 8 AppStream and BaseOS Kickstart repositories:

```
# mkdir --parents /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/appstream/kickstart
# mkdir --parents /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/baseos/kickstart
```

8. Copy the **kickstart** files from the ISO image:

```
# cp -a /mnt/iso/AppStream/* /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/appstream/kickstart
# cp -a /mnt/iso/BaseOS/* /mnt/iso/images/ /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/baseos/kickstart
```

Note that for BaseOS, you must also copy the contents of the **/mnt/iso/images/** directory.

9. Add the following entries to the listing files:

To the `/var/www/html/pub/satellite-import/content/dist/rhel8/8.1/x86_64/appstream/listing` file, append **kickstart** with a new line.

To the `/var/www/html/pub/satellite-import/content/dist/rhel8/8.1/x86_64/baseos/listing` file, append **kickstart** with a new line.

To the `/var/www/html/pub/satellite-import/content/dist/rhel8/listing` file, append the version number with a new line. For example, for the Red Hat Enterprise Linux 8.1 binary ISO, append **8.1**.

10. Copy the **.treeinfo** files from the ISO image:

```
# cp /mnt/iso/.treeinfo /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/appstream/kickstart/treeinfo
# cp /mnt/iso/.treeinfo /var/www/html/pub/satellite-
import/content/dist/rhel8/8.1/x86_64/baseos/kickstart/treeinfo
```

11. Open the `/var/www/html/pub/satellite-`

import/content/dist/rhel8/8.1/x86_64/baseos/kickstart/treeinfo file for editing.

12. In the **[general]** section, make the following changes:

- Change **packagedir = AppStream/Packages** to **packagedir = Packages**
- Change **repository = AppStream** to **repository = .**
- Change **variant = AppStream** to **variant = BaseOS**
- Change **variants = AppStream,BaseOS** to **variants = BaseOS**

13. In the **[tree]** section, change **variants = AppStream,BaseOS** to **variants = BaseOS**.

14. In the **[variant-BaseOS]** section, make the following changes:

- Change **packages = BaseOS/Packages** to **packages = Packages**
- Change **repository = BaseOS** to **repository = .**

15. Delete the **[media]** and **[variant-AppStream]** sections.

16. Save and close the file.

17. Verify that the `/var/www/html/pub/satellite-`

import/content/dist/rhel8/8.1/x86_64/baseos/kickstart/treeinfo file has the following format:

```
[checksums]
images/efiboot.img =
sha256:c01c18acc6778d6e66c8d0872bac59bfd7219ccf3cfa70a5c605c0fb37f33a83
images/install.img =
sha256:ddd08e5a5d92edee150f91ff4f12f39253eae72ff496465cf1b2766fe4a4df49
images/pxeboot/initrd.img =
sha256:a09a8ec89d485d71ed1bdad83584d6d816e67448221172d9aad97886cd70adca
images/pxeboot/vmlinuz =
sha256:6e523d7c3266e26c695923ab12b2873b16b0c61fb2e48ade608ad8998821584b

[general]
```

```

; WARNING.0 = This section provides compatibility with pre-productmd treeinfos.
; WARNING.1 = Read productmd documentation for details about new format.
arch = x86_64
family = Red Hat Enterprise Linux
name = Red Hat Enterprise Linux 8.1.0
packagedir = Packages
platforms = x86_64,xen
repository = .
timestamp = 1571146127
variant = BaseOS
variants = BaseOS
version = 8.1.0

[header]
type = productmd.treeinfo
version = 1.2

[images-x86_64]
efiboot.img = images/efiboot.img
initrd = images/pxeboot/initrd.img
kernel = images/pxeboot/vmlinuz

[images-xen]
initrd = images/pxeboot/initrd.img
kernel = images/pxeboot/vmlinuz

[release]
name = Red Hat Enterprise Linux
short = RHEL
version = 8.1.0

[stage2]
mainimage = images/install.img

[tree]
arch = x86_64
build_timestamp = 1571146127
platforms = x86_64,xen
variants = BaseOS

[variant-BaseOS]
id = BaseOS
name = BaseOS
packages = Packages
repository = .
type = variant
uid = BaseOS

```

18. Open the `/var/www/html/pub/satellite-import/content/dist/rhel8/8.1/x86_64/appstream/kickstart/treeinfo` file for editing.
19. In the **[general]** section, make the following changes:
 - Change **packagedir = AppStream/Packages** to **packagedir = Packages**
 - Change **repository = AppStream** to **repository = .**

- Change **variants = AppStream,BaseOS** to **variants = AppStream**
20. In the **[tree]** section, change **variants = AppStream,BaseOS** to **variants = AppStream**
 21. In the **[variant-AppStream]** section, make the following changes:
 - Change **packages = AppStream/Packages** to **packages = Packages**
 - Change **repository = AppStream** to **repository = .**
 22. Delete the following sections from the file: **[checksums]**, **[images-x86_64]**, **[images-xen]**, **[media]**, **[stage2]**, **[variant-BaseOS]**.
 23. Save and close the file.
 24. Verify that the **/var/www/html/pub/satellite-import/content/dist/rhel8/8.1/x86_64/appstream/kickstart/treeinfo** file has the following format:

```
[general]
; WARNING.0 = This section provides compatibility with pre-productmd treeinfos.
; WARNING.1 = Read productmd documentation for details about new format.
arch = x86_64
family = Red Hat Enterprise Linux
name = Red Hat Enterprise Linux 8.1.0
packagedir = Packages
platforms = x86_64,xen
repository = .
timestamp = 1571146127
variant = AppStream
variants = AppStream
version = 8.1.0

[header]
type = productmd.treeinfo
version = 1.2

[release]
name = Red Hat Enterprise Linux
short = RHEL
version = 8.1.0

[tree]
arch = x86_64
build_timestamp = 1571146127
platforms = x86_64,xen
variants = AppStream

[variant-AppStream]
id = AppStream
name = AppStream
packages = Packages
repository = .
type = variant
uid = AppStream
```

- If you do not plan to use the mounted binary DVD ISO image, unmount and remove the directory:

```
# umount /mnt/iso
# rmdir /mnt/iso
```

- In the Satellite web UI, enable the Kickstart repositories.

B.3. IMPORTING KICKSTART REPOSITORIES FOR RED HAT ENTERPRISE LINUX 7

Use this procedure to import Kickstart repositories for Red Hat Enterprise Linux 7.

Procedure

- Navigate to the Red Hat Customer Portal at access.redhat.com/downloads and log in.
- Click **Red Hat Enterprise Linux**.
- Click **Switch to version 7 and below** above the **Product Variant** list.
- Select a product variant and a product version from the list. For example, product variant **Red Hat Enterprise Linux for x86_64** and product version **7.9**.
- Locate the full installation image, for example, **Red Hat Enterprise Linux 7.9 Binary DVD**, and click **Download Now**.
- When the download completes, copy the ISO image to Satellite Server.
- On Satellite Server, create a mount point and temporarily mount the ISO image at that location:

```
# mkdir /mnt/iso
# mount -o loop rhel-binary-dvd.iso /mnt/iso
```

Replace *rhel-binary-dvd.iso* with the name of your ISO image.

- Create Kickstart directories:

```
# mkdir --parents /var/www/html/pub/satellite-
import/content/dist/rhel/server/7/7.9/x86_64/kickstart/
```

- Copy the **kickstart** files from the ISO image:

```
# cp -a /mnt/iso/images/* /var/www/html/pub/satellite-
import/content/dist/rhel/server/7/7.9/x86_64/kickstart/
```

- Add the following entries to the listing files:
To the **/var/www/html/pub/satellite-import/content/dist/rhel/server/7/listing** file, append the version number with a new line. For example, for the Red Hat Enterprise Linux 7.9 ISO, append **7.9**.

To the **/var/www/html/pub/satellite-import/content/dist/rhel/server/7/7.9/listing** file, append the architecture with a new line. For example, **x86_64**.

To the `/var/www/html/pub/satellite-import/content/dist/rhel/server/7/7.9/x86_64/listing` file, append **kickstart** with a new line.

11. Copy the **.treeinfo** files from the ISO image:

```
# cp /mnt/iso/.treeinfo /var/www/html/pub/satellite-  
import/content/dist/rhel/server/7/7.9/x86_64/kickstart/treeinfo
```

12. If you do not plan to use the mounted binary DVD ISO image, unmount and remove the directory:

```
# umount /mnt/iso  
# rmdir /mnt/iso
```

13. In the Satellite web UI, enable the Kickstart repositories.

APPENDIX C. IMPORTING CONTENT ISOS INTO A CONNECTED SATELLITE

Even if Satellite Server can connect directly to the Red Hat Customer Portal, you can perform the initial synchronization from locally mounted content ISOs. When the initial synchronization is completed from the content ISOs, you can switch back to downloading content through the network connection. To accomplish this, download the Content ISOs for Red Hat Satellite from the Red Hat Customer Portal and import them into Satellite Server. For locations with bandwidth limitations, using an **On Demand** download policy might be more efficient than downloading and importing Content ISOs.

Note that Content ISOs previously hosted at redhat.com for import into Satellite Server have been deprecated and will be removed in the next Satellite version.



IMPORTANT

You can only import content ISO images for Red Hat Enterprise Linux 8 because repodata checksum from CDN does not match the repodata checksum from the content ISO images for Red Hat Enterprise Linux 7 and lower.

Note that if you synchronize a Red Hat Enterprise Linux ISO, all minor versions of Red Hat Enterprise Linux also synchronize. You require adequate storage on your Satellite to account for this.



IMPORTANT

This section is not required if your Satellite Server is connected to the Internet.

This example procedure performs the first synchronization of the Red Hat Enterprise Linux 8 repository from content ISO images.

Procedure

1. Log in to the Red Hat Customer Portal at access.redhat.com.
2. In the upper left of the window, click **Downloads** and select **Red Hat Satellite**.
3. Click the Content ISOs tab. This page lists all the products that are available in your subscription.
4. Click the link for the product name, such as RHEL 8 (x86_64), to reveal links to download ISO images.
5. Download the ISO images.
6. On Satellite, create a directory to act as a temporary store for all of the required Satellite content ISO images. This example uses `/tmp/isos/rhel8`:

```
# mkdir -p /tmp/isos/rhel8
```

7. On your workstation, copy the ISO files to Satellite Server:

```
$ scp ~/Downloads/iso_file root@satellite.example.com:/tmp/isos/rhel8
```

8. On Satellite Server, create a directory to serve as a mount point for the ISOs:

```
# mkdir /mnt/iso
```

9. Create a working directory to store ISO images:

```
# mkdir /mnt/rhel8
```

10. Temporarily mount the first ISO image:

```
# mount -o loop /tmp/isos/iso_file /mnt/iso
```

11. Recursively copy the contents of the first ISO to the working directory:

```
# cp -ruv /mnt/iso/* /mnt/rhel8/
```

12. Unmount the ISO image:

```
# umount /mnt/iso
```

13. Repeat the above step for each ISO until you have copied all the data from the Content ISO images into **/mnt/rhel8**.

14. If required, remove the empty directory used as the mount point:

```
# rmdir /mnt/iso
```

15. If required, remove the temporary working directory and its contents to regain space:

```
# rm -rf /tmp/isos/
```

16. Set the owner and the SELinux context for the directory and its contents to be the same as **/var/lib/pulp**:

```
# chcon -R --reference /var/lib/pulp /mnt/rhel8/  
# chown -R apache:apache /mnt/rhel8/
```

17. Create or edit the **/etc/pulp/content/sources/conf.d/local.conf** file. Append the following text into the file:

```
[rhel-8-server]  
enabled: 1  
priority: 0  
expires: 3d  
name: Red Hat Enterprise Linux 8  
type: yum  
base_url: file:///mnt/rhel8/content/dist/rhel/server/8/x86_64/os/
```

The **base_url** path might differ in your content ISO. The directory specified in **base_url** must contain the **repodata** directory, otherwise the synchronization fails. To synchronize multiple repositories, create a separate entry for each of them in the configuration file **/etc/pulp/content/sources/conf.d/local.conf**.

18. In the Satellite web UI, navigate to **Content > Red Hat Repositories** and enable the following repositories:
 - **Red Hat Enterprise Linux 8 for x86_64 - BaseOS RPMs 8**
 - **Red Hat Enterprise Linux 8 for x86_64 - AppStream RPMs 8**
19. Under **Content > Sync Status** select the repositories to be synchronized and click **Synchronize Now**.

Note that the Satellite web UI does not indicate which source is being used. In case of problems with a local source, Satellite pulls content through the network. To monitor the process, enter the following command on Satellite:

```
# journalctl -f -l SYSLOG_IDENTIFIER=pulp | grep -v worker[^\,\.]heartbeat
```

The above command displays interactive logs. First, Satellite Server connects to the Red Hat Customer Portal to download and process repository metadata. Then, the local repository is loaded. In case of any errors, cancel the synchronization in the Satellite web UI and verify your configuration.

After successful synchronization you can detach the local source by removing its entry from **/etc/pulp/content/sources/conf.d/local.conf**.