



Red Hat Advanced Cluster Management for Kubernetes 2.3

Governance

Read more to learn about the governance policy framework, which helps harden cluster security by using policies.

Red Hat Advanced Cluster Management for Kubernetes 2.3 Governance

Read more to learn about the governance policy framework, which helps harden cluster security by using policies.

Legal Notice

Copyright © 2022 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux[®] is the registered trademark of Linus Torvalds in the United States and other countries.

Java[®] is a registered trademark of Oracle and/or its affiliates.

XFS[®] is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL[®] is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js[®] is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack[®] Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

Read more to learn about the governance policy framework, which helps harden cluster security by using policies.

Table of Contents

CHAPTER 1. RISK AND COMPLIANCE	8
1.1. CERTIFICATES	8
1.1.1. Red Hat Advanced Cluster Management hub cluster certificates	9
1.1.1.1. Observability certificates	9
1.1.1.2. Bring Your Own (BYO) observability certificate authority (CA) certificates	10
1.1.1.2.1. OpenSSL commands to generate CA certificate	10
1.1.1.2.2. Create the secrets associated with the BYO observability CA certificates	10
1.1.1.2.3. Replacing certificates for alertmanager route	11
1.1.2. Red Hat Advanced Cluster Management component certificates	11
1.1.2.1. List hub cluster managed certificates	11
1.1.2.2. Refresh hub cluster managed certificates	11
1.1.2.3. Refresh a OpenShift Container Platform managed certificate	12
1.1.3. Red Hat Advanced Cluster Management managed certificates	13
1.1.3.1. Channel certificates	13
1.1.3.2. Managed cluster certificates	13
1.1.4. Third-party certificates	13
1.1.4.1. Rotating the gatekeeper webhook certificate	13
1.1.4.2. Rotating the integrity shield webhook certificate (Technology preview)	13
1.2. REPLACING THE MANAGEMENT INGRESS CERTIFICATES	14
1.2.1. Prerequisites to replace management ingress certificate	14
1.2.1.1. Example configuration file for generating a certificate	15
1.2.1.2. OpenSSL commands for generating a certificate	15
1.2.2. Replace the Bring Your Own (BYO) ingress certificate	16
1.2.3. Restore the default self-signed certificate for management ingress	16
CHAPTER 2. GOVERNANCE	18
2.1. GOVERNANCE ARCHITECTURE	18
2.2. POLICY OVERVIEW	19
2.2.1. Policy YAML structure	20
2.2.2. Policy YAML table	20
2.2.3. Policy sample file	22
2.3. POLICY CONTROLLERS	23
2.3.1. Kubernetes configuration policy controller	24
2.3.1.1. Configuration policy controller YAML structure	24
2.3.1.2. Configuration policy sample	25
2.3.1.3. Configuration policy YAML table	25
2.3.2. Certificate policy controller	26
2.3.2.1. Certificate policy controller YAML structure	27
2.3.2.1.1. Certificate policy controller YAML table	27
2.3.2.2. Certificate policy sample	29
2.3.3. IAM policy controller	29
2.3.3.1. IAM policy YAML structure	30
2.3.3.2. IAM policy YAML table	30
2.3.3.3. IAM policy sample	31
2.3.4. Creating a custom policy controller	31
2.3.4.1. Writing a policy controller	31
2.3.4.2. Deploying your controller to the cluster	33
2.3.4.2.1. Scaling your controller deployment	35
2.4. INTEGRATE THIRD-PARTY POLICY CONTROLLERS	35
2.5. SUPPORTED POLICIES	35
2.5.1. Memory usage policy	36

2.5.1.1. Memory usage policy YAML structure	36
2.5.1.2. Memory usage policy table	37
2.5.1.3. Memory usage policy sample	37
2.5.2. Namespace policy	37
2.5.2.1. Namespace policy YAML structure	38
2.5.2.2. Namespace policy YAML table	38
2.5.2.3. Namespace policy sample	39
2.5.3. Image vulnerability policy	39
2.5.3.1. Image vulnerability policy YAML structure	40
2.5.3.2. Image vulnerability policy YAML table	41
2.5.3.3. Image vulnerability policy sample	42
2.5.4. Pod policy	42
2.5.4.1. Pod policy YAML structure	42
2.5.4.2. Pod policy table	43
2.5.4.3. Pod policy sample	44
2.5.5. Pod security policy	44
2.5.5.1. Pod security policy YAML structure	44
2.5.5.2. Pod security policy table	45
2.5.5.3. Pod security policy sample	46
2.5.6. Role policy	46
2.5.6.1. Role policy YAML structure	46
2.5.6.2. Role policy table	48
2.5.6.3. Role policy sample	48
2.5.7. Role binding policy	48
2.5.7.1. Role binding policy YAML structure	49
2.5.7.2. Role binding policy table	49
2.5.7.3. Role binding policy sample	50
2.5.8. Security Context Constraints policy	50
2.5.8.1. SCC policy YAML structure	51
2.5.8.2. SCC policy table	51
2.5.8.3. SCC policy sample	52
2.5.9. ETCD encryption policy	52
2.5.9.1. ETCD encryption policy YAML structure	53
2.5.9.2. ETCD encryption policy table	53
2.5.9.3. Etcid encryption policy sample	54
2.5.10. Integrating gatekeeper constraints and constraint templates	54
2.5.11. Compliance operator policy	57
2.5.11.1. Compliance operator resources	57
2.5.12. E8 scan policy	58
2.5.12.1. E8 scan policy resources	58
2.5.13. OpenShift CIS scan policy	60
2.5.13.1. OpenShift CIS resources	60
2.6. MANAGE SECURITY POLICIES	62
2.6.1. Configuring Ansible Tower for governance	63
2.6.1.1. Prerequisites	63
2.6.1.2. Create a policy violation automation from the console	63
2.6.1.3. Create a policy violation automation from the CLI	64
2.6.2. Deploy policies using GitOps	65
2.6.2.1. Customizing your local repository	66
2.6.2.2. Committing to your local repository	66
2.6.2.3. Deploying policies to your cluster	67
2.6.2.4. Verifying GitOps policy deployments from the console	68
2.6.3. Support for templates in configuration policies	69

2.6.3.1. Prerequisite	69
2.6.3.2. Template functions	70
2.6.3.2.1. fromSecret function	70
2.6.3.2.2. fromConfigmap function	71
2.6.3.2.3. fromClusterClaim function	72
2.6.3.2.4. lookup function	72
2.6.3.2.5. base64enc function	73
2.6.3.2.6. base64dec function	74
2.6.3.2.7. indent function	74
2.6.3.2.8. toInt function	75
2.6.3.2.9. toBool function	75
2.6.3.2.10. Template processing	76
2.6.3.2.11. Special annotation for reprocessing	76
2.6.3.2.12. Bypass template processing	78
2.6.4. Managing security policies	78
2.6.4.1. Creating a security policy	78
2.6.4.1.1. Creating a security policy from the command line interface	79
2.6.4.1.1.1. Viewing your security policy from the CLI	80
2.6.4.1.2. Creating a cluster security policy from the console	80
2.6.4.1.2.1. Viewing your security policy from the console	82
2.6.4.2. Updating security policies	82
2.6.4.2.1. Disabling security policies	82
2.6.4.3. Deleting a security policy	83
2.6.5. Managing configuration policies	83
2.6.5.1. Creating a configuration policy	83
2.6.5.1.1. Creating a configuration policy from the CLI	83
2.6.5.1.1.1. Viewing your configuration policy from the CLI	84
2.6.5.1.2. Creating a configuration policy from the console	84
2.6.5.1.2.1. Viewing your configuration policy from the console	85
2.6.5.2. Updating configuration policies	85
2.6.5.2.1. Disabling configuration policies	85
2.6.5.3. Deleting a configuration policy	85
2.6.6. Managing image vulnerability policies	86
2.6.6.1. Creating an image vulnerability policy	86
2.6.6.1.1. Creating an image vulnerability policy from the CLI	86
2.6.6.1.1.1. Viewing your image vulnerability policy from the CLI	87
2.6.6.1.2. Creating an image vulnerability policy from the console	87
2.6.6.1.3. Viewing image vulnerability violations from the console	87
2.6.6.2. Updating image vulnerability policies	88
2.6.6.2.1. Disabling image vulnerability policies	88
2.6.6.3. Deleting an image vulnerability policy	88
2.6.7. Managing memory usage policies	89
2.6.7.1. Creating a memory usage policy	89
2.6.7.1.1. Creating a memory usage policy from the CLI	89
2.6.7.1.1.1. Viewing your policy from the CLI	89
2.6.7.1.2. Creating an memory usage policy from the console	89
2.6.7.1.2.1. Viewing your memory usage policy from the console	90
2.6.7.2. Updating memory usage policies	90
2.6.7.2.1. Disabling memory usage policies	90
2.6.7.3. Deleting a memory usage policy	90
2.6.8. Managing namespace policies	91
2.6.8.1. Creating a namespace policy	91
2.6.8.1.1. Creating a namespace policy from the CLI	91

2.6.8.1.1.1. Viewing your namespace policy from the CLI	91
2.6.8.1.2. Creating a namespace policy from the console	92
2.6.8.1.2.1. Viewing your namespace policy from the console	92
2.6.8.2. Updating namespace policies	92
2.6.8.2.1. Disabling namespace policies	92
2.6.8.3. Deleting a namespace policy	93
2.6.9. Managing pod policies	93
2.6.9.1. Creating a pod policy	93
2.6.9.1.1. Creating a pod policy from the CLI	93
2.6.9.1.1.1. Viewing your pod policy from the CLI	94
2.6.9.1.2. Creating a pod policy from the console	94
Viewing your pod policy from the console	94
2.6.9.2. Updating pod policies	95
2.6.9.2.1. Disabling pod policies	95
2.6.9.3. Deleting a pod policy	95
2.6.10. Managing pod security policies	95
2.6.10.1. Creating a pod security policy	96
2.6.10.1.1. Creating a pod security policy from the CLI	96
2.6.10.1.1.1. Viewing your pod security policy from the CLI	96
2.6.10.1.2. Creating a pod security policy from the console	96
2.6.10.1.2.1. Viewing your pod security policy from the console	97
2.6.10.2. Updating pod security policies	97
2.6.10.2.1. Disabling pod security policies	97
2.6.10.3. Deleting a pod security policy	97
2.6.11. Managing role policies	98
2.6.11.1. Creating a role policy	98
2.6.11.1.1. Creating a role policy from the CLI	98
2.6.11.1.1.1. Viewing your role policy from the CLI	98
2.6.11.1.2. Creating a role policy from the console	99
2.6.11.1.2.1. Viewing your role policy from the console	99
2.6.11.2. Updating role policies	99
2.6.11.2.1. Disabling role policies	99
2.6.11.3. Deleting a role policy	99
2.6.12. Managing role binding policies	100
2.6.12.1. Creating a role binding policy	100
2.6.12.1.1. Creating a role binding policy from the CLI	100
2.6.12.1.1.1. Viewing your role binding policy from the CLI	101
2.6.12.1.2. Creating a role binding policy from the console	101
2.6.12.1.2.1. Viewing your role binding policy from the console	101
2.6.12.2. Updating role binding policies	102
2.6.12.2.1. Disabling role binding policies	102
2.6.12.3. Deleting a role binding policy	102
2.6.13. Managing Security Context Constraints policies	103
2.6.13.1. Creating an SCC policy	103
2.6.13.1.1. Creating an SCC policy from the CLI	103
2.6.13.1.1.1. Viewing your SCC policy from the CLI	103
2.6.13.1.2. Creating an SCC policy from the console	103
2.6.13.1.2.1. Viewing your SCC policy from the console	104
2.6.13.2. Updating SCC policies	104
2.6.13.2.1. Disabling SCC policies	104
2.6.13.3. Deleting an SCC policy	104
2.6.14. Managing certificate policies	105
2.6.14.1. Creating a certificate policy	105

2.6.14.1.1. Creating a certificate policy from the CLI	105
2.6.14.1.1.1. Viewing your certificate policy from the CLI	105
2.6.14.1.2. Creating a certificate policy from the console	105
2.6.14.1.2.1. Viewing your certificate policy from the console	106
2.6.14.2. Updating certificate policies	106
2.6.14.2.1. Bringing your own certificates	106
2.6.14.2.2. Adding a label into your Kubernetes secret	106
2.6.14.2.3. Disabling certificate policies	107
2.6.14.3. Deleting a certificate policy	107
2.6.15. Managing IAM policies	108
2.6.15.1. Creating an IAM policy	108
2.6.15.1.1. Creating an IAM policy from the CLI	108
2.6.15.1.1.1. Viewing your IAM policy from the CLI	109
2.6.15.1.2. Creating an IAM policy from the console	109
2.6.15.1.2.1. Viewing your IAM policy from the console	109
2.6.15.2. Updating IAM policies	109
2.6.15.2.1. Disabling IAM policies	109
2.6.15.3. Deleting an IAM policy	110
2.6.16. Managing ETCD encryption policies	110
2.6.16.1. Creating an encryption policy	110
2.6.16.1.1. Creating an encryption policy from the CLI	111
2.6.16.1.1.1. Viewing your encryption policy from the CLI	111
2.6.16.1.2. Creating an encryption policy from the console	111
2.6.16.1.2.1. Viewing your encryption policy from the console	111
2.6.16.2. Updating encryption policies	112
2.6.16.2.1. Disabling encryption policies	112
2.6.16.3. Deleting an encryption policy	112
2.6.17. Managing gatekeeper operator policies	113
2.6.17.1. Installing gatekeeper using a gatekeeper operator policy	113
2.6.17.2. Creating a gatekeeper policy from the console	113
2.6.17.2.1. Gatekeeper operator CR	113
2.6.17.3. Upgrading gatekeeper and the gatekeeper operator	114
2.6.17.4. Updating gatekeeper operator policy	115
2.6.17.4.1. Viewing gatekeeper operator policy from the console	115
2.6.17.4.2. Disabling gatekeeper operator policy	115
2.6.17.5. Deleting gatekeeper operator policy	115
2.6.17.6. Uninstalling gatekeeper policy, gatekeeper, and gatekeeper operator policy	116
2.6.18. Managing compliance operator policies	117
2.6.18.1. Creating a compliance operator policy from the console	117
2.6.18.2. Updating a compliance operator policy	117
2.6.18.2.1. Viewing a compliance operator policy from the console	117
2.6.18.2.2. Disabling a compliance operator policy	117
2.6.18.3. Deleting a compliance operator policy	118
2.6.19. Managing E8 scan policies	118
2.6.19.1. Creating an E8 scan policy from the console	118
2.6.19.2. Updating an E8 scan policy	119
2.6.19.2.1. Viewing an E8 scan policy from the console	119
2.6.19.2.2. Disabling an E8 scan policy	119
2.6.19.3. Deleting an E8 scan policy	119
2.6.20. Managing OpenShift CIS scan policies	120
2.6.20.1. Creating an OpenShift CIS scan policy from the console	120
2.6.20.2. Updating an OpenShift CIS scan policy	121
2.6.20.2.1. Viewing an OpenShift CIS scan policy from the console	121

2.6.20.2.2. Disabling an OpenShift CIS scan policy	121
2.6.20.3. Deleting an OpenShift CIS scan policy	121
2.7. INTEGRITY SHIELD PROTECTION (TECHNOLOGY PREVIEW)	122
2.7.1. Integrity shield architecture	122
2.7.2. Supported versions	123
2.7.3. Enable integrity shield protection (Technology Preview)	123
2.7.3.1. Prerequisites	123
2.7.3.2. Enabling integrity shield protection	124

CHAPTER 1. RISK AND COMPLIANCE

Manage your security of Red Hat Advanced Cluster Management for Kubernetes components. Govern your cluster with defined policies and processes to identify and minimize risks. Use policies to define rules and set controls.

Prerequisite: You must configure authentication service requirements for Red Hat Advanced Cluster Management for Kubernetes. See [Access control](#) for more information.

Review the following topics to learn more about securing your cluster:

- [Role-based access control](#)
- [Credentials](#)
- [Certificates](#)
- [Governance](#)
 - [Integrity shield protection \(Technology preview\)](#)

1.1. CERTIFICATES

Various certificates are created and used throughout Red Hat Advanced Cluster Management for Kubernetes.

You can bring your own certificates. You must create a Kubernetes TLS Secret for your certificate. After you create your certificates, you can replace certain certificates that are created by the Red Hat Advanced Cluster Management installer.

Required access: Cluster administrator or team administrator.

Note: Replacing certificates is supported only on native Red Hat Advanced Cluster Management installations.

All certificates required by services that run on Red Hat Advanced Cluster Management are created during the installation of Red Hat Advanced Cluster Management. Certificates are created and managed by the [OpenShift Service Serving Certificates](#) service.

You can also rotate the OpenShift Service Serving certificates. For more information, follow the OpenShift documentation to [Manually rotate the generated service certificate](#) and [Manually rotate the service CA certificate](#). After the rotation is complete, apply the new certificates to all of the services with the following command:

```
oc -n open-cluster-management delete pod -l chart=management-ingress
```

The related pods in your cluster restart automatically.

Continue reading to learn more about certificate management:

[Red Hat Advanced Cluster Management hub cluster certificates](#)

- [Replacing the management ingress certificates](#)
- [Replacing the OpenShift default ingress certificate](#)

- [Observability certificates](#)
 - [Bring Your Own \(BYO\) observability certificate authority \(CA\) certificates](#)
 - [OpenSSL commands to generate CA certificate](#)
 - [Create the secrets associated with the BYO observability CA certificates](#)
 - [Replacing certificates for alertmanager route](#)

Red Hat Advanced Cluster Management component certificates

- [List hub cluster managed certificates](#)
- [Refresh hub cluster managed certificates](#)
- [Refresh a OpenShift Container Platform managed certificate](#)

Red Hat Advanced Cluster Management managed certificates

- [Channel certificates](#)
- [Managed cluster certificates](#)

Third-party certificates

- [Rotating the gatekeeper webhook certificate](#)
- [Rotating the integrity shield webhook certificate \(Technology preview\)](#)

1.1.1. Red Hat Advanced Cluster Management hub cluster certificates

1.1.1.1. Observability certificates

After Red Hat Advanced Cluster Management is installed, observability certificates are created and used by the observability components, to provide mutual TLS on the traffic between the hub cluster and managed cluster. The Kubernetes secrets that are associated with the observability certificates.

The **open-cluster-management-observability** namespace contain the following certificates:

- **observability-server-ca-certs**: Has the CA certificate to sign server-side certificates
- **observability-client-ca-certs**: Has the CA certificate to sign client-side certificates
- **observability-server-certs**: Has the server certificate used by the **observability-observatorium-api** deployment
- **observability-grafana-certs**: Has the client certificate used by the **observability-rbac-query-proxy** deployment

The **open-cluster-management-addon-observability** namespace contain the following certificates on managed clusters:

- **observability-managed-cluster-certs**: Has the same server CA certificate as **observability-server-ca-certs** in the hub server

- **observability-controller-open-cluster-management.io-observability-signer-client-cert**: Has the client certificate used by the **metrics-collector-deployment**

The CA certificates are valid for five years and other certificates are valid for one year. All observability certificates are automatically refreshed upon expiration.

View the following list to understand the effects when certificates are automatically renewed:

- Non-CA certificates are renewed automatically when the remaining valid time is no more than 73 days. After the certificate is renewed, the pods in the related deployments restart automatically to use the renewed certificates.
- CA certificates are renewed automatically when the remaining valid time is no more than one year. After the certificate is renewed, the old CA is not deleted but co-exist with the renewed ones. Both old and renewed certificates are used by related deployments, and continue to work. The old CA certificates are deleted when they expire.
- When a certificate is renewed, the traffic between the hub cluster and managed cluster is not interrupted.

1.1.1.2. Bring Your Own (BYO) observability certificate authority (CA) certificates

If you do not want to use the default observability CA certificates generated by Red Hat Advanced Cluster Management, you can choose to use the BYO observability CA certificates before you enable observability.

1.1.1.2.1. OpenSSL commands to generate CA certificate

Observability requires two CA certificates; one is for the server-side and the other is for the client-side.

- Generate your CA RSA private keys with the following commands:

```
openssl genrsa -out serverCAKey.pem 2048
```

```
openssl genrsa -out clientCAKey.pem 2048
```

- Generate the self-signed CA certificates using the private keys. Run the following commands:

```
openssl req -x509 -sha256 -new -nodes -key serverCAKey.pem -days 1825 -out serverCACert.pem
```

```
openssl req -x509 -sha256 -new -nodes -key clientCAKey.pem -days 1825 -out clientCACert.pem
```

1.1.1.2.2. Create the secrets associated with the BYO observability CA certificates

Complete the following steps to create the secrets:

1. Create the **observability-server-ca-certs** secret by using your certificate and private key. Run the following command:

```
oc -n open-cluster-management-observability create secret tls observability-server-ca-certs -cert ./serverCACert.pem --key ./serverCAKey.pem
```

2. Create the **observability-client-ca-certs** secret by using your certificate and private key. Run the following command:

```
oc -n open-cluster-management-observability create secret tls observability-client-ca-certs --cert ./clientCACert.pem --key ./clientCAKey.pem
```

1.1.1.2.3. Replacing certificates for alertmanager route

You can replace alertmanager certificates by updating the alertmanager route, if you do not want to use the OpenShift default ingress certificate. Complete the following steps:

1. Examine the observability certificate with the following command:

```
openssl x509 -noout -text -in ./observability.crt
```

2. Change the common name (**CN**) on the certificate to **alertmanager**.
3. Change the SAN in the **csr.cnf** configuration file with the hostname for your alertmanager route.
4. Create the two following secrets in the **open-cluster-management-observability** namespace. Run the following command:

```
oc -n open-cluster-management-observability create secret tls alertmanager-byo-ca --cert ./ca.crt --key ./ca.key
```

```
oc -n open-cluster-management-observability create secret tls alertmanager-byo-cert --cert ./ingress.crt --key ./ingress.key
```

For more information, see [OpenSSL commands for generating a certificate](#). If you want to restore the default self-signed certificate for alertmanager route, see [Restore the default self-signed certificate for management ingress](#) to delete the two secrets in the **open-cluster-management-observability** namespace.

1.1.2. Red Hat Advanced Cluster Management component certificates

1.1.2.1. List hub cluster managed certificates

You can view a list of hub cluster managed certificates that use [OpenShift Service Serving Certificates](#) service internally. Run the following command to list the certificates:

```
oc get secret -n open-cluster-management -o custom-columns=Name:.metadata.name,Expiration:.metadata.annotations.service\\.beta\\.openshift\\.io/expiry | grep -v '<none>'
```

Note: If observability is enabled, there are additional namespaces where certificates are created.

1.1.2.2. Refresh hub cluster managed certificates

You can refresh a hub cluster managed certificate by running the command in the [List hub cluster managed certificates](#) section. When you identify the certificate that you need to refresh, delete the secret that is associated with the certificate. For example, you can delete a secret by running the following command:

```
oc delete secret grc-0c925-grc-secrets -n open-cluster-management
```

Note: After you delete the secret, a new one is created. However, you must restart pods that use the secret manually so they can begin to use the new certificate.

1.1.2.3. Refresh a OpenShift Container Platform managed certificate

You can refresh OpenShift Container Platform managed certificates, which are certificates that are used by Red Hat Advanced Cluster Management webhooks and the proxy server.

Complete the following steps to refresh OpenShift Container Platform managed certificates:

1. Delete the secret that is associated with the OpenShift Container Platform managed certificate by running the following command:

```
oc delete secret -n open-cluster-management ocm-webhook-secret
```

Note: Some services might not have a secret that needs to be deleted.

2. Restart the services that are associated with the OpenShift Container Platform managed certificate(s) by running the following command:

```
oc delete po -n open-cluster-management ocm-webhook-679444669c-5cg76
```

Important: There are replicas of many services; each service must be restarted.

View the following table for a summarized list of the pods that contain certificates and whether a secret needs to be deleted prior to restarting the pod:

Table 1.1. Pods that contain OpenShift Container Platform managed certificates

Service name	Namespace	Sample pod name	Secret name (if applicable)
channels-apps-open-cluster-management-webhook-svc	open-cluster-management	multicluster-operators-application-8c446664c-5lbfk	-
multicluster-operators-application-svc	open-cluster-management	multicluster-operators-application-8c446664c-5lbfk	-
multiclusterhub-operator-webhook	open-cluster-management	multiclusterhub-operator-bfd948595-mnhjc	-
ocm-webhook	open-cluster-management	ocm-webhook-679444669c-5cg76	ocm-webhook-secret
cluster-manager-registration-webhook	open-cluster-management-hub	cluster-manager-registration-webhook-fb7b99c-d8wfc	registration-webhook-serving-cert

Service name	Namespace	Sample pod name	Secret name (if applicable)
cluster-manager-work-webhook	open-cluster-management-hub	cluster-manager-work-webhook-89b8d7fc-f4pv8	work-webhook-serving-cert

1.1.3. Red Hat Advanced Cluster Management managed certificates

1.1.3.1. Channel certificates

CA certificates can be associated with Git channel that are a part of the Red Hat Advanced Cluster Management application management. See [Using custom CA certificates for a secure HTTPS connection](#) for more details.

Helm channels allow you to disable certificate validation. Helm channels where certificate validation is disabled, must be configured in development environments. Disabling certificate validation introduces security risks.

1.1.3.2. Managed cluster certificates

Certificates are used to authenticate managed clusters with the hub. Therefore, it is important to be aware of troubleshooting scenarios associated with these certificates. View [Troubleshooting imported clusters offline after certificate change](#) for more details.

The managed cluster certificates are refreshed automatically.

1.1.4. Third-party certificates

1.1.4.1. Rotating the gatekeeper webhook certificate

Complete the following steps to rotate the gatekeeper webhook certificate:

1. Edit the secret that contains the certificate with the following command:

```
oc edit secret -n openshift-gatekeeper-system gatekeeper-webhook-server-cert
```

2. Delete the following content in the **data** section: **ca.crt**, **ca.key**, **tls.crt**, and **tls.key**.
3. Restart the gatekeeper webhook service by deleting the **gatekeeper-controller-manager** pods with the following command:

```
oc delete po -n openshift-gatekeeper-system -l control-plane=controller-manager
```

The gatekeeper webhook certificate is rotated.

1.1.4.2. Rotating the integrity shield webhook certificate (Technology preview)

Complete the following steps to rotate the integrity shield webhook certificate:

1. Edit the IntegrityShield custom resource and add the **integrity-shield-operator-system** namespace to the excluded list of namespaces in the **inScopeNamespaceSelector** setting. Run the following command to edit the resource:

```
oc edit integrityshield integrity-shield-server -n integrity-shield-operator-system
```

2. Delete the secret that contains the integrity shield certificate by running the following command:

```
oc delete secret -n integrity-shield-operator-system ishield-server-tls
```

3. Delete the operator so that the secret is recreated. Be sure that the operator pod name matches the pod name on your system. Run the following command:

```
oc delete po -n integrity-shield-operator-system integrity-shield-operator-controller-manager-64549569f8-v4pz6
```

4. Delete the integrity shield server pod to begin using the new certificate with the following command:

```
oc delete po -n integrity-shield-operator-system integrity-shield-server-5fbdfbbbd4-bbfz
```

Use the certificate policy controller to create and manage certificate policies on managed clusters. See [Policy controllers](#) to learn more about controllers. Return to the [Risk and compliance](#) page for more information.

1.2. REPLACING THE MANAGEMENT INGRESS CERTIFICATES

You can replace management ingress certificates by updating the Red Hat Advanced Cluster Management for Kubernetes route if you do not want to use the OpenShift default ingress certificate.

- [Prerequisites to replace management ingress certificate](#)
- [Replace the Bring Your Own \(BYO\) ingress certificate](#)
- [Restore the default self-signed certificate for management ingress](#)

1.2.1. Prerequisites to replace management ingress certificate

Prepare and have your **management-ingress** certificates and private keys ready. If needed, you can generate a TLS certificate by using OpenSSL. Set the common name parameter (**CN**) on the certificate to **management-ingress**. If you are generating the certificate, include the following settings:

- Include the route name for Red Hat Advanced Cluster Management for Kubernetes as the domain name in your certificate Subject Alternative Name (SAN) list. Receive the route name by running the following command:

```
oc get route -n open-cluster-management
```

You might receive the following response:

```
multicloud-console.apps.grchub2.dev08.red-chesterfield.com
```

1.2.1.1. Example configuration file for generating a certificate

The following example configuration file and OpenSSL commands provide an example for how to generate a TLS certificate by using OpenSSL. View the following **csr.cnf** configuration file, which defines the configuration settings for generating certificates with OpenSSL.

```
[ req ]          # Main settings
default_bits = 2048    # Default key size in bits.
prompt = no          # Disables prompting for certificate values so the configuration file values are
used.
default_md = sha256    # Specifies the digest algorithm.
req_extensions = req_ext # Specifies the configuration file section that includes any extensions.
distinguished_name = dn # Specifies the section that includes the distinguished name information.

[ dn ]           # Distinguished name settings
C = US           # Country
ST = North Carolina # State or province
L = Raleigh      # Locality
O = Red Hat Open Shift # Organization
OU = Red Hat Advanced Container Management # Organizational unit
CN = management-ingress # Common name.

[ req_ext ]      # Extensions
subjectAltName = @alt_names # Subject alternative names

[ alt_names ]    # Subject alternative names
DNS.1 = multicloud-console.apps.grchub2.dev08.red-chesterfield.com

[ v3_ext ]       # x509v3 extensions
authorityKeyIdentifier=keyid,issuer:always # Specifies the public key that corresponds to the private
key that is used to sign a certificate.
basicConstraints=CA:FALSE # Indicates whether the certificate is a CA certificate during
the certificate chain verification process.
#keyUsage=keyEncipherment,dataEncipherment # Defines the purpose of the key that is contained
in the certificate.
extendedKeyUsage=serverAuth # Defines the purposes for which the public key can be
used.
subjectAltName=@alt_names # Identifies the subject alternative names for the identify
that is bound to the public key by the CA.
```

Note: Be sure to update the SAN labeled, **DNS.1** with the correct hostname for your management ingress.

1.2.1.2. OpenSSL commands for generating a certificate

The following OpenSSL commands are used with the preceding configuration file to generate the required TLS certificate.

1. Generate your certificate authority (CA) RSA private key:

```
openssl genrsa -out ca.key 4096
```

2. Generate a self-signed CA certificate by using your CA key:

```
openssl req -x509 -new -nodes -key ca.key -subj "/C=US/ST=North
Carolina/L=Raleigh/O=Red Hat OpenShift" -days 400 -out ca.crt
```

3. Generate the RSA private key for your certificate:

```
openssl genrsa -out ingress.key 4096
```

4. Generate the Certificate Signing request (CSR) by using the private key:

```
openssl req -new -key ingress.key -out ingress.csr -config csr.cnf
```

5. Generate a signed certificate by using your CA certificate and key and CSR:

```
openssl x509 -req -in ingress.csr -CA ca.crt -CAkey ca.key -CAcreateserial -out ingress.crt -
sha256 -days 300 -extensions v3_ext -extfile csr.cnf
```

6. Examine the certificate contents:

```
openssl x509 -noout -text -in ./ingress.crt
```

1.2.2. Replace the Bring Your Own (BYO) ingress certificate

Complete the following steps to replace your BYO ingress certificate:

1. Create the **byo-ingress-tls** secret by using your certificate and private key. Run the following command:

```
oc -n open-cluster-management create secret tls byo-ingress-tls-secret --cert ./ingress.crt --
key ./ingress.key
```

2. Verify that the secret is created in the correct namespace with the following command:

```
oc get secret -n open-cluster-management | grep -e byo-ingress-tls-secret -e byo-ca-cert
```

3. Optional: Create a secret containing the CA certificate by running the following command:

```
oc -n open-cluster-management create secret tls byo-ca-cert --cert ./ca.crt --key ./ca.key
```

4. Delete the **management-ingress** subscription in order to redeploy the subscription. The secrets created in the previous steps are used automatically. Run the following command:

```
oc delete subscription management-ingress-sub -n open-cluster-management
```

5. Verify that the current certificate is your certificate, and that all console access and login functionality remain the same.

1.2.3. Restore the default self-signed certificate for management ingress

1. Delete the bring your own certificate secrets with the following command:

```
oc delete secret byo-ca-cert byo-ingress-tls-secret -n open-cluster-management
```

2. Delete the **management-ingress** subscription in order to redeploy the subscription. The secrets created in the previous steps are used automatically. Run the following command:

```
oc delete subscription management-ingress-sub -n open-cluster-management
```

3. Verify that the current certificate is your certificate, and that all console access and login functionality remain the same.


See [Certificates](#) for more information about certificates that are created and managed by Red Hat Advanced Cluster Management. Return to the [Risk and compliance](#) page for more information on securing your cluster.

CHAPTER 2. GOVERNANCE

Enterprises must meet internal standards for software engineering, secure engineering, resiliency, security, and regulatory compliance for workloads hosted on private, multi and hybrid clouds. Red Hat Advanced Cluster Management for Kubernetes governance provides an extensible policy framework for enterprises to introduce their own security policies.

2.1. GOVERNANCE ARCHITECTURE

Enhance the security for your cluster with the Red Hat Advanced Cluster Management for Kubernetes governance lifecycle. The product governance lifecycle is based on defined policies, processes, and procedures to manage security and compliance from a central interface page. View the following diagram of the governance architecture:

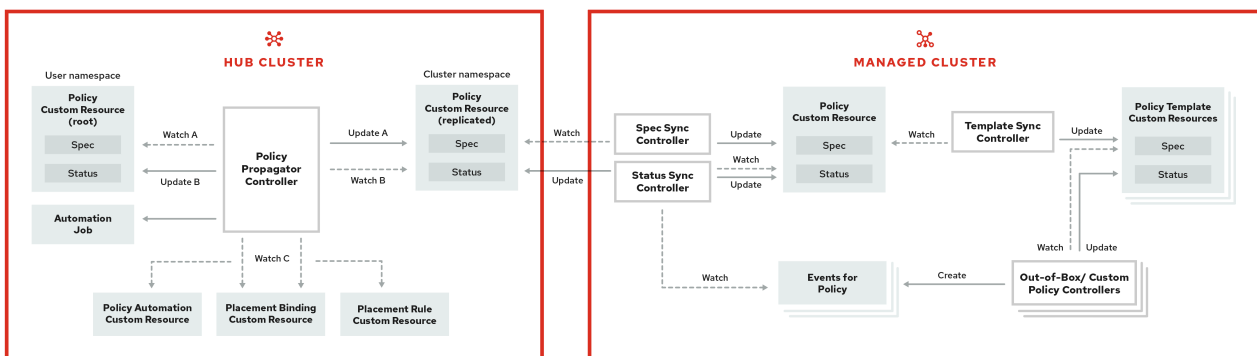

The governance architecture is composed of the following components:

- Governance dashboard:** Provides a summary of your cloud governance and risk details, which include policy and cluster violations.

Notes:

 - When a policy is propagated to a managed cluster, the replicated policy is named **namespaceName.policyName**. When you create a policy, make sure that the length of the **namespaceName.policyName** must not exceed 63 characters due to the Kubernetes limit for object names.
 - When you search for a policy in the hub cluster, you might also receive the name of the replicated policy on your managed cluster. For example, if you search for **policy-dhaz-cert**, the following policy name from the hub cluster might appear: **default.policy-dhaz-cert**.
- Policy-based governance framework:** Supports policy creation and deployment to various managed clusters based on attributes associated with clusters, such as a geographical region. See the [policy-collection repository](#) to view examples of the predefined policies, and instructions on deploying policies to your cluster. You can also contribute custom policy controllers and policies. When policies are violated, automations can be configured to run and take any action that the user chooses. See [Configuring Ansible Tower for governance](#) for more information.
- Policy controller:** Evaluates one or more policies on the managed cluster against your specified control and generates Kubernetes events for violations. Violations are propagated to the hub cluster. Policy controllers that are included in your installation are the following: Kubernetes configuration, Certificate, and IAM. You can also create a custom policy controller.
- Open source community:** Supports community contributions with a foundation of the Red Hat

Advanced Cluster Management policy framework. Policy controllers and third-party policies are also a part of the **stolostron/policy-collection** repository. Learn how to contribute and deploy policies using GitOps. For more information, see [Deploy policies using GitOps](#). Learn how to integrate third-party policies with Red Hat Advanced Cluster Management for Kubernetes. For more information, see [Integrate third-party policy controllers](#).

Learn about the structure of an Red Hat Advanced Cluster Management for Kubernetes policy framework, and how to use the Red Hat Advanced Cluster Management for Kubernetes *Governance* dashboard.

- [Policy overview](#)
- [Policy controllers](#)
- [Supported policies](#)
- [Manage security policies](#)

2.2. POLICY OVERVIEW

Use the Red Hat Advanced Cluster Management for Kubernetes security policy framework to create custom policy controllers and other policies. Kubernetes custom resource definition (CRD) instance are used to create policies. For more information about CRDs, see [Extend the Kubernetes API with CustomResourceDefinitions](#).

Each Red Hat Advanced Cluster Management for Kubernetes policy can have at least one or more templates. For more details about the policy elements, view the following *Policy YAML table* section on this page.

The policy requires a *PlacementRule* that defines the clusters that the policy document is applied to, and a *PlacementBinding* that binds the Red Hat Advanced Cluster Management for Kubernetes policy to the placement rule. For more on how to define a **PlacementRule**, see [Placement rules](#) in the Application lifecycle documentation.

Important:

- You must create a **PlacementRule** to apply your policies to the managed cluster, and bind the **PlacementRule** with a **PlacementBinding**.
- You can create a policy in any namespace on the hub cluster except the cluster namespace. If you create a policy in the cluster namespace, it is deleted by Red Hat Advanced Cluster Management for Kubernetes.
- Each client and provider is responsible for ensuring that their managed cloud environment meets internal enterprise security standards for software engineering, secure engineering, resiliency, security, and regulatory compliance for workloads hosted on Kubernetes clusters. Use the governance and security capability to gain visibility and remediate configurations to meet standards.

Learn more details about the policy components in the following sections:

- [Policy YAML structure](#)
- [Policy YAML table](#)
- [Policy sample file](#)

2.2.1. Policy YAML structure

When you create a policy, you must include required parameter fields and values. Depending on your policy controller, you might need to include other optional fields and values. View the following YAML structure for the explained parameter fields:

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name:
  annotations:
    policy.open-cluster-management.io/standards:
    policy.open-cluster-management.io/categories:
    policy.open-cluster-management.io/controls:
spec:
  policy-templates:
  - objectDefinition:
      apiVersion:
      kind:
      metadata:
        name:
      spec:
  remediationAction:
  disabled:

---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementBinding
metadata:
  name:
placementRef:
  name:
  kind:
  apiGroup:
subjects:
- name:
  kind:
  apiGroup:

---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name:
spec:
  clusterConditions:
  - type:
  clusterLabels:
    matchLabels:
    cloud:

```

2.2.2. Policy YAML table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.annotations	Optional. Used to specify a set of security details that describes the set of standards the policy is trying to validate. All annotations documented here are represented as a string that contains a comma-separated list. Note: You can view policy violations based on the standards and categories that you define for your policy on the <i>Policies</i> page, from the console.
annotations.policy.open-cluster-management.io/standards	The name or names of security standards the policy is related to. For example, National Institute of Standards and Technology (NIST) and Payment Card Industry (PCI).
annotations.policy.open-cluster-management.io/categories	A security control category represent specific requirements for one or more standards. For example, a System and Information Integrity category might indicate that your policy contains a data transfer protocol to protect personal information, as required by the HIPAA and PCI standards.
annotations.policy.open-cluster-management.io/controls	The name of the security control that is being checked. For example, the certificate policy controller.
spec.policy-templates	Required. Used to create one or more policies to apply to a managed cluster.
spec.disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.

Field	Description
spec.remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . If specified, the spec.remediationAction value that is defined overrides the remediationAction parameter defined in the child policy, from the policy-templates section. For example, if spec.remediationAction value section is set to enforce , then the remediationAction in the policy-templates section is set to enforce during runtime. Important: Some policies might not support the enforce feature.

2.2.3. Policy sample file

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-role
  annotations:
    policy.open-cluster-management.io/standards: NIST SP 800-53
    policy.open-cluster-management.io/categories: AC Access Control
    policy.open-cluster-management.io/controls: AC-3 Access Enforcement
spec:
  remediationAction: inform
  disabled: false
  policy-templates:
    - objectDefinition:
        apiVersion: policy.open-cluster-management.io/v1
        kind: ConfigurationPolicy
        metadata:
          name: policy-role-example
        spec:
          remediationAction: inform # the policy-template spec.remediationAction is overridden by the
          preceding parameter value for spec.remediationAction.
          severity: high
          namespaceSelector:
            exclude: ["kube-*"]
            include: ["default"]
          object-templates:
            - complianceType: mustonlyhave # role definition should exact match
              objectDefinition:
                apiVersion: rbac.authorization.k8s.io/v1
                kind: Role
                metadata:
                  name: sample-role
                rules:
                  - apiGroups: ["extensions", "apps"]
                    resources: ["deployments"]
                    verbs: ["get", "list", "watch", "delete", "patch"]
  ---
apiVersion: policy.open-cluster-management.io/v1
kind: PlacementBinding

```

```

metadata:
  name: binding-policy-role
placementRef:
  name: placement-policy-role
  kind: PlacementRule
  apiGroup: apps.open-cluster-management.io
subjects:
- name: policy-role
  kind: Policy
  apiGroup: policy.open-cluster-management.io
---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name: placement-policy-role
spec:
  clusterConditions:
  - status: "True"
    type: ManagedClusterConditionAvailable
  clusterSelector:
    matchExpressions:
    - {key: environment, operator: In, values: ["dev"]}

```

See [Managing security policies](#) to create and update a policy. You can also enable and update Red Hat Advanced Cluster Management policy controllers to validate the compliance of your policies. Refer to [Policy controllers](#).

To learn more policy topics, see [Governance](#).

2.3. POLICY CONTROLLERS

Policy controllers monitor and report whether your cluster is compliant with a policy. Use the Red Hat Advanced Cluster Management for Kubernetes policy framework by using the out of the box policy templates to apply predefined policy controllers, and policies. The policy controllers are Kubernetes custom resource definition (CRD) instance. For more information about CRDs, see [Extend the Kubernetes API with CustomResourceDefinitions](#). Policy controllers remediate policy violations to make the cluster status be compliant.

You can create custom policies and policy controllers with the product policy framework. See [Creating a custom policy controller](#) for more information.

Important: Only the configuration policy controller supports the **enforce** feature. You must manually remediate policies, where the policy controller does not support the **enforce** feature.

View the following topics to learn more about the following Red Hat Advanced Cluster Management for Kubernetes policy controllers:

- [Kubernetes configuration policy controller](#)
- [Certificate policy controller](#)
- [IAM policy controller](#)

Refer to [Governance](#) for more topics about managing your policies.

2.3.1. Kubernetes configuration policy controller

Configuration policy controller can be used to configure any Kubernetes resource and apply security policies across your clusters.

The configuration policy controller communicates with the local Kubernetes API server to get the list of your configurations that are in your cluster. For more information about CRDs, see [Extend the Kubernetes API with CustomResourceDefinitions](#).

The configuration policy controller is created on the hub cluster during installation. Configuration policy controller supports the **enforce** feature and monitors the compliance of the following policies:

- [Memory usage policy](#)
- [Namespace policy](#)
- [Image vulnerability policy](#)
- [Pod policy](#)
- [Pod security policy](#)
- [Role policy](#)
- [Role binding policy](#)
- [Security content constraints \(SCC\) policy](#)
- [ETCD encryption policy](#)
- [Compliance operator policy](#)
- [Integrating gatekeeper constraints and constraint templates](#)

When the **remediationAction** for the configuration policy is set to **enforce**, the controller creates a replicate policy on the target managed clusters. You can also use templates in configuration policies. For more information, see [Support for templates in configuration policies](#).

Continue reading to learn more about the configuration policy controller:

- [Configuration policy controller YAML structure](#)
- [Configuration policy sample](#)
- [Configuration policy YAML table](#)

2.3.1.1. Configuration policy controller YAML structure

```
Name:      configuration-policy-example
Namespace:
Labels:
APIVersion: policy.open-cluster-management.io/v1
Kind:      ConfigurationPolicy
Metadata:
  Finalizers:
    finalizer.policy.open-cluster-management.io
Spec:
```

```

Conditions:
Ownership:
NamespaceSelector:
  Exclude:
  Include:
RemediationAction:
Status:
ComplianceDetails:
  Configuration-Policy-Example:
    Default:
    Kube - Public:
Compliant:      Compliant
Events:

```

2.3.1.2. Configuration policy sample

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: policy-config
spec:
  namespaceSelector:
    include: ["default"]
    exclude: []
  remediationAction: inform
  severity: low
  object-templates:
  - complianceType: musthave
    objectDefinition:
      apiVersion: v1
      kind: Pod
      metadata:
        name: pod
      spec:
        containers:
        - image: 'pod-image'
          name:
          ports:
          - containerPort: 80

```

2.3.1.3. Configuration policy YAML table

Table 2.1. Parameter table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to ConfigurationPolicy to indicate the type of policy.
metadata.name	Required. The name of the policy.

Field	Description
spec	Required. Specifications of which configuration policy to monitor and how to remediate them.
spec.namespace	Required for namespaced objects or resources. The namespaces in the hub cluster that the policy is applied to. Enter at least one namespace for the include parameter, which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to.
spec.remediationAction	Required. Specifies the remediation of your policy. Enter inform
spec.remediationAction.severity	Required. Specifies the severity when the policy is non-compliant. Use the following parameter values: low, medium, or high .
spec.remediationAction.complianceType	Required. Used to list expected behavior for roles and other Kubernetes object that must be evaluated or applied to the managed clusters. You must use the following verbs as parameter values: mustonlyhave: Indicates that an object must exist with the exact name and relevant fields. musthave: Indicates an object must exist with the same name as specified object-template. The other fields in the template are a subset of what exists in the object. mustnothave: Indicated that an object with the same name or labels cannot exist and need to be deleted, regardless of the specification or rules.

See the policy samples that use [NIST Special Publication 800-53 \(Rev. 4\)](#) , and are supported by Red Hat Advanced Cluster Management from the [CM-Configuration-Management](#) folder. Learn about how policies are applied on your hub cluster, see [Supported policies](#) for more details.

Learn how to create and customize policies, see [Manage security policies](#) . Refer to [Policy controllers](#) for more details about controllers.

2.3.2. Certificate policy controller

Certificate policy controller can be used to detect certificates that are close to expiring, and detect time durations (hours) that are too long or contain DNS names that fail to match specified patterns.

Configure and customize the certificate policy controller by updating the following parameters in your controller policy:

- **minimumDuration**

- **minimumCADuration**
- **maximumDuration**
- **maximumCADuration**
- **allowedSANPattern**
- **disallowedSANPattern**

Your policy might become non-compliant due to either of the following scenarios:

- When a certificate expires in less than the minimum duration of time or exceeds the maximum time.
- When DNS names fail to match the specified pattern.

The certificate policy controller is created on your managed cluster. The controller communicates with the local Kubernetes API server to get the list of secrets that contain certificates and determine all non-compliant certificates. For more information about CRDs, see [Extend the Kubernetes API with CustomResourceDefinitions](#).

Certificate policy controller does not support the **enforce** feature.

2.3.2.1. Certificate policy controller YAML structure

View the following example of a certificate policy and review the element in the YAML table:

```
apiVersion: policy.open-cluster-management.io/v1
kind: CertificatePolicy
metadata:
  name: certificate-policy-example
  namespace:
  labels: category=system-and-information-integrity
spec:
  namespaceSelector:
    include: ["default"]
    exclude: ["kube-*"]
  remediationAction:
  severity:
  minimumDuration:
  minimumCADuration:
  maximumDuration:
  maximumCADuration:
  allowedSANPattern:
  disallowedSANPattern:
```

2.3.2.1.1. Certificate policy controller YAML table

Table 2.2. Parameter table

Field	Description
-------	-------------

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to CertificatePolicy to indicate the type of policy.
metadata.name	Required. The name to identify the policy.
metadata.namespace	Required. The namespaces within the managed cluster where the policy is created.
metadata.labels	Optional. In a certificate policy, the category=system-and-information-integrity label categorizes the policy and facilitates querying the certificate policies. If there is a different value for the category key in your certificate policy, the value is overridden by the certificate controller.
spec	Required. Specifications of which certificates to monitor and refresh.
spec.namespaceSelector	Required. Managed cluster namespace to which you want to apply the policy. Enter parameter values for Include and Exclude . Notes: <ul style="list-style-type: none"> • When you create multiple certificate policies and apply them to the same managed cluster, each policy namespaceSelector must be assigned a different value. • If the namespaceSelector for the certificate policy controller does not match any namespace, the policy is considered compliant.
spec.remediationAction	Required. Specifies the remediation of your policy. Set the parameter value to inform . Certificate policy controller only supports inform feature.
spec.severity	Optional. Informs the user of the severity when the policy is non-compliant. Use the following parameter values: low , medium , or high .
spec.minimumDuration	Required. When a value is not specified, the default value is 100h . This parameter specifies the smallest duration (in hours) before a certificate is considered non-compliant. The parameter value uses the time duration format from Golang. See Golang Parse Duration for more information.

Field	Description
spec.minimumCADuration	Optional. Set a value to identify signing certificates that might expire soon with a different value from other certificates. If the parameter value is not specified, the CA certificate expiration is the value used for the minimumDuration . See Golang Parse Duration for more information.
spec.maximumDuration	Optional. Set a value to identify certificates that have been created with a duration that exceeds your desired limit. The parameter uses the time duration format from Golang. See Golang Parse Duration for more information.
spec.maximumCADuration	Optional. Set a value to identify signing certificates that have been created with a duration that exceeds your defined limit. The parameter uses the time duration format from Golang. See Golang Parse Duration for more information.
spec.allowedSANPattern	Optional. A regular expression that must match every SAN entry that you have defined in your certificates. This parameter checks DNS names against patterns. See the Golang Regular Expression syntax for more information.
spec.disallowedSANPattern	Optional. A regular expression that must not match any SAN entries you have defined in your certificates. This parameter checks DNS names against patterns. Note: To detect wild-card certificate, use the following SAN pattern: disallowedSANPattern: "[*]" See the Golang Regular Expression syntax for more information.

2.3.2.2. Certificate policy sample

When your certificate policy controller is created on your hub cluster, a replicated policy is created on your managed cluster. See [policy-certificate.yaml](#) to view the certificate policy sample.

Learn how to manage a certificate policy, see [Managing certificate policies](#) for more details. Refer to [Policy controllers](#) for more topics.

2.3.3. IAM policy controller

The Identity and Access Management (IAM) policy controller can be used to receive notifications about IAM policies that are non-compliant. The compliance check is based on the parameters that you configure in the IAM policy.

The IAM policy controller monitors for the desired maximum the number of users with a particular cluster role (i.e. **ClusterRole**) in your cluster. The default cluster role to monitor is **cluster-admin**. The IAM policy controller communicates with the local Kubernetes API server. For more information, see [Extend the Kubernetes API with CustomResourceDefinitions](#).

The IAM policy controller runs on your managed cluster. View the following sections to learn more:

- [IAM policy YAML structure](#)
- [IAM policy YAML table](#)
- [IAM policy sample](#)

2.3.3.1. IAM policy YAML structure

View the following example of an IAM policy and review the parameters in the YAML table:

```
apiVersion: policy.open-cluster-management.io/v1
kind: iamPolicy
metadata:
  name:
spec:
  clusterRole:
  severity:
  remediationAction:
  maxClusterRoleBindingUsers:
```

2.3.3.2. IAM policy YAML table

View the following parameter table for descriptions:

Table 2.3. Parameter table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
spec	Required. Add configuration details for your policy.
spec.clusterRole	The cluster role (i.e. ClusterRole) to monitor. This defaults to cluster-admin if not specified.
spec.severity	Optional. Informs the user of the severity when the policy is non-compliant. Use the following parameter values: low , medium , or high .

Field	Description
spec.remediationAction	Optional. Specifies the remediation of your policy. Enter inform .
spec.maxClusterRoleBindingUsers	Required. Maximum number of IAM role bindings that are available before a policy is considered non-compliant.

2.3.3.3. IAM policy sample

See [policy-limitclusteradmin.yaml](#) to view the IAM policy sample. Learn how to manage an IAM policy, see [Managing IAM policies](#) for more details. Refer to [Policy controllers](#) for more topics.

2.3.4. Creating a custom policy controller

Learn to write, apply, view, and update your custom policy controllers. You can create a YAML file for your policy controller to deploy onto your cluster. View the following sections to create a policy controller:

2.3.4.1. Writing a policy controller

Use the policy controller framework that is in the [governance-policy-framework](#) repository. Complete the following steps to create a policy controller:

1. Clone the **governance-policy-framework** repository by running the following command:

```
git clone git@github.com:stolostron/governance-policy-framework.git
```

2. Customize the controller policy by updating the policy schema definition. Your policy might resemble the following content:

```
metadata:
  name: samplepolicies.policies.open-cluster-management.io
spec:
  group: policy.open-cluster-management.io
  names:
    kind: SamplePolicy
    listKind: SamplePolicyList
    plural: samplepolicies
    singular: samplepolicy
```

3. Update the policy controller to watch for the **SamplePolicy** kind. Run the following command:

```
for file in $(find . -name "*.go" -type f); do sed -i "" "s/SamplePolicy/g" $file; done
for file in $(find . -name "*.go" -type f); do sed -i "" "s/samplepolicy-controller/samplepolicy-controller/g" $file; done
```

4. Recompile and run the policy controller by completing the following steps:
 - a. Log in to your cluster.

- b. Select the user icon, then click **Configure client**.
- c. Copy and paste the configuration information into your command line, and press **Enter**.
- d. Run the following commands to apply your policy CRD and start the controller:

```
export GO111MODULE=on

kubectl apply -f deploy/crds/policy.open-cluster-management.io_samplepolicies_crd.yaml

export WATCH_NAMESPACE=<cluster_namespace_on_hub>

go run cmd/manager/main.go
```

You might receive the following output that indicates that your controller runs:

```
{"level":"info","ts":1578503280.511274,"logger":"controller-
runtime.manager","msg":"starting metrics server","path":"/metrics"}
{"level":"info","ts":1578503281.215883,"logger":"controller-
runtime.controller","msg":"Starting Controller","controller":"samplepolicy-controller"}
{"level":"info","ts":1578503281.3203468,"logger":"controller-
runtime.controller","msg":"Starting workers","controller":"samplepolicy-controller","worker
count":1}
Waiting for policies to be available for processing...
```

- e. Create a policy and verify that the controller retrieves it and applies the policy onto your cluster. Run the following command:

```
kubectl apply -f deploy/crds/policy.open-cluster-management.io_samplepolicies_crd.yaml
```

When the policy is applied, a message appears to indicate that policy is monitored and detected by your custom controller. The message might resemble the following contents:

```
{"level":"info","ts":1578503685.643426,"logger":"controller_samplepolicy","msg":"Reconciling
SamplePolicy","Request.Namespace":"default","Request.Name":"example-samplepolicy"}
{"level":"info","ts":1578503685.855259,"logger":"controller_samplepolicy","msg":"Reconciling
SamplePolicy","Request.Namespace":"default","Request.Name":"example-samplepolicy"}
Available policies in namespaces:
namespace = kube-public; policy = example-samplepolicy
namespace = default; policy = example-samplepolicy
namespace = kube-node-lease; policy = example-samplepolicy
```

5. Check the **status** field for compliance details by running the following command:

```
kubectl describe SamplePolicy example-samplepolicy -n default
```

Your output might resemble the following contents:

```
status:
  compliancyDetails:
    example-samplepolicy:
      cluster-wide:
        - 5 violations detected in namespace `cluster-wide`, there are 0 users violations
          and 5 groups violations
```

```

default:
- 0 violations detected in namespace `default`, there are 0 users violations
  and 0 groups violations
kube-node-lease:
- 0 violations detected in namespace `kube-node-lease`, there are 0 users violations
  and 0 groups violations
kube-public:
- 1 violations detected in namespace `kube-public`, there are 0 users violations
  and 1 groups violations
compliant: NonCompliant

```

6. Change the policy rules and policy logic to introduce new rules for your policy controller. Complete the following steps:
 - a. Add new fields in your YAML file by updating the **SamplePolicySpec**. Your specification might resemble the following content:

```

spec:
description: SamplePolicySpec defines the desired state of SamplePolicy
properties:
labelSelector:
additionalProperties:
type: string
type: object
maxClusterRoleBindingGroups:
type: integer
maxClusterRoleBindingUsers:
type: integer
maxRoleBindingGroupsPerNamespace:
type: integer
maxRoleBindingUsersPerNamespace:
type: integer

```

- b. Update the **SamplePolicySpec** structure in the [samplepolicy_controller.go](#) with new fields.
- c. Update the **PeriodicallyExecSamplePolicies** function in the **samplepolicy_controller.go** file with new logic to run the policy controller. View an example of the **PeriodicallyExecSamplePolicies** field, see [stolostron/multicloud-operators-policy-controller](#).
- d. Recompile and run the policy controller. See [Writing a policy controller](#)

Your policy controller is functional.

2.3.4.2. Deploying your controller to the cluster

Deploy your custom policy controller to your cluster and integrate the policy controller with the *Governance* dashboard. Complete the following steps:

1. Build the policy controller image by running the following command:

```

make build
docker build . -f build/Dockerfile -t <username>/multicloud-operators-policy-controller:latest

```

2. Run the following command to push the image to a repository of your choice. For example, run the following commands to push the image to Docker Hub:

```
docker login  
docker push <username>/multicloud-operators-policy-controller
```

3. Configure **kubectrl** to point to a cluster managed by Red Hat Advanced Cluster Management for Kubernetes.
4. Replace the operator manifest to use the built-in image name and update the namespace to watch for policies. The namespace must be the cluster namespace. Your manifest might resemble the following contents:

```
sed -i "" 's|open-cluster-management/multicloud-operators-policy-controller|ycao/multicloud-operators-policy-controller|g' deploy/operator.yaml  
sed -i "" 's|value: default|value: <namespace>|g' deploy/operator.yaml
```

5. Update the RBAC role by running the following commands:

```
sed -i "" 's|samplepolicies|testpolicies|g' deploy/cluster_role.yaml  
sed -i "" 's|namespace: default|namespace: <namespace>|g'  
deploy/cluster_role_binding.yaml
```

6. Deploy your policy controller to your cluster:

- a. Set up a service account for cluster by running the following command:

```
kubectl apply -f deploy/service_account.yaml -n <namespace>
```

- b. Set up RBAC for the operator by running the following commands:

```
kubectl apply -f deploy/role.yaml -n <namespace>  
kubectl apply -f deploy/role_binding.yaml -n <namespace>
```

- c. Set up RBAC for your policy controller. Run the following commands:

```
kubectl apply -f deploy/cluster_role.yaml  
kubectl apply -f deploy/cluster_role_binding.yaml
```

- d. Set up a custom resource definition (CRD) by running the following command:

```
kubectl apply -f deploy/crds/policies.open-cluster-management.io_samplepolicies_crd.yaml
```

- e. Deploy the **multicloud-operator-policy-controller** by running the following command:

```
kubectl apply -f deploy/operator.yaml -n <namespace>
```

- f. Verify that the controller is functional by running the following command:

```
kubectl get pod -n <namespace>
```

7. You must integrate your policy controller by creating a **policy-template** for the controller to monitor. For more information, see [Creating a cluster security policy from the console](#) .

2.3.4.2.1. Scaling your controller deployment

Policy controller deployments do not support deletion or removal. You can scale your deployment to update which pods the deployment is applied to. Complete the following steps:

1. Log in to your managed cluster.
2. Navigate to the deployment for your custom policy controller.
3. Scale the deployment. When you scale your deployment to zero pods, the policy controller deployment is disabled.

For more information on deployments, see [OpenShift Container Platform Deployments](#).

Your policy controller is deployed and integrated on your cluster. View the product policy controllers, see [Policy controllers](#) for more information.

2.4. INTEGRATE THIRD-PARTY POLICY CONTROLLERS

Integrate third-party policies to create custom annotations within the policy templates to specify one or more compliance standards, control categories, and controls.

You can also use the third-party party policies from the [policy-collection/community](#).

Learn to integrate the following third-party policies:

- [Integrating gatekeeper constraints and constraint templates](#)

2.5. SUPPORTED POLICIES

View the supported policies to learn how to define rules, processes, and controls on the hub cluster when you create and manage policies in Red Hat Advanced Cluster Management for Kubernetes.

Note: You can copy and paste an existing policy in to the *Policy YAML*. The values for the parameter fields are automatically entered when you paste your existing policy. You can also search the contents in your policy YAML file with the search feature.

View the following policy samples to view how specific policies are applied:

- [Image vulnerability policy](#)
- [Memory usage policy](#)
- [Namespace policy](#)
- [Pod policy](#)
- [Pod security policy](#)
- [Role policy](#)
- [Role binding policy](#)

- [Security context constraints policy](#)
- [ETCD encryption policy](#)
- [Compliance operator policy](#)
- [E8 scan policy](#)
- [OpenShift CIS scan policy](#)

Refer to [Governance](#) for more topics.

2.5.1. Memory usage policy

Kubernetes configuration policy controller monitors the status of the memory usage policy. Use the memory usage policy to limit or restrict your memory and compute usage. For more information, see *Limit Ranges* in the [Kubernetes documentation](#).

Learn more details about the memory usage policy structure in the following sections:

- [Memory usage policy YAML structure](#)
- [Memory usage policy table](#)
- [Memory usage policy sample](#)

2.5.1.1. Memory usage policy YAML structure

Your memory usage policy might resemble the following YAML file:

```
apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-limitrange
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
  - complianceType:
    objectDefinition:
      apiVersion:
      kind:
      metadata:
        name:
      spec:
        limits:
        - default:
            memory:
          defaultRequest:
            memory:
          type:
      ...
```


2.5.1.2. Memory usage policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.1.3. Memory usage policy sample

See the [policy-limitmemory.yaml](#) to view a sample of the policy. View [Managing memory usage policies](#) for more information. Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the controller.

2.5.2. Namespace policy

Kubernetes configuration policy controller monitors the status of your namespace policy. Apply the namespace policy to define specific rules for your namespace.

Learn more details about the namespace policy structure in the following sections:

- [Namespace policy YAML structure](#)
- [Namespace policy YAML table](#)
- [Namespace policy sample](#)

2.5.2.1. Namespace policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-namespace-1
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
  - complianceType:
    objectDefinition:
      kind:
      apiVersion:
      metadata:
        name:
    ...

```

2.5.2.2. Namespace policy YAML table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.

Field	Description
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.2.3. Namespace policy sample

See [policy-namespace.yaml](#) to view the policy sample.

View [Managing namespace policies](#) for more information. Refer to [Kubernetes configuration policy controller](#) to learn about other configuration policies.

2.5.3. Image vulnerability policy

Apply the image vulnerability policy to detect if container images have vulnerabilities by leveraging the Container Security Operator. The policy installs the Container Security Operator on your managed cluster if it is not installed.

The image vulnerability policy is checked by the Kubernetes configuration policy controller. For more information about the Security Operator, see the *Container Security Operator* from the [Quay repository](#).

Notes:

- Image vulnerability policy is not functional during a disconnected installation.
- The [Image vulnerability policy](#) is not supported on the IBM Power and IBM Z architectures. It relies on the [Quay Container Security Operator](#). There are no **ppc64le** or **s390x** images in the [container-security-operator registry](#).

View the following sections to learn more:

- [Image vulnerability policy YAML structure](#)
- [Image vulnerability policy YAML table](#)
- [Image vulnerability policy sample](#)

2.5.3.1. Image vulnerability policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-imagemanifestvulnpolicy
  namespace: default
  annotations:
    policy.open-cluster-management.io/standards: NIST-CSF
    policy.open-cluster-management.io/categories: DE.CM Security Continuous Monitoring
    policy.open-cluster-management.io/controls: DE.CM-8 Vulnerability Scans
spec:
  remediationAction:
  disabled:
  policy-templates:
  - objectDefinition:
    apiVersion: policy.open-cluster-management.io/v1
    kind: ConfigurationPolicy
    metadata:
      name:
    spec:
      remediationAction:
      severity: high
      object-templates:
      - complianceType:
        objectDefinition:
          apiVersion: operators.coreos.com/v1alpha1
          kind: Subscription
          metadata:
            name: container-security-operator
            namespace:
          spec:
            channel:
            installPlanApproval:
            name:
            source:
            sourceNamespace:
      - objectDefinition:
        apiVersion: policy.open-cluster-management.io/v1
        kind: ConfigurationPolicy
        metadata:
          name:
        spec:
          remediationAction:
          severity:
          namespaceSelector:
            exclude:
            include:
          object-templates:
            - complianceType:

```

```

    objectDefinition:
      apiVersion: secscan.quay.redhat.com/v1alpha1
      kind: ImageManifestVuln # checking for a kind
---
apiVersion: policy.open-cluster-management.io/v1
kind: PlacementBinding
metadata:
  name: binding-policy-imagemanifestvulnpolicy
  namespace: default
placementRef:
  name:
  kind:
  apiGroup:
subjects:
- name:
  kind:
  apiGroup:
---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name: placement-policy-imagemanifestvulnpolicy
  namespace: default
spec:
  clusterConditions:
  - status:
    type:
  clusterSelector:
    matchExpressions:
      [] # selects all clusters if not specified

```

2.5.3.2. Image vulnerability policy YAML table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.

Field	Description
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.3.3. Image vulnerability policy sample

See [policy-imagemanifestvuln.yaml](#). View [Managing image vulnerability policies](#) for more information. Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the configuration controller.

2.5.4. Pod policy

Kubernetes configuration policy controller monitors the status of your pod policies. Apply the pod policy to define the container rules for your pods. A pod must exist in your cluster to use this information.

Learn more details about the pod policy structure in the following sections:

- [Pod policy YAML structure](#)
- [Pod policy table](#)
- [Pod policy sample](#)

2.5.4.1. Pod policy YAML structure

```
apiVersion: policy.open-cluster-management.io/v1
kind: Policy
```

```

metadata:
  name: policy-pod
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
  - complianceType:
    objectDefinition:
      apiVersion:
      kind: Pod # pod must exist
      metadata:
        name:
      spec:
        containers:
        - image:
          name:
          ports:
        - containerPort:
    ...

```

2.5.4.2. Pod policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.

Field	Description
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.4.3. Pod policy sample

See [policy-pod.yaml](#) to view the policy sample. To learn how to manage a pod policy, see [Managing pod policies](#) for more details.

Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the configuration controller. See [Manage security policies](#) to manage other policies.

2.5.5. Pod security policy

Kubernetes configuration policy controller monitors the status of the pod security policy. Apply a pod security policy to secure pods and containers. For more information, see *Pod Security Policies* in the [Kubernetes documentation](#).

Learn more details about the pod security policy structure in the following sections:

- [Pod security policy YAML structure](#)
- [Pod security policy table](#)
- [Pod security policy sample](#)

2.5.5.1. Pod security policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-podsecuritypolicy
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:

```



```

object-templates:
- complianceType:
  objectDefinition:
    apiVersion:
    kind: PodSecurityPolicy # no privileged pods
    metadata:
      name:
      annotations:
    spec:
      privileged:
      allowPrivilegeEscalation:
      allowedCapabilities:
      volumes:
      hostNetwork:
      hostPorts:
      hostIPC:
      hostPID:
      runAsUser:
        rule:
      seLinux:
        rule:
      supplementalGroups:
        rule:
      fsGroup:
        rule:
    ...

```

2.5.5.2. Pod security policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.

Field	Description
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.5.3. Pod security policy sample

See [policy-psp.yaml](#) to view the sample policy. View [Managing pod security policies](#) for more information. Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the controller.

2.5.6. Role policy

Kubernetes configuration policy controller monitors the status of role policies. Define roles in the **object-template** to set rules and permissions for specific roles in your cluster.

Learn more details about the role policy structure in the following sections:

- [Role policy YAML structure](#)
- [Role policy table](#)
- [Role policy sample](#)

2.5.6.1. Role policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-role
  namespace:
  annotations:
    policy.open-cluster-management.io/standards: NIST-CSF
    policy.open-cluster-management.io/categories: PR.AC Identity Management Authentication and
Access Control
    policy.open-cluster-management.io/controls: PR.AC-4 Access Control
spec:

```

```

remediationAction: inform
disabled: false
policy-templates:
- objectDefinition:
  apiVersion: policy.open-cluster-management.io/v1
  kind: ConfigurationPolicy
  metadata:
    name: policy-role-example
  spec:
    remediationAction: inform # will be overridden by remediationAction in parent policy
    severity: high
    namespaceSelector:
      exclude: ["kube-*"]
      include: ["default"]
    object-templates:
    - complianceType: mustonlyhave # role definition should exact match
      objectDefinition:
        apiVersion: rbac.authorization.k8s.io/v1
        kind: Role
        metadata:
          name: sample-role
        rules:
        - apiGroups: ["extensions", "apps"]
          resources: ["deployments"]
          verbs: ["get", "list", "watch", "delete", "patch"]
---

```

```

apiVersion: policy.open-cluster-management.io/v1
kind: PlacementBinding
metadata:
  name: binding-policy-role
  namespace:
placementRef:
  name: placement-policy-role
  kind: PlacementRule
  apiGroup: apps.open-cluster-management.io
subjects:
- name: policy-role
  kind: Policy
  apiGroup: policy.open-cluster-management.io
---

```

```

apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name: placement-policy-role
  namespace:
spec:
  clusterConditions:
  - type: ManagedClusterConditionAvailable
    status: "True"
  clusterSelector:
    matchExpressions:
    []
...

```

2.5.6.2. Role policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.6.3. Role policy sample

Apply a role policy to set rules and permissions for specific roles in your cluster. For more information on roles, see [Role-based access control](#). View a sample of a role policy, see [policy-role.yaml](#).

To learn how to manage role policies, refer to [Managing role policies](#) for more information. See the [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored the controller.

2.5.7. Role binding policy

Kubernetes configuration policy controller monitors the status of your role binding policy. Apply a role binding policy to bind a policy to a namespace in your managed cluster.

Learn more details about the namespace policy structure in the following sections:

- [Role binding policy YAML structure](#)
- [Role binding policy table](#)
- [Role binding policy sample](#)

2.5.7.1. Role binding policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name:
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
  - complianceType:
    objectDefinition:
      kind: RoleBinding # role binding must exist
      apiVersion: rbac.authorization.k8s.io/v1
      metadata:
        name: operate-pods-rolebinding
      subjects:
      - kind: User
        name: admin # Name is case sensitive
      apiGroup:
      roleRef:
        kind: Role #this must be Role or ClusterRole
        name: operator # this must match the name of the Role or ClusterRole you wish to bind to
        apiGroup: rbac.authorization.k8s.io
    ...

```

2.5.7.2. Role binding policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name to identify the policy resource.

Field	Description
metadata.namespaces	Required. The namespace within the managed cluster where the policy is created.
spec	Required. Specifications of how compliance violations are identified and fixed.
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.complianceType	Required. Set the value to "musthave"
spec.namespace	Required. Managed cluster namespace to which you want to apply the policy. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
spec.remediationAction	Required. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
spec.object-template	Required. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

2.5.7.3. Role binding policy sample

See [policy-rolebinding.yaml](#) to view the policy sample. Learn how to manage a role binding policy, see [Managing role binding policies](#) for more details. Refer to [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Manage security policies](#) to manage other policies.

2.5.8. Security Context Constraints policy

Kubernetes configuration policy controller monitors the status of your Security Context Constraints (SCC) policy. Apply an Security Context Constraints (SCC) policy to control permissions for pods by defining conditions in the policy.

Learn more details about SCC policies in the following sections:

- [SCC policy YAML structure](#)

- [SCC policy table](#)
- [SCC policy sample](#)

2.5.8.1. SCC policy YAML structure

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-scc
  namespace: open-cluster-management-policies
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
    - complianceType:
      objectDefinition:
        apiVersion:
        kind: SecurityContextConstraints # restricted scc
        metadata:
          annotations:
            kubernetes.io/description:
          name: sample-restricted-scc
        allowHostDirVolumePlugin:
        allowHostIPC:
        allowHostNetwork:
        allowHostPID:
        allowHostPorts:
        allowPrivilegeEscalation:
        allowPrivilegedContainer:
        allowedCapabilities:
        defaultAddCapabilities:
        fsGroup:
          type:
        groups:
          - system:
        priority:
        readOnlyRootFilesystem:
        requiredDropCapabilities:
        runAsUser:
          type:
        seLinuxContext:
          type:
        supplementalGroups:
          type:
        users:
        volumes:

```

2.5.8.2. SCC policy table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy.
metadata.name	Required. The name to identify the policy resource.
metadata.namespace	Required. The namespace within the managed cluster where the policy is created.
spec.complianceType	Required. Set the value to "musthave"
spec.remediationAction	Required. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
spec.namespace	Required. Managed cluster namespace to which you want to apply the policy. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
spec.object-template	Required. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters.

For explanations on the contents of a SCC policy, see [Managing Security Context Constraints](#) from the OpenShift Container Platform documentation.

2.5.8.3. SCC policy sample

Apply a Security context constraints (SCC) policy to control permissions for pods by defining conditions in the policy. For more information see, [Managing Security Context Constraints \(SCC\)](#).

See [policy-scc.yaml](#) to view the policy sample. To learn how to manage an SCC policy, see [Managing Security Context Constraints policies](#) for more details.

Refer to [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Manage security policies](#) to manage other policies.

2.5.9. ETCD encryption policy

Apply the **etcd-encryption** policy to detect, or enable encryption of sensitive data in the ETCD data-store. Kubernetes configuration policy controller monitors the status of the **etcd-encryption** policy. For more information, see [Encrypting etcd data](#) in the OpenShift Container Platform documentation. **Note:** The ETCD encryption policy only supports Red Hat OpenShift Container Platform 4 and later.

Learn more details about the **etcd-encryption** policy structure in the following sections:

- [ETCD encryption policy YAML structure](#)
- [ETCD encryption policy table](#)
- [Etdc encryption policy sample](#)

2.5.9.1. ETCD encryption policy YAML structure

Your **etcd-encryption** policy might resemble the following YAML file:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: policy-etcdencryption
  namespace:
spec:
  complianceType:
  remediationAction:
  namespaces:
    exclude:
    include:
  object-templates:
  - complianceType:
    objectDefinition:
      apiVersion: config.openshift.io/v1
      kind: APIServer
      metadata:
        name: cluster
      spec:
        encryption:
          type:
    ...
```

2.5.9.2. ETCD encryption policy table

Table 2.4. Parameter table

Field	Description
apiVersion	Required. Set the value to policy.open-cluster-management.io/v1 .
kind	Required. Set the value to Policy to indicate the type of policy, for example, ConfigurationPolicy .

Field	Description
metadata.name	Required. The name for identifying the policy resource.
metadata.namespaces	Optional.
spec.namespace	Required. The namespaces within the hub cluster that the policy is applied to. Enter parameter values for include , which are the namespaces you want to apply to the policy to. The exclude parameter specifies the namespaces you explicitly do not want to apply the policy to. Note: A namespace that is specified in the object template of a policy controller overrides the namespace in the corresponding parent policy.
remediationAction	Optional. Specifies the remediation of your policy. The parameter values are enforce and inform . Important: Some policies might not support the enforce feature.
disabled	Required. Set the value to true or false . The disabled parameter provides the ability to enable and disable your policies.
spec.complianceType	Required. Set the value to "musthave"
spec.object-template	Optional. Used to list any other Kubernetes object that must be evaluated or applied to the managed clusters. See Encrypting etcd data in the OpenShift Container Platform documentation.

2.5.9.3. Etcd encryption policy sample

See [policy-etcdencryption.yaml](#) for the policy sample. View [Managing ETCD encryption policies](#) for more information. Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the controller.

2.5.10. Integrating gatekeeper constraints and constraint templates

Gatekeeper is a validating webhook that enforces custom resource definition (CRD) based policies that are run with the Open Policy Agent (OPA). You can install gatekeeper on your cluster by using the gatekeeper operator policy. Gatekeeper policy can be used to evaluate Kubernetes resource compliance. You can leverage a OPA as the policy engine, and use Rego as the policy language.

The gatekeeper policy is created as a Kubernetes configuration policy in Red Hat Advanced Cluster Management. Gatekeeper policies include constraint templates (**ConstraintTemplates**) and **Constraints**, audit templates, and admission templates. For more information, see the [Gatekeeper upstream repository](#).

Red Hat Advanced Cluster Management supports version 3.3.0 for Gatekeeper and applies the following constraint templates in your Red Hat Advanced Cluster Management gatekeeper policy:

- **ConstraintTemplates** and constraints: Use the **policy-gatekeeper-k8srequiredlabels** policy to create a gatekeeper constraint template on the managed cluster.

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: policy-gatekeeper-k8srequiredlabels
spec:
  remediationAction: enforce # will be overridden by remediationAction in parent policy
  severity: low
  object-templates:
    - complianceType: musthave
      objectDefinition:
        apiVersion: templates.gatekeeper.sh/v1beta1
        kind: ConstraintTemplate
        metadata:
          name: k8srequiredlabels
        spec:
          crd:
            spec:
              names:
                kind: K8sRequiredLabels
              validation:
                # Schema for the `parameters` field
                openAPIV3Schema:
                  properties:
                    labels:
                      type: array
                      items: string
              targets:
                - target: admission.k8s.gatekeeper.sh
                  rego: |
                    package k8srequiredlabels
                    violation[{"msg": msg, "details": {"missing_labels": missing}}] {
                      provided := {label | input.review.object.metadata.labels[label]}
                      required := {label | label := input.parameters.labels[_]}
                      missing := required - provided
                      count(missing) > 0
                      msg := sprintf("you must provide labels: %v", [missing])
                    }
            }
          - complianceType: musthave
            objectDefinition:
              apiVersion: constraints.gatekeeper.sh/v1beta1
              kind: K8sRequiredLabels
              metadata:
                name: ns-must-have-gk
              spec:
                match:
                  kinds:
                    - apiGroups: [""]
                      kinds: ["Namespace"]
                namespaces:
                  - e2etestsuccess

```

```

- e2etestfail
parameters:
  labels: ["gatekeeper"]

```

- audit template: Use the **policy-gatekeeper-audit** to periodically check and evaluate existing resources against the gatekeeper policies that are enforced to detect existing misconfigurations.

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: policy-gatekeeper-audit
spec:
  remediationAction: inform # will be overridden by remediationAction in parent policy
  severity: low
  object-templates:
    - complianceType: musthave
      objectDefinition:
        apiVersion: constraints.gatekeeper.sh/v1beta1
        kind: K8sRequiredLabels
        metadata:
          name: ns-must-have-gk
        status:
          totalViolations: 0

```

- admission template: Use the **policy-gatekeeper-admission** to check for misconfigurations that are created by the gatekeeper admission webhook:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: policy-gatekeeper-admission
spec:
  remediationAction: inform # will be overridden by remediationAction in parent policy
  severity: low
  object-templates:
    - complianceType: mustnothave
      objectDefinition:
        apiVersion: v1
        kind: Event
        metadata:
          namespace: openshift-gatekeeper-system # set it to the actual namespace where gatekeeper is running if different
        annotations:
          constraint_action: deny
          constraint_kind: K8sRequiredLabels
          constraint_name: ns-must-have-gk
          event_type: violation

```

See [policy-gatekeeper-sample.yaml](#) for more details.

Learn how to use Red Hat Advanced Cluster Management gatekeeper operator policy to install gatekeeper and create a Red Hat Advanced Cluster Management gatekeeper operator policy, see [Managing gatekeeper operator policies](#) for more details. Refer to [Governance](#) for more topics on the security framework.

2.5.11. Compliance operator policy

Compliance operator is an operator that runs OpenSCAP and allows you to keep your Red Hat OpenShift Container Platform cluster compliant with the security benchmark that you need. You can install the compliance operator on your managed cluster by using the compliance operator policy.

The compliance operator policy is created as a Kubernetes configuration policy in Red Hat Advanced Cluster Management. OpenShift Container Platform 4.7 and 4.6, support the compliance operator policy. For more information, see [Understanding the Compliance Operator](#) in the OpenShift Container Platform documentation for more details.

Note: The [Compliance operator policy](#) relies on the OpenShift Container Platform Compliance Operator, which is not supported on the IBM Power or IBM Z architectures. See [Understanding the Compliance Operator](#) in the OpenShift Container Platform documentation for more information about the Compliance Operator.

2.5.11.1. Compliance operator resources

When you create a compliance operator policy, the following resources are created:

- A compliance operator namespace (**openshift-compliance**) for the operator installation:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: comp-operator-ns
spec:
  remediationAction: inform # will be overridden by remediationAction in parent policy
  severity: high
  object-templates:
  - complianceType: musthave
    objectDefinition:
      apiVersion: v1
      kind: Namespace
      metadata:
        name: openshift-compliance
```

- An operator group (**compliance-operator**) to specify the target namespace:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: comp-operator-operator-group
spec:
  remediationAction: inform # will be overridden by remediationAction in parent policy
  severity: high
  object-templates:
  - complianceType: musthave
    objectDefinition:
      apiVersion: operators.coreos.com/v1
      kind: OperatorGroup
      metadata:
        name: compliance-operator
        namespace: openshift-compliance
```

```
spec:
  targetNamespaces:
    - openshift-compliance
```

- A subscription (**comp-operator-subscription**) to reference the name and channel. The subscription pulls the profile, as a container, that it supports:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: comp-operator-subscription
spec:
  remediationAction: inform # will be overridden by remediationAction in parent policy
  severity: high
  object-templates:
    - complianceType: musthave
      objectDefinition:
        apiVersion: operators.coreos.com/v1alpha1
        kind: Subscription
        metadata:
          name: compliance-operator
          namespace: openshift-compliance
        spec:
          channel: "4.7"
          installPlanApproval: Automatic
          name: compliance-operator
          source: redhat-operators
          sourceNamespace: openshift-marketplace
```

After you install the compliance operator policy, the following pods are created: **compliance-operator**, **ocp4**, and **rhcos4**. See a sample of the [policy-compliance-operator-install.yaml](#).

You can also create and apply the E8 scan policy and OpenShift CIS scan policy, after you have installed the compliance operator. For more information, see [E8 scan policy](#) and [OpenShift CIS scan policy](#).

To learn about managing compliance operator policies, see [Managing compliance operator policies](#) for more details. Refer to [Kubernetes configuration policy controller](#) for more topics about configuration policies.

2.5.12. E8 scan policy

An Essential 8 (E8) scan policy deploys a scan that checks the master and worker nodes for compliance with the E8 security profiles. You must install the compliance operator to apply the E8 scan policy.

The E8 scan policy is created as a Kubernetes configuration policy in Red Hat Advanced Cluster Management. OpenShift Container Platform 4.7 and 4.6, support the E8 scan policy. For more information, see *Understanding the Compliance Operator* in the [OpenShift Container Platform documentation](#) for more details.

2.5.12.1. E8 scan policy resources

When you create an E8 scan policy the following resources are created:

- A **ScanSettingBinding** resource (**e8**) to identify which profiles to scan:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: compliance-suite-e8
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: musthave # this template checks if scan has completed by checking the
      status field
      objectDefinition:
        apiVersion: compliance.openshift.io/v1alpha1
        kind: ScanSettingBinding
        metadata:
          name: e8
          namespace: openshift-compliance
        profiles:
          - apiGroup: compliance.openshift.io/v1alpha1
            kind: Profile
            name: ocp4-e8
          - apiGroup: compliance.openshift.io/v1alpha1
            kind: Profile
            name: rhcos4-e8
        settingsRef:
          apiGroup: compliance.openshift.io/v1alpha1
          kind: ScanSetting
          name: default

```

- A **ComplianceSuite** resource (**compliance-suite-e8**) to verify if the scan is complete by checking the **status** field:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: compliance-suite-e8
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: musthave # this template checks if scan has completed by checking the
      status field
      objectDefinition:
        apiVersion: compliance.openshift.io/v1alpha1
        kind: ComplianceSuite
        metadata:
          name: e8
          namespace: openshift-compliance
        status:
          phase: DONE

```

- A **ComplianceCheckResult** resource (**compliance-suite-e8-results**) which reports the results of the scan suite by checking the **ComplianceCheckResult** custom resources (CR):

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy

```

```

metadata:
  name: compliance-suite-e8-results
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: mustnothave # this template reports the results for scan suite: e8 by
      looking at ComplianceCheckResult CRs
    objectDefinition:
      apiVersion: compliance.openshift.io/v1alpha1
      kind: ComplianceCheckResult
      metadata:
        namespace: openshift-compliance
        labels:
          compliance.openshift.io/check-status: FAIL
          compliance.openshift.io/suite: e8

```

See a sample of the [policy-compliance-operator-e8-scan.yaml](#). For more information on creating an E8 scan policy, see [Managing E8 scan policies](#).

2.5.13. OpenShift CIS scan policy

An OpenShift CIS scan policy deploys a scan that checks the master and worker nodes for compliance with the OpenShift CIS security benchmark. You must install the compliance operator to apply the OpenShift CIS policy.

The OpenShift CIS scan policy is created as a Kubernetes configuration policy in Red Hat Advanced Cluster Management. OpenShift Container Platform 4.8, 4.7, and 4.6, support the OpenShift CIS scan policy. For more information, see [Understanding the Compliance Operator](#) in the OpenShift Container Platform documentation for more details.

2.5.13.1. OpenShift CIS resources

When you create an OpenShift CIS scan policy the following resources are created:

- A **ScanSettingBinding** resource (**cis**) to identify which profiles to scan:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: compliance-cis-scan
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: musthave # this template creates ScanSettingBinding:cis
    objectDefinition:
      apiVersion: compliance.openshift.io/v1alpha1
      kind: ScanSettingBinding
      metadata:
        name: cis
        namespace: openshift-compliance
      profiles:
        - apiGroup: compliance.openshift.io/v1alpha1
          kind: Profile

```



```

name: ocp4-cis
- apiGroup: compliance.openshift.io/v1alpha1
  kind: Profile
  name: ocp4-cis-node
settingsRef:
  apiGroup: compliance.openshift.io/v1alpha1
  kind: ScanSetting
  name: default

```

- A **ComplianceSuite** resource (**compliance-suite-cis**) to verify if the scan is complete by checking the **status** field:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: compliance-suite-cis
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: musthave # this template checks if scan has completed by checking the
      status field
      objectDefinition:
        apiVersion: compliance.openshift.io/v1alpha1
        kind: ComplianceSuite
        metadata:
          name: cis
          namespace: openshift-compliance
        status:
          phase: DONE

```

- A **ComplianceCheckResult** resource (**compliance-suite-cis-results**) which reports the results of the scan suite by checking the **ComplianceCheckResult** custom resources (CR):

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: compliance-suite-cis-results
spec:
  remediationAction: inform
  severity: high
  object-templates:
    - complianceType: mustnothave # this template reports the results for scan suite: cis by
      looking at ComplianceCheckResult CRs
      objectDefinition:
        apiVersion: compliance.openshift.io/v1alpha1
        kind: ComplianceCheckResult
        metadata:
          namespace: openshift-compliance
        labels:
          compliance.openshift.io/check-status: FAIL
          compliance.openshift.io/suite: cis

```

See a sample of the [policy-compliance-operator-cis-scan.yaml](#) file. For more information on creating an OpenShift Container Platform CIS policy, see [Managing OpenShift CIS scan policies](#).

2.6. MANAGE SECURITY POLICIES

Use the *Governance* dashboard to create, view, and manage your security policies and policy violations. You can create YAML files for your policies from the CLI and console.

From the *Governance* page, you can customize your Summary view by filtering the violations by categories or standards, collapse the summary to see less information, and you can search for policies. You can also filter the violation table view by policies or cluster violations.

The table of policies list the following details of a policy: *Policy name*, *Namespace*, *Remediation*, *Cluster violations*, *Controls*, *Automation* and *Created*. You can edit, enable or disable, inform, or remove a policy by selecting the **Actions** icon. You can view the categories and standards of a specific policy by selecting the drop-down arrow to expand the row.

View the following descriptions of the frequency fields in the *Automation* column:

- *Manual run*: Manually set this automation to run once. After the automation runs, it is set to **disabled**.
- *Run once mode*: When a policy is violated, the automation runs one time. After the automation runs, it is set to **disabled**. After the automation is set to **disabled**, you must continue to run the automation manually. When you run *once mode*, the extra variable of **target_clusters** is automatically supplied with the list of clusters that violated the policy. The Ansible Tower Job Template must have **PROMPT ON LAUNCH** enabled for the **EXTRA VARIABLES** section.
- *Disable automation*: When the scheduled automation is set to **disabled**, the automation does not run until the setting is updated.

When you select a policy in the table list, the following tabs of information are displayed from the console:

- *Details*: Select the *Details* tab to view policy details and placement details.
- *Status*: Select the *Status* tab to view a table list of violations. You can filter your view by *Clusters* or *Templates*. To view the compliance status of your policy, click the *View history* link to view a list of violation messages from the *Status* tab.

Review the following topics to learn more about creating and updating your security policies:

- [Managing security policies](#)
- [Managing configuration policies](#)
- [Managing image vulnerability policies](#)
- [Managing memory usage policies](#)
- [Managing namespace policies](#)
- [Managing pod policies](#)
- [Managing pod security policies](#)
- [Managing role policies](#)
- [Managing role binding policies](#)

- [Managing Security Context Constraints policies](#)
- [Managing certificate policies](#)
- [Managing IAM policies](#)
- [Managing ETCD encryption policies](#)
- [Managing gatekeeper policies](#)
- [Managing compliance operator policies](#)
- [Managing E8 scan policies](#)
- [Configuring Ansible Tower for governance](#)
- [Managing OpenShift CIS scan policies](#)

Refer to [Governance](#) for more topics.

2.6.1. Configuring Ansible Tower for governance

Red Hat Advanced Cluster Management for Kubernetes governance can be integrated with Ansible Tower automation to create policy violation automations. You can configure the automation from the Red Hat Advanced Cluster Management console.

- [Prerequisites](#)
- [Create a policy violation automation from the console](#)
- [Create a policy violation automation from the CLI](#)

2.6.1.1. Prerequisites

- Red Hat OpenShift Container Platform 4.5 or later
- You must have Ansible Tower version 3.7.3 or a later version installed. It is best practice to install the latest supported version of Ansible Tower. See [Red Hat Ansible Tower documentation](#) for more details.
- Install the Ansible Automation Platform Resource Operator on to your hub cluster to connect Ansible jobs to the governance framework. For best results when using the AnsibleJob to launch Ansible Tower jobs, the Ansible Tower job template should be idempotent when it is run. If you do not have Ansible Automation Platform Resource Operator, you can find it from the Red Hat OpenShift Container Platform *OperatorHub* page.

For more information about installing and configuring Ansible Tower automation, see [Setting up Ansible tasks](#)

2.6.1.2. Create a policy violation automation from the console

Complete the following steps to configure a policy violation automation:

1. Log in to your Red Hat Advanced Cluster Management hub cluster.
2. From the navigation menu, select **Governance**.

3. Configure an automation for a specific policy by clicking **Configure** in the *Automation* column.
4. The *Create policy violation automation* panel appears.
5. From the *Credential* section, click the drop-down menu to select an Ansible credential. If you need to add a credential, see [Managing credentials overview](#).

Note: This credential is copied to the same namespace as the policy. The credential is used by the **AnsibleJob** resource that is created to initiate the automation. Changes to the Ansible credential in the *Credentials* section of the console is automatically updated.
6. Click the drop-down list to select a job template.
7. In the *Extra variables* section, add the parameter values from the **extra_vars** section of the **PolicyAutomation**.
8. Select the frequency of the automation. You can select *Manual run*, *Run once mode*, or *Disable automation*.
 - *Manual run*: Manually set this automation to run once. After the automation runs, it is set to **disabled**.
 - *Run once mode*: When a policy is violated, the automation runs one time. After the automation runs, it is set to **disabled**. After the automation is set to **disabled**, you must continue to run the automation manually. When you run *once mode*, the extra variable of **target_clusters** is automatically supplied with the list of clusters that violated the policy. The Ansible Tower Job template must have **PROMPT ON LAUNCH** enabled for the **EXTRA VARIABLES** section.
 - *Disable automation*: When the scheduled automation is set to **disabled**, the automation does not run until the setting is updated.
9. Click **Save**.
10. When you select the *View Job* link from the *History* tab, the link directs you to the job template on the *Search* page.
11. After you add the policy violation automation, the status is updated to *Successful*.
12. The name of the policy violation automation is now displayed in the *Automation* column.

Your policy violation automation is created from the console.

2.6.1.3. Create a policy violation automation from the CLI

Complete the following steps to configure a policy violation automation from the CLI:

1. From your terminal, log in to your Red Hat Advanced Cluster Management hub cluster using the **oc login** command.
2. Find or create a policy that you want to add an automation to. Note the policy name and namespace.
3. Create a **PolicyAutomation** resource using the following sample as a guide:

```
apiVersion: policy.open-cluster-management.io/v1beta1
kind: PolicyAutomation
metadata:
```

```

name: policyname-policy-automation
spec:
  automationDef:
    extra_vars:
      your_var: your_value
    name: Policy Compliance Template
    secret: ansible-tower
    type: AnsibleJob
    mode: disabled
    policyRef: policyname

```

4. The Ansible job template name in the previous sample is **Policy Compliance Template**. Change that value to match your job template name.
5. In the **extra_vars** section, add any parameters you need to pass to the Ansible job template.
6. Set the mode to either **once** or **disabled**. The **once** mode runs the job one time and then the mode is set to **disabled**.
 - *once mode*: When a policy is violated, the automation runs one time. After the automation runs, it is set to **disabled**. After the automation is set to **disabled**, you must continue to run the automation manually. When you run *once mode*, the extra variable of **target_clusters** is automatically supplied with the list of clusters that violated the policy. The Ansible Tower Job template must have **PROMPT ON LAUNCH** enabled for the **EXTRA VARIABLES** section.
 - *Disable automation*: When the scheduled automation is set to **disabled**, the automation does not run until the setting is updated.
7. Set the **policyRef** to the name of your policy.
8. Create a secret in the same namespace as this **PolicyAutomation** resource that contains the Ansible Tower credential. In the previous example, the secret name is **ansible-tower**. Use the [sample from application lifecycle](#) to see how to create the secret.
9. Create the **PolicyAutomation** resource.

Notes:

- An immediate run of the policy automation can be initiated by adding the following annotation to the **PolicyAutomation** resource:

```

metadata:
  annotations:
    policy.open-cluster-management.io/rerun: "true"

```

- When the policy is in **once** mode, the automation runs when the policy is non-compliant. The **extra_vars** variable, named **target_clusters** is added and the value is an array of each managed cluster name where the policy is non-compliant.

2.6.2. Deploy policies using GitOps

You can deploy a set of policies across a fleet of managed clusters with the governance framework. You can add to the open source community, [policy-collection](#) by contributing to and using the policies in the repository. For more information, see [Contributing a custom policy](#). Policies in each of the **stable** and **community** folders from the open source community are further organized according to [NIST Special Publication 800-53](#).

Continue reading to learn best practices to use GitOps to automate and track policy updates and creation through a Git repository.

Prerequisites: Before you begin, be sure to fork the **policy-collection** repository.

2.6.2.1. Customizing your local repository

Customize your local repository by consolidating the **stable** and **community** policies into a single folder. Remove the policies you do not want to use. Complete the following steps to customize your local repository:

1. Create a new directory in the repository to hold the policies that you want to deploy. Be sure that you are in your local **policy-collection** repository on your main default branch for GitOps. Run the following command:

```
mkdir my-policies
```

2. Copy all of the **stable** and **community** policies into your **my-policies** directory. Start with the **community** policies first, in case the **stable** folder contains duplicates of what is available in the community. Run the following commands:

```
cp -R community/* my-policies/
```

```
cp -R stable/* my-policies/
```

Now that you have all of the policies in a single parent directory structure, you can edit the policies in your fork.

Tips:

- It is best practice to remove the policies you are not planning to use.
- Learn about policies and the definition of the policies from the following list:
 - Purpose: Understand what the policy does.
 - Remediation Action: Does the policy only inform you of compliance, or enforce the policy and make changes? See the **spec.remediationAction** parameter. If changes are enforced, make sure you understand the functional expectation. Remember to check which policies support enforcement. For more information, view the *Validate* section. **Note:** The **spec.remediationAction** set for the policy overrides any remediation action that is set in the individual **spec.policy-templates**.
 - Placement: What clusters is the policy deployed to? By default, most policies target the clusters with the **environment: dev** label. Some policies may target OpenShift Container Platform clusters or another label. You can update or add additional labels to include other clusters. When there is no specific value, the policy is applied to all of your clusters. You can also create multiple copies of a policy and customize each one if you want to use a policy that is configured one way for one set of clusters and configured another way for another set of clusters.

2.6.2.2. Committing to your local repository

After you are satisfied with the changes you have made to your directory, commit and push your changes to Git so that they can be accessed by your cluster.

Note: This example is used to show the basics of how to use policies with GitOps, so you might have a different workflow to get changes to your branch.

Complete the following steps:

1. From your terminal, run **git status** to view your recent changes in your directory that you previously created. Add your new directory to the list of changes to be committed with the following command:

```
git add my-policies/
```

2. Commit the changes and customize your message. Run the following command:

```
git commit -m "Policies to deploy to the hub cluster"
```

3. Push the changes to the branch of your forked repository that is used for GitOps. Run the following command:

```
git push origin <your_default_branch>master
```

Your changes are committed.

2.6.2.3. Deploying policies to your cluster

After you push your changes, you can deploy the policies to your Red Hat Advanced Cluster Management for Kubernetes installation. Post deployment, your hub cluster is connected to your Git repository. Any further changes to your chosen branch of the Git repository is reflected in your cluster.

Note: By default, policies deployed with GitOps use the **merge** reconcile option. If you want to use the **replace** reconcile option instead, add the **apps.open-cluster-management.io/reconcile-option: replace** annotation to the **Subscription** resource. See [Application Lifecycle](#) for more details.

The **deploy.sh** script creates **Channel** and **Subscription** resources in your hub cluster. The channel connects to the Git repository, and the subscription specifies the data to bring to the cluster through the channel. As a result, all policies defined in the specified subdirectory are created on your hub. After the policies are created by the subscription, Red Hat Advanced Cluster Management analyzes the policies and creates additional policy resources in the namespace associated with each managed cluster that the policy is applied to, based on the defined placement rule.

The policy is then copied to the managed cluster from its respective managed cluster namespace on the hub cluster. As a result, the policies in your Git repository are pushed to all managed clusters that have labels that match the **clusterSelector** that are defined in the placement rule of your policy.

Complete the following steps:

1. From the **policy-collection** folder, run the following command to change the directory:

```
cd deploy
```

2. Make sure that your command line interface (CLI) is configured to create resources on the correct cluster with the following command:

```
oc cluster-info
```

The output of the command displays the API server details for the cluster, where Red Hat Advanced Cluster Management is installed. If the correct URL is not displayed, configure your CLI to point to the correct cluster. See [Using the OpenShift CLI](#) for more information.

3. Create a namespace where your policies are created to control access and to organize the policies. Run the following command:

```
oc create namespace policy-namespace
```

4. Run the following command to deploy the policies to your cluster:

```
./deploy.sh -u https://github.com/<your-repository>/policy-collection -p my-policies -n policy-namespace
```

Replace **your-repository** with your Git user name or repository name.

Note: For reference, the full list of arguments for the **deploy.sh** script uses the following syntax:

```
./deploy.sh [-u <url>] [-b <branch>] [-p <path/to/dir>] [-n <namespace>] [-a|--name <resource-name>]
```

View the following explanations for each argument:

- URL: The URL to the repository that you forked from the main **policy-collection** repository. The default URL is <https://github.com/stolostron/policy-collection.git>.
- Branch: Branch of the Git repository to point to. The default branch is **main**.
- Subdirectory Path: The subdirectory path you created to contain the policies you want to use. In the previous sample, we used the **my-policies** subdirectory, but you can also specify which folder you want start with. For example, you can use **my-policies/AC-Access-Control**. The default folder is **stable**.
- Namespace: The namespace where the resources and policies are created on the hub cluster. These instructions use the **policy-namespace** namespace. The default namespace is **policies**.
- Name Prefix: Prefix for the **Channel** and **Subscription** resources. The default is **demo-stable-policies**.

After you run the **deploy.sh** script, any user with access to the repository can commit changes to the branch, which pushes changes to existing policies on your clusters.

2.6.2.4. Verifying GitOps policy deployments from the console

Verify that your changes were applied to your policies from the console. You can also make more changes to your policy from the console. Complete the following steps:

1. Log in to your Red Hat Advanced Cluster Management cluster.
2. From the navigation menu, select **Governance**.
3. Check for the following policy details:
 - Why is a specific policy compliant or non-compliant on the clusters that it was distributed

to?

- Are the policies applied to the correct clusters?
 - If this policy is not distributed to any clusters, why?
4. Identify the GitOps deployed policies that you created or modified. The GitOps deployed policies can be identified by the annotation that is applied automatically. Annotations for the GitOps deployed policies resemble the following paths:

```
apps.open-cluster-management.io/hosting-deployable: policies/deploy-stable-policies-Policy-policy-role9
```

```
apps.open-cluster-management.io/hosting-subscription: policies/demo-policies
```

```
apps.open-cluster-management.io/sync-source: subgbk8s-policies/demo-policies
```

GitOps annotations are valuable to see which subscription created the policy. You can also add your own labels to your policies so that you can write runtime queries that select policies based on labels.

For example, you can add a label to a policy with the following command:

```
oc label policy <policy-name> -n <policy-namespace> <key>=<value>
```

Then, you can query policies that have labels with the following command:

```
oc get policy -n <policy-namespace> -l <key>=<value>
```

Your policies are deployed using GitOps.

2.6.3. Support for templates in configuration policies

Configuration policies support the inclusion of Golang text templates in the object definitions. These templates are resolved at runtime on the target managed cluster using configurations related to that cluster. This gives you the ability to define configuration policies with dynamic content, and inform or enforce Kubernetes resources that are customized to the target cluster.

- [Prerequisite](#)
- [Template functions](#)
 - [Template processing](#)
 - [Special annotation for reprocessing](#)
 - [Bypass template processing](#)

2.6.3.1. Prerequisite

- The template syntax must be conformed to the Golang template language specification, and the resource definition generated from the resolved template must be a valid YAML. See the Golang documentation about [Package templates](#) for more information. Any errors in template validation are recognized as policy violations. When you use a custom template function, the values are replaced at runtime.

2.6.3.2. Template functions

Template functions, such as resource-specific and generic, **lookup** template functions, are available for referencing Kubernetes resources on the cluster. The resource-specific functions are used for convenience and makes content of the resources more accessible. If you use the generic function, **lookup**, which is more advanced, it is best to be familiar with the YAML structure of the resource that is being looked up. In addition to these functions, utility functions like **base64encode**, **base64decode**, **indent**, **toInt**, **toBool** etc. are also available.

To conform templates into YAML syntax, templates must be set in the policy resource as strings using quotes or a block character (`|` or `>`). This causes the resolved template value to also be a string. To override this, consider using **toInt** or **toBool** as the final function in the template to initiate further processing that forces the value to be interpreted as an integer, or boolean.

Note: If the string value is more than 80 characters, this block character, `|` needs to be used to avoid YAML parsing errors.

Continue reading to view descriptions and examples for some of the custom template functions that are supported:

- [fromSecret function](#)
- [fromConfigmap function](#)
- [fromClusterClaim function](#)
- [lookup function](#)
- [base64enc function](#)
- [base64dec function](#)
- [indent function](#)
- [toInt function](#)
- [toBool function](#)

2.6.3.2.1. fromSecret function

The **fromSecret** function returns the value of the given data key in the secret. View the following syntax for the function:

```
func fromSecret (ns string, secretName string, datakey string) (dataValue string, err error)
```

When you use this function, enter the namespace, name, and data key of a Kubernetes **Secret** resource. You receive a policy violation if the Kubernetes **Secret** resource does not exist on the target cluster. If the data key does not exist on the target cluster, the value becomes an empty string. View the following configuration policy that enforces a **Secret** resource on the target cluster. The value for the **PASSWORD** data key is a template that references the secret on the target cluster:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-fromsecret
  namespace: test
```

```

spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
  object-templates:
    - complianceType: musthave
      objectDefinition:
        apiVersion: v1
        data:
          USER_NAME: YWRtaW4=
          PASSWORD: '{{ fromSecret "default" "localsecret" "PASSWORD" }}'
        kind: Secret
        metadata:
          name: demosecret
          namespace: test
        type: Opaque
      remediationAction: enforce
      severity: low

```

2.6.3.2.2. fromConfigmap function

The **fromConfigmap** function returns the value of the given data key in the ConfigMap. View the following syntax for the function:

```
func fromConfigMap (ns string, configmapName string, datakey string) (dataValue string, err Error)
```

When you use this function, enter the namespace, name, and data key of a Kubernetes **ConfigMap** resource. You receive a policy violation if the Kubernetes **ConfigMap** resource does not exist on the target cluster. If the data key does not exist on the target cluster, the value becomes an empty string. View the following configuration policy that enforces a Kubernetes resource on the target managed cluster. The value for the **log-file** data key is a template that retrieves the value of the **log-file** from the ConfigMap, **logs-config** from the **default** namespace, and the **log-level** is set to the data key **log-level**.

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-fromcm-lookup
  namespace: test-templates
spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
  object-templates:
    - complianceType: musthave
      objectDefinition:
        kind: ConfigMap
        apiVersion: v1
        metadata:
          name: demo-app-config
          namespace: test
        data:

```

```

app-name: sampleApp
app-description: "this is a sample app"
log-file: '{{ fromConfigMap "default" "logs-config" "log-file" }}'
log-level: '{{ fromConfigMap "default" "logs-config" "log-level"}}'
remediationAction: enforce
severity: low

```

2.6.3.2.3. fromClusterClaim function

The **fromClusterClaim** function returns the value of the **Spec.Value** in the **ClusterClaim** resource. View the following syntax for the function:

```
func fromClusterClaim (clusterclaimName string) (value map[string]interface{}, err Error)
```

When you use the function, enter the name of a Kubernetes **ClusterClaim** resource. You receive a policy violation if the **ClusterClaim** resource does not exist. View the following example of the configuration policy that enforces a Kubernetes resource on the target managed cluster. The value for the **platform** data key is a template that retrieves the value of the **platform.open-cluster-management.io** cluster claim. Similarly, it retrieves values for **product** and **version** from the **ClusterClaim**:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-clusterclaims
  namespace: default
spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
  object-templates:
    - complianceType: musthave
      objectDefinition:
        kind: ConfigMap
        apiVersion: v1
        metadata:
          name: sample-app-config
          namespace: default
        data:
          # Configuration values can be set as key-value properties
          platform: '{{ fromClusterClaim "platform.open-cluster-management.io" }}'
          product: '{{ fromClusterClaim "product.open-cluster-management.io" }}'
          version: '{{ fromClusterClaim "version.openshift.io" }}'
      remediationAction: enforce
      severity: low

```

2.6.3.2.4. lookup function

The **lookup** function returns the Kubernetes resource as a JSON compatible map. Note that if the requested resource does not exist, an empty map is returned. View the following syntax for the function:

```
func lookup (apiversion string, kind string, namespace string, name string) (value string, err Error)
```

When you use the function, enter the API version, kind, namespace, and name of the Kubernetes resource. View the following example of the configuration policy that enforces a Kubernetes resource on the target managed cluster. The value for the **metrics-url** data key is a template that retrieves the **v1/Service** Kubernetes resource **metrics** from the **default** namespace, and is set to the value of the **Spec.ClusterIP** in the queried resource:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-lookup
  namespace: test-templates
spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
  object-templates:
    - complianceType: musthave
      objectDefinition:
        kind: ConfigMap
        apiVersion: v1
        metadata:
          name: demo-app-config
          namespace: test
        data:
          # Configuration values can be set as key-value properties
          app-name: sampleApp
          app-description: "this is a sample app"
          metrics-url: |
            http://{{ (lookup "v1" "Service" "default" "metrics").spec.clusterIP }}:8080
  remediationAction: enforce
  severity: low
```

2.6.3.2.5. base64enc function

The **base64enc** function returns a **base64** encoded value of the input **data string**. View the following syntax for the function:

```
func base64enc (data string) (enc-data string)
```

When you use the function, enter a string value. View the following example of the configuration policy that uses the **base64enc** function:

```
apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-fromsecret
  namespace: test
spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
```

```

object-templates:
- complianceType: musthave
  objectDefinition:
  ...
data:
  USER_NAME: '{{ fromConfigMap "default" "myconfigmap" "admin-user" | base64enc }}'

```

2.6.3.2.6. base64dec function

The **base64dec** function returns a **base64** decoded value of the input **enc-data string**. View the following syntax for the function:

```
func base64dec (enc-data string) (data string)
```

When you use this function, enter a string value. View the following example of the configuration policy that uses the **base64dec** function:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-fromsecret
  namespace: test
spec:
  namespaceSelector:
    exclude:
    - kube-*
    include:
    - default
  object-templates:
  - complianceType: musthave
    objectDefinition:
    ...
    data:
      app-name: |
        '{{ ( lookup "v1" "Secret" "testns" "mytestsecret" ) .data.appname ) | base64dec }}'

```

2.6.3.2.7. indent function

The **indent** function returns the padded **data string**. View the following syntax for the function:

```
func indent (spaces int, data string) (padded-data string)
```

When you use the function, enter a data string with the specific number of spaces. View the following example of the configuration policy that uses the **indent** function:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-fromsecret
  namespace: test
spec:
  namespaceSelector:
    exclude:
    - kube-*

```

```

include:
- default
object-templates:
- complianceType: musthave
  objectDefinition:
  ...
data:
  Ca-cert: |
    {{ ( index ( lookup "v1" "Secret" "default" "mycert-tls" ).data "ca.pem" ) | base64dec | indent 4
}}

```

2.6.3.2.8. toInt function

The **toInt** function casts and returns the integer value of the input value. Also, when this is the last function in the template, there is further processing of the source content. This is to ensure that the value is interpreted as an integer by the YAML. View the following syntax for the function:

```
func toInt (input interface{}) (output int)
```

When you use the function, enter the data that needs to be casted as an integer. View the following example of the configuration policy that uses the **toInt** function:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy
metadata:
  name: demo-template-function
  namespace: test
spec:
  namespaceSelector:
    exclude:
    - kube-*
    include:
    - default
  object-templates:
  - complianceType: musthave
    objectDefinition:
    ...
  spec:
    vlanid: |
      {{ (fromConfigMap "site-config" "site1" "vlan") | toInt }}

```

2.6.3.2.9. toBool function

The **toBool** function converts the input string into a boolean, and returns the boolean. Also, when this is the last function in the template, there is further processing of the source content. This is to ensure that the value is interpreted as a boolean by the YAML. View the following syntax for the function:

```
func toBool (input string) (output bool)
```

When you use the function, enter the string data that needs to be converted to a boolean. View the following example of the configuration policy that uses the **toBool** function:

```

apiVersion: policy.open-cluster-management.io/v1
kind: ConfigurationPolicy

```

```

metadata:
  name: demo-template-function
  namespace: test
spec:
  namespaceSelector:
    exclude:
      - kube-*
    include:
      - default
  object-templates:
    - complianceType: musthave
      objectDefinition:
        ...
      spec:
        enabled: |
          {{ (fromConfigMap "site-config" "site1" "enabled") | toBool }}

```

2.6.3.2.10. Template processing

A configuration policy definition can contain both hub cluster and managed cluster templates. Hub cluster templates are processed first on the hub cluster, then the policy definition with resolved hub cluster templates is propagated to the target clusters. On the managed cluster, the **ConfigurationPolicyController** processes any managed cluster templates in the policy definition and then enforces or verifies the fully resolved object definition.

2.6.3.2.11. Special annotation for reprocessing

Policies are processed on the hub cluster only upon creation or after an update. Therefore, hub cluster templates are only resolved to the data in the referenced resources upon policy creation or update. Any changes to the referenced resources are not automatically synced to the policies.

A special annotation, **policy.open-cluster-management.io/trigger-update** can be used to indicate changes to the data referenced by the templates. Any change to the special annotation value initiates template processing, and the latest contents of the referenced resource are read and updated in the policy definition that is the propagator for processing on managed clusters. A typical way to use this annotation is to increment the value by one each time.

See the following table for a comparison of hub cluster and managed cluster templates:

Table 2.5. Comparison table of hub cluster and managed cluster

Templates	Hub cluster	Managed cluster
Syntax	Golang text template specification	Golang text template specification
Delimiter	{{hub ... hub}}	{{ ... }}

Templates	Hub cluster	Managed cluster
Functions	<p>A set of template functions that support dynamic access to Kubernetes resources and string manipulation. See Template functions for more information.</p> <p>Note: The fromSecret template function is not available.</p>	<p>A set of template functions support dynamic access to Kubernetes resources and string manipulation. See Template functions for more information.</p>
Function output storage	<p>The output of template functions are stored in Policy resource objects in each applicable managed cluster namespace on the hub cluster, before it is synced to the managed cluster. This means that any sensitive results from template functions are readable by anyone with read access to the Policy resource objects on the hub cluster, and read access with ConfigurationPolicy resource objects on the managed clusters. Additionally, if etcd encryption is enabled, the Policy and ConfigurationPolicy resource objects are not encrypted. It is best to carefully consider this when using template functions that return sensitive output (e.g. from a secret).</p>	<p>The output of template functions are not stored in policy related resource objects.</p>
Context	<p>A .ManagedClusterName variable is available, which at runtime, resolves to the name of the target cluster where the policy is propagated.</p>	<p>No context variables</p>
Processing	<p>Processing occurs at runtime on the hub cluster during propagation of replicated policies to clusters. Policies and the hub cluster templates within the policies are processed on the hub cluster only when templates are created or updated.</p>	<p>Processing occurs in the ConfigurationPolicyController on the managed cluster. Policies are processed periodically, which automatically updates the resolved object definition with data in the referenced resources.</p>
Access control	<p>You can only reference Kubernetes resources that are in the same namespace as the Policy resource.</p>	<p>You can reference any resource on the cluster.</p>

Templates	Hub cluster	Managed cluster
Processing errors	Errors from the hub cluster templates are displayed as violations on the managed clusters the policy applies to.	Errors from the managed cluster templates are displayed as violations on the specific target cluster where the violation occurred.

2.6.3.2.12. Bypass template processing

You might create a policy that contains a template that is not intended to be processed by Red Hat Advanced Cluster Management. By default, Red Hat Advanced Cluster Management processes all templates.

To bypass template processing, you must change `{{ template content }}` to `'{{ template content }}'`.

Alternatively, you can add the following annotation in the **ConfigurationPolicy** section of your **Policy**: **policy.open-cluster-management.io/disable-templates: "true"**. When this annotation is included, the previous workaround is not necessary. Template processing is bypassed for the **ConfigurationPolicy**.

2.6.4. Managing security policies

Create a security policy to report and validate your cluster compliance based on your specified security standards, categories, and controls. To create a policy for Red Hat Advanced Cluster Management for Kubernetes, you must create a YAML file on your managed clusters.

Note: You can copy and paste an existing policy in to the *Policy YAML*. The values for the parameter fields are automatically entered when you paste your existing policy. You can also search the contents in your policy YAML file with the search feature.

View the following sections:

- [Creating a security policy](#)
- [Updating security policies](#)
- [Deleting a security policy](#)

2.6.4.1. Creating a security policy

You can create a security policy from the command line interface (CLI) or from the console. Cluster administrator access is required.

Important: You must define a placement rule and placement binding to apply your policy to a specific cluster. Enter a valid value for the *Cluster selector* field to define a **PlacementRule** and **PlacementBinding**. See [Resources that support support set-based requirements](#) in the Kubernetes documentation for a valid expression. View the definitions of the objects that are required for your Red Hat Advanced Cluster Management policy:

- *PlacementRule*: Defines a *cluster selector* where the policy must be deployed.
- *PlacementBinding*: Binds the placement to a placement rule.

View more descriptions of the policy YAML files in the [Policy overview](#).

2.6.4.1.1. Creating a security policy from the command line interface

Complete the following steps to create a policy from the command line interface (CLI):

1. Create a policy by running the following command:

```
kubectl create -f policy.yaml -n <namespace>
```

2. Define the template that the policy uses. Edit your **.yaml** file by adding a **templates** field to define a template. Your policy might resemble the following YAML file:

```
apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy1
spec:
  remediationAction: "enforce" # or inform
  disabled: false # or true
  namespaces:
    include: ["default"]
    exclude: ["kube*"]
  policy-templates:
    - objectDefinition:
        apiVersion: policy.open-cluster-management.io/v1
        kind: ConfigurationPolicy
        metadata:
          namespace: kube-system # will be inferred
          name: operator
        spec:
          remediationAction: "inform"
          object-templates:
            complianceType: "musthave" # at this level, it means the role must exist and must
            have the following rules
            apiVersion: rbac.authorization.k8s.io/v1
            kind: Role
            metadata:
              name: example
            objectDefinition:
              rules:
                - complianceType: "musthave" # at this level, it means if the role exists the rule is a
                musthave
                apiGroups: ["extensions", "apps"]
                resources: ["deployments"]
                verbs: ["get", "list", "watch", "create", "delete", "patch"]
```

3. Define a **PlacementRule**. Be sure to change the **PlacementRule** to specify the clusters where the policies need to be applied, either by **clusterNames**, or **clusterLabels**. View [Creating and managing placement rules](#).

Your **PlacementRule** might resemble the following content:

+

```

apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name: placement1
spec:
  clusterConditions:
    - type: ManagedClusterConditionAvailable
      status: "True"
  clusterNames:
    - "cluster1"
    - "cluster2"
  clusterLabels:
    matchLabels:
      cloud: IBM

```

1. Define a **PlacementBinding** to bind your policy and your **PlacementRule**. Your **PlacementBinding** might resemble the following YAML sample:

```

apiVersion: policy.open-cluster-management.io/v1
kind: PlacementBinding
metadata:
  name: binding1
placementRef:
  name: placement1
  apiGroup: apps.open-cluster-management.io
  kind: PlacementRule
subjects:
  - name: policy1
    apiGroup: policy.open-cluster-management.io
    kind: Policy

```

2.6.4.1.1.1. Viewing your security policy from the CLI

Complete the following steps to view your security policy from the CLI:

1. View details for a specific security policy by running the following command:

```
kubectl get securitypolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your security policy by running the following command:

```
kubectl describe securitypolicy <name> -n <namespace>
```

2.6.4.1.2. Creating a cluster security policy from the console

As you create your new policy from the console, a YAML file is also created in the YAML editor.

1. From the navigation menu, click **Governance**.
2. To create a policy, click **Create policy**.
3. Enter or select values for the following parameters:
 - Name

- Namespace
 - Specifications
 - Cluster selector
 - Standards
 - Categories
 - Controls
 - Remediation action
 - Disable policy
4. View the following example Red Hat Advanced Cluster Management for Kubernetes security policy definition. Copy and paste the YAML file for your policy. Your YAML file might resemble the following policy:

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-pod
  annotations:
    policy.open-cluster-management.io/categories:
'SystemAndCommunicationsProtections,SystemAndInformationIntegrity'
    policy.open-cluster-management.io/controls: 'control example'
    policy.open-cluster-management.io/standards: 'NIST,HIPAA'
spec:
  complianceType: musthave
  namespaces:
    exclude: ["kube*"]
    include: ["default"]
  object-templates:
  - complianceType: musthave
    objectDefinition:
      apiVersion: v1
      kind: Pod
      metadata:
        name: pod1
      spec:
        containers:
        - name: pod-name
          image: 'pod-image'
          ports:
          - containerPort: 80
      remediationAction: enforce
      disabled: false

---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementBinding
metadata:
  name: binding-pod
placementRef:

```

```

name: placement-pod
kind: PlacementRule
apiGroup: apps.open-cluster-management.io
subjects:
- name: policy-pod
  kind: Policy
  apiGroup: policy.open-cluster-management.io

---
apiVersion: apps.open-cluster-management.io/v1
kind: PlacementRule
metadata:
  name: placement-pod
spec:
  clusterConditions:
  - type: ManagedClusterConditionAvailable
    status: "True"
  clusterLabels:
  matchLabels:
    cloud: "IBM"

```

5. Click **Create Policy**.

A security policy is created from the console.

2.6.4.1.2.1. Viewing your security policy from the console

You can view any security policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details. The *Details* tab and *Status* tab are displayed. When the cluster or policy status cannot be determined, the following message is displayed: **No status**.

2.6.4.2. Updating security policies

Learn to update security policies by viewing the following section.

2.6.4.2.1. Disabling security policies

Your policy is enabled by default. You can disable your policy by completing the following steps:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable policy**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.4.3. Deleting a security policy

Delete a security policy from the CLI or the console.

- Delete a security policy from the CLI:
 - a. Delete a security policy by running the following command:

```
kubectl delete policy <securitypolicy-name> -n <open-cluster-management-namespace>
```

+ After your policy is deleted, it is removed from your target cluster or clusters. Verify that your policy is removed by running the following command: **kubectl get policy <securitypolicy-name> -n <open-cluster-management-namespace>**

- Delete a security policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**

To manage other policies, see [Managing security policies](#) for more information. Refer to [Governance](#) for more topics about policies.

2.6.5. Managing configuration policies

Learn to create, apply, view, and update your configuration policies.

Required access: Administrator or cluster administrator

- [Creating a configuration policy](#)
- [Updating configuration policies](#)
- [Deleting a configuration policy](#)

2.6.5.1. Creating a configuration policy

You can create a YAML file for your configuration policy from the command line interface (CLI) or from the console. View the following sections to create a configuration policy:

2.6.5.1.1. Creating a configuration policy from the CLI

Complete the following steps to create a configuration policy from the (CLI):

1. Create a YAML file for your configuration policy. Run the following command:

```
kubectl create -f configpolicy-1.yaml
```

Your configuration policy might resemble the following policy:

-

```

apiVersion: policy.open-cluster-management.io/v1
kind: Policy
metadata:
  name: policy-1
  namespace: kube-system
spec:
  namespaces:
    include: ["default", "kube-*"]
    exclude: ["kube-system"]
  remediationAction: inform
  disabled: false
  complianceType: musthave
  object-templates:
    ...

```

2. Apply the policy by running the following command:

```
kubectl apply -f <policy-file-name> --namespace=<namespace>
```

3. Verify and list the policies by running the following command:

```
kubectl get policy --namespace=<namespace>
```

Your configuration policy is created.

2.6.5.1.1. Viewing your configuration policy from the CLI

Complete the following steps to view your configuration policy from the CLI:

1. View details for a specific configuration policy by running the following command:

```
kubectl get policy <policy-name> -n <namespace> -o yaml
```

2. View a description of your configuration policy by running the following command:

```
kubectl describe policy <name> -n <namespace>
```

2.6.5.1.2. Creating a configuration policy from the console

As you create a configuration policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create a configuration policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Specify the policy you want to create by selecting one of the configuration policies for the specification parameter. Continue to enter or select the appropriate values for the following fields:
 - Name

- Specifications
- Cluster selector
- Remediation action
- Standards
- Categories
- Controls

5. Click **Create**.

2.6.5.1.2.1. Viewing your configuration policy from the console

You can view any configuration policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *All policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details. The *Details* tab and *Status* tab are displayed.

2.6.5.2. Updating configuration policies

Learn to update configuration policies by viewing the following section.

2.6.5.2.1. Disabling configuration policies

Complete the following steps to disable your configuration policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.5.3. Deleting a configuration policy

Delete a configuration policy from the CLI or the console.

- Delete a configuration policy from the CLI:
 - a. Delete a configuration policy by running the following command:

```
kubectl delete policy <policy-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

- b. Verify that your policy is removed by running the following command:

```
kubectl get policy <policy-name> -n <namespace>
```

- Delete a configuration policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your policy is deleted.

See configuration policy samples that are supported by Red Hat Advanced Cluster Management from the [CM-Configuration-Management folder](#).

Alternatively, you can refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the controller. For details to manage other policies, refer to [Managing security policies](#).

2.6.6. Managing image vulnerability policies

Configuration policy controller monitors the status of image vulnerability policies. Image vulnerability policies are applied to check if your containers have vulnerabilities. Learn to create, apply, view, and update your image vulnerability policy.

- [Creating an image vulnerability policy](#)
- [Updating image vulnerability policies](#)
- [Deleting an image vulnerability policy](#)

2.6.6.1. Creating an image vulnerability policy

You can create a YAML for your image vulnerability policy from the command line interface (CLI) or from the console. View the following sections to create an image vulnerability policy:

2.6.6.1.1. Creating an image vulnerability policy from the CLI

Complete the following steps to create an image vulnerability policy from the CLI:

1. Create a YAML file for your image vulnerability policy by running the following command:

```
kubectl create -f imagevulnpolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <imagevuln-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get imagevulnpolicy --namespace=<namespace>
```

-

Your image vulnerability policy is created.

2.6.6.1.1.1. Viewing your image vulnerability policy from the CLI

Complete the following steps to view your image vulnerability policy from the CLI:

1. View details for a specific image vulnerability policy by running the following command:

```
kubectl get imagevulnpolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your image vulnerability policy by running the following command:

```
kubectl describe imagevulnpolicy <name> -n <namespace>
```

2.6.6.1.2. Creating an image vulnerability policy from the console

As you create an image vulnerability policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the image vulnerability policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **ImageManifestVulnPolicy** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

An image vulnerability policy is created.

2.6.6.1.3. Viewing image vulnerability violations from the console

1. From the navigation menu, click **Governance** to view a table list of your policies.
2. Select **policy-imagemanifestvulnpolicy** > **Status** to view the cluster location of the violation. Your image vulnerability violation might resemble the following:

```
imagemanifestvulns exist and should be deleted:
[sha256.7ac7819e1523911399b798309025935a9968b277d86d50e5255465d6592c0266] in
namespace default;
[sha256.4109631e69d1d562f014dd49d5166f1c18b4093f4f311275236b94b21c0041c0] in
namespace calamari;
[sha256.573e9e0a1198da4e29eb9a8d7757f7afb7ad085b0771bc6aa03ef96dedc5b743,
sha256.a56d40244a544693ae18178a0be8af76602b89abe146a43613eaeac84a27494e,
sha256.b25126b194016e84c04a64a0ad5094a90555d70b4761d38525e4aed21d372820] in
namespace open-cluster-management-agent-addon;
[sha256.64320fbf95d968fc6b9863581a92d373bc75f563a13ae1c727af37450579f61a] in
namespace openshift-cluster-version
```

3. Navigate to your OpenShift Container Platform console by selecting the *Cluster* link.

4. From the navigation menu on the OpenShift Container Platform console, click **Administration > Custom Resource Definitions**
5. Select **imagemanifestvulns > Instances tab** to view all of the **imagemanifestvulns** instances.
6. Select an entry to view more details.

2.6.6.2. Updating image vulnerability policies

Learn to update image vulnerability policies by viewing the following section.

2.6.6.2.1. Disabling image vulnerability policies

Complete the following steps to disable your image vulnerability policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.6.3. Deleting an image vulnerability policy

Delete the image vulnerability policy from the CLI or the console.

- Delete an image vulnerability policy from the CLI:

- a. Delete a certificate policy by running the following command:

```
kubectl delete policy <imagevulnpolicy-name> -n <namespace>
```

+ After your policy is deleted, it is removed from your target cluster or clusters.

- a. Verify that your policy is removed by running the following command:

```
kubectl get policy <imagevulnpolicy-name> -n <namespace>
```

- Delete an image vulnerability policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your image vulnerability policy is deleted.

View a sample of an image vulnerability policy, see *Image vulnerability policy sample* from the [Image vulnerability policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other policies that are monitored by the Kubernetes configuration policy controller. See [Managing security policies](#) to

manage other policies.

2.6.7. Managing memory usage policies

Apply a memory usage policy to limit or restrict your memory and compute usage.

Learn to create, apply, view, and update your memory usage policy in the following sections:

- [Creating a memory usage policy](#)
- [Updating memory usage policies](#)
- [Deleting a memory usage policy](#)

2.6.7.1. Creating a memory usage policy

You can create a YAML file for your memory usage policy from the command line interface (CLI) or from the console. View the following sections to create a memory usage policy:

2.6.7.1.1. Creating a memory usage policy from the CLI

Complete the following steps to create a memory usage policy from the CLI:

1. Create a YAML file for your memory usage policy by running the following command:

```
kubectl create -f memorypolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <memory-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get memorypolicy --namespace=<namespace>
```

Your memory usage policy is created from the CLI.

2.6.7.1.1.1. Viewing your policy from the CLI

Complete the following steps to view your memory usage policy from the CLI:

1. View details for a specific memory usage policy by running the following command:

```
kubectl get memorypolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your memory usage policy by running the following command:

```
kubectl describe memorypolicy <name> -n <namespace>
```

2.6.7.1.2. Creating an memory usage policy from the console

As you create a memory usage policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the memory usage policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **Limitrange** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

2.6.7.1.2.1. Viewing your memory usage policy from the console

You can view any memory usage policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.7.2. Updating memory usage policies

Learn to update memory usage policies by viewing the following section.

2.6.7.2.1. Disabling memory usage policies

Complete the following steps to disable your memory usage policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.7.3. Deleting a memory usage policy

Delete the memory usage policy from the CLI or the console.

- Delete a memory usage policy from the CLI:
 - a. Delete a memory usage policy by running the following command:

```
kubectl delete policy <memorypolicy-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

- b. Verify that your policy is removed by running the following command:

```
kubectl get policy <memorypolicy-name> -n <namespace>
```

- Delete a memory usage policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your memory usage policy is deleted.

View a sample of a memory usage policy, see *Memory usage policy sample* from the [Memory usage policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.8. Managing namespace policies

Namespace policies are applied to define specific rules for your namespace. Learn to create, apply, view, and update your namespace policy in the following sections:

- [Creating a namespace policy](#)
- [Updating namespace policies](#)
- [Deleting a namespace policy](#)

2.6.8.1. Creating a namespace policy

You can create a YAML file for your namespace policy from the command line interface (CLI) or from the console. View the following sections to create a namespace policy:

2.6.8.1.1. Creating a namespace policy from the CLI

Complete the following steps to create a namespace policy from the CLI:

1. Create a YAML file for your namespace policy by running the following command:

```
kubectl create -f namespacepolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <namespace-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get namespacepolicy --namespace=<namespace>
```

Your namespace policy is created from the CLI.

2.6.8.1.1.1. Viewing your namespace policy from the CLI

Complete the following steps to view your namespace policy from the CLI:

1. View details for a specific namespace policy by running the following command:

```
kubectl get namespacepolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your namespace policy by running the following command:

```
kubectl describe namespacepolicy <name> -n <namespace>
```

2.6.8.1.2. Creating a namespace policy from the console

As you create a namespace policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create a namespace policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **Namespace** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

2.6.8.1.2.1. Viewing your namespace policy from the console

You can view any namespace policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.8.2. Updating namespace policies

Learn to update namespace policies by viewing the following section.

2.6.8.2.1. Disabling namespace policies

Complete the following steps to disable your namespace policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.8.3. Deleting a namespace policy

Delete a namespace policy from the CLI or the console.

- Delete a namespace policy from the CLI:

- a. Delete a namespace policy by running the following command:

```
kubectl delete policy <namespacepolicy-name> -n <namespace>
```

+ After your policy is deleted, it is removed from your target cluster or clusters.

- a. Verify that your policy is removed by running the following command:

```
kubectl get policy <namespacepolicy-name> -n <namespace>
```

- Delete a namespace policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your namespace policy is deleted.

View a sample of a namespace policy, see *Namespace policy sample* on the [Namespace policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.9. Managing pod policies

Kubernetes configuration policy controller monitors the status of your pod policies. Pod policies are applied to define the container rules for your pods.

Learn to create, apply, view, and update your pod policy:

- [Creating a pod policy](#)
- [Updating pod policies](#)
- [Deleting a pod policy](#)

2.6.9.1. Creating a pod policy

You can create a YAML for your pod policy from the command line interface (CLI) or from the console. View the following sections to create a pod policy:

2.6.9.1.1. Creating a pod policy from the CLI

Complete the following steps to create a pod policy from the CLI:

1. Create a YAML file for your pod policy by running the following command:

```
kubectl create -f podpolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <pod-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get podpolicy --namespace=<namespace>
```

Your image pod policy is created from the CLI.

2.6.9.1.1.1. Viewing your pod policy from the CLI

Complete the following steps to view your pod policy from the CLI:

1. View details for a specific pod policy by running the following command:

```
kubectl get podpolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your pod policy by running the following command:

```
kubectl describe podpolicy <name> -n <namespace>
```

2.6.9.1.2. Creating a pod policy from the console

As you create a pod policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the pod policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **Pod** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

Viewing your pod policy from the console

You can view any pod policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.9.2. Updating pod policies

Learn to update pod policies by viewing the following section.

2.6.9.2.1. Disabling pod policies

Complete the following steps to disable your pod policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.9.3. Deleting a pod policy

Delete the pod policy from the CLI or the console.

- Delete a pod policy from the CLI:
 - a. Delete a pod policy by running the following command:


```
kubectl delete policy <podpolicy-name> -n <namespace>
```
 - + After your policy is deleted, it is removed from your target cluster or clusters.
 - a. Verify that your policy is removed by running the following command:


```
kubectl get policy <podpolicy-name> -n <namespace>
```
- Delete a pod policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your pod policy is deleted.

To view a sample of a pod policy, see the *Pod policy sample* from the [Pod policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.10. Managing pod security policies

Apply a pod security policy to secure pods and containers. Learn to create, apply, view, and update your pod security policy in the following sections:

- [Creating a pod security policy](#)

- [Updating pod security policies](#)
- [Deleting a pod security policy](#)

2.6.10.1. Creating a pod security policy

You can create a YAML file for your pod security policy from the command line interface (CLI) or from the console. View the following sections to create a pod security policy:

2.6.10.1.1. Creating a pod security policy from the CLI

Complete the following steps to create a pod security from the CLI:

1. Create a YAML file for your pod security policy by running the following command:

```
kubectl create -f podsecuritypolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <podsecurity-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get podsecuritypolicy --namespace=<namespace>
```

Your pod security policy is created from the CLI.

2.6.10.1.1.1. Viewing your pod security policy from the CLI

Complete the following steps to view your pod security policy from the CLI:

1. View details for a specific pod security policy by running the following command:

```
kubectl get podsecuritypolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your pod security policy by running the following command:

```
kubectl describe podsecuritypolicy <name> -n <namespace>
```

2.6.10.1.2. Creating a pod security policy from the console

As you create a pod security policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the pod security policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **Podsecuritypolicy** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

2.6.10.1.2.1. Viewing your pod security policy from the console

You can view any pod security policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.10.2. Updating pod security policies

Learn to update pod security policies by viewing the following section.

2.6.10.2.1. Disabling pod security policies

Complete the following steps to disable your pod security policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.10.3. Deleting a pod security policy

Delete the pod security policy from the CLI or the console.

- Delete a pod security policy from the CLI:

- a. Delete a pod security policy by running the following command:

```
kubectl delete policy <podsecurity-policy-name> -n <namespace>
```

+ After your policy is deleted, it is removed from your target cluster or clusters.

- a. Verify that your policy is removed by running the following command:

```
kubectl get policy <podsecurity-policy-name> -n <namespace>
```

- Delete a pod security policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.

- d. From the *Remove policy* dialog box, click **Remove policy**.

Your pod security policy is deleted.

View a sample of a pod security policy, see *Pod security policy sample* on the [Pod security policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.11. Managing role policies

Kubernetes configuration policy controller monitors the status of role policies. Apply a role policy to set rules and permissions for specific roles in your cluster. Learn to create, apply, view, and update your role policy in the following sections:

- [Creating a role policy](#)
- [Updating role policies](#)
- [Deleting a role policy](#)

2.6.11.1. Creating a role policy

You can create a YAML file for your role policy from the command line interface (CLI) or from the console. View the following sections to create a role policy:

2.6.11.1.1. Creating a role policy from the CLI

Complete the following steps to create a role from the CLI:

1. Create a YAML file for your role policy by running the following command:

```
kubectl create -f rolepolicy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <role-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get rolepolicy --namespace=<namespace>
```

Your role policy is created from the CLI.

2.6.11.1.1.1. Viewing your role policy from the CLI

Complete the following steps to view your role policy from the CLI:

1. View details for a specific role policy by running the following command:

```
kubectl get rolepolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your role policy by running the following command:

```
kubectl describe rolepolicy <name> -n <namespace>
```

-

2.6.11.1.2. Creating a role policy from the console

As you create a role policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the role policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **Role** from the *Specifications* field. Parameter values are automatically set. You can edit your values.
5. Click **Create**.

2.6.11.1.2.1. Viewing your role policy from the console

You can view any role policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.11.2. Updating role policies

Learn to update role policies by viewing the following section.

2.6.11.2.1. Disabling role policies

Complete the following steps to disable your role policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.11.3. Deleting a role policy

Delete the role policy from the CLI or the console.

- Delete a role policy from the CLI:
 - a. Delete a role policy by running the following command:

```
kubectl delete policy <podsecurity-policy-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

- b. Verify that your policy is removed by running the following command:

```
kubectl get policy <podsecurity-policy-name> -n <namespace>
```

- Delete a role policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your role policy is deleted.

See the [policy-role.yaml](#) for the sample policy. Refer to [Kubernetes configuration policy controller](#) to view other configuration policies that are monitored by the controller.

For details to manage other policies, refer to [Managing security policies](#).

2.6.12. Managing role binding policies

Learn to create, apply, view, and update your role binding policies:

- [Creating a role binding policy](#)
- [Updating role binding policies](#)
- [Deleting a role binding policy](#)

2.6.12.1. Creating a role binding policy

You can create a YAML file for your role binding policy from the command line interface (CLI) or from the console. View the following sections to create a role binding policy:

2.6.12.1.1. Creating a role binding policy from the CLI

Complete the following steps to create a role binding policy from the CLI:

1. Create a YAML file for your role binding policy. Run the following command:

```
kubectl create -f rolebindingpolicy.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <rolebinding-policy-file-name> --namespace=<namespace>
```

3. Verify and list the policies by running the following command:


```
kubectl get rolebindingpolicy --namespace=<namespace>
```

Your role binding policy is created.

2.6.12.1.1. Viewing your role binding policy from the CLI

Complete the following steps to view your role binding policy from the CLI:

1. View details for a specific role binding policy by running the following command:

```
kubectl get rolebindingpolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your role binding policy by running the following command:

```
kubectl describe rolebindingpolicy <name> -n <namespace>
```

2.6.12.1.2. Creating a role binding policy from the console

As you create a role binding policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create a role binding policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Enter or select the appropriate values for the following fields:
 - Name
 - Specifications
 - Cluster selector
 - Remediation action
 - Standards
 - Categories
 - Controls
 - Disabled
5. Click **Create**.

A role binding policy is created.

2.6.12.1.2.1. Viewing your role binding policy from the console

You can view any role binding policy and its status from the console.

1. Log in to your cluster from the console.

2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the role binding policy violations by selecting the *Status* tab.

2.6.12.2. Updating role binding policies

Learn to update role binding policies by viewing the following section.

2.6.12.2.1. Disabling role binding policies

Complete the following steps to disable your role binding policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.12.3. Deleting a role binding policy

Delete the role binding policy from the CLI or the console.

- Delete a role binding policy from the CLI:
 - a. Delete a role binding policy by running the following command:

```
kubectl delete policy <rolebinding-policy-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.
 - b. Verify that your policy is removed by running the following command:

```
kubectl get policy <rolebinding-policy-name> -n <namespace>
```
- Delete a role binding policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your role binding policy is deleted.

View a sample of a role binding policy, see *Role binding policy sample* on the [Role binding policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.13. Managing Security Context Constraints policies

Learn to create, apply, view, and update your Security Context Constraints (SCC) policies:

- [Creating an SCC policy](#)
- [Updating SCC policies](#)
- [Deleting an SCC policy](#)

2.6.13.1. Creating an SCC policy

You can create a YAML file for your SCC policy from the command line interface (CLI) or from the console. View the following sections to create an SCC policy:

2.6.13.1.1. Creating an SCC policy from the CLI

See [Creating Security Context Constraints](#) in the OpenShift Container Platform documentation for more details.

2.6.13.1.1.1. Viewing your SCC policy from the CLI

See [Examining an SCC](#) in the OpenShift Container Platform documentation for more details.

2.6.13.1.2. Creating an SCC policy from the console

As you create an SCC policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create an SCC policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Enter or select the appropriate values for the following fields:
 - Name
 - Specifications
 - Cluster selector
 - Remediation action
 - Standards
 - Categories
 - Controls
 - Disabled

5. Click **Create**.

An SCC policy is created.

2.6.13.1.2.1. Viewing your SCC policy from the console

You can view any SCC policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the SCC policy violations by selecting the *Status* tab.

2.6.13.2. Updating SCC policies

Learn to update SCC policies by viewing the following sections.

2.6.13.2.1. Disabling SCC policies

Complete the following steps to disable your SCC policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.13.3. Deleting an SCC policy

Delete the SCC policy from the CLI or the console.

See [Deleting an SCC](#) in the OpenShift Container Platform documentation to learn more about deleting an SCC policy from the CLI.

- Delete an SCC policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your SCC policy is deleted.

To view a sample of an SCC policy, see the *Security context constraint policy sample* section of [Security Context Constraints policy](#). See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.14. Managing certificate policies

Learn to create, apply, view, and update your certificate policies.

- [Creating a certificate policy](#)
- [Updating certificate policies](#)
- [Deleting a certificate policy](#)

2.6.14.1. Creating a certificate policy

You can create a YAML file for your certificate policy from the command line interface (CLI) or from the console. View the following sections to create a certificate policy:

2.6.14.1.1. Creating a certificate policy from the CLI

Complete the following steps to create a certificate policy from the CLI:

1. Create a YAML file for your certificate policy. Run the following command:

```
kubectl create -f policy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <certificate-policy-file-name> --namespace=<namespace>
```

3. Verify and list the policies by running the following command:

```
kubectl get certificatepolicy --namespace=<namespace>
```

Your certificate policy is created.

2.6.14.1.1.1. Viewing your certificate policy from the CLI

Complete the following steps to view your certificate policy from the CLI:

1. View details for a specific certificate policy by running the following command:

```
kubectl get certificatepolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your certificate policy by running the following command:

```
kubectl describe certificatepolicy <name> -n <namespace>
```

2.6.14.1.2. Creating a certificate policy from the console

As you create a certificate policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create a certificate policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select *CertificatePolicy* for the *Specifications* parameter. Values for the remaining parameters are automatically set when you select the policy. You can edit your values.
5. Click **Create**.

A certificate policy is created.

2.6.14.1.2.1. Viewing your certificate policy from the console

You can view any certificate policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details. The *Details* tab and *Status* tab are displayed.
4. To view the compliance status of your policy, select the *Status* tab. Click the *View history* link to view a list of violation messages.

2.6.14.2. Updating certificate policies

2.6.14.2.1. Bringing your own certificates

You can monitor your own certificates with the certificate policy controller. You must complete one of the following requirements to monitor your own certificates:

- Create a Kubernetes TLS Secret for your certificate.
- Add the label **certificate_key_name** into your Kubernetes secret to monitor your certificates.

Create a Kubernetes TLS secret to monitor your own certificates by running the following command:

```
kubectl -n <namespace> create secret tls <secret name> --cert=<path to certificate>/<certificate name> --key=<path to key>/<key name>
```

2.6.14.2.2. Adding a label into your Kubernetes secret

Update the **metadata** parameter in your TLS Secret by adding the **certificate_key_name** label. Run the following command to add the **certificate_key_name** label:

```
kubectl label secret my-certificate -n default certificate_key_name=cert
```

Your updated TLS Secret might resemble the following content:

```
apiVersion: policy.open-cluster-management.io/v1
```

```

kind: Secret
metadata:
  name: my-certificate
  namespace: default
  labels:
    certificate_key_name: cert
type: Opaque
data:
  cert: <Certificate Data>
  key: <Private Key Data>

```

Note: When you add the label from the console, you must manually add the label into the TLS Secret YAML file.

2.6.14.2.3. Disabling certificate policies

When you create a certificate policy, it is enabled by default. Complete the following steps to disable a certificate policy from the CLI or the console:

- Disable a certificate policy from the console:
 - a. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
 - b. From the navigation menu, click **Governance** to view a table list of your policies.
 - c. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
 - d. Click **Disable policy**.

Your policy is disabled.

2.6.14.3. Deleting a certificate policy

Delete the certificate policy from the CLI or the console.

- Delete a certificate policy from the CLI:
 - a. Delete a certificate policy by running the following command:

```
kubectl delete policy <cert-policy-name> -n <namespace>
```

+ After your policy is deleted, it is removed from your target cluster or clusters.

- a. Verify that your policy is removed by running the following command:


```
kubectl get policy <policy-name> -n <namespace>
```
- Delete a certificate policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.

- d. From the *Remove policy* dialog box, click **Remove policy**.

Your certificate policy is deleted.

View a sample of a certificate policy, see [policy-certificate.yaml](#). Refer to [Certificate policy controller](#) for more details.

For more information about other policy controllers, see [Policy controllers](#). See [Managing security policies](#) to manage other policies.

2.6.15. Managing IAM policies

Apply an IAM policy to check the number of cluster administrators that you allow in your managed cluster. Learn to create, apply, view, and update your IAM policies in the following sections.

- [Creating an IAM policy](#)
- [Updating IAM policies](#)
- [Deleting an IAM policy](#)

2.6.15.1. Creating an IAM policy

You can create a YAML file for your IAM policy from the command line interface (CLI) or from the console.

2.6.15.1.1. Creating an IAM policy from the CLI

Complete the following steps to create an IAM policy from the CLI:

1. Create a YAML file with the IAM policy definition. Run the following command:

```
kubectl create -f iam-policy-1.yaml
```

Your IAM policy might resemble the following YAML file:

```
apiVersion: policy.open-cluster-management.io/v1
kind: IAMPolicy
metadata:
  name: iam-grc-policy
  label:
    category: "System-Integrity"
spec:
  clusterRole: cluster-admin
  remediationAction: inform
  disabled: false
  maxClusterRoleBindingUsers: 5
```

2. Apply the policy by running the following command:

```
kubectl apply -f <iam-policy-file-name> --namespace=<namespace>
```

3. Verify and list the policy by running the following command:


```
kubectl get <iam-policy-file-name> --namespace=<namespace>
```

Your IAM policy is created.

2.6.15.1.1. Viewing your IAM policy from the CLI

Complete the following steps to view your IAM policy:

1. View details for specific IAM policy by running the following command:

```
kubectl get iampolicy <policy-name> -n <namespace> -o yaml
```

2. View a description of your IAM policy by running the following command:

```
kubectl describe iampolicy <name> -n <namespace>
```

2.6.15.1.2. Creating an IAM policy from the console

As you create your IAM policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create an IAM policy from the console:

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance**.
3. Click **Create policy**.
4. Select **IamPolicy** from the *Specifications* field. Values for the remaining parameters are set automatically when you select the policy. You can edit your values.
5. Click **Create**.

An IAM policy is created.

2.6.15.1.2.1. Viewing your IAM policy from the console

You can view any IAM policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select one of your policies to view more details.
4. View the IAM policy violations by selecting the *Status* tab.

2.6.15.2. Updating IAM policies

Learn to update IAM policies by viewing the following section.

2.6.15.2.1. Disabling IAM policies

Complete the following steps to disable your IAM policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.15.3. Deleting an IAM policy

Delete a configuration policy from the CLI or the console.

- Delete an IAM policy from the CLI:
 - a. Delete an IAM policy by running the following command:

```
kubectl delete policy <iam-policy-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

- b. Verify that your policy is removed by running the following command:

```
kubectl get policy <iam-policy-name> -n <namespace>
```

- Delete an IAM policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your policy is deleted.

View the *IAM policy sample* from the [IAM policy controller](#) page. See [Managing security policies](#) for more topics.

2.6.16. Managing ETCD encryption policies

Apply an encryption policy to detect, or enable encryption of sensitive data in the ETCD data-store. Learn to create, apply, view, and update your encryption policy in the following sections.

- [Creating an encryption policy](#)
- [Updating encryption policies](#)
- [Deleting an encryption policy](#)

2.6.16.1. Creating an encryption policy

You can create a YAML file for your encryption policy from the command line interface (CLI) or from the console. View the following sections to create a encryption policy:

2.6.16.1.1. Creating an encryption policy from the CLI

Complete the following steps to create an encryption policy from the CLI:

1. Create a YAML file for your encryption policy by running the following command:

```
kubectl create -f etcd-encryption-policy-1.yaml
```

2. Apply the policy by running the following command:

```
kubectl apply -f <etcd-encryption-policy-file-name> --namespace=<namespace>
```

3. List and verify the policies by running the following command:

```
kubectl get etcd-encryption-policy --namespace=<namespace>
```

Your encryption policy is created from the CLI.

2.6.16.1.1.1. Viewing your encryption policy from the CLI

Complete the following steps to view your encryption policy from the CLI:

1. View details for a specific encryption policy by running the following command:

```
kubectl get etcd-encryption-policy <policy-name> -n <namespace> -o yaml
```

2. View a description of your encryption policy by running the following command:

```
kubectl describe etcd-encryption-policy <name> -n <namespace>
```

2.6.16.1.2. Creating an encryption policy from the console

As you create a encryption policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create the encryption policy from the console:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Govern risk**.
3. Click **Create policy**.
4. Select **EtcdEncryption** from the *Specifications* field. Values for the remaining parameters are set automatically when you select the policy. You can edit your values.
5. Click **Create**.

2.6.16.1.2.1. Viewing your encryption policy from the console

You can view any encryption policy and its status from the console.

1. Log in to your cluster from the console.

2. From the navigation menu, click **Govern risk** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *All policies* tab or *_Cluster violations+* tab.
3. Select one of your policies to view more details. The *Details* tab and *Status* tab are displayed.

2.6.16.2. Updating encryption policies

Learn to update encryption policies by viewing the following section.

2.6.16.2.1. Disabling encryption policies

Complete the following steps to disable your encryption policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Govern risk** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.16.3. Deleting an encryption policy

Delete the encryption policy from the CLI or the console.

- Delete an encryption policy from the CLI:
 - a. Delete an encryption policy by running the following command:

```
kubectl delete policy <podsecurity-policy-name> -n <namespace>
```
 - + After your policy is deleted, it is removed from your target cluster or clusters.
 - a. Verify that your policy is removed by running the following command:

```
kubectl get policy <podsecurity-policy-name> -n <namespace>
```
- Delete an encryption policy from the console:
 - a. From the navigation menu, click **Govern risk** to view a table list of your policies.
 - b. Click the **Actions** icon for the policy you want to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your encryption policy is deleted.

View a sample of an encryption policy, see *ETCD encryption policy sample* on the [ETCD encryption policy](#) page. See [Kubernetes configuration policy controller](#) to learn about other configuration policies. See [Managing security policies](#) to manage other policies.

2.6.17. Managing gatekeeper operator policies

Use the gatekeeper operator policy to install the gatekeeper operator and gatekeeper on a managed cluster. Learn to create, view, and update your gatekeeper operator policies in the following sections.

Required access: Cluster administrator

- [Installing gatekeeper using a gatekeeper operator policy](#)
- [Creating a gatekeeper policy from the console](#)
- [Upgrading gatekeeper and the gatekeeper operator](#)
- [Updating gatekeeper operator policy](#)
- [Deleting gatekeeper operator policy](#)
- [Uninstalling gatekeeper policy, gatekeeper, and gatekeeper operator policy](#)

2.6.17.1. Installing gatekeeper using a gatekeeper operator policy

Use the governance framework to install the gatekeeper operator. Gatekeeper operator is available in the OpenShift Container Platform catalog. See *Adding Operators to a cluster* in the [OpenShift Container Platform documentation](#) for more information.

Use the configuration policy controller to install the gatekeeper operator policy. During the install, the operator group and subscription pull the gatekeeper operator to install it in your managed cluster. Then, the gatekeeper operator creates a gatekeeper CR to configure gatekeeper. View the [Gatekeeper operator CR](#) sample.

Gatekeeper operator policy is monitored by the Red Hat Advanced Cluster Management configuration policy controller, where **enforce** remediation action is supported. Gatekeeper operator policies are created automatically by the controller when set to **enforce**.

2.6.17.2. Creating a gatekeeper policy from the console

Complete the following steps to install the gatekeeper operator policy from the console:

1. Log in to your cluster.
2. From the navigation menu, click **Governance**.
3. Create a policy by selecting **Create policy**.
4. As you complete the form, select **GatekeeperOperator** from the *Specifications* field. The parameter values for your policy are automatically populated and the policy is set to **inform** by default. Set your remediation action to **enforce** to install gatekeeper. See [policy-gatekeeper-operator.yaml](#) to view an the sample.
Note: Consider that default values can be generated by the operator. See [Gatekeeper Helm Chart](#) for an explanation of the optional parameters that can be used for the gatekeeper operator policy.

2.6.17.2.1. Gatekeeper operator CR

```
apiVersion: operator.gatekeeper.sh/v1alpha1
kind: Gatekeeper
```

```

metadata:
  name: gatekeeper
spec:
  # Add fields here
  image:
    image: docker.io/openpolicyagent/gatekeeper:v3.2.2
    imagePullPolicy: Always
  audit:
    replicas: 1
    logLevel: DEBUG
    auditInterval: 10s
    constraintViolationLimit: 55
    auditFromCache: Enabled
    auditChunkSize: 66
    emitAuditEvents: Enabled
  resources:
    limits:
      cpu: 500m
      memory: 150Mi
    requests:
      cpu: 500m
      memory: 130Mi
  validatingWebhook: Enabled
  webhook:
    replicas: 2
    logLevel: ERROR
    emitAdmissionEvents: Enabled
    failurePolicy: Fail
  resources:
    limits:
      cpu: 480m
      memory: 140Mi
    requests:
      cpu: 400m
      memory: 120Mi
  nodeSelector:
    region: "EMEA"
  affinity:
    podAffinity:
      requiredDuringSchedulingIgnoredDuringExecution:
        - labelSelector:
            matchLabels:
              auditKey: "auditValue"
            topologyKey: topology.kubernetes.io/zone
  tolerations:
    - key: "Example"
      operator: "Exists"
      effect: "NoSchedule"
  podAnnotations:
    some-annotation: "this is a test"
    other-annotation: "another test"

```

2.6.17.3. Upgrading gatekeeper and the gatekeeper operator

You can upgrade the versions for gatekeeper and the gatekeeper operator. Complete the following steps:

- When you install the gatekeeper operator with the gatekeeper operator policy, notice the value for **installPlanApproval**. The operator upgrades automatically when **installPlanApproval** is set to **Automatic**. You must approve the upgrade of the gatekeeper operator manually, for each cluster, when **installPlanApproval** is set to **Manual**.
- Upgrade the gatekeeper version manually by completing the following steps:
 - a. Identify the latest version for gatekeeper, see [Red Hat Ecosystem Catalog - gatekeeper](#).
 - b. Select the drop-down menu of the *Tag* filter to find the latest static tag. For example, **v3.3.0-1**.
 - c. Edit the gatekeeper operator policy and update the **image** tag to use the latest static tag. View the following example of the updated line in the gatekeeper operator policy:

```
image: 'registry.redhat.io/rhacm2/gatekeeper-rhel8:v3.3.0-1'
```

For more information, see [How to use Gatekeeper](#).

2.6.17.4. Updating gatekeeper operator policy

Learn to update the gatekeeper operator policy by viewing the following section.

2.6.17.4.1. Viewing gatekeeper operator policy from the console

You can view your gatekeeper operator policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select the **policy-gatekeeper-operator** policy to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.17.4.2. Disabling gatekeeper operator policy

Complete the following steps to disable your gatekeeper operator policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable your policy by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.17.5. Deleting gatekeeper operator policy

Delete the gatekeeper operator policy from the CLI or the console.

- Delete gatekeeper operator policy from the CLI:

- a. Delete gatekeeper operator policy by running the following command:

```
kubectl delete policy <policy-gatekeeper-operator-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

- b. Verify that your policy is removed by running the following command:

```
kubectl get policy <policy-gatekeeper-operator-name> -n <namespace>
```

- Delete gatekeeper operator policy from the console:
 - a. From the navigation menu, click **Governance** to view a table list of your policies.
 - b. Click the **Actions** icon for the **policy-gatekeeper-operator** policy to delete in the policy violation table.
 - c. Click **Remove**.
 - d. From the *Remove policy* dialog box, click **Remove policy**.

Your gatekeeper operator policy is deleted.

2.6.17.6. Uninstalling gatekeeper policy, gatekeeper, and gatekeeper operator policy

Complete the following steps to uninstall gatekeeper policy, gatekeeper, and gatekeeper operator policy:

1. Remove the gatekeeper **Constraint** and **ConstraintTemplate** that is applied on your managed cluster:
 - a. Edit your gatekeeper operator policy. Locate the **ConfigurationPolicy** template that you used to create the gatekeeper **Constraint** and **ConstraintTemplate**.
 - b. Change the value for **complianceType** of the **ConfigurationPolicy** template to **mustnothave**.
 - c. Save and apply the policy.
2. Remove gatekeeper instance from your managed cluster:
 - a. Edit your gatekeeper operator policy. Locate the **ConfigurationPolicy** template that you used to create the Gatekeeper custom resource (CR).
 - b. Change the value for **complianceType** of the **ConfigurationPolicy** template to **mustnothave**.
3. Remove the gatekeeper operator that is on your managed cluster:
 - a. Edit your gatekeeper operator policy. Locate the **ConfigurationPolicy** template that you used to create the Subscription CR.
 - b. Change the value for **complianceType** of the **ConfigurationPolicy** template to **mustnothave**.

Gatekeeper policy, gatekeeper, and gatekeeper operator policy are uninstalled.

See [Integrating gatekeeper constraints and constraint templates](#) for details about gatekeeper. For a list of topics to integrate third-party policies with the product, see [Integrate third-party policy controllers](#).

2.6.18. Managing compliance operator policies

Apply a compliance operator policy to install the Red Hat OpenShift Container Platform compliance operator. Learn to create, update, apply, view, and your compliance operator policy in the following sections.

- [Creating a compliance operator policy from the console](#)
- [Updating a compliance operator policy](#)
- [Deleting a compliance operator policy](#)

2.6.18.1. Creating a compliance operator policy from the console

As you create a compliance operator policy from the console, a YAML file is also created in the YAML editor. Complete the following steps to create a compliance operator policy from the console:

1. Log in to your hub cluster.
2. From the navigation menu, select **Governance**.
3. Click **Create policy**. As you complete the YAML form, select **ComplianceOperator** from the *Specifications* field.
The following resources are created: compliance operator namespace (**openshift-compliance**), an operator group (**compliance-operator**), and a subscription (**comp-operator-subscription**).

Note: Enforce is supported. When you set the remediation action to **enforce** the policy installs the compliance operator.

A compliance operator policy is created.

2.6.18.2. Updating a compliance operator policy

Learn to update the compliance operator policy by viewing the following section.

2.6.18.2.1. Viewing a compliance operator policy from the console

You can view any compliance operator policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select **policy-comp-operator** policy to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.18.2.2. Disabling a compliance operator policy

Complete the following steps to disable your compliance operator policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable **policy-comp-operator** by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.18.3. Deleting a compliance operator policy

Delete the compliance operator policy from the CLI or the console.

- Delete compliance operator policy from the CLI:
 1. Delete compliance operator policy by running the following command:

```
kubectl delete policy <policy-comp-operator-name> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.
 2. Verify that your policy is removed by running the following command:

```
kubectl get policy <policy-comp-operator-name> -n <namespace>
```
- Delete compliance operator policy from the console:
 1. From the navigation menu, click **Governance** to view a table list of your policies.
 2. Click the **Actions** icon for the **policy-comp-operator** policy to delete in the policy violation table.
 3. Click **Remove**.
 4. From the *Remove policy* dialog box, click **Remove policy**.

Your compliance operator policy is deleted.

For more details about the compliance operator policy, see [Compliance operator policy](#).

2.6.19. Managing E8 scan policies

Apply an E8 scan policy to scan master and worker nodes for compliance with the E8 profiles. Learn to create, update, apply, view, and your E8 scan policy in the following sections.

- [Creating an E8 scan policy from the console](#)
- [Updating an E8 scan policy](#)
- [Deleting an E8 scan policy](#)

2.6.19.1. Creating an E8 scan policy from the console

As you create an E8 scan policy from the console, a YAML file is also created in the YAML editor. **Note:** The compliance operator must be installed. For more details, see [Creating a compliance operator policy from the console](#).

Complete the following steps to create an E8 scan policy from the console:

1. Log in to your hub cluster.
2. From the navigation menu, select **Governance**.
3. Click **Create policy**. Select *Custom specification* from the *Specification* field. Copy and paste the **policy-e8-scan** from the policy-collection repository.
The following resources are created: ScanSettingBinding (**ScanSettingBinding**), a ComplianceSuite (**compliance-suite-e8**), and a ComplianceCheckResult (**compliance-suite-e8-results**).

Note: Automatic remediation is supported. Set the remediation action to **enforce** to create ScanSettingBinding resource.

An E8 scan policy is created.

2.6.19.2. Updating an E8 scan policy

Learn to update the E8 scan policy by viewing the following section.

2.6.19.2.1. Viewing an E8 scan policy from the console

You can view any E8 scan policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select **policy-compliance-operator-e8-scan** policy to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.19.2.2. Disabling an E8 scan policy

Complete the following steps to disable your compliance operator policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable **policy-compliance-operator-e8-scan** by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.19.3. Deleting an E8 scan policy

Delete the E8 scan policy from the CLI or the console.

- Delete an E8 scan policy from the CLI:

1. Delete an E8 policy by running the following command:

```
kubectl delete policy <policy-compliance-operator-e8-scan> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

2. Verify that your policy is removed by running the following command:

```
kubectl get policy <policy-compliance-operator-e8-scan> -n <namespace>
```

- Delete an E8 scan policy from the console:

1. From the navigation menu, click **Governance** to view a table list of your policies.
2. Click the **Actions** icon for the ***policy-compliance-operator-e8-scan*** policy to delete in the policy violation table.
3. Click **Remove**.
4. From the *Remove policy* dialog box, click **Remove policy**.

Your E8 scan policy is deleted.

For more details about the E8 scan policy, see [E8 scan policy](#).

2.6.20. Managing OpenShift CIS scan policies

Apply an OpenShift CIS scan policy to scan master and worker nodes for compliance with the CIS security benchmark. Learn to create, update, apply, and view your OpenShift CIS scan policy in the following sections.

- [Creating an OpenShift CIS scan policy from the console](#)
- [Updating an OpenShift CIS scan policy](#)
 - [Viewing an OpenShift CIS scan policy from the console](#)
 - [Disabling an OpenShift CIS scan policy](#)
- [Deleting an OpenShift CIS scan policy](#)

2.6.20.1. Creating an OpenShift CIS scan policy from the console

As you create an OpenShift Container Platform CIS policy from the console, a YAML file is also created in the YAML editor. **Note:** The compliance operator must be installed. For more details, see [Creating a compliance operator policy from the console](#).

Complete the following steps to create an OpenShift Container Platform CIS policy from the console:

1. Log in to your hub cluster.
2. From the navigation menu, select **Governance**.

3. Click **Create policy**. Select *Custom specification* from the *Specification* field. Copy and paste the **policy-compliance-operator-cis-scan** file contents from the **policy-collection** repository. The following resources are created: **ScanSettingBinding** (**compliance-cis-scan**), a **ComplianceSuite** (**compliance-suite-cis**), and a **ComplianceCheckResult** (**compliance-suite-cis-results**).

Note: Automatic remediation is supported. Set the remediation action to **enforce** to create **ScanSettingBinding** resource.

An OpenShift CIS scan policy is created.

2.6.20.2. Updating an OpenShift CIS scan policy

Learn to update the OpenShift CIS scan policy by viewing the following section.

2.6.20.2.1. Viewing an OpenShift CIS scan policy from the console

You can view any OpenShift CIS scan policy and its status from the console.

1. Log in to your cluster from the console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
Note: You can filter the table list of your policies by selecting the *Policies* tab or *Cluster violations* tab.
3. Select **policy-compliance-operator-cis-scan** policy to view more details.
4. View the policy violations by selecting the *Status* tab.

2.6.20.2.2. Disabling an OpenShift CIS scan policy

Complete the following steps to disable your compliance operator policy:

1. Log in to your Red Hat Advanced Cluster Management for Kubernetes console.
2. From the navigation menu, click **Governance** to view a table list of your policies.
3. Disable **policy-compliance-operator-cis-scan** by clicking the **Actions** icon > **Disable**. The *Disable Policy* dialog box appears.
4. Click **Disable policy**.

Your policy is disabled.

2.6.20.3. Deleting an OpenShift CIS scan policy

Delete the OpenShift CIS scan policy by using the CLI or the console.

- Delete an OpenShift CIS scan policy by using the CLI:
 1. Delete an OpenShift CIS scan policy by running the following command:

```
kubectl delete policy <policy-compliance-operator-cis-scan> -n <namespace>
```

After your policy is deleted, it is removed from your target cluster or clusters.

2. Verify that your policy is removed by running the following command:

```
kubectl get policy <policy-compliance-operator-cis-scan> -n <namespace>
```

- Delete an OpenShift CIS scan policy by using the console:
 1. From the navigation menu, click **Governance** to view a table list of your policies.
 2. Click the **Actions** icon for the **policy-compliance-operator-cis-scan** policy to delete in the policy violation table.
 3. Click **Remove**.
 4. From the *Remove policy* dialog box, click **Remove policy**.

Your OpenShift CIS scan policy is deleted.

For more details about the OpenShift CIS scan policy, see [OpenShift CIS scan policy](#).

2.7. INTEGRITY SHIELD PROTECTION (TECHNOLOGY PREVIEW)

Integrity shield is a tool that helps with integrity control for enforcing signature verification for any requests to create, or update resources. Integrity shield supports Open Policy Agent (OPA) and Gatekeeper, verifies if the requests have a signature, and blocks any unauthorized requests according to the defined constraint.

See the following integrity shield capabilities:

- Support the deployment of authorized Kubernetes manifests only.
- Support zero-drift in resource configuration unless the resource is added to the allowlist.
- Perform all integrity verification on the cluster such as enforcing the admission controller.
- Monitor resources continuously to report if unauthorized Kubernetes resources are deployed on the cluster.
- X509, GPG, and Sigstore signing are supported to sign Kubernetes manifest YAML files. Kubernetes integrity shield supports Sigstore signing by using the [k8s-manifest-sigstore](#).

2.7.1. Integrity shield architecture

Integrity shield consists of two main components, API and Observer. Integrity shield operator supports the installation and management of the integrity shield components on your cluster. View the following description of the components:

- *Integrity shield API* receives a Kubernetes resource from the OPA or gatekeeper, validates the resource that is included in the admission request, and sends the verification result to the OPA or gatekeeper. The integrity shield API uses the **verify-resource** feature of the **k8s-manifest-sigstore** internally to verify the Kubernetes manifest YAML file. Integrity shield API validates resources according to **ManifestingIntegrityConstraint**, which is a custom resource based on the constraint framework of OPA or gatekeeper.
- *Integrity shield Observer* continuously verifies Kubernetes resources on clusters according to **ManifestingIntegrityConstraint** resources and exports the results to resources called, **ManifestIntegrityState**. Integrity shield Observer also uses **k8s-manifest-sigstore** to verify

signatures.

2.7.2. Supported versions

The following product versions support integrity shield protection:

- [Red Hat OpenShift Container Platform 4.7.1 and later](#)
- [Kubernetes v1.19.7 and later](#)
- [gatekeeper-operator.v-2.0](#)
- [gatekeeper v3.5](#)

See [Enable integrity shield protection \(Technology preview\)](#) for more details.

2.7.3. Enable integrity shield protection (Technology Preview)

Enable integrity shield protection in an Red Hat Advanced Cluster Management for Kubernetes cluster to protect the integrity of Kubernetes resources.

2.7.3.1. Prerequisites

The following prerequisites are required to enable integrity shield protection on a Red Hat Advanced Cluster Management managed cluster:

- Install an Red Hat Advanced Cluster Management hub cluster that has one or more managed clusters, along with cluster administrator access to the cluster to use the **oc** or **kubectl** commands.
- Install integrity shield. Before you install the integrity shield, you must install an Open Policy Agent or gatekeeper on your cluster. Complete the following steps to install the integrity shield operator:
 - a. Install the integrity shield operator in a namespace for integrity shield by running the following command:

```
kubectl create -f https://raw.githubusercontent.com/stolostron/integrity-shield/master/integrity-shield-operator/deploy/integrity-shield-operator-latest.yaml
```

- b. Install the integrity shield custom resource with the following command:

```
kubectl create -f https://raw.githubusercontent.com/stolostron/integrity-shield/master/integrity-shield-operator/config/samples/apis_v1_integrityshield.yaml -n integrity-shield-operator-system
```

- c. Integrity shield requires a pair of keys for signing and verifying signatures of resources that need to be protected in a cluster. Set up signing and verification key pair:

- Generate a new GPG key with the following command:

```
gpg --full-generate-key
```

- Export your new GPG public key to a file with the following command:

```
gpg --export signer@enterprise.com > /tmp/pubring.gpg
```

- Install [yq](#) to run the script for signing a Red Hat Advanced Cluster Management policy.
- Enabling integrity shield protection and signing Red Hat Advanced Cluster Management include retrieving and committing sources from the **integrity-shield** repository. You must install [Git](#).

2.7.3.2. Enabling integrity shield protection

Enable the integrity shield on your Red Hat Advanced Cluster Management managed cluster by completing the following steps:

1. Create a namespace on your hub cluster for the integrity shield. Run the following command:

```
oc create ns your-integrity-shield-ns
```

2. Deploy a verification key to a Red Hat Advanced Cluster Management managed cluster. As a reminder, you must create signing and verification keys. Run the [acm-verification-key-setup.sh](#) on your hub cluster to setup a verification key. Run the following command:

```
curl -s https://raw.githubusercontent.com/stolostron/integrity-shield/master/scripts/ACM/acm-verification-key-setup.sh | bash -s \
  --namespace integrity-shield-operator-system \
  --secret keyring-secret \
  --path /tmp/pubring.gpg \
  --label environment=dev | oc apply -f -
```

To remove the verification key, run the following command:

```
curl -s https://raw.githubusercontent.com/stolostron/integrity-shield/master/scripts/ACM/acm-verification-key-setup.sh | bash -s - \
  --namespace integrity-shield-operator-system \
  --secret keyring-secret \
  --path /tmp/pubring.gpg \
  --label environment=dev | oc delete -f -
```

3. Create a Red Hat Advanced Cluster Management policy named **policy-integrity-shield** on your hub cluster.
 - a. Retrieve the [policy-integrity-shield](#) policy from the **policy-collection** repository. Be sure to fork the repository.
 - b. Configure the namespace to deploy the integrity shield on a Red Hat Advanced Cluster Management managed cluster by updating the **remediationAction** parameter value, from **inform** to **enforce**.
 - c. Configure a email for the signer and verification key by updating the **signerConfig** section.
 - d. Configure the **PlacementRule** which determines what Red Hat Advanced Cluster Management managed clusters that integrity shield should be deployed to.
 - e. Sign **policy-integrity-shield.yaml** by running the following command:

```
curl -s https://raw.githubusercontent.com/stolostron/integrity-shield/master/scripts/gpg-
```



```
annotation-sign.sh | bash -s \  
signer@enterprise.com \  
policy-integrity-shield.yaml
```

Note: You must create a new signature whenever you change the policy and apply to other clusters. Otherwise, the change is blocked and not applied.

See [policy-integrity-shield](#) policy for an example.