



# OpenShift Container Platform 4.15

## Web console

Getting started with the web console in OpenShift Container Platform



# OpenShift Container Platform 4.15 Web console

---

Getting started with the web console in OpenShift Container Platform

## Legal Notice

Copyright © 2024 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux<sup>®</sup> is the registered trademark of Linus Torvalds in the United States and other countries.

Java<sup>®</sup> is a registered trademark of Oracle and/or its affiliates.

XFS<sup>®</sup> is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL<sup>®</sup> is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js<sup>®</sup> is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack<sup>®</sup> Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

## Abstract

This document provides instructions for accessing and customizing the OpenShift Container Platform web console.

## Table of Contents

<b>CHAPTER 1. WEB CONSOLE OVERVIEW</b> .....	<b>8</b>
1.1. ABOUT THE ADMINISTRATOR PERSPECTIVE IN THE WEB CONSOLE	8
1.2. ABOUT THE DEVELOPER PERSPECTIVE IN THE WEB CONSOLE	8
1.3. ACCESSING THE PERSPECTIVES	9
<b>CHAPTER 2. ACCESSING THE WEB CONSOLE</b> .....	<b>11</b>
2.1. PREREQUISITES	11
2.2. UNDERSTANDING AND ACCESSING THE WEB CONSOLE	11
<b>CHAPTER 3. USING THE OPENSIFT CONTAINER PLATFORM DASHBOARD TO GET CLUSTER INFORMATION</b> .....	<b>12</b>
3.1. ABOUT THE OPENSIFT CONTAINER PLATFORM DASHBOARDS PAGE	12
3.2. RECOGNIZING RESOURCE AND PROJECT LIMITS AND QUOTAS	13
<b>CHAPTER 4. ADDING USER PREFERENCES</b> .....	<b>14</b>
4.1. SETTING USER PREFERENCES	14
<b>CHAPTER 5. CONFIGURING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM</b> .....	<b>15</b>
5.1. PREREQUISITES	15
5.2. CONFIGURING THE WEB CONSOLE	15
5.3. DISABLING QUICK STARTS IN THE WEB CONSOLE	15
<b>CHAPTER 6. CUSTOMIZING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM</b> .....	<b>17</b>
6.1. ADDING A CUSTOM LOGO AND PRODUCT NAME	17
6.2. CREATING CUSTOM LINKS IN THE WEB CONSOLE	18
6.3. CUSTOMIZING CONSOLE ROUTES	19
6.3.1. Customizing the console route	19
6.3.2. Customizing the download route	20
6.4. CUSTOMIZING THE LOGIN PAGE	21
6.5. DEFINING A TEMPLATE FOR AN EXTERNAL LOG LINK	22
6.6. CREATING CUSTOM NOTIFICATION BANNERS	23
6.7. CUSTOMIZING CLI DOWNLOADS	23
6.8. ADDING YAML EXAMPLES TO KUBERNETES RESOURCES	24
6.9. CUSTOMIZING USER PERSPECTIVES	25
6.9.1. Customizing a perspective using YAML view	25
6.9.2. Customizing a perspective using form view	27
6.10. DEVELOPER CATALOG AND SUB-CATALOG CUSTOMIZATION	27
6.10.1. Customizing a developer catalog or its sub-catalogs using the YAML view	28
6.10.2. Customizing a developer catalog or its sub-catalogs using the form view	29
6.10.2.1. Example YAML file changes	30
<b>CHAPTER 7. DYNAMIC PLUGINS</b> .....	<b>32</b>
7.1. OVERVIEW OF DYNAMIC PLUGINS	32
7.1.1. About dynamic plugins	32
7.1.2. Key features	32
7.1.3. General guidelines	32
PatternFly guidelines	32
7.2. GETTING STARTED WITH DYNAMIC PLUGINS	33
7.2.1. Dynamic plugin development	33
7.3. DEPLOY YOUR PLUGIN ON A CLUSTER	34
7.3.1. Build an image with Docker	34
7.3.2. Deploy your plugin on a cluster	34
7.3.3. Plugin service proxy	36

7.3.4. Disabling your plugin in the browser	37
7.3.5. Additional resources	37
7.4. DYNAMIC PLUGIN EXAMPLE	37
7.4.1. Adding a tab to the pods page	38
7.5. DYNAMIC PLUGIN REFERENCE	39
7.5.1. Dynamic plugin extension types	40
console.action/filter	40
console.action/group	40
console.action/provider	41
console.action/resource-provider	41
console.alert-action	42
console.catalog/item-filter	42
console.catalog/item-metadata	42
console.catalog/item-provider	43
console.catalog/item-type	43
console.catalog/item-type-metadata	44
console.cluster-overview/inventory-item	44
console.cluster-overview/multiline-utilization-item	44
console.cluster-overview/utilization-item	45
console.context-provider	45
console.dashboards/card	46
console.dashboards/custom/overview/detail/item	46
console.dashboards/overview/activity/resource	47
console.dashboards/overview/health/operator	47
console.dashboards/overview/health/prometheus	48
console.dashboards/overview/health/resource	48
console.dashboards/overview/health/url	49
console.dashboards/overview/inventory/item	50
console.dashboards/overview/inventory/item/group	50
console.dashboards/overview/inventory/item/replacement	50
console.dashboards/overview/prometheus/activity/resource	51
console.dashboards/project/overview/item	51
console.dashboards/tab	52
console.file-upload	52
console.flag	52
console.flag/hookProvider	52
console.flag/model	53
console.global-config	53
console.model-metadata	53
console.navigation/href	54
console.navigation/resource-cluster	55
console.navigation/resource-ns	56
console.navigation/section	57
console.navigation/separator	58
console.page/resource/details	59
console.page/resource/list	59
console.page/route	60
console.page/route/standalone	60
console.perspective	61
console.project-overview/inventory-item	61
console.project-overview/utilization-item	62
console.pvc/alert	62
console.pvc/create-prop	63

console.pvc/delete	63
console.pvc/status	63
console.redux-reducer	64
console.resource/create	64
console.resource/details-item	64
console.storage-class/provisioner	65
console.storage-provider	65
console.tab	66
console.tab/horizontalNav	66
console.telemetry/listener	67
console.topology/adapter/build	67
console.topology/adapter/network	67
console.topology/adapter/pod	67
console.topology/component/factory	68
console.topology/create/connector	68
console.topology/data/factory	68
console.topology/decorator/provider	69
console.topology/details/resource-alert	69
console.topology/details/resource-link	69
console.topology/details/tab	70
console.topology/details/tab-section	70
console.topology/display/filters	71
console.topology/relationship/provider	71
console.user-preference/group	72
console.user-preference/item	72
console.yaml-template	73
dev-console.add/action	73
dev-console.add/action-group	74
dev-console.import/environment	75
console.dashboards/overview/detail/item	75
console.page/resource/tab	75
7.5.2. Dynamic plugin API	76
useActivePerspective	76
GreenCheckCircleIcon	76
RedExclamationCircleIcon	76
YellowExclamationTriangleIcon	77
BlueInfoCircleIcon	77
ErrorStatus	77
InfoStatus	78
ProgressStatus	78
SuccessStatus	79
checkAccess	79
useAccessReview	79
useResolvedExtensions	80
HorizontalNav	80
VirtualizedTable	81
TableData	81
useActiveColumns	82
ListPageHeader	83
ListPageCreate	83
ListPageCreateLink	84
ListPageCreateButton	84
ListPageCreateDropdown	85

ListPageFilter	85
useListPageFilter	86
ResourceLink	87
ResourceIcon	88
useK8sModel	88
useK8sModels	89
useK8sWatchResource	89
useK8sWatchResources	89
consoleFetch	90
consoleFetchJSON	90
consoleFetchText	90
getConsoleRequestHeaders	91
k8sGetResource	91
k8sCreateResource	92
k8sUpdateResource	92
k8sPatchResource	92
k8sDeleteResource	93
k8sListResource	94
k8sListResourceItems	94
getAPIVersionForModel	94
getGroupVersionKindForResource	94
getGroupVersionKindForModel	94
StatusPopupSection	94
StatusPopupItem	95
Overview	96
OverviewGrid	96
InventoryItem	96
InventoryItemTitle	97
InventoryItemBody	97
InventoryItemStatus	97
InventoryItemLoading	98
useFlag	98
CodeEditor	98
ResourceYAMLEditor	99
ResourceEventStream	100
usePrometheusPoll	100
Timestamp	101
useModal	101
ActionServiceProvider	101
NamespaceBar	102
ErrorBoundaryFallbackPage	102
QueryBrowser	103
useAnnotationsModal	105
useDeleteModal	105
useLabelsModel	106
useActiveNamespace	106
PerspectiveContext	107
useAccessReviewAllowed	107
useSafetyFirst	107
YAMLEditor	107
7.5.3. Troubleshooting your dynamic plugin	108

<b>CHAPTER 8. WEB TERMINAL</b>	<b>110</b>
--------------------------------	------------



8.1. INSTALLING THE WEB TERMINAL	110
Prerequisites	110
Procedure	110
8.2. CONFIGURING THE WEB TERMINAL	110
8.2.1. Configuring the web terminal timeout for a session	111
8.2.2. Configuring the web terminal timeout for all users	111
8.2.3. Configuring the web terminal image for a session	112
8.2.4. Configuring the web terminal image for all users	112
8.3. USING THE WEB TERMINAL	113
8.3.1. Accessing the web terminal	113
8.4. TROUBLESHOOTING THE WEB TERMINAL	114
8.4.1. Web terminal and network policies	114
8.5. UNINSTALLING THE WEB TERMINAL	114
8.5.1. Removing the Web Terminal Operator	115
8.5.2. Removing the DevWorkspace Operator	115
<b>CHAPTER 9. DISABLING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM .....</b>	<b>118</b>
9.1. PREREQUISITES	118
9.2. DISABLING THE WEB CONSOLE	118
<b>CHAPTER 10. CREATING QUICK START TUTORIALS IN THE WEB CONSOLE .....</b>	<b>119</b>
10.1. UNDERSTANDING QUICK STARTS	119
10.2. QUICK START USER WORKFLOW	119
10.3. QUICK START COMPONENTS	120
10.4. CONTRIBUTING QUICK STARTS	120
10.4.1. Viewing the quick start API documentation	121
10.4.2. Mapping the elements in the quick start to the quick start CR	121
10.4.2.1. conclusion element	121
10.4.2.2. description element	122
10.4.2.3. displayName element	123
10.4.2.4. durationMinutes element	124
10.4.2.5. icon element	125
10.4.2.6. introduction element	126
10.4.3. Adding a custom icon to a quick start	129
10.4.4. Limiting access to a quick start	129
10.4.5. Linking to other quick starts	129
10.4.6. Supported tags for quick starts	130
10.4.7. Quick start highlighting markdown reference	130
10.4.7.1. Perspective switcher	131
10.4.7.2. Administrator perspective navigation links	131
10.4.7.3. Developer perspective navigation links	131
10.4.7.4. Common navigation links	131
10.4.7.5. Masthead links	131
10.4.8. Code snippet markdown reference	131
10.4.8.1. Syntax for inline code snippets	132
10.4.8.2. Syntax for multi-line code snippets	132
10.5. QUICK START CONTENT GUIDELINES	132
10.5.1. Card copy	132
10.5.2. Introduction	132
10.5.3. Task steps	133
10.5.4. Check your work module	135
10.5.5. Formatting UI elements	135
10.6. ADDITIONAL RESOURCES	135

<b>CHAPTER 11. OPTIONAL CAPABILITIES AND PRODUCTS IN THE WEB CONSOLE .....</b>	<b>136</b>
11.1. ENHANCING THE OPENSIFT CONTAINER PLATFORM WEB CONSOLE WITH OPERATORS	136
11.2. RED HAT OPENSIFT PIPELINES IN THE WEB CONSOLE	136
11.3. RED HAT OPENSIFT SERVERLESS IN THE WEB CONSOLE	136
11.4. RED HAT DEVELOPER HUB IN THE OPENSIFT CONTAINER PLATFORM WEB CONSOLE	136
11.4.1. Installing the Red Hat Developer Hub using the OpenShift Container Platform web console	137



## CHAPTER 1. WEB CONSOLE OVERVIEW

The Red Hat OpenShift Container Platform web console provides a graphical user interface to visualize your project data and perform administrative, management, and troubleshooting tasks. The web console runs as pods on the control plane nodes in the openshift-console project. It is managed by a **console-operator** pod. Both **Administrator** and **Developer** perspectives are supported.

Both **Administrator** and **Developer** perspectives enable you to create quick start tutorials for OpenShift Container Platform. A quick start is a guided tutorial with user tasks and is useful for getting oriented with an application, Operator, or other product offering.

### 1.1. ABOUT THE ADMINISTRATOR PERSPECTIVE IN THE WEB CONSOLE

The **Administrator** perspective enables you to view the cluster inventory, capacity, general and specific utilization information, and the stream of important events, all of which help you to simplify planning and troubleshooting tasks. Both project administrators and cluster administrators can view the **Administrator** perspective.

Cluster administrators can also open an embedded command line terminal instance with the web terminal Operator in OpenShift Container Platform 4.7 and later.



#### NOTE

The default web console perspective that is shown depends on the role of the user. The **Administrator** perspective is displayed by default if the user is recognized as an administrator.

The **Administrator** perspective provides workflows specific to administrator use cases, such as the ability to:

- Manage workload, storage, networking, and cluster settings.
- Install and manage Operators using the Operator Hub.
- Add identity providers that allow users to log in and manage user access through roles and role bindings.
- View and manage a variety of advanced settings such as cluster updates, partial cluster updates, cluster Operators, custom resource definitions (CRDs), role bindings, and resource quotas.
- Access and manage monitoring features such as metrics, alerts, and monitoring dashboards.
- View and manage logging, metrics, and high-status information about the cluster.
- Visually interact with applications, components, and services associated with the **Administrator** perspective in OpenShift Container Platform.

### 1.2. ABOUT THE DEVELOPER PERSPECTIVE IN THE WEB CONSOLE

The **Developer** perspective offers several built-in ways to deploy applications, services, and databases. In the **Developer** perspective, you can:

- View real-time visualization of rolling and recreating rollouts on the component.

- View the application status, resource utilization, project event streaming, and quota consumption.
- Share your project with others.
- Troubleshoot problems with your applications by running Prometheus Query Language (PromQL) queries on your project and examining the metrics visualized on a plot. The metrics provide information about the state of a cluster and any user-defined workloads that you are monitoring.

Cluster administrators can also open an embedded command line terminal instance in the web console in OpenShift Container Platform 4.7 and later.



## NOTE

The default web console perspective that is shown depends on the role of the user. The **Developer** perspective is displayed by default if the user is recognised as a developer.

The **Developer** perspective provides workflows specific to developer use cases, such as the ability to:

- Create and deploy applications on OpenShift Container Platform by importing existing codebases, images, and container files.
- Visually interact with applications, components, and services associated with them within a project and monitor their deployment and build status.
- Group components within an application and connect the components within and across applications.
- Integrate serverless capabilities (Technology Preview).
- Create workspaces to edit your application code using Eclipse Che.

You can use the **Topology** view to display applications, components, and workloads of your project. If you have no workloads in the project, the **Topology** view will show some links to create or import them. You can also use the **Quick Search** to import components directly.

## Additional Resources

See [Viewing application composition using the Topology](#) view for more information on using the **Topology** view in **Developer** perspective.

## 1.3. ACCESSING THE PERSPECTIVES

You can access the **Administrator** and **Developer** perspective from the web console as follows:

### Prerequisites


To access a perspective, ensure that you have logged in to the web console. Your default perspective is automatically determined by the permission of the users. The **Administrator** perspective is selected for users with access to all projects, while the **Developer** perspective is selected for users with limited access to their own projects

## Additional Resources

See [Adding User Preferences](#) for more information on changing perspectives.

## Procedure

1. Use the perspective switcher to switch to the **Administrator** or **Developer** perspective.
2. Select an existing project from the **Project** drop-down list. You can also create a new project from this dropdown.



### NOTE

You can use the perspective switcher only as **cluster-admin**.

## Additional resources

- [Learn more about Cluster Administrator](#)
- [Overview of the \*\*Administrator\*\* perspective](#)
- [Creating and deploying applications on OpenShift Container Platform using the \*\*Developer\*\* perspective](#)
- [Viewing the applications in your project, verifying their deployment status, and interacting with them in the \*\*Topology\*\* view](#)
- [Viewing cluster information](#)
- [Configuring the web console](#)
- [Customizing the web console](#)
- [About the web console](#)
- [Using the web terminal](#)
- [Creating quick start tutorials](#)
- [Disabling the web console](#)

## CHAPTER 2. ACCESSING THE WEB CONSOLE

The OpenShift Container Platform web console is a user interface accessible from a web browser. Developers can use the web console to visualize, browse, and manage the contents of projects.

### 2.1. PREREQUISITES

- JavaScript must be enabled to use the web console. For the best experience, use a web browser that supports [WebSockets](#).
- Review the [OpenShift Container Platform 4.x Tested Integrations](#) page before you create the supporting infrastructure for your cluster.

### 2.2. UNDERSTANDING AND ACCESSING THE WEB CONSOLE

The web console runs as a pod on the control plane node. The static assets required to run the web console are served by the pod.

After you install OpenShift Container Platform using the **openshift-install create cluster** command, you can find the web console URL and login credentials for the installed cluster in the CLI output of the installation program. For example:

#### Example output

```
INFO Install complete!
INFO Run 'export KUBECONFIG=<your working directory>/auth/kubeconfig' to manage the cluster
with 'oc', the OpenShift CLI.
INFO The cluster is ready when 'oc login -u kubeadmin -p <provided>' succeeds (wait a few minutes).
INFO Access the OpenShift web-console here: https://console-openshift-
console.apps.demo1.openshift4-beta-abcorp.com
INFO Login to the console with user: kubeadmin, password: <provided>
```

Use those details to log in and access the web console.

For existing clusters that you did not install, you can use **oc whoami --show-console** to see the web console URL.



#### IMPORTANT

The **dir** parameter specifies the **assets** directory, which stores the manifest files, the ISO image, and the **auth** directory. The **auth** directory stores the **kubeadmin-password** and **kubeconfig** files. As a **kubeadmin** user, you can use the **kubeconfig** file to access the cluster with the following setting: **export KUBECONFIG=<install\_directory>/auth/kubeconfig**. The **kubeconfig** is specific to the generated ISO image, so if the **kubeconfig** is set and the **oc** command fails, it is possible that the system did not boot with the generated ISO image. To perform debugging, during the bootstrap process, you can log in to the console as the **core** user by using the contents of the **kubeadmin-password** file.

#### Additional resources

- [Enabling feature sets using the web console](#)

## CHAPTER 3. USING THE OPENSIFT CONTAINER PLATFORM DASHBOARD TO GET CLUSTER INFORMATION

The OpenShift Container Platform web console captures high-level information about the cluster.

### 3.1. ABOUT THE OPENSIFT CONTAINER PLATFORM DASHBOARDS PAGE

Access the OpenShift Container Platform dashboard, which captures high-level information about the cluster, by navigating to **Home** → **Overview** from the OpenShift Container Platform web console.

The OpenShift Container Platform dashboard provides various cluster information, captured in individual dashboard cards.

The OpenShift Container Platform dashboard consists of the following cards:

- **Details** provides a brief overview of informational cluster details. Status include **ok**, **error**, **warning**, **in progress**, and **unknown**. Resources can add custom status names.
  - Cluster ID
  - Provider
  - Version
- **Cluster Inventory** details number of resources and associated statuses. It is helpful when intervention is required to resolve problems, including information about:
  - Number of nodes
  - Number of pods
  - Persistent storage volume claims
  - Bare metal hosts in the cluster, listed according to their state (only available in **metal3** environment)
- **Status** helps administrators understand how cluster resources are consumed. Click on a resource to jump to a detailed page listing pods and nodes that consume the largest amount of the specified cluster resource (CPU, memory, or storage).
- **Cluster Utilization** shows the capacity of various resources over a specified period of time, to help administrators understand the scale and frequency of high resource consumption, including information about:
  - CPU time
  - Memory allocation
  - Storage consumed
  - Network resources consumed
  - Pod count



- **Activity** lists messages related to recent activity in the cluster, such as pod creation or virtual machine migration to another host.

## 3.2. RECOGNIZING RESOURCE AND PROJECT LIMITS AND QUOTAS

You can view a graphical representation of available resources in the **Topology** view of the web console **Developer** perspective.

If a resource has a message about resource limitations or quotas being reached, a yellow border appears around the resource name. Click the resource to open a side panel to see the message. If the **Topology** view has been zoomed out, a yellow dot indicates that a message is available.

If you are using **List View** from the **View Shortcuts** menu, resources appear as a list. The **Alerts** column indicates if a message is available.

## CHAPTER 4. ADDING USER PREFERENCES

You can change the default preferences for your profile to meet your requirements. You can set your default project, topology view (graph or list), editing medium (form or YAML), language preferences, and resource type.

The changes made to the user preferences are automatically saved.

### 4.1. SETTING USER PREFERENCES

You can set the default user preferences for your cluster.

#### Procedure

1. Log in to the OpenShift Container Platform web console using your login credentials.
2. Use the masthead to access the user preferences under the user profile.
3. In the **General** section:
  - a. In the **Theme** field, you can set the theme that you want to work in. The console defaults to the selected theme each time you log in.
  - b. In the **Perspective** field, you can set the default perspective you want to be logged in to. You can select the **Administrator** or the **Developer** perspective as required. If a perspective is not selected, you are logged into the perspective you last visited.
  - c. In the **Project** field, select a project you want to work in. The console defaults to the project every time you log in.
  - d. In the **Topology** field, you can set the topology view to default to the graph or list view. If not selected, the console defaults to the last view you used.
  - e. In the **Create/Edit resource method** field, you can set a preference for creating or editing a resource. If both the form and YAML options are available, the console defaults to your selection.
4. In the **Language** section, select **Default browser language** to use the default browser language settings. Otherwise, select the language that you want to use for the console.
5. In the **Notifications** section, you can toggle display notifications created by users for specific projects on the **Overview** page or notification drawer.
6. In the **Applications** section:
  - a. You can view the default **Resource type**. For example, if the OpenShift Serverless Operator is installed, the default resource type is **Serverless Deployment**. Otherwise, the default resource type is **Deployment**.
  - b. You can select another resource type to be the default resource type from the **Resource Type** field.

## CHAPTER 5. CONFIGURING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM

You can modify the OpenShift Container Platform web console to set a logout redirect URL or disable the quick start tutorials.

### 5.1. PREREQUISITES

- Deploy an OpenShift Container Platform cluster.

### 5.2. CONFIGURING THE WEB CONSOLE

You can configure the web console settings by editing the `console.config.openshift.io` resource.

- Edit the `console.config.openshift.io` resource:

```
$ oc edit console.config.openshift.io cluster
```

The following example displays the sample resource definition for the console:

```
apiVersion: config.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  authentication:
    logoutRedirect: "" 1
status:
  consoleURL: "" 2
```

- 1 Specify the URL of the page to load when a user logs out of the web console. If you do not specify a value, the user returns to the login page for the web console. Specifying a **logoutRedirect** URL allows your users to perform single logout (SLO) through the identity provider to destroy their single sign-on session.
- 2 The web console URL. To update this to a custom value, see **Customizing the web console URL**.

### 5.3. DISABLING QUICK STARTS IN THE WEB CONSOLE

You can use the **Administrator** perspective of the web console to disable one or more quick starts.

#### Prerequisites

- You have cluster administrator permissions and are logged in to the web console.

#### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. On the **Cluster Settings** page, click the **Configuration** tab.

- On the **Configuration** page, click the **Console** configuration resource with the description **operator.openshift.io**.

#### Cluster Settings

Details ClusterOperators **Configuration**

Edit the following resources to manage the configuration of your cluster.

console /

Configuration resource	Description
<a href="#">Console</a> config.openshift.io	Console holds cluster-wide configuration for the web console, including the logout URL, and reports the public URL of the console. The canonical name is "cluster". Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).
<a href="#">Console</a> operator.openshift.io	Console provides a means to configure an operator to manage the console. Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).

- From the **Action** drop-down list, select **Customize**, which opens the **Cluster configuration** page.
- On the **General** tab, in the **Quick starts** section, you can select items in either the **Enabled** or **Disabled** list, and move them from one list to the other by using the arrow buttons.
  - To enable or disable a single quick start, click the quick start, then use the single arrow buttons to move the quick start to the appropriate list.
  - To enable or disable multiple quick starts at once, press Ctrl and click the quick starts you want to move. Then, use the single arrow buttons to move the quick starts to the appropriate list.
  - To enable or disable all quick starts at once, click the double arrow buttons to move all of the quick starts to the appropriate list.

## CHAPTER 6. CUSTOMIZING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM

You can customize the OpenShift Container Platform web console to set a custom logo, product name, links, notifications, and command line downloads. This is especially helpful if you need to tailor the web console to meet specific corporate or government requirements.

### 6.1. ADDING A CUSTOM LOGO AND PRODUCT NAME

You can create custom branding by adding a custom logo or custom product name. You can set both or one without the other, as these settings are independent of each other.

#### Prerequisites

- You must have administrator privileges.
- Create a file of the logo that you want to use. The logo can be a file in any common image format, including GIF, JPG, PNG, or SVG, and is constrained to a **max-height** of **60px**. Image size must not exceed 1 MB due to constraints on the **ConfigMap** object size.

#### Procedure

1. Import your logo file into a config map in the **openshift-config** namespace:

```
$ oc create configmap console-custom-logo --from-file /path/to/console-custom-logo.png -n openshift-config
```

#### TIP

You can alternatively apply the following YAML to create the config map:

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: console-custom-logo
  namespace: openshift-config
binaryData:
  console-custom-logo.png: <base64-encoded_logo> ... 1
```

- 1 Provide a valid base64-encoded logo.

2. Edit the web console's Operator configuration to include **customLogoFile** and **customProductName**:

```
$ oc edit consoles.operator.openshift.io cluster
```

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  customization:
```

```

customLogoFile:
  key: console-custom-logo.png
  name: console-custom-logo
customProductName: My Console

```

Once the Operator configuration is updated, it will sync the custom logo config map into the console namespace, mount it to the console pod, and redeploy.

3. Check for success. If there are any issues, the console cluster Operator will report a **Degraded** status, and the console Operator configuration will also report a **CustomLogoDegraded** status, but with reasons like **KeyOrFilenameInvalid** or **NoImageProvided**.

To check the **clusteroperator**, run:

```
$ oc get clusteroperator console -o yaml
```

To check the console Operator configuration, run:

```
$ oc get consoles.operator.openshift.io -o yaml
```

## 6.2. CREATING CUSTOM LINKS IN THE WEB CONSOLE

### Prerequisites

- You must have administrator privileges.

### Procedure

1. From **Administration** → **Custom Resource Definitions**, click on **ConsoleLink**.
2. Select **Instances** tab
3. Click **Create Console Link** and edit the file:

```

apiVersion: console.openshift.io/v1
kind: ConsoleLink
metadata:
  name: example
spec:
  href: 'https://www.example.com'
  location: HelpMenu 1
  text: Link 1

```

- 1** Valid location settings are **HelpMenu**, **UserMenu**, **ApplicationMenu**, and **NamespaceDashboard**.

To make the custom link appear in all namespaces, follow this example:

```

apiVersion: console.openshift.io/v1
kind: ConsoleLink
metadata:
  name: namespaced-dashboard-link-for-all-namespaces
spec:

```

```
href: 'https://www.example.com'
location: NamespaceDashboard
text: This appears in all namespaces
```

To make the custom link appear in only some namespaces, follow this example:

```
apiVersion: console.openshift.io/v1
kind: ConsoleLink
metadata:
  name: namespaced-dashboard-for-some-namespaces
spec:
  href: 'https://www.example.com'
  location: NamespaceDashboard
  # This text will appear in a box called "Launcher" under "namespace" or "project" in the web
  console
  text: Custom Link Text
  namespaceDashboard:
    namespaces:
      # for these specific namespaces
      - my-namespace
      - your-namespace
      - other-namespace
```

To make the custom link appear in the application menu, follow this example:

```
apiVersion: console.openshift.io/v1
kind: ConsoleLink
metadata:
  name: application-menu-link-1
spec:
  href: 'https://www.example.com'
  location: ApplicationMenu
  text: Link 1
  applicationMenu:
    section: My New Section
    # image that is 24x24 in size
    imageURL: https://via.placeholder.com/24
```

4. Click **Save** to apply your changes.

## 6.3. CUSTOMIZING CONSOLE ROUTES

For **console** and **downloads** routes, custom routes functionality uses the **ingress** config route configuration API. If the **console** custom route is set up in both the **ingress** config and **console-operator** config, then the new **ingress** config custom route configuration takes precedent. The route configuration with the **console-operator** config is deprecated.

### 6.3.1. Customizing the console route

You can customize the console route by setting the custom hostname and TLS certificate in the **spec.componentRoutes** field of the cluster **Ingress** configuration.

#### Prerequisites

- You have logged in to the cluster as a user with administrative privileges.
- You have created a secret in the **openshift-config** namespace containing the TLS certificate and key. This is required if the domain for the custom hostname suffix does not match the cluster domain suffix. The secret is optional if the suffix matches.

## TIP

You can create a TLS secret by using the **oc create secret tls** command.

## Procedure

1. Edit the cluster **Ingress** configuration:

```
$ oc edit ingress.config.openshift.io cluster
```

2. Set the custom hostname and optionally the serving certificate and key:

```
apiVersion: config.openshift.io/v1
kind: Ingress
metadata:
  name: cluster
spec:
  componentRoutes:
  - name: console
    namespace: openshift-console
    hostname: <custom_hostname> 1
    servingCertKeyPairSecret:
      name: <secret_name> 2
```

- 1 The custom hostname.
- 2 Reference to a secret in the **openshift-config** namespace that contains a TLS certificate (**tls.crt**) and key (**tls.key**). This is required if the domain for the custom hostname suffix does not match the cluster domain suffix. The secret is optional if the suffix matches.

3. Save the file to apply the changes.

### 6.3.2. Customizing the download route

You can customize the download route by setting the custom hostname and TLS certificate in the **spec.componentRoutes** field of the cluster **Ingress** configuration.

#### Prerequisites

- You have logged in to the cluster as a user with administrative privileges.
- You have created a secret in the **openshift-config** namespace containing the TLS certificate and key. This is required if the domain for the custom hostname suffix does not match the cluster domain suffix. The secret is optional if the suffix matches.



**TIP**

You can create a TLS secret by using the **oc create secret tls** command.

**Procedure**

1. Edit the cluster **Ingress** configuration:

```
$ oc edit ingress.config.openshift.io cluster
```

2. Set the custom hostname and optionally the serving certificate and key:

```
apiVersion: config.openshift.io/v1
kind: Ingress
metadata:
  name: cluster
spec:
  componentRoutes:
    - name: downloads
      namespace: openshift-console
      hostname: <custom_hostname> 1
  servingCertKeyPairSecret:
    name: <secret_name> 2
```

1

The custom hostname.

2

Reference to a secret in the **openshift-config** namespace that contains a TLS certificate (**tls.crt**) and key (**tls.key**). This is required if the domain for the custom hostname suffix does not match the cluster domain suffix. The secret is optional if the suffix matches.

3. Save the file to apply the changes.

**6.4. CUSTOMIZING THE LOGIN PAGE**

Create Terms of Service information with custom login pages. Custom login pages can also be helpful if you use a third-party login provider, such as GitHub or Google, to show users a branded page that they trust and expect before being redirected to the authentication provider. You can also render custom error pages during the authentication process.

**NOTE**

Customizing the error template is limited to identity providers (IDPs) that use redirects, such as request header and OIDC-based IDPs. It does not have an effect on IDPs that use direct password authentication, such as LDAP and htpasswd.

**Prerequisites**

- You must have administrator privileges.

**Procedure**

1. Run the following commands to create templates you can modify:

```
$ oc adm create-login-template > login.html
```

```
$ oc adm create-provider-selection-template > providers.html
```

```
$ oc adm create-error-template > errors.html
```

2. Create the secrets:

```
$ oc create secret generic login-template --from-file=login.html -n openshift-config
```

```
$ oc create secret generic providers-template --from-file=providers.html -n openshift-config
```

```
$ oc create secret generic error-template --from-file=errors.html -n openshift-config
```

3. Run:

```
$ oc edit oauths cluster
```

4. Update the specification:

```
apiVersion: config.openshift.io/v1
kind: OAuth
metadata:
  name: cluster
# ...
spec:
  templates:
    error:
      name: error-template
    login:
      name: login-template
    providerSelection:
      name: providers-template
```

Run **oc explain oauths.spec.templates** to understand the options.

## 6.5. DEFINING A TEMPLATE FOR AN EXTERNAL LOG LINK

If you are connected to a service that helps you browse your logs, but you need to generate URLs in a particular way, then you can define a template for your link.

### Prerequisites

- You must have administrator privileges.

### Procedure

1. From **Administration** → **Custom Resource Definitions**, click on **ConsoleExternalLogLink**.
2. Select **Instances** tab
3. Click **Create Console External Log Link** and edit the file:

```

apiVersion: console.openshift.io/v1
kind: ConsoleExternalLogLink
metadata:
  name: example
spec:
  hrefTemplate: >-
    https://example.com/logs?
resourceName=${resourceName}&containerName=${containerName}&resourceNamespace=${
resourceNamespace}&podLabels=${podLabels}
text: Example Logs

```

## 6.6. CREATING CUSTOM NOTIFICATION BANNERS

### Prerequisites

- You must have administrator privileges.

### Procedure

- From **Administration** → **Custom Resource Definitions**, click on **ConsoleNotification**.
- Select **Instances** tab
- Click **Create Console Notification** and edit the file:

```

apiVersion: console.openshift.io/v1
kind: ConsoleNotification
metadata:
  name: example
spec:
  text: This is an example notification message with an optional link.
  location: BannerTop 1
  link:
    href: 'https://www.example.com'
    text: Optional link text
  color: '#fff'
  backgroundColor: '#0088ce'

```

- 1** Valid location settings are **BannerTop**, **BannerBottom**, and **BannerTopBottom**.

- Click **Create** to apply your changes.

## 6.7. CUSTOMIZING CLI DOWNLOADS

You can configure links for downloading the CLI with custom link text and URLs, which can point directly to file packages or to an external page that provides the packages.

### Prerequisites

- You must have administrator privileges.

### Procedure

1. Navigate to **Administration** → **Custom Resource Definitions**
2. Select **ConsoleCLIDownload** from the list of Custom Resource Definitions (CRDs).
3. Click the **YAML** tab, and then make your edits:

```

apiVersion: console.openshift.io/v1
kind: ConsoleCLIDownload
metadata:
  name: example-cli-download-links
spec:
  description: |
    This is an example of download links
  displayName: example
  links:
  - href: 'https://www.example.com/public/example.tar'
    text: example for linux
  - href: 'https://www.example.com/public/example.mac.zip'
    text: example for mac
  - href: 'https://www.example.com/public/example.win.zip'
    text: example for windows

```

4. Click the **Save** button.

## 6.8. ADDING YAML EXAMPLES TO KUBERNETES RESOURCES

You can dynamically add YAML examples to any Kubernetes resources at any time.

### Prerequisites

- You must have cluster administrator privileges.

### Procedure

1. From **Administration** → **Custom Resource Definitions**, click on **ConsoleYAMLSample**.
2. Click **YAML** and edit the file:

```

apiVersion: console.openshift.io/v1
kind: ConsoleYAMLSample
metadata:
  name: example
spec:
  targetResource:
    apiVersion: batch/v1
    kind: Job
  title: Example Job
  description: An example Job YAML sample
  yaml: |
    apiVersion: batch/v1
    kind: Job
    metadata:
      name: countdown
    spec:
      template:

```

```

metadata:
  name: countdown
spec:
  containers:
  - name: counter
    image: centos:7
    command:
    - "bin/bash"
    - "-c"
    - "for i in 9 8 7 6 5 4 3 2 1 ; do echo $i ; done"
  restartPolicy: Never

```

Use **spec.snippet** to indicate that the YAML sample is not the full YAML resource definition, but a fragment that can be inserted into the existing YAML document at the user's cursor.

3. Click **Save**.

## 6.9. CUSTOMIZING USER PERSPECTIVES

The OpenShift Container Platform web console provides two perspectives by default, **Administrator** and **Developer**. You might have more perspectives available depending on installed console plugins. As a cluster administrator, you can show or hide a perspective for all users or for a specific user role. Customizing perspectives ensures that users can view only the perspectives that are applicable to their role and tasks. For example, you can hide the **Administrator** perspective from unprivileged users so that they cannot manage cluster resources, users, and projects. Similarly, you can show the **Developer** perspective to users with the developer role so that they can create, deploy, and monitor applications.

You can also customize the perspective visibility for users based on role-based access control (RBAC). For example, if you customize a perspective for monitoring purposes, which requires specific permissions, you can define that the perspective is visible only to users with required permissions.

Each perspective includes the following mandatory parameters, which you can edit in the YAML view:

- **id**: Defines the ID of the perspective to show or hide
- **visibility**: Defines the state of the perspective along with access review checks, if needed
- **state**: Defines whether the perspective is enabled, disabled, or needs an access review check



### NOTE

By default, all perspectives are enabled. When you customize the user perspective, your changes are applicable to the entire cluster.

### 6.9.1. Customizing a perspective using YAML view

#### Prerequisites

- You must have administrator privileges.

#### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. Select the **Configuration** tab and click the **Console (operator.openshift.io)** resource.

3. Click the **YAML** tab and make your customization:

- a. To enable or disable a perspective, insert the snippet for **Add user perspectives** and edit the YAML code as needed:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  customization:
    perspectives:
      - id: admin
        visibility:
          state: Enabled
      - id: dev
        visibility:
          state: Enabled
```

- b. To hide a perspective based on RBAC permissions, insert the snippet for **Hide user perspectives** and edit the YAML code as needed:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  customization:
    perspectives:
      - id: admin
        requiresAccessReview:
          - group: rbac.authorization.k8s.io
            resource: clusterroles
            verb: list
      - id: dev
        state: Enabled
```

- c. To customize a perspective based on your needs, create your own YAML snippet:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  customization:
    perspectives:
      - id: admin
        visibility:
          state: AccessReview
        accessReview:
          missing:
            - resource: deployment
              verb: list
          required:
            - resource: namespaces
```

```

    verb: list
  - id: dev
  visibility:
    state: Enabled

```

4. Click **Save**.

## 6.9.2. Customizing a perspective using form view


### Prerequisites

- You must have administrator privileges.

### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. Select the **Configuration** tab and click the **Console (operator.openshift.io)** resource.
3. Click **Actions** → **Customize** on the right side of the page.
4. In the **General** settings, customize the perspective by selecting one of the following options from the dropdown list:
  - **Enabled**: Enables the perspective for all users
  - **Only visible for privileged users**: Enables the perspective for users who can list all namespaces
  - **Only visible for unprivileged users**: Enables the perspective for users who cannot list all namespaces
  - **Disabled**: Disables the perspective for all users

A notification opens to confirm that your changes are saved.

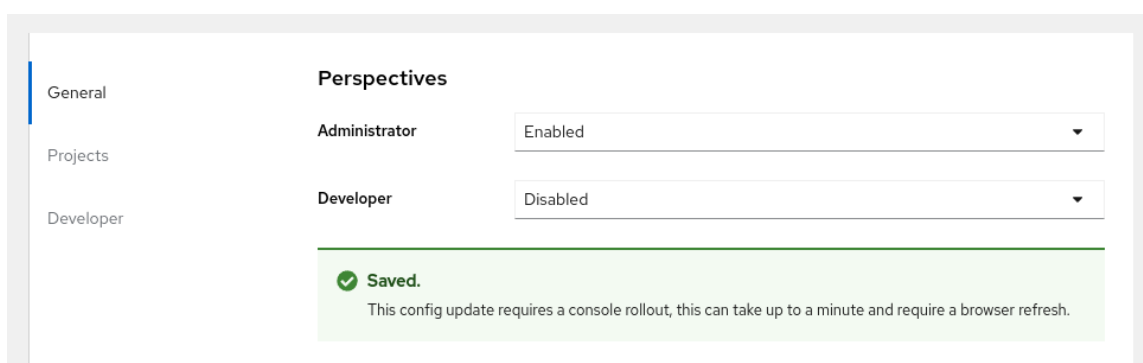

### NOTE

When you customize the user perspective, your changes are automatically saved and take effect after a browser refresh.

## 6.10. DEVELOPER CATALOG AND SUB-CATALOG CUSTOMIZATION

As a cluster administrator, you have the ability to organize and manage the Developer catalog or its sub-catalogs. You can enable or disable the sub-catalog types or disable the entire developer catalog.

The **developerCatalog.types** object includes the following parameters that you must define in a snippet to use them in the YAML view:

- **state**: Defines if a list of developer catalog types should be enabled or disabled.
- **enabled**: Defines a list of developer catalog types (sub-catalogs) that are visible to users.
- **disabled**: Defines a list of developer catalog types (sub-catalogs) that are not visible to users.

You can enable or disable the following developer catalog types (sub-catalogs) using the YAML view or the form view.

- **Builder Images**
- **Templates**
- **Devfiles**
- **Samples**
- **Helm Charts**
- **Event Sources**
- **Event Sinks**
- **Operator Backed**

### 6.10.1. Customizing a developer catalog or its sub-catalogs using the YAML view

You can customize a developer catalog by editing the YAML content in the YAML view.

#### Prerequisites

- An OpenShift web console session with cluster administrator privileges.

#### Procedure

1. In the **Administrator** perspective of the web console, navigate to **Administration** → **Cluster Settings**.
2. Select the **Configuration** tab, click the **Console (operator.openshift.io)** resource and view the **Details** page.
3. Click the **YAML** tab to open the editor and edit the YAML content as needed.  
For example, to disable a developer catalog type, insert the following snippet that defines a list of disabled developer catalog resources:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
...
```



```
spec:
  customization:
    developerCatalog:
      categories:
        types:
          state: Disabled
          disabled:
            - BuilderImage
            - Devfile
            - HelmChart
      ...
```

4. Click **Save**.



## NOTE

By default, the developer catalog types are enabled in the Administrator view of the Web Console.

### 6.10.2. Customizing a developer catalog or its sub-catalogs using the form view

You can customize a developer catalog by using the form view in the Web Console.

#### Prerequisites

- An OpenShift web console session with cluster administrator privileges.
- The Developer perspective is enabled.

#### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. Select the **Configuration** tab and click the **Console (operator.openshift.io)** resource.
3. Click **Actions** → **Customize**.
4. Enable or disable items in the **Pre-pinned navigation items**, **Add page**, and **Developer Catalog** sections.

#### Verification

After you have customized the developer catalog, your changes are automatically saved in the system and take effect in the browser after a refresh.

 **Saved.**

This config update requires a console rollout, this can take up to a minute and require a browser refresh.



## NOTE

As an administrator, you can define the navigation items that appear by default for all users. You can also reorder the navigation items.

## TIP

You can use a similar procedure to customize Web UI items such as Quick starts, Cluster roles, and Actions.

### 6.10.2.1. Example YAML file changes

You can dynamically add the following snippets in the YAML editor for customizing a developer catalog.

Use the following snippet to display all the sub-catalogs by setting the *state* type to **Enabled**.

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
...
spec:
  customization:
    developerCatalog:
      categories:
      types:
        state: Enabled
```

Use the following snippet to disable all sub-catalogs by setting the *state* type to **Disabled**:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
...
spec:
  customization:
    developerCatalog:
      categories:
      types:
        state: Disabled
```

Use the following snippet when a cluster administrator defines a list of sub-catalogs, which are enabled in the Web Console.

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
...
spec:
  customization:
    developerCatalog:
      categories:
      types:
        state: Enabled
      enabled:
        - BuilderImage
```

- Devfile
- HelmChart
- ...

## CHAPTER 7. DYNAMIC PLUGINS

### 7.1. OVERVIEW OF DYNAMIC PLUGINS

#### 7.1.1. About dynamic plugins

Dynamic plugins are deployed as workloads on the cluster. They allow you to add custom pages and other extensions to your console user interface at runtime. The **ConsolePlugin** custom resource registers plugins with the console, and a cluster administrator enables plugins in the **console-operator** configuration.

#### 7.1.2. Key features

A dynamic plugin allows you to make the following customizations to the OpenShift Container Platform experience:

- Add custom pages.
- Add perspectives beyond administrator and developer.
- Add navigation items.
- Add tabs and actions to resource pages.

#### 7.1.3. General guidelines

When creating your plugin, follow these general guidelines:

- **Node.js** and **yarn** are required to build and run your plugin.
- Prefix your CSS class names with your plugin name to avoid collisions. For example, **my-plugin\_\_heading** and **my-plugin\_\_icon**.
- Maintain a consistent look, feel, and behavior with other console pages.
- Follow [react-i18next](#) localization guidelines when creating your plugin. You can use the **useTranslation** hook like the one in the following example:

```
const Header: React.FC = () => {
  const { t } = useTranslation('plugin__console-demo-plugin');
  return <h1>{t('Hello, World!')}</h1>;
};
```

- Avoid selectors that could affect markup outside of your plugins components, such as element selectors. These are not APIs and are subject to change. Using them might break your plugin. Avoid selectors like element selectors that could affect markup outside of your plugins components.
- Provide valid JavaScript Multipurpose Internet Mail Extension (MIME) type using the **Content-Type** response header for all assets served by your plugin web server. Each plugin deployment should include a web server that hosts the generated assets of the given plugin.

#### PatternFly guidelines

When creating your plugin, follow these guidelines for using PatternFly:

- Use [PatternFly](#) components and PatternFly CSS variables. Core PatternFly components are available through the SDK. Using PatternFly components and variables help your plugin look consistent in future console versions.
  - Use Patternfly 4.x if you are using OpenShift Container Platform versions 4.14 and earlier.
  - Use Patternfly 5.x if you are using OpenShift Container Platform 4.15 or later.
- Make your plugin accessible by following [PatternFly's accessibility fundamentals](#).
- Avoid using other CSS libraries such as Bootstrap or Tailwind. They can conflict with PatternFly and will not match the console look and feel. Plugins should only include styles that are specific to their user interfaces to be evaluated on top of base PatternFly styles. Avoid importing styles such as `@patternfly/react-styles/*.css` or any styles from `@patternfly/patternfly` package in your plugin.
- The console application is responsible for loading base styles for all supported PatternFly version(s).

## 7.2. GETTING STARTED WITH DYNAMIC PLUGINS

To get started using the dynamic plugin, you must set up your environment to write a new OpenShift Container Platform dynamic plugin. For an example of how to write a new plugin, see [Adding a tab to the pods page](#).

### 7.2.1. Dynamic plugin development

You can run the plugin using a local development environment. The OpenShift Container Platform web console runs in a container connected to the cluster you have logged into.

#### Prerequisites

- You must have an OpenShift cluster running.
- You must have the OpenShift CLI (**oc**) installed.
- You must have [yarn](#) installed.
- You must have [Docker](#) v3.2.0 or newer or [Podman](#) installed and running.

#### Procedure

1. In your terminal, run the following command to install the dependencies for your plugin using yarn.

```
$ yarn install
```

2. After installing, run the following command to start yarn.

```
$ yarn run start
```

3. In another terminal window, login to the OpenShift Container Platform through the CLI.

```
$ oc login
```

4. Run the OpenShift Container Platform web console in a container connected to the cluster you have logged into by running the following command:

```
$ yarn run start-console
```

### Verification

- Visit [localhost:9000](http://localhost:9000) to view the running plugin. Inspect the value of **window.SERVER\_FLAGS.consolePlugins** to see the list of plugins which load at runtime.

## 7.3. DEPLOY YOUR PLUGIN ON A CLUSTER

You can deploy the plugin to a OpenShift Container Platform cluster.

### 7.3.1. Build an image with Docker

To deploy your plugin on a cluster, you need to build an image and push it to an image registry.

#### Procedure

1. Build the image with the following command:

```
$ docker build -t quay.io/my-repositroy/my-plugin:latest .
```

2. Optional: If you want to test your image, run the following command:

```
$ docker run -it --rm -d -p 9001:80 quay.io/my-repository/my-plugin:latest
```

3. Push the image by running the following command:

```
$ docker push quay.io/my-repository/my-plugin:latest
```

### 7.3.2. Deploy your plugin on a cluster

After pushing an image with your changes to a registry, you can deploy the plugin to a cluster.

#### Procedure

1. To deploy your plugin to a cluster, install a Helm chart with the name of the plugin as the Helm release name into a new namespace or an existing namespace as specified by the **-n** command-line option. Provide the location of the image within the **plugin.image** parameter by using the following command:

```
$ helm upgrade -i my-plugin charts/openshift-console-plugin -n my-plugin-namespace --create-namespace --set plugin.image=my-plugin-image-location
```

Where:

**n** **<my-plugin-namespace>**

Specifies an existing namespace to deploy your plugin into.

**--create-namespace**

Optional: If deploying to a new namespace, use this parameter.

**--set plugin.image=my-plugin-image-location**

Specifies the location of the image within the **plugin.image** parameter.

- Optional: You can specify any additional parameters by using the set of supported parameters in the **charts/openshift-console-plugin/values.yaml** file.

```

plugin:
  name: ""
  description: ""
  image: ""
  imagePullPolicy: IfNotPresent
  replicas: 2
  port: 9443
  securityContext:
    enabled: true
  podSecurityContext:
    enabled: true
    runAsNonRoot: true
  seccompProfile:
    type: RuntimeDefault
  containerSecurityContext:
    enabled: true
    allowPrivilegeEscalation: false
  capabilities:
    drop:
      - ALL
  resources:
    requests:
      cpu: 10m
      memory: 50Mi
  basePath: /
  certificateSecretName: ""
  serviceAccount:
    create: true
    annotations: {}
    name: ""
  patcherServiceAccount:
    create: true
    annotations: {}
    name: ""
  jobs:
    patchConsoles:
      enabled: true
      image: "registry.redhat.io/openshift4/ose-tools-
rhel8@sha256:e44074f21e0cca6464e50cb6ff934747e0bd11162ea01d522433a1a1ae116103"

  podSecurityContext:
    enabled: true
    runAsNonRoot: true
  seccompProfile:
    type: RuntimeDefault
  containerSecurityContext:
    enabled: true
    allowPrivilegeEscalation: false

```

```
capabilities:
  drop:
  - ALL
resources:
  requests:
    cpu: 10m
    memory: 50Mi
```

## Verification

- View the list of enabled plugins by navigating from **Administration** → **Cluster Settings** → **Configuration** → **Console operator.openshift.io** → **Console plugins** or by visiting the **Overview** page.



### NOTE

It can take a few minutes for the new plugin configuration to appear. If you do not see your plugin, you might need to refresh your browser if the plugin was recently enabled. If you receive any errors at runtime, check the JS console in browser developer tools to look for any errors in your plugin code.

### 7.3.3. Plugin service proxy

If you need to make HTTP requests to an in-cluster service from your plugin, you can declare a service proxy in its **ConsolePlugin** resource by using the **spec.proxy** array field. The console backend exposes the `/api/proxy/plugin/<plugin-name>/<proxy-alias>/<request-path>?<optional-query-parameters>` endpoint to proxy the communication between the plugin and the service. A proxied request uses a *service CA bundle* by default. The service must use HTTPS.



### NOTE

The plugin must use the **consolefetch** API to make requests from its JavaScript code or some requests might fail. For more information, see "Dynamic plugin API".

For each entry, you must specify an endpoint and alias of the proxy under the **endpoint** and **alias** fields. For the Service proxy type, you must set the endpoint **type** field to **Service** and the **service** must include values for the **name**, **namespace**, and **port** fields. For example, `/api/proxy/plugin/helm/helm-charts/releases?limit=10` is a proxy request path from the **helm** plugin with a **helm-charts** service that lists ten helm releases.

### Example service proxy

```
apiVersion: console.openshift.io/v1
kind: ConsolePlugin
metadata:
  name: <plugin-name>
spec:
  proxy:
  - alias: helm-charts 1
    authorization: UserToken 2
    caCertificate: '-----BEGIN CERTIFICATE-----\nMIID....'en 3
    endpoint: 4
    service:
```



```

name: <service-name>
namespace: <service-namespace>
port: <service-port>
type: Service

```

- 1 Alias of the proxy.
- 2 If the service proxy request must contain the logged-in user's OpenShift Container Platform access token, you must set the authorization field to **UserToken**.

**NOTE**

If the service proxy request does not contain the logged-in user's OpenShift Container Platform access token, set the authorization field to **None**.

- 3 If the service uses a custom service CA, the **caCertificate** field must contain the certificate bundle.
- 4 Endpoint of the proxy.

**Additional resources**

- [Service CA certificates](#)
- [Securing service traffic using service serving certificate secrets](#)
- [Dynamic plugin API](#)

**7.3.4. Disabling your plugin in the browser**

Console users can use the **disable-plugins** query parameter to disable specific or all dynamic plugins that would normally get loaded at run-time.

**Procedure**

- To disable a specific plugin(s), remove the plugin you want to disable from the comma-separated list of plugin names.
- To disable all plugins, leave an empty string in the **disable-plugins** query parameter.

**NOTE**

Cluster administrators can disable plugins in the **Cluster Settings** page of the web console

**7.3.5. Additional resources**

- [Understanding Helm](#)

**7.4. DYNAMIC PLUGIN EXAMPLE**

Before working through the example, verify that the plugin is working by following the steps in [Dynamic plugin development](#)

### 7.4.1. Adding a tab to the pods page

There are different customizations you can make to the OpenShift Container Platform web console. The following procedure adds a tab to the **Pod details** page as an example extension to your plugin.



#### NOTE

The OpenShift Container Platform web console runs in a container connected to the cluster you have logged into. See "Dynamic plugin development" for information to test the plugin before creating your own.

#### Procedure

1. Visit the [console-plugin-template](#) repository containing a template for creating plugins in a new tab.



#### IMPORTANT

Custom plugin code is not supported by Red Hat. Only [Cooperative community support](#) is available for your plugin.

2. Create a GitHub repository for the template by clicking **Use this template → Create new repository**.
3. Rename the new repository with the name of your plugin.
4. Clone the new repository to your local machine so you can edit the code.
5. Edit the **package.json** file, adding your plugin's metadata to the **consolePlugin** declaration. For example:

```
"consolePlugin": {
  "name": "my-plugin", 1
  "version": "0.0.1", 2
  "displayName": "My Plugin", 3
  "description": "Enjoy this shiny, new console plugin!", 4
  "exposedModules": {
    "ExamplePage": "./components/ExamplePage"
  },
  "dependencies": {
    "@console/pluginAPI": "*"
  }
}
```

- 1 Update the name of your plugin.
- 2 Update the version.
- 3 Update the display name for your plugin.
- 4 Update the description with a synopsis about your plugin.

6. Add the following to the **console-extensions.json** file:

■

```

{
  "type": "console.tab/horizontalNav",
  "properties": {
    "page": {
      "name": "Example Tab",
      "href": "example"
    },
    "model": {
      "group": "core",
      "version": "v1",
      "kind": "Pod"
    },
    "component": { "$codeRef": "ExampleTab" }
  }
}

```

7. Edit the **package.json** file to include the following changes:

```

"exposedModules": {
  "ExamplePage": "./components/ExamplePage",
  "ExampleTab": "./components/ExampleTab"
}

```

8. Write a message to display on a new custom tab on the **Pods** page by creating a new file **src/components/ExampleTab.tsx** and adding the following script:

```

import * as React from 'react';

export default function ExampleTab() {
  return (
    <p>This is a custom tab added to a resource using a dynamic plugin.</p>
  );
}

```

9. Install a Helm chart with the name of the plugin as the Helm release name into a new namespace or an existing namespace as specified by the **-n** command-line option to deploy your plugin on a cluster. Provide the location of the image within the **plugin.image** parameter by using the following command:

```

$ helm upgrade -i my-plugin charts/openshift-console-plugin -n my-plugin-namespace --
create-namespace --set plugin.image=my-plugin-image-location

```



#### NOTE

For more information on deploying your plugin on a cluster, see "Deploy your plugin on a cluster".

#### Verification

- Visit a **Pod** page to view the added tab.

## 7.5. DYNAMIC PLUGIN REFERENCE

You can add extensions that allow you to customize your plugin. Those extensions are then loaded to the console at run-time.

### 7.5.1. Dynamic plugin extension types

#### `console.action/filter`

**ActionFilter** can be used to filter an action.

Name	Value Type	Optional	Description
<b>contextId</b>	<b>string</b>	no	The context ID helps to narrow the scope of contributed actions to a particular area of the application. Examples include <b>topology</b> and <b>helm</b> .
<b>filter</b>	<b>CodeRef&lt;(scope: any, action: Action) ⇒ boolean&gt;</b>	no	A function that will filter actions based on some conditions.  <b>scope:</b> The scope in which actions should be provided for. A hook might be required if you want to remove the <b>ModifyCount</b> action from a deployment with a horizontal pod autoscaler (HPA).

#### `console.action/group`

**ActionGroup** contributes an action group that can also be a submenu.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID used to identify the action section.
<b>label</b>	<b>string</b>	yes	The label to display in the UI. Required for submenus.
<b>submenu</b>	<b>boolean</b>	yes	Whether this group should be displayed as submenu.

Name	Value Type	Optional	Description
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. The <b>insertBefore</b> value takes precedence.

### console.action/provider

**ActionProvider** contributes a hook that returns list of actions for specific context.

Name	Value Type	Optional	Description
<b>contextId</b>	<b>string</b>	no	The context ID helps to narrow the scope of contributed actions to a particular area of the application. Examples include <b>topology</b> and <b>helm</b> .
<b>provider</b>	<b>CodeRef&lt;Extension Hook&lt;Action[], any&gt;&gt;</b>	no	A React hook that returns actions for the given scope. If <b>contextId = resource</b> , then the scope will always be a Kubernetes resource object.

### console.action/resource-provider

**ResourceActionProvider** contributes a hook that returns list of actions for specific resource model.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sKindVersionModel</b>	no	The model for which this provider provides actions for.
<b>provider</b>	<b>CodeRef&lt;Extension Hook&lt;Action[], any&gt;&gt;</b>	no	A react hook which returns actions for the given resource model

**console.alert-action**

This extension can be used to trigger a specific action when a specific Prometheus alert is observed by the Console based on its **rule.name** value.

Name	Value Type	Optional	Description
<b>alert</b>	<b>string</b>	no	Alert name as defined by <b>alert.rule.name</b> property
<b>text</b>	<b>string</b>	no	
<b>action</b>	<b>CodeRef&lt;(alert: any) ⇒ void&gt;</b>	no	Function to perform side effect

**console.catalog/item-filter**

This extension can be used for plugins to contribute a handler that can filter specific catalog items. For example, the plugin can contribute a filter that filters helm charts from specific provider.

Name	Value Type	Optional	Description
<b>catalogId</b>	<b>string   string[]</b>	no	The unique identifier for the catalog this provider contributes to.
<b>type</b>	<b>string</b>	no	Type ID for the catalog item type.
<b>filter</b>	<b>CodeRef&lt;(item: CatalogItem) ⇒ boolean&gt;</b>	no	Filters items of a specific type. Value is a function that takes <b>CatalogItem[]</b> and returns a subset based on the filter criteria.

**console.catalog/item-metadata**

This extension can be used to contribute a provider that adds extra metadata to specific catalog items.

Name	Value Type	Optional	Description
<b>catalogId</b>	<b>string   string[]</b>	no	The unique identifier for the catalog this provider contributes to.
<b>type</b>	<b>string</b>	no	Type ID for the catalog item type.

Name	Value Type	Optional	Description
<b>provider</b>	<b>CodeRef&lt;Extension Hook&lt;CatalogItemMetadataProviderFunction, CatalogExtensionHookOptions&gt;&gt;</b>	no	A hook which returns a function that will be used to provide metadata to catalog items of a specific type.

### console.catalog/item-provider

This extension allows plugins to contribute a provider for a catalog item type. For example, a Helm Plugin can add a provider that fetches all the Helm Charts. This extension can also be used by other plugins to add more items to a specific catalog item type.

Name	Value Type	Optional	Description
<b>catalogId</b>	<b>string   string[]</b>	no	The unique identifier for the catalog this provider contributes to.
<b>type</b>	<b>string</b>	no	Type ID for the catalog item type.
<b>title</b>	<b>string</b>	no	Title for the catalog item provider
<b>provider</b>	<b>CodeRef&lt;Extension Hook&lt;CatalogItem&lt;any&gt;[], CatalogExtensionHookOptions&gt;&gt;</b>	no	Fetch items and normalize it for the catalog. Value is a react effect hook.
<b>priority</b>	<b>number</b>	yes	Priority for this provider. Defaults to <b>0</b> . Higher priority providers may override catalog items provided by other providers.

### console.catalog/item-type

This extension allows plugins to contribute a new type of catalog item. For example, a Helm plugin can define a new catalog item type as HelmCharts that it wants to contribute to the Developer Catalog.

Name	Value Type	Optional	Description
<b>type</b>	<b>string</b>	no	Type for the catalog item.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	Title for the catalog item.
<b>catalogDescription</b>	<b>string</b>   <b>CodeRef&lt;React.ReactNode&gt;</b>	yes	Description for the type specific catalog.
<b>typeDescription</b>	<b>string</b>	yes	Description for the catalog item type.
<b>filters</b>	<b>CatalogItemAttribute</b> []	yes	Custom filters specific to the catalog item.
<b>groupings</b>	<b>CatalogItemAttribute</b> []	yes	Custom groupings specific to the catalog item.

#### **console.catalog/item-type-metadata**

This extension allows plugins to contribute extra metadata like custom filters or groupings for any catalog item type. For example, a plugin can attach a custom filter for HelmCharts that can filter based on chart provider.

Name	Value Type	Optional	Description
<b>type</b>	<b>string</b>	no	Type for the catalog item.
<b>filters</b>	<b>CatalogItemAttribute</b> []	yes	Custom filters specific to the catalog item.
<b>groupings</b>	<b>CatalogItemAttribute</b> []	yes	Custom groupings specific to the catalog item.

#### **console.cluster-overview/inventory-item**

Adds a new inventory item into cluster overview page.

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{}&gt;&gt;</b>	no	The component to be rendered.

#### **console.cluster-overview/multiline-utilization-item**

Adds a new cluster overview multi-line utilization item.



Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The title of the utilization item.
<b>getUtilizationQueries</b>	<b>CodeRef&lt;GetMultipleQueries&gt;</b>	no	Prometheus utilization query.
<b>humanize</b>	<b>CodeRef&lt;Humanize&gt;</b>	no	Convert Prometheus data to human-readable form.
<b>TopConsumerPopovers</b>	<b>CodeRef&lt;React.ComponentType&lt;TopConsumerPopoverProps&gt;[]&gt;</b>	yes	Shows Top consumer popover instead of plain value.

#### **console.cluster-overview/utilization-item**

Adds a new cluster overview utilization item.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The title of the utilization item.
<b>getUtilizationQuery</b>	<b>CodeRef&lt;GetQuery&gt;</b>	no	Prometheus utilization query.
<b>humanize</b>	<b>CodeRef&lt;Humanize&gt;</b>	no	Convert Prometheus data to human-readable form.
<b>getTotalQuery</b>	<b>CodeRef&lt;GetQuery&gt;</b>	yes	Prometheus total query.
<b>getRequestQuery</b>	<b>CodeRef&lt;GetQuery&gt;</b>	yes	Prometheus request query.
<b>getLimitQuery</b>	<b>CodeRef&lt;GetQuery&gt;</b>	yes	Prometheus limit query.
<b>TopConsumerPopover</b>	<b>CodeRef&lt;React.ComponentType&lt;TopConsumerPopoverProps&gt;&gt;</b>	yes	Shows Top consumer popover instead of plain value.

#### **console.context-provider**

Adds a new React context provider to the web console application root.

Name	Value Type	Optional	Description
<b>provider</b>	<b>CodeRef&lt;Provider&lt;T &gt;&gt;</b>	no	Context Provider component.
<b>useValueHook</b>	<b>CodeRef&lt;() ⇒ T&gt;</b>	no	Hook for the Context value.

**console.dashboards/card**

Adds a new dashboard card.

Name	Value Type	Optional	Description
<b>tab</b>	<b>string</b>	no	The ID of the dashboard tab to which the card will be added.
<b>position</b>	<b>'LEFT'   'RIGHT'   'MAIN'</b>	no	The grid position of the card on the dashboard.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{}&gt;&gt;</b>	no	Dashboard card component.
<b>span</b>	<b>OverviewCardSpan</b>	yes	Card's vertical span in the column. Ignored for small screens; defaults to <b>12</b> .

**console.dashboards/custom/overview/detail/item**

Adds an item to the Details card of Overview Dashboard.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	Details card title
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{}&gt;&gt;</b>	no	The value, rendered by the OverviewDetailItem component
<b>valueClassName</b>	<b>string</b>	yes	Value for a className
<b>isLoading</b>	<b>CodeRef&lt;() ⇒ boolean&gt;</b>	yes	Function returning the loading state of the component
<b>error</b>	<b>CodeRef&lt;() ⇒ string&gt;</b>	yes	Function returning errors to be displayed by the component

**console.dashboards/overview/activity/resource**

Adds an activity to the Activity Card of Overview Dashboard where the triggering of activity is based on watching a Kubernetes resource.

Name	Value Type	Optional	Description
<b>k8sResource</b>	<b>CodeRef&lt;FirehoseResource &amp; { isList: true; }&gt;</b>	no	The utilization item to be replaced.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;K8sActivityProps&lt;T&gt;&gt;&gt;</b>	no	The action component.
<b>isActivity</b>	<b>CodeRef&lt;(resource: T) =&gt; boolean&gt;</b>	yes	Function which determines if the given resource represents the action. If not defined, every resource represents activity.
<b>getTimestamp</b>	<b>CodeRef&lt;(resource: T) =&gt; Date&gt;</b>	yes	Time stamp for the given action, which will be used for ordering.

**console.dashboards/overview/health/operator**

Adds a health subsystem to the status card of the **Overview** dashboard, where the source of status is a Kubernetes REST API.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	Title of Operators section in the pop-up menu.
<b>resources</b>	<b>CodeRef&lt;FirehoseResource[]&gt;</b>	no	Kubernetes resources which will be fetched and passed to <b>healthHandler</b> .
<b>getOperatorsWithStatuses</b>	<b>CodeRef&lt;GetOperatorsWithStatuses&lt;T&gt;&gt;</b>	yes	Resolves status for the Operators.
<b>operatorRowLoader</b>	<b>CodeRef&lt;React.ComponentType&lt;OperatorRowProps&lt;T&gt;&gt;&gt;</b>	yes	Loader for pop-up row component.

Name	Value Type	Optional	Description
<b>viewAllLink</b>	<b>string</b>	yes	Links to all resources page. If not provided, then a list page of the first resource from resources prop is used.

### **console.dashboards/overview/health/prometheus**

Adds a health subsystem to the status card of Overview dashboard where the source of status is Prometheus.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The display name of the subsystem.
<b>queries</b>	<b>string[]</b>	no	The Prometheus queries.
<b>healthHandler</b>	<b>CodeRef&lt;PrometheusHealthHandler&gt;</b>	no	Resolve the subsystem's health.
<b>additionalResource</b>	<b>CodeRef&lt;FirehoseResource&gt;</b>	yes	Additional resource which will be fetched and passed to <b>healthHandler</b> .
<b>popupComponent</b>	<b>CodeRef&lt;React.ComponentType&lt;PrometheusHealthPopupProps&gt;&gt;</b>	yes	Loader for pop-up menu content. If defined, a health item is represented as a link, which opens a pop-up menu with the given content.
<b>popupTitle</b>	<b>string</b>	yes	The title of the popover.
<b>disallowedControlPlaneTopology</b>	<b>string[]</b>	yes	Control plane topology for which the subsystem should be hidden.

### **console.dashboards/overview/health/resource**

Adds a health subsystem to the status card of Overview dashboard where the source of status is a Kubernetes Resource.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The display name of the subsystem.
<b>resources</b>	<b>CodeRef&lt;WatchK8sResources&lt;T&gt;&gt;</b>	no	Kubernetes resources that will be fetched and passed to <b>healthHandler</b> .
<b>healthHandler</b>	<b>CodeRef&lt;ResourceHealthHandler&lt;T&gt;&gt;</b>	no	Resolve the subsystem's health.
<b>popupComponent</b>	<b>CodeRef&lt;WatchK8sResults&lt;T&gt;&gt;</b>	yes	Loader for pop-up menu content. If defined, a health item is represented as a link, which opens a pop-up menu with the given content.
<b>popupTitle</b>	<b>string</b>	yes	The title of the popover.

#### **console.dashboards/overview/health/url**

Adds a health subsystem to the status card of Overview dashboard where the source of status is a Kubernetes REST API.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The display name of the subsystem.
<b>url</b>	<b>string</b>	no	The URL to fetch data from. It will be prefixed with base Kubernetes URL.
<b>healthHandler</b>	<b>CodeRef&lt;URLHealthHandler&lt;T, K8sResourceComm on   K8sResourceComm on[]&gt;&gt;</b>	no	Resolve the subsystem's health.
<b>additionalResource</b>	<b>CodeRef&lt;FirehoseResource&gt;</b>	yes	Additional resource which will be fetched and passed to <b>healthHandler</b> .

Name	Value Type	Optional	Description
<b>popupComponent</b>	<b>CodeRef&lt;React.ComponentType&lt;{ healthResult?: T; healthResultError?: any; k8sResult?: FirehoseResult&lt;R&gt;; }&gt;&gt;</b>	yes	Loader for popup content. If defined, a health item will be represented as a link which opens popup with given content.
<b>popupTitle</b>	<b>string</b>	yes	The title of the popover.

**console.dashboards/overview/inventory/item**

Adds a resource tile to the overview inventory card.

Name	Value Type	Optional	Description
<b>model</b>	<b>CodeRef&lt;T&gt;</b>	no	The model for <b>resource</b> which will be fetched. Used to get the model's <b>label</b> or <b>abbr</b> .
<b>mapper</b>	<b>CodeRef&lt;StatusGroupMapper&lt;T, R&gt;&gt;</b>	yes	Function which maps various statuses to groups.
<b>additionalResources</b>	<b>CodeRef&lt;WatchK8sResources&lt;R&gt;&gt;</b>	yes	Additional resources which will be fetched and passed to the <b>mapper</b> function.

**console.dashboards/overview/inventory/item/group**

Adds an inventory status group.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	The ID of the status group.
<b>icon</b>	<b>CodeRef&lt;React.ReactElement&lt;any, string   React.JSXElementConstructor&lt;any&gt;&gt;&gt;</b>	no	React component representing the status group icon.

**console.dashboards/overview/inventory/item/replacement**

Replaces an overview inventory card.

Name	Value Type	Optional	Description
<b>model</b>	<b>CodeRef&lt;T&gt;</b>	no	The model for <b>resource</b> which will be fetched. Used to get the model's <b>label</b> or <b>abbr</b> .
<b>mapper</b>	<b>CodeRef&lt;StatusGroupMapper&lt;T, R&gt;&gt;</b>	yes	Function which maps various statuses to groups.
<b>additionalResources</b>	<b>CodeRef&lt;WatchK8sResources&lt;R&gt;&gt;</b>	yes	Additional resources which will be fetched and passed to the <b>mapper</b> function.

### **console.dashboards/overview/prometheus/activity/resource**

Adds an activity to the Activity Card of Prometheus Overview Dashboard where the triggering of activity is based on watching a Kubernetes resource.

Name	Value Type	Optional	Description
<b>queries</b>	<b>string[]</b>	no	Queries to watch.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;PrometheusActivityProps&gt;&gt;</b>	no	The action component.
<b>isActivity</b>	<b>CodeRef&lt;(results: PrometheusResponse[]) ⇒ boolean&gt;</b>	yes	Function which determines if the given resource represents the action. If not defined, every resource represents activity.

### **console.dashboards/project/overview/item**

Adds a resource tile to the project overview inventory card.

Name	Value Type	Optional	Description
<b>model</b>	<b>CodeRef&lt;T&gt;</b>	no	The model for <b>resource</b> which will be fetched. Used to get the model's <b>label</b> or <b>abbr</b> .
<b>mapper</b>	<b>CodeRef&lt;StatusGroupMapper&lt;T, R&gt;&gt;</b>	yes	Function which maps various statuses to groups.

Name	Value Type	Optional	Description
<b>additionalResources</b>	<b>CodeRef&lt;WatchK8sResources&lt;R&gt;&gt;</b>	yes	Additional resources which will be fetched and passed to the <b>mapper</b> function.

**console.dashboards/tab**

Adds a new dashboard tab, placed after the **Overview** tab.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique tab identifier, used as tab link <b>href</b> and when adding cards to this tab.
<b>navSection</b>	<b>'home'   'storage'</b>	no	Navigation section to which the tab belongs to.
<b>title</b>	<b>string</b>	no	The title of the tab.

**console.file-upload**

This extension can be used to provide a handler for the file drop action on specific file extensions.

Name	Value Type	Optional	Description
<b>fileExtensions</b>	<b>string[]</b>	no	Supported file extensions.
<b>handler</b>	<b>CodeRef&lt;FileUploadHandler&gt;</b>	no	Function which handles the file drop action.

**console.flag**

Gives full control over the web console feature flags.

Name	Value Type	Optional	Description
<b>handler</b>	<b>CodeRef&lt;FeatureFlagHandler&gt;</b>	no	Used to set or unset arbitrary feature flags.

**console.flag/hookProvider**

Gives full control over the web console feature flags with hook handlers.



Name	Value Type	Optional	Description
<b>handler</b>	<b>CodeRef&lt;FeatureFlagHandler&gt;</b>	no	Used to set or unset arbitrary feature flags.

### console.flag/model

Adds a new web console feature flag driven by the presence of a **CustomResourceDefinition** (CRD) object on the cluster.

Name	Value Type	Optional	Description
<b>flag</b>	<b>string</b>	no	The name of the flag to set after the CRD is detected.
<b>model</b>	<b>ExtensionK8sModel</b>	no	The model which refers to a CRD.

### console.global-config

This extension identifies a resource used to manage the configuration of the cluster. A link to the resource will be added to the **Administration** → **Cluster Settings** → **Configuration** page.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	Unique identifier for the cluster config resource instance.
<b>name</b>	<b>string</b>	no	The name of the cluster config resource instance.
<b>model</b>	<b>ExtensionK8sModel</b>	no	The model which refers to a cluster config resource.
<b>namespace</b>	<b>string</b>	no	The namespace of the cluster config resource instance.

### console.model-metadata

Customize the display of models by overriding values retrieved and generated through API discovery.

Name	Value Type	Optional	Description
------	------------	----------	-------------

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sGroup Model</b>	no	The model to customize. May specify only a group, or optional version and kind.
<b>badge</b>	<b>ModelBadge</b>	yes	Whether to consider this model reference as Technology Preview or Developer Preview.
<b>color</b>	<b>string</b>	yes	The color to associate to this model.
<b>label</b>	<b>string</b>	yes	Override the label. Requires <b>kind</b> be provided.
<b>labelPlural</b>	<b>string</b>	yes	Override the plural label. Requires <b>kind</b> be provided.
<b>abbr</b>	<b>string</b>	yes	Customize the abbreviation. Defaults to all uppercase characters in <b>kind</b> , up to 4 characters long. Requires that <b>kind</b> is provided.

### **console.navigation/href**

This extension can be used to contribute a navigation item that points to a specific link in the UI.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this item.
<b>name</b>	<b>string</b>	no	The name of this item.
<b>href</b>	<b>string</b>	no	The link <b>href</b> value.
<b>perspective</b>	<b>string</b>	yes	The perspective ID to which this item belongs to. If not specified, contributes to the default perspective.

Name	Value Type	Optional	Description
<b>section</b>	<b>string</b>	yes	Navigation section to which this item belongs to. If not specified, render this item as a top level link.
<b>dataAttributes</b>	<b>{ [key: string]: string; }</b>	yes	Adds data attributes to the DOM.
<b>startsWith</b>	<b>string[]</b>	yes	Mark this item as active when the URL starts with one of these paths.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. <b>insertBefore</b> takes precedence.
<b>namespaced</b>	<b>boolean</b>	yes	If <b>true</b> , adds <b>/ns/active-namespace</b> to the end.
<b>prefixNamespaced</b>	<b>boolean</b>	yes	If <b>true</b> , adds <b>/k8s/ns/active-namespace</b> to the beginning.

### **console.navigation/resource-cluster**

This extension can be used to contribute a navigation item that points to a cluster resource details page. The K8s model of that resource can be used to define the navigation item.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this item.
<b>model</b>	<b>ExtensionK8sModel</b>	no	The model for which this navigation item links to.

Name	Value Type	Optional	Description
<b>perspective</b>	<b>string</b>	yes	The perspective ID to which this item belongs to. If not specified, contributes to the default perspective.
<b>section</b>	<b>string</b>	yes	Navigation section to which this item belongs to. If not specified, render this item as a top-level link.
<b>dataAttributes</b>	<b>{ [key: string]: string; }</b>	yes	Adds data attributes to the DOM.
<b>startsWith</b>	<b>string[]</b>	yes	Mark this item as active when the URL starts with one of these paths.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. <b>insertBefore</b> takes precedence.
<b>name</b>	<b>string</b>	yes	Overrides the default name. If not supplied the name of the link will equal the plural value of the model.

### **console.navigation/resource-ns**

This extension can be used to contribute a navigation item that points to a namespaced resource details page. The K8s model of that resource can be used to define the navigation item.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this item.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sModel</b>	no	The model for which this navigation item links to.
<b>perspective</b>	<b>string</b>	yes	The perspective ID to which this item belongs to. If not specified, contributes to the default perspective.
<b>section</b>	<b>string</b>	yes	Navigation section to which this item belongs to. If not specified, render this item as a top-level link.
<b>dataAttributes</b>	<b>{ [key: string]: string; }</b>	yes	Adds data attributes to the DOM.
<b>startsWith</b>	<b>string[]</b>	yes	Mark this item as active when the URL starts with one of these paths.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. <b>insertBefore</b> takes precedence.
<b>name</b>	<b>string</b>	yes	Overrides the default name. If not supplied the name of the link will equal the plural value of the model.

### **console.navigation/section**

This extension can be used to define a new section of navigation items in the navigation tab.

Name	Value Type	Optional	Description
------	------------	----------	-------------

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this item.
<b>perspective</b>	<b>string</b>	yes	The perspective ID to which this item belongs to. If not specified, contributes to the default perspective.
<b>dataAttributes</b>	<b>{ [key: string]: string; }</b>	yes	Adds data attributes to the DOM.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. <b>insertBefore</b> takes precedence.
<b>name</b>	<b>string</b>	yes	Name of this section. If not supplied, only a separator will be shown above the section.

### console.navigation/separator

This extension can be used to add a separator between navigation items in the navigation.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this item.
<b>perspective</b>	<b>string</b>	yes	The perspective ID to which this item belongs to. If not specified, contributes to the default perspective.

Name	Value Type	Optional	Description
<b>section</b>	<b>string</b>	yes	Navigation section to which this item belongs to. If not specified, render this item as a top level link.
<b>dataAttributes</b>	<b>{ [key: string]: string; }</b>	yes	Adds data attributes to the DOM.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. <b>insertBefore</b> takes precedence.

### console.page/resource/details

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sGroup KindModel</b>	no	The model for which this resource page links to.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{ match: match&lt;{}&gt;; namespace: string; model: ExtensionK8sModel; }&gt;&gt;</b>	no	The component to be rendered when the route matches.

### console.page/resource/list

Adds new resource list page to Console router.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sGroup KindModel</b>	no	The model for which this resource page links to.

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{ match: match&lt;{}&gt;; namespace: string; model: ExtensionK8sModel; }&gt;&gt;</b>	no	The component to be rendered when the route matches.

**console.page/route**

Adds a new page to the web console router. See [React Router](#).

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;RouteComponentProps&lt;{}&gt;, StaticContext, any&gt;&gt;&gt;</b>	no	The component to be rendered when the route matches.
<b>path</b>	<b>string   string[]</b>	no	Valid URL path or array of paths that <b>path-to-regexp@^1.7.0</b> understands.
<b>perspective</b>	<b>string</b>	yes	The perspective to which this page belongs to. If not specified, contributes to all perspectives.
<b>exact</b>	<b>boolean</b>	yes	When true, will only match if the path matches the <b>location.pathname</b> exactly.

**console.page/route/standalone**

Adds a new standalone page, rendered outside the common page layout, to the web console router. See [React Router](#).

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;RouteComponentProps&lt;{}&gt;, StaticContext, any&gt;&gt;&gt;</b>	no	The component to be rendered when the route matches.



Name	Value Type	Optional	Description
<b>path</b>	<b>string   string[]</b>	no	Valid URL path or array of paths that <b>path-to-regexp@^1.7.0</b> understands.
<b>exact</b>	<b>boolean</b>	yes	When true, will only match if the path matches the <b>location.pathname</b> exactly.

### console.perspective

This extension contributes a new perspective to the console, which enables customization of the navigation menu.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	The perspective identifier.
<b>name</b>	<b>string</b>	no	The perspective display name.
<b>icon</b>	<b>CodeRef&lt;LazyComponent&gt;</b>	no	The perspective display icon.
<b>landingPageURL</b>	<b>CodeRef&lt;(flags: { [key: string]: boolean; }, isFirstVisit: boolean) ⇒ string&gt;</b>	no	The function to get perspective landing page URL.
<b>importRedirectURL</b>	<b>CodeRef&lt;(namespace: string) ⇒ string&gt;</b>	no	The function to get redirect URL for import flow.
<b>default</b>	<b>boolean</b>	yes	Whether the perspective is the default. There can only be one default.
<b>defaultPins</b>	<b>ExtensionK8sModel[]</b>	yes	Default pinned resources on the nav
<b>usePerspectiveDetection</b>	<b>CodeRef&lt;() ⇒ [boolean, boolean]&gt;</b>	yes	The hook to detect default perspective

**console.project-overview/inventory-item**

Adds a new inventory item into the **Project Overview** page.

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{ projectName: string; }&gt;&gt;</b>	no	The component to be rendered.

### console.project-overview/utilization-item

Adds a new project overview utilization item.

Name	Value Type	Optional	Description
<b>title</b>	<b>string</b>	no	The title of the utilization item.
<b>getUtilizationQuery</b>	<b>CodeRef&lt;GetProjectQuery&gt;</b>	no	Prometheus utilization query.
<b>humanize</b>	<b>CodeRef&lt;Humanize&gt;</b>	no	Convert Prometheus data to human-readable form.
<b>getTotalQuery</b>	<b>CodeRef&lt;GetProjectQuery&gt;</b>	yes	Prometheus total query.
<b>getRequestQuery</b>	<b>CodeRef&lt;GetProjectQuery&gt;</b>	yes	Prometheus request query.
<b>getLimitQuery</b>	<b>CodeRef&lt;GetProjectQuery&gt;</b>	yes	Prometheus limit query.
<b>TopConsumerPopover</b>	<b>CodeRef&lt;React.ComponentType&lt;TopConsumerPopoverProps&gt;&gt;</b>	yes	Shows the top consumer popover instead of plain value.

### console.pvc/alert

This extension can be used to contribute custom alerts on the PVC details page.

Name	Value Type	Optional	Description
<b>alert</b>	<b>CodeRef&lt;React.ComponentType&lt;{ pvc: K8sResourceComm on; }&gt;&gt;</b>	no	The alert component.

**console.pvc/create-prop**

This extension can be used to specify additional properties that will be used when creating PVC resources on the PVC list page.

Name	Value Type	Optional	Description
<b>label</b>	<b>string</b>	no	Label for the create prop action.
<b>path</b>	<b>string</b>	no	Path for the create prop action.

**console.pvc/delete**

This extension allows hooking into deleting PVC resources. It can provide an alert with additional information and custom PVC delete logic.

Name	Value Type	Optional	Description
<b>predicate</b>	<b>CodeRef&lt;(pvc: K8sResourceComm on) ⇒ boolean&gt;</b>	no	Predicate that tells whether to use the extension or not.
<b>onPVCKill</b>	<b>CodeRef&lt;(pvc: K8sResourceComm on) ⇒ Promise&lt;void&gt;&gt;</b>	no	Method for the PVC delete operation.
<b>alert</b>	<b>CodeRef&lt;React.ComponentType&lt;{ pvc: K8sResourceComm on; }&gt;&gt;</b>	no	Alert component to show additional information.

**console.pvc/status**

Name	Value Type	Optional	Description
<b>priority</b>	<b>number</b>	no	Priority for the status component. A larger value means higher priority.
<b>status</b>	<b>CodeRef&lt;React.ComponentType&lt;{ pvc: K8sResourceComm on; }&gt;&gt;</b>	no	The status component.
<b>predicate</b>	<b>CodeRef&lt;(pvc: K8sResourceComm on) ⇒ boolean&gt;</b>	no	Predicate that tells whether to render the status component or not.

**console.reducer-reducer**

Adds new reducer to Console Redux store which operates on **plugins.<scope>** substate.

Name	Value Type	Optional	Description
<b>scope</b>	<b>string</b>	no	The key to represent the reducer-managed substate within the Redux state object.
<b>reducer</b>	<b>CodeRef&lt;Reducer&lt;any, AnyAction&gt;&gt;</b>	no	The reducer function, operating on the reducer-managed substate.

**console.resource/create**

This extension allows plugins to provide a custom component (i.e., wizard or form) for specific resources, which will be rendered, when users try to create a new resource instance.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sModel</b>	no	The model for which this create resource page will be rendered
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;CreateResourceComponentProps&gt;&gt;</b>	no	The component to be rendered when the model matches

**console.resource/details-item**

Adds a new details item to the default resource summary on the details page.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sModel</b>	no	The subject resource's API group, version, and kind.
<b>id</b>	<b>string</b>	no	A unique identifier.
<b>column</b>	<b>DetailsItemColumn</b>	no	Determines if the item will appear in the 'left' or 'right' column of the resource summary on the details page. Default: 'right'
<b>title</b>	<b>string</b>	no	The details item title.

Name	Value Type	Optional	Description
<b>path</b>	<b>string</b>	yes	An optional, fully-qualified path to a resource property to used as the details item value. Only <a href="#">primitive type</a> values can be rendered directly. Use the component property to handle other data types.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;DetailsItem ComponentProps&lt;K8s ResourceCommon, any&gt;&gt;&gt;</b>	yes	An optional React component that will render the details item value.
<b>sortWeight</b>	<b>number</b>	yes	An optional sort weight, relative to all other details items in the same column. Represented by any valid <a href="#">JavaScriptNumber</a> . Items in each column are sorted independently, lowest to highest. Items without sort weights are sorted after items with sort weights.

### **console.storage-class/provisioner**

Adds a new storage class provisioner as an option during storage class creation.

Name	Value Type	Optional	Description
<b>CSI</b>	<b>ProvisionerDetails</b>	yes	Container Storage Interface provisioner type
<b>OTHERS</b>	<b>ProvisionerDetails</b>	yes	Other provisioner type

### **console.storage-provider**

This extension can be used to contribute a new storage provider to select, when attaching storage and a provider specific component.

Name	Value Type	Optional	Description
<b>name</b>	<b>string</b>	no	Displayed name of the provider.

Name	Value Type	Optional	Description
<b>Component</b>	<b>CodeRef&lt;React.ComponentType&lt;Partial&lt;RouteComponentProps&lt;{}&gt;, StaticContext, any&gt;&gt;&gt;&gt;</b>	no	Provider specific component to render.

**console.tab**

Adds a tab to a horizontal nav matching the **contextId**.

Name	Value Type	Optional	Description
<b>contextId</b>	<b>string</b>	no	Context ID assigned to the horizontal nav in which the tab will be injected. Possible values: <b>dev-console-observe</b>
<b>name</b>	<b>string</b>	no	The display label of the tab
<b>href</b>	<b>string</b>	no	The <b>href</b> appended to the existing URL
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;PageComponentProps&lt;K8sResourceCommon&gt;&gt;&gt;</b>	no	Tab content component.

**console.tab/horizontalNav**

This extension can be used to add a tab on the resource details page.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sKindVersionModel</b>	no	The model for which this provider show tab.
<b>page</b>	<b>{ name: string; href: string; }</b>	no	The page to be show in horizontal tab. It takes tab name as name and href of the tab

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;PageComponentProps&lt;K8sResourceCommon&gt;&gt;</b>	no	The component to be rendered when the route matches.

### console.telemetry/listener

This component can be used to register a listener function receiving telemetry events. These events include user identification, page navigation, and other application specific events. The listener may use this data for reporting and analytics purposes.

Name	Value Type	Optional	Description
<b>listener</b>	<b>CodeRef&lt;TelemetryEventListener&gt;</b>	no	Listen for telemetry events

### console.topology/adapter/build

**BuildAdapter** contributes an adapter to adapt element to data that can be used by the Build component.

Name	Value Type	Optional	Description
<b>adapt</b>	<b>CodeRef&lt;(element: GraphElement) ⇒ AdapterDataType&lt;BuildConfigData&gt;   undefined&gt;</b>	no	Adapter to adapt element to data that can be used by Build component.

### console.topology/adapter/network

**NetworkAdapter** contributes an adapter to adapt element to data that can be used by the **Networking** component.

Name	Value Type	Optional	Description
<b>adapt</b>	<b>CodeRef&lt;(element: GraphElement) ⇒ NetworkAdapterType   undefined&gt;</b>	no	Adapter to adapt element to data that can be used by Networking component.

### console.topology/adapter/pod

**PodAdapter** contributes an adapter to adapt element to data that can be used by the **Pod** component.

Name	Value Type	Optional	Description
------	------------	----------	-------------

Name	Value Type	Optional	Description
<b>adapt</b>	<b>CodeRef&lt;(element: GraphElement) ⇒ AdapterDataType&lt;PodsAdapterDataType&gt;   undefined&gt;</b>	no	Adapter to adapt element to data that can be used by Pod component.

**console.topology/component/factory**

Getter for a **ViewComponentFactory**.

Name	Value Type	Optional	Description
<b>getFactory</b>	<b>CodeRef&lt;ViewComponentFactory&gt;</b>	no	Getter for a <b>ViewComponentFactory</b> .

**console.topology/create/connector**

Getter for the create connector function.

Name	Value Type	Optional	Description
<b>getCreateConnector</b>	<b>CodeRef&lt;CreateConnectorGetter&gt;</b>	no	Getter for the create connector function.

**console.topology/data/factory**

Topology Data Model Factory Extension

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	Unique ID for the factory.
<b>priority</b>	<b>number</b>	no	Priority for the factory
<b>resources</b>	<b>WatchK8sResourcesGeneric</b>	yes	Resources to be fetched from <b>useK8sWatchResources</b> hook.
<b>workloadKeys</b>	<b>string[]</b>	yes	Keys in resources containing workloads.
<b>getDataModel</b>	<b>CodeRef&lt;TopologyDataModelGetter&gt;</b>	yes	Getter for the data model factory.



Name	Value Type	Optional	Description
<b>isResourceDepicted</b>	<b>CodeRef&lt;TopologyDataModelDepicted&gt;</b>	yes	Getter for function to determine if a resource is depicted by this model factory.
<b>getDataModelReconciler</b>	<b>CodeRef&lt;TopologyDataModelReconciler&gt;</b>	yes	Getter for function to reconcile data model after all extensions' models have loaded.

### **console.topology/decorator/provider**

Topology Decorator Provider Extension

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID for topology decorator specific to the extension
<b>priority</b>	<b>number</b>	no	Priority for topology decorator specific to the extension
<b>quadrant</b>	<b>TopologyQuadrant</b>	no	Quadrant for topology decorator specific to the extension
<b>decorator</b>	<b>CodeRef&lt;TopologyDecoratorGetter&gt;</b>	no	Decorator specific to the extension

### **console.topology/details/resource-alert**

**DetailsResourceAlert** contributes an alert for specific topology context or graph element.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	The ID of this alert. Used to save state if the alert should not be shown after dismissed.
<b>contentProvider</b>	<b>CodeRef&lt;(element: GraphElement) ⇒ DetailsResourceAlertContent   null&gt;</b>	no	Hook to return the contents of the alert.

### **console.topology/details/resource-link**

**DetailsResourceLink** contributes a link for specific topology context or graph element.

Name	Value Type	Optional	Description
<b>link</b>	<b>CodeRef&lt;(element: GraphElement) =&gt; React.Component   undefined&gt;</b>	no	Return the resource link if provided, otherwise undefined. Use the <b>ResourceIcon</b> and <b>ResourceLink</b> properties for styles.
<b>priority</b>	<b>number</b>	yes	A higher priority factory will get the first chance to create the link.

### console.topology/details/tab

**DetailsTab** contributes a tab for the topology details panel.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this details tab.
<b>label</b>	<b>string</b>	no	The tab label to display in the UI.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. The <b>insertBefore</b> value takes precedence.

### console.topology/details/tab-section

**DetailsTabSection** contributes a section for a specific tab in the topology details panel.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	A unique identifier for this details tab section.

Name	Value Type	Optional	Description
<b>tab</b>	<b>string</b>	no	The parent tab ID that this section should contribute to.
<b>provider</b>	<b>CodeRef&lt;DetailsTabSectionExtensionHook&gt;</b>	no	A hook that returns a component, or if null or undefined, renders in the topology sidebar. SDK component: <b>&lt;Section title=\{&gt;... padded area</b>
<b>section</b>	<b>CodeRef&lt;(element: GraphElement, renderNull?: () =&gt; null) =&gt; React.Component   undefined&gt;</b>	no	Deprecated: Fallback if no provider is defined. renderNull is a no-op already.
<b>insertBefore</b>	<b>string   string[]</b>	yes	Insert this item before the item referenced here. For arrays, the first one found in order is used.
<b>insertAfter</b>	<b>string   string[]</b>	yes	Insert this item after the item referenced here. For arrays, the first one found in order is used. The <b>insertBefore</b> value takes precedence.

### console.topology/display/filters

Topology Display Filters Extension

Name	Value Type	Optional	Description
<b>getTopologyFilters</b>	<b>CodeRef&lt;() =&gt; TopologyDisplayOption[]&gt;</b>	no	Getter for topology filters specific to the extension
<b>applyDisplayOptions</b>	<b>CodeRef&lt;TopologyApplyDisplayOptions&gt;</b>	no	Function to apply filters to the model

### console.topology/relationship/provider

Topology relationship provider connector extension

Name	Value Type	Optional	Description
<b>provides</b>	<b>CodeRef&lt;RelationshipProviderProvides&gt;</b>	no	Use to determine if a connection can be created between the source and target node
<b>tooltip</b>	<b>string</b>	no	Tooltip to show when connector operation is hovering over the drop target, for example, "Create a Visual Connector"
<b>create</b>	<b>CodeRef&lt;RelationshipProviderCreate&gt;</b>	no	Callback to execute when connector is drop over target node to create a connection
<b>priority</b>	<b>number</b>	no	Priority for relationship, higher will be preferred in case of multiple

#### **console.user-preference/group**

This extension can be used to add a group on the console user-preferences page. It will appear as a vertical tab option on the console user-preferences page.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID used to identify the user preference group.
<b>label</b>	<b>string</b>	no	The label of the user preference group
<b>insertBefore</b>	<b>string</b>	yes	ID of user preference group before which this group should be placed
<b>insertAfter</b>	<b>string</b>	yes	ID of user preference group after which this group should be placed

#### **console.user-preference/item**

This extension can be used to add an item to the user preferences group on the console user preferences page.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID used to identify the user preference item and referenced in <code>insertAfter</code> and <code>insertBefore</code> to define the item order
<b>label</b>	<b>string</b>	no	The label of the user preference
<b>description</b>	<b>string</b>	no	The description of the user preference
<b>field</b>	<b>UserPreferenceField</b>	no	The input field options used to render the values to set the user preference
<b>groupId</b>	<b>string</b>	yes	IDs used to identify the user preference groups the item would belong to
<b>insertBefore</b>	<b>string</b>	yes	ID of user preference item before which this item should be placed
<b>insertAfter</b>	<b>string</b>	yes	ID of user preference item after which this item should be placed

### console.yaml-template

YAML templates for editing resources via the yaml editor.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sModel</b>	no	Model associated with the template.
<b>template</b>	<b>CodeRef&lt;string&gt;</b>	no	The YAML template.
<b>name</b>	<b>string</b>	no	The name of the template. Use the name <b>default</b> to mark this as the default template.

### dev-console.add/action

This extension allows plugins to contribute an add action item to the add page of developer perspective. For example, a Serverless plugin can add a new action item for adding serverless functions to the add page of developer console.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID used to identify the action.
<b>label</b>	<b>string</b>	no	The label of the action.
<b>description</b>	<b>string</b>	no	The description of the action.
<b>href</b>	<b>string</b>	no	The <b>href</b> to navigate to.
<b>groupId</b>	<b>string</b>	yes	IDs used to identify the action groups the action would belong to.
<b>icon</b>	<b>CodeRef&lt;React.ReactNode&gt;</b>	yes	The perspective display icon.
<b>accessReview</b>	<b>AccessReviewResourceAttributes[]</b>	yes	Optional access review to control the visibility or enablement of the action.

### dev-console.add/action-group

This extension allows plugins to contribute a group in the add page of developer console. Groups can be referenced by actions, which will be grouped together in the add action page based on their extension definition. For example, a Serverless plugin can contribute a Serverless group and together with multiple add actions.

Name	Value Type	Optional	Description
<b>id</b>	<b>string</b>	no	ID used to identify the action group
<b>name</b>	<b>string</b>	no	The title of the action group
<b>insertBefore</b>	<b>string</b>	yes	ID of action group before which this group should be placed
<b>insertAfter</b>	<b>string</b>	yes	ID of action group after which this group should be placed

**dev-console.import/environment**

This extension can be used to specify extra build environment variable fields under the builder image selector in the developer console git import form. When set, the fields will override environment variables of the same name in the build section.

Name	Value Type	Optional	Description
<b>imageStreamName</b>	<b>string</b>	no	Name of the image stream to provide custom environment variables for
<b>imageStreamTags</b>	<b>string[]</b>	no	List of supported image stream tags
<b>environments</b>	<b>ImageEnvironment[]</b>	no	List of environment variables

**console.dashboards/overview/detail/item**

Deprecated. use **CustomOverviewDetailItem** type instead

Name	Value Type	Optional	Description
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;{}&gt;&gt;</b>	no	The value, based on the <b>DetailItem</b> component

**console.page/resource/tab**

Deprecated. Use **console.tab/horizontalNav** instead. Adds a new resource tab page to Console router.

Name	Value Type	Optional	Description
<b>model</b>	<b>ExtensionK8sGroupKindModel</b>	no	The model for which this resource page links to.
<b>component</b>	<b>CodeRef&lt;React.ComponentType&lt;RouteComponentProps&lt;{}&gt;, StaticContext, any&gt;&gt;&gt;</b>	no	The component to be rendered when the route matches.
<b>name</b>	<b>string</b>	no	The name of the tab.
<b>href</b>	<b>string</b>	yes	The optional <b>href</b> for the tab link. If not provided, the first <b>path</b> is used.

Name	Value Type	Optional	Description
<b>exact</b>	<b>boolean</b>	yes	When true, will only match if the path matches the <b>location.pathname</b> exactly.

## 7.5.2. Dynamic plugin API

### **useActivePerspective**

Hook that provides the currently active perspective and a callback for setting the active perspective. It returns a tuple containing the current active perspective and setter callback.

#### Example

```
const Component: React.FC = (props) => {
  const [activePerspective, setActivePerspective] = useActivePerspective();
  return <select
    value={activePerspective}
    onChange={(e) => setActivePerspective(e.target.value)}
  >
    {
      // ...perspective options
    }
  </select>
}
```

### **GreenCheckCircleIcon**

Component for displaying a green check mark circle icon.

#### Example

```
<GreenCheckCircleIcon title="Healthy" />
```

Parameter Name	Description
<b>className</b>	(optional) additional class name for the component
<b>title</b>	(optional) icon title
<b>size</b>	(optional) icon size: ( <b>sm, md, lg, xl</b> )

### **RedExclamationCircleIcon**

Component for displaying a red exclamation mark circle icon.

#### Example

-



```
<RedExclamationCircleIcon title="Failed" />
```

Parameter Name	Description
<b>className</b>	(optional) additional class name for the component
<b>title</b>	(optional) icon title
<b>size</b>	(optional) icon size: ( <b>sm, md, lg, xl</b> )

### YellowExclamationTriangleIcon

Component for displaying a yellow triangle exclamation icon.

#### Example

```
<YellowExclamationTriangleIcon title="Warning" />
```

Parameter Name	Description
<b>className</b>	(optional) additional class name for the component
<b>title</b>	(optional) icon title
<b>size</b>	(optional) icon size: ( <b>sm, md, lg, xl</b> )

### BlueInfoCircleIcon

Component for displaying a blue info circle icon.

#### Example

```
<BlueInfoCircleIcon title="Info" />
```

Parameter Name	Description
<b>className</b>	(optional) additional class name for the component
<b>title</b>	(optional) icon title
<b>size</b>	(optional) icon size: ('sm', 'md', 'lg', 'xl')

### ErrorStatus

Component for displaying an error status popover.

#### Example

```
<ErrorStatus title={errorMsg} />
```

Parameter Name	Description
<b>title</b>	(optional) status text
<b>iconOnly</b>	(optional) if true, only displays icon
<b>noTooltip</b>	(optional) if true, tooltip won't be displayed
<b>className</b>	(optional) additional class name for the component
<b>popoverTitle</b>	(optional) title for popover

### InfoStatus

Component for displaying an information status popover.

#### Example

```
<InfoStatus title={infoMsg} />
```

Parameter Name	Description
<b>title</b>	(optional) status text
<b>iconOnly</b>	(optional) if true, only displays icon
<b>noTooltip</b>	(optional) if true, tooltip won't be displayed
<b>className</b>	(optional) additional class name for the component
<b>popoverTitle</b>	(optional) title for popover

### ProgressStatus

Component for displaying a progressing status popover.

#### Example

```
<ProgressStatus title={progressMsg} />
```

Parameter Name	Description
<b>title</b>	(optional) status text
<b>iconOnly</b>	(optional) if true, only displays icon
<b>noTooltip</b>	(optional) if true, tooltip won't be displayed

Parameter Name	Description
<b>className</b>	(optional) additional class name for the component
<b>popoverTitle</b>	(optional) title for popover

### SuccessStatus

Component for displaying a success status popover.

### Example

```
<SuccessStatus title={successMsg} />
```

Parameter Name	Description
<b>title</b>	(optional) status text
<b>iconOnly</b>	(optional) if true, only displays icon
<b>noTooltip</b>	(optional) if true, tooltip won't be displayed
<b>className</b>	(optional) additional class name for the component
<b>popoverTitle</b>	(optional) title for popover

### checkAccess

Provides information about user access to a given resource. It returns an object with resource access information.

Parameter Name	Description
<b>resourceAttributes</b>	resource attributes for access review
<b>impersonate</b>	impersonation details

### useAccessReview

Hook that provides information about user access to a given resource. It returns an array with **isAllowed** and **loading** values.

Parameter Name	Description
<b>resourceAttributes</b>	resource attributes for access review
<b>impersonate</b>	impersonation details

### useResolvedExtensions

React hook for consuming Console extensions with resolved **CodeRef** properties. This hook accepts the same argument(s) as **useExtensions** hook and returns an adapted list of extension instances, resolving all code references within each extension's properties.

Initially, the hook returns an empty array. After the resolution is complete, the React component is re-rendered with the hook returning an adapted list of extensions. When the list of matching extensions changes, the resolution is restarted. The hook will continue to return the previous result until the resolution completes.

The hook's result elements are guaranteed to be referentially stable across re-renders. It returns a tuple containing a list of adapted extension instances with resolved code references, a boolean flag indicating whether the resolution is complete, and a list of errors detected during the resolution.

### Example

```
const [navItemExtensions, navItemsResolved] = useResolvedExtensions<NavItem>(isNavItem);
// process adapted extensions and render your component
```

Parameter Name	Description
<b>typeGuards</b>	A list of callbacks that each accept a dynamic plugin extension as an argument and return a boolean flag indicating whether or not the extension meets desired type constraints

### HorizontalNav

A component that creates a Navigation bar for a page. Routing is handled as part of the component. **console.tab/horizontalNav** can be used to add additional content to any horizontal navigation.

### Example

```
const HomePage: React.FC = (props) => {
  const page = {
    href: '/home',
    name: 'Home',
    component: () => <>Home</>
  }
  return <HorizontalNav match={props.match} pages={[page]} />
}
```

Parameter Name	Description
<b>resource</b>	The resource associated with this Navigation, an object of K8sResourceCommon type
<b>pages</b>	An array of page objects
<b>match</b>	match object provided by React Router

## VirtualizedTable

A component for making virtualized tables.

### Example

```

const MachineList: React.FC<MachineListProps> = (props) => {
  return (
    <VirtualizedTable<MachineKind>
      {...props}
      aria-label='Machines'
      columns={getMachineColumns}
      Row={getMachineTableRow}
    />
  );
}

```

Parameter Name	Description
<b>data</b>	data for table
<b>loaded</b>	flag indicating data is loaded
<b>loadError</b>	error object if issue loading data
<b>columns</b>	column setup
<b>Row</b>	row setup
<b>unfilteredData</b>	original data without filter
<b>NoDataEmptyMsg</b>	(optional) no data empty message component
<b>EmptyMsg</b>	(optional) empty message component
<b>scrollNode</b>	(optional) function to handle scroll
<b>label</b>	(optional) label for table
<b>ariaLabel</b>	(optional) aria label
<b>gridBreakPoint</b>	sizing of how to break up grid for responsiveness
<b>onSelect</b>	(optional) function for handling select of table
<b>rowData</b>	(optional) data specific to row

## TableData

Component for displaying table data within a table row.

## Example

```
const PodRow: React.FC<RowProps<K8sResourceCommon>> = ({ obj, activeColumnIDs }) => {
  return (
    <>
      <TableData id={columns[0].id} activeColumnIDs={activeColumnIDs}>
        <ResourceLink kind="Pod" name={obj.metadata.name} namespace={obj.metadata.namespace} />
      </TableData>
      <TableData id={columns[1].id} activeColumnIDs={activeColumnIDs}>
        <ResourceLink kind="Namespace" name={obj.metadata.namespace} />
      </TableData>
    </>
  );
};
```

Parameter Name	Description
<b>id</b>	unique ID for table
<b>activeColumnIDs</b>	active columns
<b>className</b>	(optional) option class name for styling

## useActiveColumns

A hook that provides a list of user-selected active TableColumns.

## Example

```
// See implementation for more details on TableColumn type
const [activeColumns, userSettingsLoaded] = useActiveColumns({
  columns,
  showNamespaceOverride: false,
  columnManagementID,
});
return userSettingsAreLoaded ? <VirtualizedTable columns={activeColumns} {...otherProps} /> : null
```

Parameter Name	Description
<b>options</b>	Which are passed as a key-value map
<b>\{TableColumn[]\} options.columns</b>	An array of all available TableColumns
<b>{boolean}</b> <b>[options.showNamespaceOverride]</b>	(optional) If true, a namespace column will be included, regardless of column management selections

Parameter Name	Description
<b>{string} [options.columnManagementID]</b>	(optional) A unique ID used to persist and retrieve column management selections to and from user settings. Usually a group/version/kind (GVK) string for a resource.

A tuple containing the current user selected active columns (a subset of options.columns), and a boolean flag indicating whether user settings have been loaded.

### ListPageHeader

Component for generating a page header.

#### Example

```
const exampleList: React.FC = () => {
  return (
    <>
      <ListPageHeader title="Example List Page"/>
    </>
  );
};
```

Parameter Name	Description
<b>title</b>	heading title
<b>helpText</b>	(optional) help section as react node
<b>badge</b>	(optional) badge icon as react node

### ListPageCreate

Component for adding a create button for a specific resource kind that automatically generates a link to the create YAML for this resource.

#### Example

```
const exampleList: React.FC<MyProps> = () => {
  return (
    <>
      <ListPageHeader title="Example Pod List Page"/>
      <ListPageCreate groupVersionKind="Pod">Create Pod</ListPageCreate>
    </ListPageHeader>
    </>
  );
};
```

Parameter Name	Description
<b>groupVersionKind</b>	the resource group/version/kind to represent

### ListPageCreateLink

Component for creating a stylized link.

#### Example

```
const exampleList: React.FC<MyProps> = () => {
  return (
    <>
      <ListPageHeader title="Example Pod List Page"/>
      <ListPageCreateLink to={'/link/to/my/page'}>Create Item</ListPageCreateLink>
    </ListPageHeader>
    </>
  );
};
```

Parameter Name	Description
<b>to</b>	string location where link should direct
<b>createAccessReview</b>	(optional) object with namespace and kind used to determine access
<b>children</b>	(optional) children for the component

### ListPageCreateButton

Component for creating button.

#### Example

```
const exampleList: React.FC<MyProps> = () => {
  return (
    <>
      <ListPageHeader title="Example Pod List Page"/>
      <ListPageCreateButton createAccessReview={access}>Create Pod</ListPageCreateButton>
    </ListPageHeader>
    </>
  );
};
```

Parameter Name	Description
<b>createAccessReview</b>	(optional) object with namespace and kind used to determine access



Parameter Name	Description
<b>pfButtonProps</b>	(optional) Patternfly Button props

### ListPageCreateDropdown

Component for creating a dropdown wrapped with permissions check.

#### Example

```
const exampleList: React.FC<MyProps> = () => {
  const items = {
    SAVE: 'Save',
    DELETE: 'Delete',
  }
  return (
    <>
      <ListPageHeader title="Example Pod List Page"/>
      <ListPageCreateDropdown createAccessReview={access}
items={items}>Actions</ListPageCreateDropdown>
      </ListPageHeader>
    </>
  );
};
```

Parameter Name	Description
<b>items</b>	key:ReactNode pairs of items to display in dropdown component
<b>onClick</b>	callback function for click on dropdown items
<b>createAccessReview</b>	(optional) object with namespace and kind used to determine access
<b>children</b>	(optional) children for the dropdown toggle

### ListPageFilter

Component that generates filter for list page.

#### Example

```
// See implementation for more details on RowFilter and FilterValue types
const [staticData, filteredData, onFilterChange] = useListPageFilter(
  data,
  rowFilters,
  staticFilters,
);
// ListPageFilter updates filter state based on user interaction and resulting filtered data can be
rendered in an independent component.
return (
```

```

<>
  <ListPageHeader .../>
  <ListPageBody>
    <ListPageFilter data={staticData} onFilterChange={onFilterChange} />
    <List data={filteredData} />
  </ListPageBody>
</>
)

```

Parameter Name	Description
<b>data</b>	An array of data points
<b>loaded</b>	indicates that data has loaded
<b>onFilterChange</b>	callback function for when filter is updated
<b>rowFilters</b>	(optional) An array of RowFilter elements that define the available filter options
<b>nameFilterPlaceholder</b>	(optional) placeholder for name filter
<b>labelFilterPlaceholder</b>	(optional) placeholder for label filter
<b>hideLabelFilter</b>	(optional) only shows the name filter instead of both name and label filter
<b>hideNameLabelFilter</b>	(optional) hides both name and label filter
<b>columnLayout</b>	(optional) column layout object
<b>hideColumnManagement</b>	(optional) flag to hide the column management

### useListPageFilter

A hook that manages filter state for the ListPageFilter component. It returns a tuple containing the data filtered by all static filters, the data filtered by all static and row filters, and a callback that updates rowFilters.

### Example

```

// See implementation for more details on RowFilter and FilterValue types
const [staticData, filteredData, onFilterChange] = useListPageFilter(
  data,
  rowFilters,
  staticFilters,
);
// ListPageFilter updates filter state based on user interaction and resulting filtered data can be
// rendered in an independent component.
return (
  <>

```

```

    <ListPageHeader .../>
    <ListPageBody>
      <ListPageFilter data={staticData} onFilterChange={onFilterChange} />
      <List data={filteredData} />
    </ListPageBody>
  </>
)

```

Parameter Name	Description
<b>data</b>	An array of data points
<b>rowFilters</b>	(optional) An array of RowFilter elements that define the available filter options
<b>staticFilters</b>	(optional) An array of FilterValue elements that are statically applied to the data

### ResourceLink

Component that creates a link to a specific resource type with an icon badge.

#### Example

```

<ResourceLink
  kind="Pod"
  name="testPod"
  title={metadata.uid}
/>

```

Parameter Name	Description
<b>kind</b>	(optional) the kind of resource i.e. Pod, Deployment, Namespace
<b>groupVersionKind</b>	(optional) object with group, version, and kind
<b>className</b>	(optional) class style for component
<b>displayName</b>	(optional) display name for component, overwrites the resource name if set
<b>inline</b>	(optional) flag to create icon badge and name inline with children
<b>linkTo</b>	(optional) flag to create a Link object - defaults to true
<b>name</b>	(optional) name of resource

Parameter Name	Description
<b>namespace</b>	(optional) specific namespace for the kind resource to link to
<b>hideIcon</b>	(optional) flag to hide the icon badge
<b>title</b>	(optional) title for the link object (not displayed)
<b>dataTest</b>	(optional) identifier for testing
<b>onClick</b>	(optional) callback function for when component is clicked
<b>truncate</b>	(optional) flag to truncate the link if too long

### ResourceIcon

Component that creates an icon badge for a specific resource type.

### Example

```
<ResourceIcon kind="Pod"/>
```

Parameter Name	Description
<b>kind</b>	(optional) the kind of resource i.e. Pod, Deployment, Namespace
<b>groupVersionKind</b>	(optional) object with group, version, and kind
<b>className</b>	(optional) class style for component

### useK8sModel

Hook that retrieves the k8s model for provided K8sGroupVersionKind from redux. It returns an array with the first item as k8s model and second item as **inFlight** status.

### Example

```
const Component: React.FC = () => {
  const [model, inFlight] = useK8sModel({ group: 'app'; version: 'v1'; kind: 'Deployment' });
  return ...
}
```

Parameter Name	Description
----------------	-------------

Parameter Name	Description
<b>groupVersionKind</b>	group, version, kind of k8s resource K8sGroupVersionKind is preferred alternatively can pass reference for group, version, kind which is deprecated, i.e, group/version/kind (GVK) K8sResourceKindReference.

### useK8sModels

Hook that retrieves all current k8s models from redux. It returns an array with the first item as the list of k8s model and second item as **inFlight** status.

#### Example

```
const Component: React.FC = () => {
  const [models, inFlight] = UseK8sModels();
  return ...
}
```

### useK8sWatchResource

Hook that retrieves the k8s resource along with status for loaded and error. It returns an array with first item as resource(s), second item as loaded status and third item as error state if any.

#### Example

```
const Component: React.FC = () => {
  const watchRes = {
    ...
  }
  const [data, loaded, error] = useK8sWatchResource(watchRes)
  return ...
}
```

Parameter Name	Description
<b>initResource</b>	options needed to watch for resource.

### useK8sWatchResources

Hook that retrieves the k8s resources along with their respective status for loaded and error. It returns a map where keys are as provided in initResources and value has three properties data, loaded and error.

#### Example

```
const Component: React.FC = () => {
  const watchResources = {
    'deployment': {...},
    'pod': {...}
    ...
  }
```

```

    }
    const {deployment, pod} = useK8sWatchResources(watchResources)
    return ...
  }

```

Parameter Name	Description
<b>initResources</b>	Resources must be watched as key-value pair, wherein key will be unique to resource and value will be options needed to watch for the respective resource.

### consoleFetch

A custom wrapper around **fetch** that adds console specific headers and allows for retries and timeouts. It also validates the response status code and throws appropriate error or logs out the user if required. It returns a promise that resolves to the response.

Parameter Name	Description
<b>url</b>	The URL to fetch
<b>options</b>	The options to pass to fetch
<b>timeout</b>	The timeout in milliseconds

### consoleFetchJSON

A custom wrapper around **fetch** that adds console specific headers and allows for retries and timeouts. It also validates the response status code and throws appropriate error or logs out the user if required. It returns the response as a JSON object. Uses **consoleFetch** internally. It returns a promise that resolves to the response as JSON object.

Parameter Name	Description
<b>url</b>	The URL to fetch
<b>method</b>	The HTTP method to use. Defaults to GET
<b>options</b>	The options to pass to fetch
<b>timeout</b>	The timeout in milliseconds
<b>cluster</b>	The name of the cluster to make the request to. Defaults to the active cluster the user has selected

### consoleFetchText

A custom wrapper around **fetch** that adds console specific headers and allows for retries and timeouts. It also validates the response status code and throws appropriate error or logs out the user if required. It returns the response as a text. Uses **consoleFetch** internally. It returns a promise that resolves to the

response as text.

Parameter Name	Description
<b>url</b>	The URL to fetch
<b>options</b>	The options to pass to fetch
<b>timeout</b>	The timeout in milliseconds
<b>cluster</b>	The name of the cluster to make the request to. Defaults to the active cluster the user has selected

### **getConsoleRequestHeaders**

A function that creates impersonation and multicluster related headers for API requests using current redux state. It returns an object containing the appropriate impersonation and cluster request headers, based on redux state.

Parameter Name	Description
<b>targetCluster</b>	Override the current active cluster with the provided targetCluster

### **k8sGetResource**

It fetches a resource from the cluster, based on the provided options. If the name is provided it returns one resource else it returns all the resources matching the model. It returns a promise that resolves to the response as JSON object with a resource if the name is provided else it returns all the resources matching the model. In case of failure, the promise gets rejected with HTTP error response.

Parameter Name	Description
<b>options</b>	Which are passed as key-value pairs in the map
<b>options.model</b>	k8s model
<b>options.name</b>	The name of the resource, if not provided then it will look for all the resources matching the model.
<b>options.ns</b>	The namespace to look into, should not be specified for cluster-scoped resources.
<b>options.path</b>	Appends as subpath if provided
<b>options.queryParams</b>	The query parameters to be included in the URL.

Parameter Name	Description
<b>options.requestInit</b>	The fetch init object to use. This can have request headers, method, redirect, etc. See <a href="#">Interface RequestInit</a> for more.

### k8sCreateResource

It creates a resource in the cluster, based on the provided options. It returns a promise that resolves to the response of the resource created. In case of failure promise gets rejected with HTTP error response.

Parameter Name	Description
<b>options</b>	Which are passed as key-value pairs in the map
<b>options.model</b>	k8s model
<b>options.data</b>	Payload for the resource to be created
<b>options.path</b>	Appends as subpath if provided
<b>options.queryParams</b>	The query parameters to be included in the URL.

### k8sUpdateResource

It updates the entire resource in the cluster, based on provided options. When a client needs to replace an existing resource entirely, they can use k8sUpdate. Alternatively can use k8sPatch to perform the partial update. It returns a promise that resolves to the response of the resource updated. In case of failure promise gets rejected with HTTP error response.

Parameter Name	Description
<b>options</b>	Which are passed as key-value pair in the map
<b>options.model</b>	k8s model
<b>options.data</b>	Payload for the k8s resource to be updated
<b>options.ns</b>	Namespace to look into, it should not be specified for cluster-scoped resources.
<b>options.name</b>	Resource name to be updated.
<b>options.path</b>	Appends as subpath if provided
<b>options.queryParams</b>	The query parameters to be included in the URL.

### k8sPatchResource

It patches any resource in the cluster, based on provided options. When a client needs to perform the



partial update, they can use `k8sPatch`. Alternatively can use `k8sUpdate` to replace an existing resource entirely. See [Data Tracker](#) for more. It returns a promise that resolves to the response of the resource patched. In case of failure promise gets rejected with HTTP error response.

Parameter Name	Description
<b>options</b>	Which are passed as key-value pairs in the map.
<b>options.model</b>	k8s model
<b>options.resource</b>	The resource to be patched.
<b>options.data</b>	Only the data to be patched on existing resource with the operation, path, and value.
<b>options.path</b>	Appends as subpath if provided.
<b>options.queryParams</b>	The query parameters to be included in the URL.

### **k8sDeleteResource**

It deletes resources from the cluster, based on the provided model, resource. The garbage collection works based on **Foreground|Background** can be configured with `propagationPolicy` property in provided model or passed in json. It returns a promise that resolves to the response of kind Status. In case of failure promise gets rejected with HTTP error response.

### Example

**kind: 'DeleteOptions', apiVersion: 'v1', propagationPolicy**

Parameter Name	Description
<b>options</b>	Which are passed as key-value pair in the map.
<b>options.model</b>	k8s model
<b>options.resource</b>	The resource to be deleted.
<b>options.path</b>	Appends as subpath if provided
<b>options.queryParams</b>	The query parameters to be included in the URL.
<b>options.requestInit</b>	The fetch init object to use. This can have request headers, method, redirect, etc. See <a href="#">Interface RequestInit</a> for more.
<b>options.json</b>	Can control garbage collection of resources explicitly if provided else will default to model's "propagationPolicy".

**k8sListResource**

Lists the resources as an array in the cluster, based on provided options. It returns a promise that resolves to the response.

Parameter Name	Description
<b>options</b>	Which are passed as key-value pairs in the map
<b>options.model</b>	k8s model
<b>options.queryParams</b>	The query parameters to be included in the URL and can pass label selector's as well with key "labelSelector".
<b>options.requestInit</b>	The fetch init object to use. This can have request headers, method, redirect, etc. See <a href="#">Interface RequestInit</a> for more.

**k8sListResourceItems**

Same interface as k8sListResource but returns the sub items. It returns the apiVersion for the model, i.e., **group/version**.

**getAPIVersionForModel**

Provides apiVersion for a k8s model.

Parameter Name	Description
<b>model</b>	k8s model

**getGroupVersionKindForResource**

Provides a group, version, and kind for a resource. It returns the group, version, kind for the provided resource. If the resource does not have an API group, group "core" will be returned. If the resource has an invalid apiVersion, then it will throw an Error.

Parameter Name	Description
<b>resource</b>	k8s resource

**getGroupVersionKindForModel**

Provides a group, version, and kind for a k8s model. This returns the group, version, kind for the provided model. If the model does not have an apiGroup, group "core" will be returned.

Parameter Name	Description
<b>model</b>	k8s model

**StatusPopupSection**

Component that shows the status in a popup window. Helpful component for building **console.dashboards/overview/health/resource** extensions.

### Example

```
<StatusPopupSection
  firstColumn={
    <>
      <span>{title}</span>
      <span className="text-secondary">
        My Example Item
      </span>
    </>
  }
  secondColumn='Status'
>
```

Parameter Name	Description
<b>firstColumn</b>	values for first column of popup
<b>secondColumn</b>	(optional) values for second column of popup
<b>children</b>	(optional) children for the popup

### StatusPopuItem

Status element used in status popup; used in **StatusPopupSection**.

### Example

```
<StatusPopupSection
  firstColumn='Example'
  secondColumn='Status'
>
  <StatusPopuItem icon={healthStateMapping[MCGMetrics.state]?.icon}>
    Complete
  </StatusPopuItem>
  <StatusPopuItem icon={healthStateMapping[RGWMetrics.state]?.icon}>
    Pending
  </StatusPopuItem>
</StatusPopupSection>
```

Parameter Name	Description
<b>value</b>	(optional) text value to display
<b>icon</b>	(optional) icon to display
<b>children</b>	child elements

## Overview

Creates a wrapper component for a dashboard.

### Example

```

<Overview>
  <OverviewGrid mainCards={mainCards} leftCards={leftCards} rightCards={rightCards} />
</Overview>

```

Parameter Name	Description
<b>className</b>	(optional) style class for div
<b>children</b>	(optional) elements of the dashboard

## OverviewGrid

Creates a grid of card elements for a dashboard; used within **Overview**.

### Example

```

<Overview>
  <OverviewGrid mainCards={mainCards} leftCards={leftCards} rightCards={rightCards} />
</Overview>

```

Parameter Name	Description
<b>mainCards</b>	cards for grid
<b>leftCards</b>	(optional) cards for left side of grid
<b>rightCards</b>	(optional) cards for right side of grid

## InventoryItem

Creates an inventory card item.

### Example

```

return (
  <InventoryItem>
    <InventoryItemTitle>{title}</InventoryItemTitle>
    <InventoryItemBody error={loadError}>
      {loaded && <InventoryItemStatus count={workerNodes.length} icon={<MonitoringIcon />} />}
    </InventoryItemBody>
  </InventoryItem>
)

```

Parameter Name	Description
<b>children</b>	elements to render inside the item

### **InventoryItemTitle**

Creates a title for an inventory card item; used within **InventoryItem**.

#### **Example**

```
return (
  <InventoryItem>
    <InventoryItemTitle>{title}</InventoryItemTitle>
    <InventoryItemBody error={loadError}>
      {loaded && <InventoryItemStatus count={workerNodes.length} icon={<MonitoringIcon />} />}
    </InventoryItemBody>
  </InventoryItem>
)
```

Parameter Name	Description
<b>children</b>	elements to render inside the title

### **InventoryItemBody**

Creates the body of an inventory card; used within **InventoryCard** and can be used with **InventoryTitle**.

#### **Example**

```
return (
  <InventoryItem>
    <InventoryItemTitle>{title}</InventoryItemTitle>
    <InventoryItemBody error={loadError}>
      {loaded && <InventoryItemStatus count={workerNodes.length} icon={<MonitoringIcon />} />}
    </InventoryItemBody>
  </InventoryItem>
)
```

Parameter Name	Description
<b>children</b>	elements to render inside the Inventory Card or title
<b>error</b>	elements of the div

### **InventoryItemStatus**

Creates a count and icon for an inventory card with optional link address; used within **InventoryItemBody**

#### **Example**

```

return (
  <InventoryItem>
    <InventoryItemTitle>{title}</InventoryItemTitle>
    <InventoryItemBody error={loadError}>
      {loaded && <InventoryItemStatus count={workerNodes.length} icon={<MonitoringIcon />} />} />
    </InventoryItemBody>
  </InventoryItem>
)

```

Parameter Name	Description
<b>count</b>	count for display
<b>icon</b>	icon for display
<b>linkTo</b>	(optional) link address

### InventoryItemLoading

Creates a skeleton container for when an inventory card is loading; used with **InventoryItem** and related components

#### Example

```

if (loadError) {
  title = <Link to={workerNodesLink}>{t('Worker Nodes')}</Link>;
} else if (!loaded) {
  title = <><InventoryItemLoading /><Link to={workerNodesLink}>{t('Worker Nodes')}</Link></>;
}
return (
  <InventoryItem>
    <InventoryItemTitle>{title}</InventoryItemTitle>
  </InventoryItem>
)

```

### useFlag

Hook that returns the given feature flag from FLAGS redux state. It returns the boolean value of the requested feature flag or undefined.

Parameter Name	Description
<b>flag</b>	The feature flag to return

### CodeEditor

A basic lazy loaded Code editor with hover help and completion.

#### Example

```

<React.Suspense fallback={<LoadingBox />}>
  <CodeEditor
    value={code}

```

```

    language="yaml"
  />
</React.Suspense>

```

Parameter Name	Description
<b>value</b>	String representing the yaml code to render.
<b>language</b>	String representing the language of the editor.
<b>options</b>	Monaco editor options. For more details, please, visit <a href="#">Interface IStandAloneEditorConstructionOptions</a> .
<b>minHeight</b>	Minimum editor height in valid CSS height values.
<b>showShortcuts</b>	Boolean to show shortcuts on top of the editor.
<b>toolbarLinks</b>	Array of ReactNode rendered on the toolbar links section on top of the editor.
<b>onChange</b>	Callback for on code change event.
<b>onSave</b>	Callback called when the command CTRL / CMD + S is triggered.
<b>ref</b>	React reference to <b>{ editor?: IStandAloneCodeEditor }</b> . Using the <b>editor</b> property, you are able to access to all methods to control the editor. For more information, visit <a href="#">Interface IStandAloneCodeEditor</a> .

### ResourceYAMLEditor

A lazy loaded YAML editor for Kubernetes resources with hover help and completion. The component use the YAMLEditor and add on top of it more functionality liker resource update handling, alerts, save, cancel and reload buttons, accessibility and more. Unless **onSave** callback is provided, the resource update is automatically handled. It should be wrapped in a **React.Suspense** component.

### Example

```

<React.Suspense fallback={<LoadingBox />}>
  <ResourceYAMLEditor
    initialResource={resource}
    header="Create resource"
    onSave={(content) => updateResource(content)}
  />
</React.Suspense>

```

Parameter Name	Description
<b>initialResource</b>	YAML/Object representing a resource to be shown by the editor. This prop is used only during the initial render
<b>header</b>	Add a header on top of the YAML editor
<b>onSave</b>	Callback for the Save button. Passing it will override the default update performed on the resource by the editor

### ResourceEventStream

A component to show events related to a particular resource.

### Example

```
const [resource, loaded, loadError] = useK8sWatchResource(clusterResource);
return <ResourceEventStream resource={resource} />
```

Parameter Name	Description
<b>resource</b>	An object whose related events should be shown.

### usePrometheusPoll

Sets up a poll to Prometheus for a single query. It returns a tuple containing the query response, a boolean flag indicating whether the response has completed, and any errors encountered during the request or post-processing of the request.

Parameter Name	Description
<b>{PrometheusEndpoint} props.endpoint</b>	one of the PrometheusEndpoint (label, query, range, rules, targets)
<b>{string} [props.query]</b>	(optional) Prometheus query string. If empty or undefined, polling is not started.
<b>{number} [props.delay]</b>	(optional) polling delay interval (ms)
<b>{number} [props.endTime]</b>	(optional) for QUERY_RANGE endpoint, end of the query range
<b>{number} [props.samples]</b>	(optional) for QUERY_RANGE endpoint
<b>{number} [options.timespan]</b>	(optional) for QUERY_RANGE endpoint



Parameter Name	Description
<b>{string} [options.namespace]</b>	(optional) a search param to append
<b>{string} [options.timeout]</b>	(optional) a search param to append

### Timestamp

A component to render timestamp. The timestamps are synchronized between individual instances of the Timestamp component. The provided timestamp is formatted according to user locale.

Parameter Name	Description
<b>timestamp</b>	the timestamp to render. Format is expected to be ISO 8601 (used by Kubernetes), epoch timestamp, or an instance of a Date.
<b>simple</b>	render simple version of the component omitting icon and tooltip.
<b>omitSuffix</b>	formats the date omitting the suffix.
<b>className</b>	additional class name for the component.

### useModal

A hook to launch Modals.

### Example

```
const context: AppPage: React.FC = () => {<br/> const [launchModal] = useModal();<br/> const
onClick = () => launchModal(ModalComponent);<br/> return (<br/> <Button onClick=
{onClick}>Launch a Modal</Button><br/> )<br/><br/>`
```

### ActionServiceProvider

Component that allows to receive contributions from other plugins for the **console.action/provider** extension type.

### Example

```
const context: ActionContext = { 'a-context-id': { dataFromDynamicPlugin } };
...
<ActionServiceProvider context={context}>
  {{{ actions, options, loaded }} =>
    loaded && (
      <ActionMenu actions={actions} options={options} variant={ActionMenuVariant.DROPDOWN}
    />
    )
  }
</ActionServiceProvider>
```

Parameter Name	Description
<b>context</b>	Object with contextId and optional plugin data

### NamespaceBar

A component that renders a horizontal toolbar with a namespace dropdown menu in the leftmost position. Additional components can be passed in as children and will be rendered to the right of the namespace dropdown. This component is designed to be used at the top of the page. It should be used on pages where the user needs to be able to change the active namespace, such as on pages with k8s resources.

### Example

```
const logNamespaceChange = (namespace) => console.log(`New namespace: ${namespace}`);

...

<NamespaceBar onNamespaceChange={logNamespaceChange}>
  <NamespaceBarApplicationSelector />
</NamespaceBar>
<Page>

...
```

Parameter Name	Description
<b>onNamespaceChange</b>	(optional) A function that is executed when a namespace option is selected. It accepts the new namespace in the form of a string as its only argument. The active namespace is updated automatically when an option is selected, but additional logic can be applied via this function. When the namespace is changed, the namespace parameter in the URL will be changed from the previous namespace to the newly selected namespace.
<b>isDisabled</b>	(optional) A boolean flag that disables the namespace dropdown if set to true. This option only applies to the namespace dropdown and has no effect on child components.
<b>children</b>	(optional) Additional elements to be rendered inside the toolbar to the right of the namespace dropdown.

### ErrorBoundaryFallbackPage

Creates full page ErrorBoundaryFallbackPage component to display the "Oh no! Something went wrong." message along with the stack trace and other helpful debugging information. This is to be used in conjunction with an component.

### Example

```
//in ErrorBoundary component
return (
  if (this.state.hasError) {
    return <ErrorBoundaryFallbackPage errorMessage={errorString} componentStack=
{componentStackString}
    stack={stackTraceString} title={errorString}/>;
  }

  return this.props.children;
)
```

Parameter Name	Description
<b>errorMessage</b>	text description of the error message
<b>componentStack</b>	component trace of the exception
<b>stack</b>	stack trace of the exception
<b>title</b>	title to render as the header of the error boundary page

### QueryBrowser

A component that renders a graph of the results from a Prometheus PromQL query along with controls for interacting with the graph.

### Example

```
<QueryBrowser
  defaultTimespan={15 * 60 * 1000}
  namespace={namespace}
  pollInterval={30 * 1000}
  queries={[
    'process_resident_memory_bytes{job="console"}',
    'sum(irate(container_network_receive_bytes_total[6h:5m])) by (pod)',
  ]}
/>
```

Parameter Name	Description
<b>customDataSource</b>	(optional) Base URL of an API endpoint that handles PromQL queries. If provided, this is used instead of the default API for fetching data.
<b>defaultSamples</b>	(optional) The default number of data samples plotted for each data series. If there are many data series, QueryBrowser might automatically pick a lower number of data samples than specified here.

Parameter Name	Description
<b>defaultTimespan</b>	(optional) The default timespan for the graph in milliseconds - defaults to 1,800,000 (30 minutes).
<b>disabledSeries</b>	(optional) Disable (don't display) data series with these exact label / value pairs.
<b>disableZoom</b>	(optional) Flag to disable the graph zoom controls.
<b>filterLabels</b>	(optional) Optionally filter the returned data series to only those that match these label / value pairs.
<b>fixedEndTime</b>	(optional) Set the end time for the displayed time range rather than showing data up to the current time.
<b>formatSeriesTitle</b>	(optional) Function that returns a string to use as the title for a single data series.
<b>GraphLink</b>	(optional) Component for rendering a link to another page (for example getting more information about this query).
<b>hideControls</b>	(optional) Flag to hide the graph controls for changing the graph timespan, and so on.
<b>isStack</b>	(optional) Flag to display a stacked graph instead of a line graph. If showStackedControl is set, it will still be possible for the user to switch to a line graph.
<b>namespace</b>	(optional) If provided, data is only returned for this namespace (only series that have this namespace label).
<b>onZoom</b>	(optional) Callback called when the graph is zoomed.
<b>pollInterval</b>	(optional) If set, determines how often the graph is updated to show the latest data (in milliseconds).
<b>queries</b>	Array of PromQL queries to run and display the results in the graph.
<b>showLegend</b>	(optional) Flag to enable displaying a legend below the graph.

Parameter Name	Description
<b>showStackedControl</b>	Flag to enable displaying a graph control for switching between stacked graph mode and line graph mode.
<b>timespan</b>	(optional) The timespan that should be covered by the graph in milliseconds.
<b>units</b>	(optional) Units to display on the Y-axis and in the tooltip.

### useAnnotationsModal

A hook that provides a callback to launch a modal for editing Kubernetes resource annotations.

#### Example

```
const PodAnnotationsButton = ({ pod }) => {
  const { t } = useTranslation();
  const launchAnnotationsModal = useAnnotationsModal<PodKind>(pod);
  return <button onClick={launchAnnotationsModal}>{t('Edit Pod Annotations')}</button>
}
```

Parameter Name	Description
<b>resource</b>	The resource to edit annotations for an object of K8sResourceCommon type.

### Returns

A function which will launch a modal for editing a resource's annotations.

### useDeleteModal

A hook that provides a callback to launch a modal for deleting a resource.

#### Example

```
const DeletePodButton = ({ pod }) => {
  const { t } = useTranslation();
  const launchDeleteModal = useDeleteModal<PodKind>(pod);
  return <button onClick={launchDeleteModal}>{t('Delete Pod')}</button>
}
```

Parameter Name	Description
<b>resource</b>	The resource to delete.

Parameter Name	Description
<b>redirectTo</b>	(optional) A location to redirect to after deleting the resource.
<b>message</b>	(optional) A message to display in the modal.
<b>btnText</b>	(optional) The text to display on the delete button.
<b>deleteAllResources</b>	(optional) A function to delete all resources of the same kind.

## Returns

A function which will launch a modal for deleting a resource.

## useLabelsModal

A hook that provides a callback to launch a modal for editing Kubernetes resource labels.

## Example

```
const PodLabelsButton = ({ pod }) => {
  const { t } = useTranslation();
  const launchLabelsModal = useLabelsModal<PodKind>(pod);
  return <button onClick={launchLabelsModal}>{t('Edit Pod Labels')}</button>
}
```

Parameter Name	Description
<b>resource</b>	The resource to edit labels for, an object of K8sResourceCommon type.

## Returns

A function which will launch a modal for editing a resource's labels.

## useActiveNamespace

Hook that provides the currently active namespace and a callback for setting the active namespace.

## Example

```
const Component: React.FC = (props) => {
  const [activeNamespace, setActiveNamespace] = useActiveNamespace();
  return <select
    value={activeNamespace}
    onChange={(e) => setActiveNamespace(e.target.value)}
  >
    {
      // ...namespace options
    }
  </select>
```

```

    }
  </select>
}

```

## Returns

A tuple containing the current active namespace and setter callback.

## PerspectiveContext

Deprecated: Use the provided **usePerspectiveContext** instead. Creates the perspective context.

Parameter Name	Description
<b>PerspectiveContextType</b>	object with active perspective and setter

## useAccessReviewAllowed

Deprecated: Use **useAccessReview** from **@console/dynamic-plugin-sdk** instead. Hook that provides allowed status about user access to a given resource. It returns the **isAllowed** boolean value.

Parameter Name	Description
<b>resourceAttributes</b>	resource attributes for access review
<b>impersonate</b>	impersonation details

## useSafetyFirst

Deprecated: This hook is not related to console functionality. Hook that ensures a safe asynchronous setting of React state in case a given component could be unmounted. It returns an array with a pair of state value and its set function.

Parameter Name	Description
<b>initialState</b>	initial state value

## YAMLEditor

Deprecated: A basic lazy loaded YAML editor with hover help and completion.

## Example

```

<React.Suspense fallback={<LoadingBox />}>
  <YAMLEditor
    value={code}
  />
</React.Suspense>

```

Parameter Name	Description
<b>value</b>	String representing the yaml code to render.

Parameter Name	Description
<b>options</b>	Monaco editor options.
<b>minHeight</b>	Minimum editor height in valid CSS height values.
<b>showShortcuts</b>	Boolean to show shortcuts on top of the editor.
<b>toolbarLinks</b>	Array of ReactNode rendered on the toolbar links section on top of the editor.
<b>onChange</b>	Callback for on code change event.
<b>onSave</b>	Callback called when the command CTRL / CMD + S is triggered.
<b>ref</b>	React reference to <b>{ editor?: IStandaloneCodeEditor }</b> . Using the <b>editor</b> property, you are able to access to all methods to control the editor.

### 7.5.3. Troubleshooting your dynamic plugin

Refer to this list of troubleshooting tips if you run into issues loading your plugin.

- Verify that you have enabled your plugin in the console Operator configuration and your plugin name is the output by running the following command:
 

```
$ oc get console.operator.openshift.io cluster -o jsonpath='{.spec.plugins}'
```

  - Verify the enabled plugins on the status card of the **Overview** page in the **Administrator** perspective. You must refresh your browser if the plugin was recently enabled.
- Verify your plugin service is healthy by:
  - Verifying your plugin pod status is running and your containers are ready.
  - Verifying the service label selector matches the pod and the target port is correct.
  - Curl the **plugin-manifest.json** from the service in a terminal on the console pod or another pod on the cluster.
- Verify your **ConsolePlugin** resource name (**consolePlugin.name**) matches the plugin name used in **package.json**.
- Verify your service name, namespace, port, and path are declared correctly in the **ConsolePlugin** resource.
- Verify your plugin service uses HTTPS and service serving certificates.
- Verify any certificates or connection errors in the console pod logs.



- Verify the feature flag your plugin relies on is not disabled.
- Verify your plugin does not have any **consolePlugin.dependencies** in **package.json** that are not met.
  - This can include console version dependencies or dependencies on other plugins. Filter the JS console in your browser for your plugin's name to see messages that are logged.
- Verify there are no typos in the nav extension perspective or section IDs.
  - Your plugin may be loaded, but nav items missing if IDs are incorrect. Try navigating to a plugin page directly by editing the URL.
- Verify there are no network policies that are blocking traffic from the console pod to your plugin service.
  - If necessary, adjust network policies to allow console pods in the openshift-console namespace to make requests to your service.
- Verify the list of dynamic plugins to be loaded in your browser in the **Console** tab of the developer tools browser.
  - Evaluate **window.SERVER\_FLAGS.consolePlugins** to see the dynamic plugin on the Console frontend.

#### Additional resources

- [Understanding service serving certificates](#)

## CHAPTER 8. WEB TERMINAL

### 8.1. INSTALLING THE WEB TERMINAL


You can install the web terminal by using the Web Terminal Operator listed in the OpenShift Container Platform OperatorHub. When you install the Web Terminal Operator, the custom resource definitions (CRDs) that are required for the command line configuration, such as the **DevWorkspace** CRD, are automatically installed. The web console creates the required resources when you open the web terminal.

#### Prerequisites

- You are logged into the OpenShift Container Platform web console.
- You have cluster administrator permissions.

#### Procedure

1. In the **Administrator** perspective of the web console, navigate to **Operators → OperatorHub**.
2. Use the **Filter by keyword** box to search for the Web Terminal Operator in the catalog, and then click the **Web Terminal** tile.
3. Read the brief description about the Operator on the **Web Terminal** page, and then click **Install**.
4. On the **Install Operator** page, retain the default values for all fields.
  - The **fast** option in the **Update Channel** menu enables installation of the latest release of the Web Terminal Operator.
  - The **All namespaces on the cluster** option in the **Installation Mode** menu enables the Operator to watch and be available to all namespaces in the cluster.
  - The **openshift-operators** option in the **Installed Namespace** menu installs the Operator in the default **openshift-operators** namespace.
  - The **Automatic** option in the **Approval Strategy** menu ensures that the future upgrades to the Operator are handled automatically by the Operator Lifecycle Manager.
5. Click **Install**.
6. In the **Installed Operators** page, click the **View Operator** to verify that the Operator is listed on the **Installed Operators** page.



#### NOTE

The Web Terminal Operator installs the DevWorkspace Operator as a dependency.

7. After the Operator is installed, refresh your page to see the command line terminal icon (  ) in the masthead of the console.

### 8.2. CONFIGURING THE WEB TERMINAL

You can configure timeout and image settings for the web terminal, either for your current session or for all user sessions if you are a cluster administrator.


### 8.2.1. Configuring the web terminal timeout for a session

You can change the default timeout period for the web terminal for your current session.

#### Prerequisites

- You have access to an OpenShift Container Platform cluster that has the Web Terminal Operator installed.
- You are logged into the web console.

#### Procedure

1. Click the web terminal icon (  ).
2. Optional: Set the web terminal timeout for the current session:
  - a. Click Timeout.
  - b. In the field that appears, enter the timeout value.
  - c. From the drop-down list, select a timeout interval of **Seconds**, **Minutes**, **Hours**, or **Milliseconds**.
3. Optional: Select a custom image for the web terminal to use.
  - a. Click Image.
  - b. In the field that appears, enter the URL of the image that you want to use.
4. Click **Start** to begin a terminal instance using the specified timeout setting.

### 8.2.2. Configuring the web terminal timeout for all users

You can use the **Administrator** perspective of the web console to set the default web terminal timeout period for all users.

#### Prerequisites

- You have cluster administrator permissions and are logged in to the web console.
- You have installed the Web Terminal Operator.

#### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. On the **Cluster Settings** page, click the **Configuration** tab.
3. On the **Configuration** page, click the **Console** configuration resource with the description **operator.openshift.io**.

## Cluster Settings

Details ClusterOperators Configuration

Edit the following resources to manage the configuration of your cluster.

console /

Configuration resource	Description
<a href="#">Console</a> config.openshift.io	Console holds cluster-wide configuration for the web console, including the logout URL, and reports the public URL of the console. The canonical name is "cluster". Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).
<a href="#">Console</a> operator.openshift.io	Console provides a means to configure an operator to manage the console. Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).

- From the **Action** drop-down list, select **Customize**, which opens the **Cluster configuration** page.
- Click the **Web Terminal** tab, which opens the **Web Terminal Configuration** page.
- Set a value for the timeout. From the drop-down list, select a time interval of **Seconds**, **Minutes**, **Hours**, or **Milliseconds**.
- Click **Save**.


### 8.2.3. Configuring the web terminal image for a session

You can change the default image for the web terminal for your current session.

#### Prerequisites

- You have access to an OpenShift Container Platform cluster that has the Web Terminal Operator installed.
- You are logged into the web console.

#### Procedure

- Click the web terminal icon (  ).
- Click **Image** to display advanced configuration options for the web terminal image.
- Enter the URL of the image that you want to use.
- Click **Start** to begin a terminal instance using the specified image setting.

### 8.2.4. Configuring the web terminal image for all users

You can use the **Administrator** perspective of the web console to set the default web terminal image for all users.

#### Prerequisites

- You have cluster administrator permissions and are logged in to the web console.
- You have installed the Web Terminal Operator.

#### Procedure

1. In the **Administrator** perspective, navigate to **Administration** → **Cluster Settings**.
2. On the **Cluster Settings** page, click the **Configuration** tab.
3. On the **Configuration** page, click the **Console** configuration resource with the description **operator.openshift.io**.

**Cluster Settings**

Details ClusterOperators **Configuration**

Edit the following resources to manage the configuration of your cluster.

console /

Configuration resource	Description
<a href="#">Console</a> config.openshift.io	Console holds cluster-wide configuration for the web console, including the logout URL, and reports the public URL of the console. The canonical name is "cluster". Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).
<a href="#">Console</a> operator.openshift.io	Console provides a means to configure an operator to manage the console. Compatibility level 1: Stable within a major release for a minimum of 12 months or 3 minor releases (whichever is longer).

4. From the **Action** drop-down list, select **Customize**, which opens the **Cluster configuration** page.
5. Click the **Web Terminal** tab, which opens the **Web Terminal Configuration** page.
6. Enter the URL of the image that you want to use.
7. Click **Save**.

## 8.3. USING THE WEB TERMINAL

You can launch an embedded command line terminal instance in the web console. This terminal instance is preinstalled with common CLI tools for interacting with the cluster, such as **oc**, **kubectl**, **odo**, **kn**, **tkn**, **helm**, and **subctl**. It also has the context of the project you are working on and automatically logs you in using your credentials.


### 8.3.1. Accessing the web terminal

After the Web Terminal Operator is installed, you can access the web terminal. After the web terminal is initialized, you can use the preinstalled CLI tools like **oc**, **kubectl**, **odo**, **kn**, **tkn**, **helm**, and **subctl** in the web terminal. You can re-run commands by selecting them from the list of commands you have run in the terminal. These commands persist across multiple terminal sessions. The web terminal remains open until you close it or until you close the browser window or tab.


#### Prerequisites

- You have access to an OpenShift Container Platform cluster and are logged into the web console.
- The Web Terminal Operator is installed on your cluster.

#### Procedure

1. To launch the web terminal, click the command line terminal icon (  ) in the masthead of the console. A web terminal instance is displayed in the **Command line terminal** pane. This instance is automatically logged in with your credentials.

2. If a project has not been selected in the current session, select the project where the **DevWorkspace** CR must be created from the **Project** drop-down list. By default, the current project is selected.



#### NOTE

- The **DevWorkspace** CR is created only if it does not already exist.
- The **openshift-terminal** project is the default project used for cluster administrators. They do not have the option to choose another project. The Web Terminal Operator installs the DevWorkspace Operator as a dependency.

3. Optional: Set the web terminal timeout for the current session:
  - a. Click Timeout.
  - b. In the field that appears, enter the timeout value.
  - c. From the drop-down list, select a timeout interval of **Seconds**, **Minutes**, **Hours**, or **Milliseconds**.
4. Optional: Select a custom image for the web terminal to use.
  - a. Click Image.
  - b. In the field that appears, enter the URL of the image that you want to use.
5. Click **Start** to initialize the web terminal using the selected project.
6. Click + to open multiple tabs within the web terminal in the console.

## 8.4. TROUBLESHOOTING THE WEB TERMINAL

### 8.4.1. Web terminal and network policies

The web terminal might fail to launch if the cluster has network policies configured. To initialize a web terminal instance, the Web Terminal Operator must communicate with the web terminal's pod to verify it is running, and the OpenShift Container Platform web console needs to send information to automatically log in to the cluster within the terminal. If either step fails, the web terminal fails to initialize and the terminal panel appears to be in a loading state.

To avoid this issue, ensure that the network policies for namespaces that are used for terminals allow ingress from the **openshift-console** and **openshift-operators** namespaces.

## 8.5. UNINSTALLING THE WEB TERMINAL

Uninstalling the Web Terminal Operator does not remove any of the custom resource definitions (CRDs) or managed resources that are created when the Operator is installed. For security purposes, you must manually uninstall these components. By removing these components, you save cluster resources because terminals do not idle when the Operator is uninstalled.

Uninstalling the web terminal is a two-step process:

1. Uninstall the Web Terminal Operator and related custom resources (CRs) that were added when you installed the Operator.
2. Uninstall the DevWorkspace Operator and its related custom resources that were added as a dependency of the Web Terminal Operator.


### 8.5.1. Removing the Web Terminal Operator

You can uninstall the web terminal by removing the Web Terminal Operator and custom resources used by the Operator.

#### Prerequisites

- You have access to an OpenShift Container Platform cluster with cluster administrator permissions.
- You have installed the **oc** CLI.

#### Procedure

1. In the **Administrator** perspective of the web console, navigate to **Operators → Installed Operators**.
2. Scroll the filter list or type a keyword into the **Filter by name** box to find the Web Terminal Operator.
3. Click the Options menu  for the Web Terminal Operator, and then select **Uninstall Operator**.
4. In the **Uninstall Operator** confirmation dialog box, click **Uninstall** to remove the Operator, Operator deployments, and pods from the cluster. The Operator stops running and no longer receives updates.

### 8.5.2. Removing the DevWorkspace Operator

To completely uninstall the web terminal, you must also remove the DevWorkspace Operator and custom resources used by the Operator.



#### IMPORTANT

The DevWorkspace Operator is a standalone Operator and may be required as a dependency for other Operators installed in the cluster. Follow the steps below only if you are sure that the DevWorkspace Operator is no longer needed.

#### Prerequisites

- You have access to an OpenShift Container Platform cluster with cluster administrator permissions.
- You have installed the **oc** CLI.

#### Procedure

1. Remove the **DevWorkspace** custom resources used by the Operator, along with any related Kubernetes objects:

```
$ oc delete devworkspaces.workspace.devfile.io --all-namespaces --all --wait
```

```
$ oc delete devworkspaceroutings.controller.devfile.io --all-namespaces --all --wait
```



### WARNING

If this step is not complete, finalizers make it difficult to fully uninstall the Operator.

2. Remove the CRDs used by the Operator:



### WARNING

The DevWorkspace Operator provides custom resource definitions (CRDs) that use conversion webhooks. Failing to remove these CRDs can cause issues in the cluster.

```
$ oc delete customresourcedefinitions.apiextensions.k8s.io  
devworkspaceroutings.controller.devfile.io
```

```
$ oc delete customresourcedefinitions.apiextensions.k8s.io  
devworkspaces.workspace.devfile.io
```

```
$ oc delete customresourcedefinitions.apiextensions.k8s.io  
devworkspacetemplates.workspace.devfile.io
```

```
$ oc delete customresourcedefinitions.apiextensions.k8s.io  
devworkspaceoperatorconfigs.controller.devfile.io
```

3. Verify that all involved custom resource definitions are removed. The following command should not display any output:

```
$ oc get customresourcedefinitions.apiextensions.k8s.io | grep "devfile.io"
```


4. Remove the **devworkspace-webhook-server** deployment, mutating, and validating webhooks:

```
$ oc delete deployment/devworkspace-webhook-server -n openshift-operators
```



```
$ oc delete mutatingwebhookconfigurations controller.devfile.io
```

```
$ oc delete validatingwebhookconfigurations controller.devfile.io
```



#### NOTE

If you remove the **devworkspace-webhook-server** deployment without removing the mutating and validating webhooks, you can not use **oc exec** commands to run commands in a container in the cluster. After you remove the webhooks you can use the **oc exec** commands again.

5. Remove any remaining services, secrets, and config maps. Depending on the installation, some resources included in the following commands may not exist in the cluster.


```
$ oc delete all --selector app.kubernetes.io/part-of=devworkspace-operator,app.kubernetes.io/name=devworkspace-webhook-server -n openshift-operators
```

```
$ oc delete serviceaccounts devworkspace-webhook-server -n openshift-operators
```

```
$ oc delete clusterrole devworkspace-webhook-server
```

```
$ oc delete clusterrolebinding devworkspace-webhook-server
```

6. Uninstall the DevWorkspace Operator:

- a. In the **Administrator** perspective of the web console, navigate to **Operators → Installed Operators**.
- b. Scroll the filter list or type a keyword into the **Filter by name** box to find the DevWorkspace Operator.
- c. Click the Options menu  for the Operator, and then select **Uninstall Operator**.
- d. In the **Uninstall Operator** confirmation dialog box, click **Uninstall** to remove the Operator, Operator deployments, and pods from the cluster. The Operator stops running and no longer receives updates.

## CHAPTER 9. DISABLING THE WEB CONSOLE IN OPENSIFT CONTAINER PLATFORM

You can disable the OpenShift Container Platform web console.

### 9.1. PREREQUISITES

- Deploy an OpenShift Container Platform cluster.

### 9.2. DISABLING THE WEB CONSOLE

You can disable the web console by editing the **consoles.operator.openshift.io** resource.

- Edit the **consoles.operator.openshift.io** resource:

```
$ oc edit consoles.operator.openshift.io cluster
```

The following example displays the parameters from this resource that you can modify:

```
apiVersion: operator.openshift.io/v1
kind: Console
metadata:
  name: cluster
spec:
  managementState: Removed 1
```

- 1** Set the **managementState** parameter value to **Removed** to disable the web console. The other valid values for this parameter are **Managed**, which enables the console under the cluster's control, and **Unmanaged**, which means that you are taking control of web console management.

## CHAPTER 10. CREATING QUICK START TUTORIALS IN THE WEB CONSOLE

If you are creating quick start tutorials for the OpenShift Container Platform web console, follow these guidelines to maintain a consistent user experience across all quick starts.

### 10.1. UNDERSTANDING QUICK STARTS

A quick start is a guided tutorial with user tasks. In the web console, you can access quick starts under the **Help** menu. They are especially useful for getting oriented with an application, Operator, or other product offering.

A quick start primarily consists of tasks and steps. Each task has multiple steps, and each quick start has multiple tasks. For example:

- Task 1
  - Step 1
  - Step 2
  - Step 3
- Task 2
  - Step 1
  - Step 2
  - Step 3
- Task 3
  - Step 1
  - Step 2
  - Step 3

### 10.2. QUICK START USER WORKFLOW

When you interact with an existing quick start tutorial, this is the expected workflow experience:

1. In the **Administrator** or **Developer** perspective, click the **Help icon** and select **Quick Starts**.
2. Click a quick start card.
3. In the panel that appears, click **Start**.
4. Complete the on-screen instructions, then click **Next**.
5. In the **Check your work** module that appears, answer the question to confirm that you successfully completed the task.
  - a. If you select **Yes**, click **Next** to continue to the next task.

- b. If you select **No**, repeat the task instructions and check your work again.
6. Repeat steps 1 through 6 above to complete the remaining tasks in the quick start.
7. After completing the final task, click **Close** to close the quick start.

## 10.3. QUICK START COMPONENTS

A quick start consists of the following sections:

- **Card:** The catalog tile that provides the basic information of the quick start, including title, description, time commitment, and completion status
- **Introduction:** A brief overview of the goal and tasks of the quick start
- **Task headings:** Hyper-linked titles for each task in the quick start
- **Check your work module** A module for a user to confirm that they completed a task successfully before advancing to the next task in the quick start
- **Hints:** An animation to help users identify specific areas of the product
- **Buttons**
  - **Next and back buttons** Buttons for navigating the steps and modules within each task of a quick start
  - **Final screen buttons** Buttons for closing the quick start, going back to previous tasks within the quick start, and viewing all quick starts

The main content area of a quick start includes the following sections:

- **Card copy**
- **Introduction**
- **Task steps**
- **Modals and in-app messaging**
- **Check your work module**

## 10.4. CONTRIBUTING QUICK STARTS

OpenShift Container Platform introduces the quick start custom resource, which is defined by a **ConsoleQuickStart** object. Operators and administrators can use this resource to contribute quick starts to the cluster.

### Prerequisites

- You must have cluster administrator privileges.

### Procedure

1. To create a new quick start, run:

```
$ oc get -o yaml consolequickstart spring-with-s2i > my-quick-start.yaml
```

2. Run:

```
$ oc create -f my-quick-start.yaml
```

3. Update the YAML file using the guidance outlined in this documentation.

4. Save your edits.

### 10.4.1. Viewing the quick start API documentation

#### Procedure

- To see the quick start API documentation, run:

```
$ oc explain consolequickstarts
```

Run **oc explain -h** for more information about **oc explain** usage.

### 10.4.2. Mapping the elements in the quick start to the quick start CR

This section helps you visually map parts of the quick start custom resource (CR) with where they appear in the quick start within the web console.

#### 10.4.2.1. conclusion element

##### Viewing the conclusion element in the YAML file

```
...  
summary:  
  failed: Try the steps again.  
  success: Your Spring application is running.  
title: Run the Spring application  
conclusion: >-  
  Your Spring application is deployed and ready. 1
```

**1** conclusion text

##### Viewing the conclusion element in the web console

The conclusion appears in the last section of the quick start.

## Get started with Spring 10 minutes



- 1 Create a Spring application
- 2 View the build status
- 3 View the associated Git repository
- 4 View the pod status
- 5 Change the deployment icon to Spring
- 6 Run the Spring application

Your Spring application is deployed and ready.

### 10.4.2.2. description element

#### Viewing the description element in the YAML file

```
apiVersion: console.openshift.io/v1
kind: ConsoleQuickStart
metadata:
  name: spring-with-s2i
spec:
  description: 'Import a Spring Application from git, build, and deploy it onto OpenShift.' 1
  ...
```

- 1 description text

#### Viewing the description element in the web console

The description appears on the introductory tile of the quick start on the **Quick Starts** page.



## Get started with Spring

🕒 10 minutes

Import a Spring Application from git, build, and deploy it onto OpenShift.

### 10.4.2.3. displayName element

#### Viewing the displayName element in the YAML file

```
apiVersion: console.openshift.io/v1
kind: ConsoleQuickStart
metadata:
  name: spring-with-s2i
spec:
  description: 'Import a Spring Application from git, build, and deploy it onto OpenShift.'
  displayName: Get started with Spring 1
  durationMinutes: 10
```

**1** **displayName** text.

#### Viewing the displayName element in the web console

The display name appears on the introductory tile of the quick start on the **Quick Starts** page.



## Get started with Spring

🕒 10 minutes

Import a Spring Application from git, build, and deploy it onto OpenShift.

### 10.4.2.4. durationMinutes element

#### Viewing the durationMinutes element in the YAML file

```
apiVersion: console.openshift.io/v1
kind: ConsoleQuickStart
metadata:
  name: spring-with-s2i
spec:
  description: 'Import a Spring Application from git, build, and deploy it onto OpenShift.'
  displayName: Get started with Spring
  durationMinutes: 10 1
```

- 1** **durationMinutes** value, in minutes. This value defines how long the quick start should take to complete.

#### Viewing the durationMinutes element in the web console

The duration minutes element appears on the introductory tile of the quick start on the **Quick Starts** page.





```

0LjctMzAuMTUsNDkuNzctNDAuMTFhMjEyLDIxMiwWLDAsMSw2NS45My0yNS43M0ExOTgsMTk4LDA
sMCwXLDUxMiwXMTYUjMjdhMTk2LjExLDE5Ni4xMSwWLDAsMSwzMiWzLjFjNC41LjKxLDkuMzYsMi4wN
wxNC41MywzLjUyLDYwLjQxLDIwLjQ4LDg0LjkyLDkxLjA1LTQ3LjQ0LDI0OC4wNi0yOC43NSwzNC4x
Mi0xNDAuNywxOTQuODQtMTg0LjY2LDI2OC40MmE2MzAuODYsNjMwLjg2LDAsMCwwLTMzLjlyLD
U4LjMyQzI3NiW2NTUuMzQsMjY1LjQsNTk4LDI2NS40LDUyMC4yOSwYjUuNCwzNDAuNjEsMzExLjY
5LDI0MC43NCwzNjQuMTUsMTg1LjIzWlVpJxwYXRoIGNsYXNzPSJjbHMtMyIlgZD0iTTUyNy41NCwzO
DQuODNjODQuMDYtOTkuNywxMTYUjMjdyMTc3LjI4LDk1LjlyLTIzMC43NCwzMS42MiW4LjY5LDI0LD
E5LjIsMzcuMDYsMzEuMTMsNTluNDgsNTUuNSw5OC43OCwzNTUuMzgsOTguNzgsMzM1LjA3LDAs
NzcuNzEtMTAuNiWxMzUuMDUtMjcuNzcsMTc3LjRhNjI4LjczLDYyOC43MywWLDAsMC0zMy4yMy01OC
4zMmMtMzktNjUuMjYtMTMxLjQ1LTE5OS0xNzEuOTMtMjUyLjI3QzUyNi4zMiwzODYUjMjksNTI3LDM4
NS41Miw1MjcuNTQsMzg0LjgzWlVpJxwYXRoIGNsYXNzPSJjbHMtNCIlgZD0iTEzNC41OCw5MDguM
DdoLS4wNmEuMzkuMzksMCwwLDEtLjI3LS4xMwMtMTE5LjUyLTYeMS4wNy0xNTUtMjg3LjQtNDcuN
TQtNDA0LjU4LDM0LjYzLTQxLjE0LDEyMC0xNTEuNiwyMDluNzUtMjYyLjE5LTMuMTMsNy02LjEyLDE
0LjI1LTguOTIsMjEuNjktMjQuMzQsNjQuNDUtMzYuNjcsMTQ0LjMyLTM2LjY3LDIzNy40MSwWLDU2LjU
zLDUuNTgsMTA2LDE2LjU5LDE0Ny4xNEEzMDcuNDksMzA3LjQ5LDAsMCwwLDI4MC45MSw3MjND
MjM3LDGxNi44OCwyMTYUjOTMsODkzLjKzLDEzNC41OCw5MDguMDdali8+PHBhdGggY2xhc3M9ImN
scy01liBkPSJNNTgzLjQzLDgxMy43OUm1NjAuMTgsNzI3LjcyLDUxMiw2NjQuMTUsNTEyLDY2NC4xN
XMtNDguMTcsNjMuNTctNzEuNDMsMTQ5LjY0Yy00OC40NS02Ljc0LTEwMC45MS0yNy41Mi0xMzUu
NjYtOTEuMThhNjQ1LjY4LDY0NS42OCwwLDAsMSwzOS41Ny03MS41NGwuMjEtLjMyLjE5LS4zM2M
zOC02My42MywXMTYUjUuNC0xOTEuMzcsMTY3LjEyLTI0NS42NiW0MC43MSw1NC4yOCwXMTkuMSwXO
DIsMTY3LjEyLDI0NS42NmWuMTkuMzMuMjEuMjYyMjYyLjY4LDY0NS42OCwwLDAsMSwzOS41Nyw
3MS41NEM2ODQuMzQsNzg2LjI3LDYzMS44OCw4MDcuMDUsNTgzLjQzLDgxMy43OVoiLz48cGF0a
CBjbGFzc0iY2xzLTQiIGQ9Ik04ODkuNzUsOTA4YS4zOS4zOSwWLDAsMS0uMjcuMTFoLS4wNkM4M
DcuMDcsODkzLjKzLDc4Nyw4MTYUjODgsNzQzLjA5LDcyM2EzMDcuNDksMzA3LjQ5LDAsMCwwLDIwL
jQ1LTU1LjU0YzExLTQxLjExLDE2LjU5LTKwLjYxLDE2LjU5LTYeM0Ny4xNCwwLTKzLjA4LTYeLjMzLTYeM
y0zNi42Ni0yMzcuNHEtNC4yMi0xMS4xNi04LjKzLTlxLjJjODIuNzUsOTAuNTksMTY4LjEyLDIwMS4wNS
wyMDluNzUsMjYyLjE5QzEwNDQuNzksNjIwLjU2LDEwMDkuMjcsNzg2Ljg5LDg4OS43NSw5MDhali8+
PC9zdmc+Cg==

```

...

- 1 The icon defined as a base64 value.

## Viewing the icon element in the web console

The icon appears on the introductory tile of the quick start on the **Quick Starts** page.



### Get started with Spring

🕒 10 minutes

Import a Spring Application from git,  
build, and deploy it onto OpenShift.

#### 10.4.2.6. introduction element

## Viewing the introduction element in the YAML file

```

...
  introduction: >- 1
    **Spring** is a Java framework for building applications based on a distributed microservices
    architecture.

    - Spring enables easy packaging and configuration of Spring applications into a self-contained
    executable application which can be easily deployed as a container to OpenShift.

    - Spring applications can integrate OpenShift capabilities to provide a natural "Spring on
    OpenShift" developer experience for both existing and net-new Spring applications. For example:

    - Externalized configuration using Kubernetes ConfigMaps and integration with Spring Cloud
    Kubernetes

    - Service discovery using Kubernetes Services

    - Load balancing with Replication Controllers

    - Kubernetes health probes and integration with Spring Actuator

    - Metrics: Prometheus, Grafana, and integration with Spring Cloud Sleuth

    - Distributed tracing with Istio & Jaeger tracing

    - Developer tooling through Red Hat OpenShift and Red Hat CodeReady developer tooling to
    quickly scaffold new Spring projects, gain access to familiar Spring APIs in your favorite IDE, and
    deploy to Red Hat OpenShift
  ...

```

**1** The introduction introduces the quick start and lists the tasks within it.

## Viewing the introduction element in the web console

After clicking a quick start card, a side panel slides in that introduces the quick start and lists the tasks within it.

## Get started with Spring 10 minutes



**Spring** is a Java framework for building applications based on a distributed microservices architecture.

- Spring enables easy packaging and configuration of Spring applications into a self-contained executable application which can be easily deployed as a container to OpenShift.
- Spring applications can integrate OpenShift capabilities to provide a natural "Spring on OpenShift" developer experience for both existing and net-new Spring applications. For example:
  - Externalized configuration using Kubernetes ConfigMaps and integration with Spring Cloud Kubernetes
  - Service discovery using Kubernetes Services
  - Load balancing with Replication Controllers
  - Kubernetes health probes and integration with Spring Actuator
  - Metrics: Prometheus, Grafana, and integration with Spring Cloud Sleuth
  - Distributed tracing with Istio & Jaeger tracing
- Developer tooling through Red Hat OpenShift and Red Hat CodeReady developer tooling to quickly scaffold new Spring projects, gain access to familiar Spring APIs in your favorite IDE, and deploy to Red Hat OpenShift

In this quick start, you will complete 6 tasks:

- 1 Create a Spring application
- 2 View the build status
- 3 View the associated Git repository
- 4 View the pod status
- 5 Change the deployment icon to Spring
- 6 Run the Spring application

Start

### 10.4.3. Adding a custom icon to a quick start

A default icon is provided for all quick starts. You can provide your own custom icon.

#### Procedure

1. Find the **.svg** file that you want to use as your custom icon.
2. Use an [online tool to convert the text to base64](#) .
3. In the YAML file, add **icon: >**, then on the next line include **data:image/svg+xml;base64** followed by the output from the base64 conversion. For example:

```
icon: >-
data:image/svg+xml;base64,PHN2ZyB4bWxucz0iaHR0cDovL3d3dy53My5vcmcvMjAwMC9zdr
cilHJvbGU9ImltZyIgdmlld.
```

### 10.4.4. Limiting access to a quick start

Not all quick starts should be available for everyone. The **accessReviewResources** section of the YAML file provides the ability to limit access to the quick start.

To only allow the user to access the quick start if they have the ability to create **HelmChartRepository** resources, use the following configuration:

```
accessReviewResources:
- group: helm.openshift.io
  resource: helmchartrepositories
  verb: create
```

To only allow the user to access the quick start if they have the ability to list Operator groups and package manifests, thus ability to install Operators, use the following configuration:

```
accessReviewResources:
- group: operators.coreos.com
  resource: operatorgroups
  verb: list
- group: packages.operators.coreos.com
  resource: packagemanifests
  verb: list
```

### 10.4.5. Linking to other quick starts

#### Procedure

- In the **nextQuickStart** section of the YAML file, provide the **name**, not the **displayName**, of the quick start to which you want to link. For example:

```
nextQuickStart:
- add-healthchecks
```

## 10.4.6. Supported tags for quick starts

Write your quick start content in markdown using these tags. The markdown is converted to HTML.

Tag	Description
'b',	Defines bold text.
'img',	Embeds an image.
'i',	Defines italic text.
'strike',	Defines strike-through text.
's',	Defines smaller text
'del',	Defines smaller text.
'em',	Defines emphasized text.
'strong',	Defines important text.
'a',	Defines an anchor tag.
'p',	Defines paragraph text.
'h1',	Defines a level 1 heading.
'h2',	Defines a level 2 heading.
'h3',	Defines a level 3 heading.
'h4',	Defines a level 4 heading.
'ul',	Defines an unordered list.
'ol',	Defines an ordered list.
'li',	Defines a list item.
'code',	Defines a text as code.
'pre',	Defines a block of preformatted text.
'button',	Defines a button in text.

## 10.4.7. Quick start highlighting markdown reference

The highlighting, or hint, feature enables Quick Starts to contain a link that can highlight and animate a component of the web console.

The markdown syntax contains:

- Bracketed link text
- The **highlight** keyword, followed by the ID of the element that you want to animate

#### 10.4.7.1. Perspective switcher

```
[Perspective switcher]{{highlight qs-perspective-switcher}}
```

#### 10.4.7.2. Administrator perspective navigation links

```
[Home]{{highlight qs-nav-home}}
[Operators]{{highlight qs-nav-operators}}
[Workloads]{{highlight qs-nav-workloads}}
[Serverless]{{highlight qs-nav-serverless}}
[Networking]{{highlight qs-nav-networking}}
[Storage]{{highlight qs-nav-storage}}
[Service catalog]{{highlight qs-nav-servicecatalog}}
[Compute]{{highlight qs-nav-compute}}
[User management]{{highlight qs-nav-usermanagement}}
[Administration]{{highlight qs-nav-administration}}
```

#### 10.4.7.3. Developer perspective navigation links

```
[Add]{{highlight qs-nav-add}}
[Topology]{{highlight qs-nav-topology}}
[Search]{{highlight qs-nav-search}}
[Project]{{highlight qs-nav-project}}
[Helm]{{highlight qs-nav-helm}}
```

#### 10.4.7.4. Common navigation links

```
[Builds]{{highlight qs-nav-builds}}
[Pipelines]{{highlight qs-nav-pipelines}}
[Monitoring]{{highlight qs-nav-monitoring}}
```

#### 10.4.7.5. Masthead links

```
[CloudShell]{{highlight qs-masthead-cloudshell}}
[Utility Menu]{{highlight qs-masthead-utilitymenu}}
[User Menu]{{highlight qs-masthead-usermenu}}
[Applications]{{highlight qs-masthead-applications}}
[Import]{{highlight qs-masthead-import}}
[Help]{{highlight qs-masthead-help}}
[Notifications]{{highlight qs-masthead-notifications}}
```

#### 10.4.8. Code snippet markdown reference

You can execute a CLI code snippet when it is included in a quick start from the web console. To use this feature, you must first install the Web Terminal Operator. The web terminal and code snippet actions that execute in the web terminal are not present if you do not install the Web Terminal Operator. Alternatively, you can copy a code snippet to the clipboard regardless of whether you have the Web Terminal Operator installed or not.

#### 10.4.8.1. Syntax for inline code snippets

```
`code block`{{copy}}
`code block`{{execute}}
```



#### NOTE

If the **execute** syntax is used, the **Copy to clipboard** action is present whether you have the Web Terminal Operator installed or not.

#### 10.4.8.2. Syntax for multi-line code snippets

```
...
multi line code block
```{{copy}}
...
multi line code block
```{{execute}}
```

## 10.5. QUICK START CONTENT GUIDELINES

### 10.5.1. Card copy

You can customize the title and description on a quick start card, but you cannot customize the status.

- Keep your description to one to two sentences.
- Start with a verb and communicate the goal of the user. Correct example:

■ Create a serverless application.

### 10.5.2. Introduction

After clicking a quick start card, a side panel slides in that introduces the quick start and lists the tasks within it.

- Make your introduction content clear, concise, informative, and friendly.
- State the outcome of the quick start. A user should understand the purpose of the quick start before they begin.
- Give action to the user, not the quick start.
  - **Correct example:**



In this quick start, you will deploy a sample application to {product-title}.

- **Incorrect example:**

This quick start shows you how to deploy a sample application to {product-title}.

- The introduction should be a maximum of four to five sentences, depending on the complexity of the feature. A long introduction can overwhelm the user.
- List the quick start tasks after the introduction content, and start each task with a verb. Do not specify the number of tasks because the copy would need to be updated every time a task is added or removed.

- **Correct example:**

Tasks to complete: Create a serverless application; Connect an event source; Force a new revision

- **Incorrect example:**

You will complete these 3 tasks: Creating a serverless application; Connecting an event source; Forcing a new revision

### 10.5.3. Task steps

After the user clicks **Start**, a series of steps appears that they must perform to complete the quick start.

Follow these general guidelines when writing task steps:

- Use "Click" for buttons and labels. Use "Select" for checkboxes, radio buttons, and drop-down menus.
- Use "Click" instead of "Click on"

- **Correct example:**

Click OK.

- **Incorrect example:**

Click on the OK button.

- Tell users how to navigate between **Administrator** and **Developer** perspectives. Even if you think a user might already be in the appropriate perspective, give them instructions on how to get there so that they are definitely where they need to be.

Examples:

Enter the Developer perspective: In the main navigation, click the dropdown menu and select Developer.

Enter the Administrator perspective: In the main navigation, click the dropdown menu and select Admin.

- Use the "Location, action" structure. Tell a user where to go before telling them what to do.

- **Correct example:**
  - █ In the node.js deployment, hover over the icon.
- **Incorrect example:**
  - █ Hover over the icon in the node.js deployment.
- Keep your product terminology capitalization consistent.
- If you must specify a menu type or list as a dropdown, write "dropdown" as one word without a hyphen.
- Clearly distinguish between a user action and additional information on product functionality.
  - **User action:**
    - █ Change the time range of the dashboard by clicking the dropdown menu and selecting time range.
  - **Additional information:**
    - █ To look at data in a specific time frame, you can change the time range of the dashboard.
- Avoid directional language, like "In the top-right corner, click the icon". Directional language becomes outdated every time UI layouts change. Also, a direction for desktop users might not be accurate for users with a different screen size. Instead, identify something using its name.
  - **Correct example:**
    - █ In the navigation menu, click Settings.
  - **Incorrect example:**
    - █ In the left-hand menu, click Settings.
- Do not identify items by color alone, like "Click the gray circle". Color identifiers are not useful for sight-limited users, especially colorblind users. Instead, identify an item using its name or copy, like button copy.
  - **Correct example:**
    - █ The success message indicates a connection.
  - **Incorrect example:**
    - █ The message with a green icon indicates a connection.
- Use the second-person point of view, you, consistently:
  - **Correct example:**
    - █ Set up your environment.

- **Incorrect example:**

Let's set up our environment.

#### 10.5.4. Check your work module

- After a user completes a step, a **Check your work** module appears. This module prompts the user to answer a yes or no question about the step results, which gives them the opportunity to review their work. For this module, you only need to write a single yes or no question.
  - If the user answers **Yes**, a check mark will appear.
  - If the user answers **No**, an error message appears with a link to relevant documentation, if necessary. The user then has the opportunity to go back and try again.

#### 10.5.5. Formatting UI elements

Format UI elements using these guidelines:

- Copy for buttons, dropdowns, tabs, fields, and other UI controls: Write the copy as it appears in the UI and bold it.
- All other UI elements—including page, window, and panel names: Write the copy as it appears in the UI and bold it.
- Code or user-entered text: Use monospaced font.
- Hints: If a hint to a navigation or masthead element is included, style the text as you would a link.
- CLI commands: Use monospaced font.
- In running text, use a bold, monospaced font for a command.
- If a parameter or option is a variable value, use an italic monospaced font.
- Use a bold, monospaced font for the parameter and a monospaced font for the option.

### 10.6. ADDITIONAL RESOURCES

- For voice and tone requirements, refer to [PatternFly's brand voice and tone guidelines](#).
- For other UX content guidance, refer to all areas of [PatternFly's UX writing style guide](#).

## CHAPTER 11. OPTIONAL CAPABILITIES AND PRODUCTS IN THE WEB CONSOLE

You can further customize the OpenShift Container Platform web console by adding additional capabilities to your existing workflows and integrations through products.

### 11.1. ENHANCING THE OPENSIFT CONTAINER PLATFORM WEB CONSOLE WITH OPERATORS

Cluster administrators can install Operators on clusters in the OpenShift Container Platform web console by using the OperatorHub to provide customization outside of layered products for developers. For example, the Web Terminal Operator allows you to start a web terminal in your browser with common CLI tools for interacting with the cluster.

#### Additional resources

- [Understanding OperatorHub](#)
- [Installing the web terminal](#)

### 11.2. RED HAT OPENSIFT PIPELINES IN THE WEB CONSOLE

Red Hat OpenShift Pipelines is a cloud-native, continuous integration and continuous delivery (CI/CD) solution based on Kubernetes resources. Install the Red Hat OpenShift Pipelines Operator using the OperatorHub in the OpenShift Container Platform web console. Once the Operator is installed, you can create and modify pipeline objects on **Pipelines** page.

#### Additional resources

- [Working with Red Hat OpenShift Pipelines in the web console](#)
- [Pipeline execution statistics in the web console](#)

### 11.3. RED HAT OPENSIFT SERVERLESS IN THE WEB CONSOLE

Red Hat OpenShift Serverless enables developers to create and deploy serverless, event-driven applications on OpenShift Container Platform. You can use the OpenShift Container Platform web console OperatorHub to install the OpenShift Serverless Operator.

#### Additional resources

- [Installing the OpenShift Serverless Operator from the web console](#) .

### 11.4. RED HAT DEVELOPER HUB IN THE OPENSIFT CONTAINER PLATFORM WEB CONSOLE

The Red Hat Developer Hub is a platform you can use to experience a streamlined development environment. Red Hat Developer Hub is driven by a centralized software catalog, providing efficiency to your microservices and infrastructure. It enables your product team to deliver quality code without any compromises. A quick start is available for you to learn more about how to install the developer hub.

### 11.4.1. Installing the Red Hat Developer Hub using the OpenShift Container Platform web console

The web console provides a quick start with instructions on how to install the Red Hat Developer Hub Operator.

#### Prerequisites

- You must be logged in to the OpenShift Container Platform web console with **admin** privileges.

#### Procedure

1. On the **Overview** page of the Administrator perspective, click **Install Red Hat Developer Hub (RHDH) with an Operator** in the **Getting started resources** tile.
2. A quick start pane is displayed with instructions for you to install the Red Hat Developer Hub with an Operator. Follow the quick start for instructions on how to install the Operator, create a Red Hat Developer Hub instance, and add your instance to the **OpenShift Console Application** menu.

#### Verification

1. You can click the **Application launcher** link that is displayed to verify your **Application** tab is available.
2. Verify your Janus IDP instance can be opened.

#### Additional resources

- [Product Documentation for Red Hat Developer Hub](#)